

OmniVista 3600 Air Manager

Version 7.3.0



User Guide

Copyright

© 2011 Alcatel-Lucent. All rights reserved.
Specifications in this manual are subject to change without notice.
Originated in the USA.

AOS-W, Alcatel 4302, Alcatel 4304, Alcatel 4306, Alcatel 4308, Alcatel 4324, Alcatel 4504, Alcatel 4604, Alcatel 4704, Alcatel 6000, OAW-AP41, OAW-AP68, OAW-AP60/61/65, OAW-AP70, OAW-AP80, OAW-AP92/93, OAW-AP105, OAW-AP120/121, OAW-AP124/125, OAW-AP175, OAW-IAP92/93/105, OAW-RAP2, OAW-RAP5, and Omnivista 3600 Air Manager are trademarks of Alcatel-Lucent in the United States and certain other countries.

Any other trademarks appearing in this manual are the property of their respective companies.

Legal Notice

The use of Alcatel-Lucent switching platforms and software, by all individuals or corporations, to terminate Cisco or Nortel VPN client devices constitutes complete acceptance of liability by that individual or corporation for this action and indemnifies, in full, Alcatel-Lucent from any and all legal actions that might be taken against it with respect to infringement of copyright on behalf of Cisco Systems or Nortel Networks.



www.alcatel-lucent.com
26801 West Agoura Road
Calabasas, CA 91301

	Document Organization.....	11
	Note, Caution, and Warning Icons	12
	Contacting Support	12
Chapter 1	Introduction.....	13
	OV3600—A Unified Wireless Network Command Center.....	13
	OV3600 Management Platform	13
	Alcatel-Lucent Configuration	14
	VisualRF.....	14
	RAPIDS.....	14
	Master Console and Failover.....	15
	Integrating OV3600 into the Network and Organizational Hierarchy.....	15
	Supported Browsers.....	16
Chapter 2	Installing and Getting Started in OV3600.....	17
	OV3600 Hardware Requirements and Installation Media	17
	Installing Linux CentOS 5 (Phase 1)	17
	Installing OV3600 Software (Phase 2)	18
	Getting Started	18
	Step 1: Configuring Date and Time, Checking for Prior Installations	18
	Date and Time.....	18
	Previous OV3600 Installations	18
	Step 2: Installing OV3600 Software.....	19
	Step 3: Checking the OV3600 Installation.....	19
	Step 4: Assigning an IP Address to the OV3600 System.....	19
	Step 5: Naming the OV3600 Network Administration System	20
	Step 6: Assigning a Host Name to OV3600.....	20
	Step 7: Changing the Default Root Password.....	20
	Completing the Installation.....	20
	Configuring and Mapping Port Usage for OV3600.....	21
	OV3600 Navigation Basics	22
	Status Section	22
	Navigation Section.....	24
	Activity Section	26
	Help Links in the UI.....	26
	Common List Settings	26
	Buttons and Icons	26
	Getting Started with OV3600.....	28
Chapter 3	Configuring OV3600.....	31
	Before You Begin	31
	Formatting the Top Header	31
	Customizing Columns in Lists	32

Resetting Pagination Records	33
Using the Pagination Widget	33
Using Export CSV for Lists and Reports	34
Defining Graph Display Preferences.....	34
Customizing the Dashboard	34
Customized Search	36
Setting Severe Alert Warning Behavior	36
Defining General OV3600 Server Settings.....	37
Defining OV3600 Network Settings	45
Creating OV3600 Users	46
Creating OV3600 User Roles.....	48
Configuring Timeout, Login Message, TACACS+ and RADIUS Authentication..	51
Setting Up Login Configuration Options	51
Configuring TACACS+ Authentication.....	52
Configuring RADIUS Authentication and Authorization.....	53
Integrating a RADIUS Accounting Server	54
Enabling OV3600 to Manage Your Devices	55
Configuring Communication Settings for Discovered Devices	56
Loading Device Firmware Onto OV3600 (optional)	58
Overview of the Device Setup > Upload Firmware & Files Page	58
Loading Firmware Files to OV3600	59
Using Web Auth Bundles in OV3600	60
Setting Up Device Types	61
Configuring Cisco WLSE and WLSE Rogue Scanning.....	61
Introduction to Cisco WLSE	62
Configuring WLSE Initially in OV3600.....	62
Adding an ACS Server for WLSE	62
Enabling Rogue Alerts for Cisco WLSE	63
Configuring WLSE to Communicate with APs	63
Discovering Devices.....	63
Managing Devices.....	63
Inventory Reporting.....	63
Defining Access.....	64
Grouping	64
Configuring IOS APs for WDS Participation	64
WDS Participation	64
Primary or Secondary WDS	64
Configuring ACS for WDS Authentication	65
Configuring Cisco WLSE Rogue Scanning.....	65
Configuring ACS Servers.....	66
Integrating OV3600 with an Existing Network Management Solution (NMS).....	68
Auditing PCI Compliance on the Network.....	69
Introduction to PCI Requirements	69
PCI Auditing in the OV3600 Interface	70
Enabling or Disabling PCI Auditing.....	71
Deploying WMS Offload	72
Overview of WMS Offload in OV3600.....	72
General Configuration Tasks Supporting WMS Offload in OV3600	73
Additional Information Supporting WMS Offload	73
Chapter 4 Configuring and Using Device Groups in OV3600	75
OV3600 Groups Overview	76
Viewing All Defined Device Groups	77
Configuring Basic Group Settings.....	78

Adding and Configuring Group AAA Servers	86
Configuring Group Security Settings.....	87
Configuring Group SSIDs and VLANs	90
Configuring Radio Settings for Device Groups	93
Cisco WLC Group Configuration	97
Accessing Cisco WLC Configuration	97
Navigating Cisco WLC Configuration	97
Configuring WLANs for Cisco WLC Devices	98
Defining and Configuring LWAPP AP Groups for Cisco Devices.....	100
Viewing and Creating Cisco AP Groups.....	100
Configuring Cisco Controller Settings.....	101
Configuring Wireless Parameters for Cisco Controllers	101
Configuring Cisco WLC Security Parameters and Functions.....	101
Configuring Management Settings for Cisco WLC	102
Configuring Group PTMP Settings.....	102
Configuring Proxim Mesh Radio Settings	103
Configuring Group MAC Access Control Lists.....	105
Specifying Minimum Firmware Versions for APs in a Group.....	105
Comparing Device Groups	106
Deleting a Group.....	107
Changing Multiple Group Configurations	107
Modifying Multiple Devices	109
Using Global Groups for Group Configuration	111

Chapter 5 Discovering, Adding, and Managing Devices 113

Device Discovery Overview	113
Discovering and Adding Devices.....	114
SNMP/HTTP Scanning	114
Adding Networks for SNMP/HTTP Scanning.....	114
Adding Credentials for Scanning	115
Defining a Scan Set.....	115
Running a Scan Set.....	116
Enabling Cisco Discovery Protocol (CDP).....	118
Authorizing Devices to OV3600 from APs/Devices > New Page	118
Manually Adding Individual Devices	118
Adding Devices with the Device Setup > Add Page	119
Adding Multiple Devices from a CSV File	121
Adding Universal Devices	122
Assigning Devices to the Ignored Page.....	122
Monitoring Devices.....	123
Viewing Device Monitoring Statistics	123
Understanding the APs/Devices > Monitor Pages for All Device Types	124
Monitoring Data Specific to Wireless Devices.....	125
Evaluating Radio Statistics for an AP	131
Overview of the Radio Statistics Page.....	131
Viewing Real-Time ARM Statistics.....	131
Issues Summary section	132
802.11 Radio Counters Summary	132
Radio Statistics Interactive Graphs.....	132
Recent ARM Events Log	134
Detected Interfering Devices Table	135
Active BSSIDs Table	135
Monitoring Data for Mesh Devices	135
Monitoring Data for Wired Devices (Routers and Switches)	137
Understanding the APs/Devices > Interfaces Page	139

	Auditing Device Configuration	140
	Using Device Folders (Optional)	141
	Configuring and Managing Devices	141
	Moving a Device from Monitor Only to Manage Read/Write Mode.....	142
	Configuring AP Settings	142
	Configuring Device Interfaces for Switches	148
	Individual Device Support and Firmware Upgrades.....	150
	Troubleshooting a Newly Discovered Down Device	152
	Setting up Alcatel-Lucent Spectrum Analysis in OV3600	154
	Spectrum Configurations and Prerequisites.....	154
	Setting up a Permanent Spectrum Alcatel-Lucent AP Group	155
	Configuring an Individual AP to run in Spectrum Mode	155
	Configuring a Switch to use the Spectrum Profile	156
Chapter 6	Creating and Using Templates.....	159
	Group Templates.....	159
	Supported Device Templates	159
	Template Variables	159
	Viewing and Adding Templates	160
	Configuring General Template Files and Variables	164
	Configuring General Templates	164
	IOS Configuration File Template	165
	Device Configuration File on APs/Devices > Audit Configuration Page	165
	Using Template Syntax.....	165
	Using Directives to Eliminate Reporting of Configuration Mismatches.....	166
	Ignore_and_do_not_push Command.....	166
	Push_and_exclude Command	166
	Using Conditional Variables in Templates	167
	Using Substitution Variables in Templates	167
	Using OAW-APSpecific Variables.....	168
	Configuring Cisco IOS Templates	169
	Applying Startup-config Files	169
	WDS Settings in Templates	169
	SCP Required Settings in Templates	170
	Supporting Multiple Radio Types via a Single IOS Template.....	170
	Configuring Single and Dual-Radio APs via a Single IOS Template	171
	Configuring Cisco Catalyst Switch Templates	171
	Configuring Symbol Controller / HP WESM Templates	171
	Configuring a Global Template.....	173
Chapter 7	Using RAPIDS and Rogue Classification.....	175
	Introduction to RAPIDS	175
	Viewing Overall Network Health on RAPIDS > Overview	176
	Setting Up RAPIDS.....	177
	Basic Configuration	177
	Rogue Containment Options	179
	Additional Settings.....	180
	Defining RAPIDS Rules.....	181
	Switch Classification with WMS Offload	181
	Device OUI Score	182
	Rogue Device Threat Level.....	182
	Viewing and Configuring RAPIDS Rules.....	182
	Deleting or Editing a Rule.....	184
	Recommended RAPIDS Rules	185
	Using RAPIDS Rules with Additional OV3600 Functions	185

Viewing Rogues on the RAPIDS > List Page.....	185
Overview of the RAPIDS > Detail Page	188
Viewing Ignored Rogue Devices.....	189
Using RAPIDS Workflow to Process Rogue Devices	189
Score Override.....	189
Using the Audit Log.....	190
Additional Resources.....	191

Chapter 8 **Performing Daily Administration in OV3600 193**

Monitoring and Supporting OV3600 with the System Pages.....	193
Using the System > Status Page.....	194
Viewing Device Events in System > Syslog & Traps	195
Using the System > Event Log Page.....	196
Viewing, Delivering and Responding to Triggers and Alerts	197
Viewing Triggers	197
Creating New Triggers.....	197
Setting Triggers for Devices	200
Setting Triggers for Interfaces and Radios.....	201
Setting Triggers for Discovery.....	201
Setting Triggers for Users	202
Setting Triggers for RADIUS Authentication Issues	202
Setting Triggers for IDS Events.....	203
Setting Triggers for OV3600 Health	203
Delivering Triggered Alerts	203
Viewing Alerts	204
Responding to Alerts	205
Monitoring and Supporting WLAN Users.....	205
Overview of the Users Pages	206
Monitoring WLAN Users with the Users > Connected and Users > All Pages....	206
Supporting Guest WLAN Users With the Users > Guest Users Page.....	209
Supporting RFID Tags With the Users > Tags Page	211
Evaluating and Diagnosing User Status and Issues.....	212
Evaluating User Status with the Users > User Detail Page	213
Mobile Device Access Control in Users > User Detail and Users > Connected....	214
Classifying Alcatel-Lucent Devices in User Detail.....	214
Quick Links for Users on Alcatel-Lucent Devices	215
Using the Deauthenticate User Feature	215
Viewing a User's Association History.....	215
Evaluating User Status with the Users > Diagnostics Page	216
Managing Mobile Devices with SOTI MobiControl and OV3600.....	219
Overview of SOTI MobiControl.....	219
Prerequisites for Using MobiControl with OV3600.....	219
Adding a Mobile Device Management Server for MobiControl	219
Accessing MobiControl from the Users > User Detail Page	220
Monitoring and Supporting OV3600 with the Home Pages	220
Monitoring OV3600 with the Home > Overview Page	221
Viewing and Updating License Information.....	222
Searching OV3600 with the Home > Search Page.....	224
Accessing OV3600 Documentation.....	225
Configuring Your Own User Information with the Home > User Info Page...	225
Using the System > Configuration Change Jobs Page.....	227
Using the System > Firmware Upgrade Jobs Page	228
Using the System > Performance Page	229
Supporting OV3600 Servers with the Master Console.....	233

Using the Public Portal on Master Console.....	233
Adding a Managed OV3600 with the Master Console	234
Using Global Groups with Master Console	235
Backing Up OV3600	235
Viewing and Downloading Backups	236
Running Backup on Demand.....	236
Restoring from a Backup.....	236
Upgrading OV3600	237
Upgrade Instructions	237
Upgrading Without Internet Access.....	237
Backing Up OV3600	237
Overview of Backups.....	237
Viewing and Downloading Backups	237
Running Backup on Demand.....	238
Restoring from a Backup.....	238
Using OV3600 Failover for Backup	238
Navigation Section of OV3600 Failover	239
Adding Watched OV3600 Stations	239
Logging out of OV3600	240

Chapter 9 Creating, Running, and Emailing Reports 241

Overview of OV3600 Reports	241
Reports > Definitions Page Overview	241
Reports > Generated Page Overview	243
Using Daily Reports	244
Viewing Generated Reports.....	244
Using Custom Reports	244
Using the Alcatel-Lucent License Report.....	246
Using the Capacity Planning Report	246
Using the Configuration Audit Report.....	248
Using the Device Summary Report	249
Using the Device Uptime Report	252
Using the IDS Events Report	253
Using the Inventory Report.....	254
Using the Memory and CPU Utilization Report	255
Using the Network Usage Report.....	255
Using the New Rogue Devices Report	256
Using the New Users Report	259
Using the PCI Compliance Report.....	259
Using the Port Usage Report.....	260
Using the RADIUS Authentication Issues Report	261
Using the RF Health Report.....	261
Using the Rogue Containment Audit Report	263
Using the User Session Report	263
Defining Reports.....	265
Emailing and Exporting Reports.....	268
Emailing Reports in General Email Applications.....	268
Emailing Reports to Smarthost.....	268
Exporting Reports to XML or CSV.....	269
Transferring Reports Using FTP	269

Chapter 10 Using the OV3600 Helpdesk 271

Helpdesk Overview.....	271
Enabling Helpdesk.....	271
Monitoring Incidents with Helpdesk	271

Creating a New Incident with Helpdesk	273
Creating New Snapshots or Incident Relationships	274
Using the Helpdesk Tab with an Existing Remedy Server	274

Chapter 11 **Using VisualRF** **277**

Features	278
Useful Terms	278
Starting VisualRF	279
Basic QuickView Navigation	279
Network View Navigation	280
Overlays	280
Display Menu	281
Edit Menu	282
Using the Settings in the VisualRF > Setup Page	283
VisualRF Resource Utilization	286
Configuring QuickView Personal Preferences	287
Increasing Location Accuracy	288
Adding Exterior Walls	289
Location Training for Stationary Devices	289
Adding Client Surveys	290
Adding Location Probability Regions	291
Adding an IDF	292
Viewing Port Status on Deployed Switches	293
Fine-Tuning Location Service in VisualRF > Setup	293
Configuring Infrastructure	294
Deploying APs for Client Location Accuracy	295
Using QuickView to Assess RF Environments	295
Viewing a Wireless User's RF Environment	295
Tracking Location History	296
Checking Signal Strength to Client Location	297
Viewing an AP's Wireless RF Environment	297
Viewing a Floor Plan's RF Environment	299
Viewing a Network, Campus, Building's RF Environment	299
Viewing Campuses, Buildings, or Floors from a Tree View	300
Planning and Provisioning	300
Creating a New Campus	300
Building Creation	301
Importing a Floor Plan	302
Editing a Floor Plan Image	303
Cropping the Floor Plan Image	303
Sizing a Non-CAD Floor Plan	304
Removing Color from a Floor Plan Image	304
Assigning Campus, Building and Floor Numbers	305
Assigning Optional Planner, Owner, or Installer Information for the Floor Plan	305
Controlling the Layers in the Uploaded Floor Plan (CAD only)	305
Error Checking of CAD Images	305
Provisioning Existing Access Points onto the Floor Plan	306
Automatically Provisioning APs onto a Floor Plan	307
Tweaking a Planning Region	308
Printing a Bill of Materials Report	309
Importing and Exporting in VisualRF	310
Exporting a campus	310
Importing from CAD	310
Batch Importing CAD Files	310
Requirements	310

	Pre Processing Steps.....	311
	Upload Processing Steps.....	311
	Post Processing Steps.....	311
	Sample Upload Instruction XML File.....	311
	Common Importation Problems.....	312
	Importing from an Alcatel-Lucent Controller	312
	Pre-Conversion Checklist	312
	Process on Controller.....	312
	Process on OV3600	312
	VisualRF Location APIs	312
	Sample Device Location Response.....	313
	Sample Site Inventory Response.....	313
Appendix A	Setting Up Alcatel-Lucent Instant in OV3600.....	315
	Overview of Alcatel-Lucent Instant.....	315
	Using Alcatel-Lucent Instant with OV3600.....	315
	Workflow of the Alcatel-Lucent Instant and OV3600 Integration Process	316
	Setting up Alcatel-Lucent Instant Hardware.....	316
	Required Personnel	316
	Creating your Organization String	316
	The Shared Secret Key.....	317
	Entering the Organization String and OV3600 Info into OAW-IAP	317
	Receiving the Alcatel-Lucent Instant Virtual Controller as a New Device	318
	Verifying the Shared Secret and Adding the Device	318
	Remaining Manual Admin Tasks in OV3600	319
	OV3600 Pages with Instant-Specific Features	319
	Other Available Features	320
	Firmware Image Management.....	320
	Intrusion Detection System	320
	Known Issues of Alcatel-Lucent Instant integration with OV3600	320
	Index.....	321

This preface provides an overview of this user guide and contact information for Alcatel-Lucent, in the following sections:

- “Document Organization” on page 11
- “Note, Caution, and Warning Icons” on page 12
- “Contacting Support” on page 12

Document Organization

This user guide includes instructions and examples of the graphical user interface (GUI) for installation, configuration, and daily operation of OV3600. This includes wide deployment of wireless access points (APs), device administration, rogue detection and classification, wireless controller devices, security, reports, and additional features of OV3600.

Table 1 *Document Organization and Purposes*

Chapter	Description
Chapter 1, “Introduction”	Introduces and presents OV3600, its components, and general network functions.
Chapter 2, “Installing and Getting Started in OV3600”	Describes system and network requirements, Linux OS installation, and OV3600 installation.
Chapter 3, “Configuring OV3600”	Describes the primary and required configurations for startup and launch of OV3600, with frequently used optional configurations.
Chapter 4, “Configuring and Using Device Groups in OV3600”	Describes configuration and deployment for group device profiles.
Chapter 5, “Discovering, Adding, and Managing Devices”	Describes how to discover and manage devices on the network.
Chapter 6, “Creating and Using Templates”	Describes and illustrates the use of templates in group and global device configuration.
Chapter 7, “Using RAPIDS and Rogue Classification”	Describes RAPIDS module of OV3600, and enhanced rogue classification supported in OV3600.
Chapter 8, “Performing Daily Administration in OV3600”	Describes common daily operations and tools in OV3600, to include general user administration, the use of triggers and alerts, network monitoring, and backups.
Chapter 9, “Creating, Running, and Emailing Reports”	Describes OV3600 reports, scheduling and generation options, and distribution of reports from OV3600.
Chapter 10, “Using the OV3600 Helpdesk”	Describes how to use the OV3600 Helpdesk GUI and related functions.
Chapter 11, “Using VisualRF”	Describes how to use VisualRF.
Appendix A, “Setting Up Alcatel-Lucent Instant in OV3600” on page 315	Describes how to set up and use Alcatel-Lucent Instant in OV3600.
Index	Provides extensive citation of and links to document topics, with emphasis on the OV3600 GUI and tasks relating to OV3600 installation and operation.

Note, Caution, and Warning Icons

This document uses the following notice icons to emphasize advisories for certain actions, configurations, or concepts:



Indicates helpful suggestions, pertinent information, and important things to remember.



Indicates a risk of damage to your hardware or loss of data.



Indicates a risk of personal injury or death.

Contacting Support

Table 2 *Alcatel-Lucent Contact Information*

Online Contact and Support	
Main Website	http://www.alcatel-lucent.com/enterprise
Support Website	http://service.esd.alcatel-lucent.com
Alcatel-Lucent Enterprise Service and OmniVista 3600 Email Support	Esd.support@alcatel-lucent.com

Thank you for choosing OmniVista3600 Air Manager, or OV3600. OV3600 makes it easy and efficient to manage your wireless network by combining industry-leading functionality with an intuitive user interface, enabling network administrators and helpdesk staff to support and control even the largest wireless networks in the world.

This User Guide provides instructions for the installation, configuration, and operation of OV3600. This chapter includes the following topics:

- “OV3600—A Unified Wireless Network Command Center” on page 13
- “Integrating OV3600 into the Network and Organizational Hierarchy” on page 15
- “Supported Browsers” on page 16

If you have any questions or comments, please contact Alcatel support.

OV3600—A Unified Wireless Network Command Center

OV3600 is the only network management software that offers you a single intelligent console from which to monitor, analyze, and configure wireless networks in automatic fashion. Whether your wireless network is simple or a large, complex, multi-vendor installation, OV3600 manages it all.

OV3600 supports hardware from leading wireless vendors including Alcatel-Lucent Inc., Avaya, Cisco (Aironet and WLC), Enterasys, Juniper Networks, LANCOM Systems, Meru, Nortel, ProCurve by HP, Proxim, Symbol, Trapeze, Tropos, and many others.

The components of the OV3600 are listed here, and detailed below:

- The OV3600 wireless network management software, including the AOS-W Configuration feature that supports global and group configuration of Alcatel-Lucent devices, as well as the *VisualRF* location and RF mapping software module and the *RAPIDS* rogue access point detection software module
- **Master Console** and **Failover** tabs

OV3600 Management Platform

OV3600 offers the following functions and benefits:

- Core network management functionality:
 - Network discovery
 - Configuration of APs & controllers
 - Automated compliance audits
 - Firmware distribution
 - Monitoring of every device and user connected to the network
 - Real-time and historical trend reports
- Granular administrative access
 - Role-based (for example, Administrator contrasted with Help Desk)
 - Network segment (for example, "Retail Store" network contrasted with "Corporate HQ" network)
- Flexible device support
 - Thin, thick, mesh network architecture
 - Multi-vendor support

- Current and legacy hardware support

Alcatel-Lucent Configuration

OV3600 supports global and group-level configuration of AOS-W (AOS-W), the operating system, software suite, and application engine that operates Alcatel-Lucent mobility and centralizes control over the entire mobile environment. For a complete description of AOS-W, refer to the *AOS-W User Guide*.

OV3600 consolidates AOS-W configuration and pushes global Alcatel-Lucent configurations from within OV3600.

Two pages in OV3600 support Alcatel-Lucent Configuration:

- **Device Setup > Alcatel-Lucent Configuration** for global Alcatel-Lucent Configuration
- **Groups > Alcatel-Lucent Config** for group-level Alcatel-Lucent Configuration

For additional information that includes a comprehensive inventory of all pages and settings that support Alcatel-Lucent Configuration, refer to the *OV3600 7.3 Alcatel-Lucent Configuration Guide*.

VisualRF

VisualRF is a powerful tool for monitoring and managing radio frequency (RF) dynamics within your wireless network, to include the following functions and benefits:

- Accurate location information for all wireless users and devices
- Up-to-date heat maps and channel maps for RF diagnostics
 - Adjusts for building materials.
 - Supports multiple antenna types.
- Floor plan, building, and campus views
- Visual display of errors and alerts
- Easy import of existing floor plans and building maps
- Planning of new floor plans and AP placement recommendations

RAPIDS

RAPIDS is a powerful and easy-to-use tool for monitoring and managing security on your wireless network, to include the following features and benefits:

- Automatic detection of unauthorized wireless devices
- Rogue device classification that supports multiple methods of rogue detection
- Wireless detection:
 - Uses authorized wireless APs to report other devices within range.
 - Calculates and displays rogue location on VisualRF map.
- Wired network detection:
 - Discovers rogue APs located beyond the range of authorized APs/sensors.
 - Queries routers and switches.
 - Ranks devices according to the likelihood they are rogues.
 - Multiple tests to eliminate false positive results.
 - Provides rogue discovery that identifies the switch and port to which a rogue device is connected.

Master Console and Failover

The OV3600 **Master Console** and **Failover** tools enable network-wide information in easy-to-understand presentation, to entail operational information and high-availability for failover scenarios. The benefits of these tools include the following:

- Provides network-wide visibility, even when the WLAN grows to 50,000+ devices
- Executive Portal allows executives to view high-level usage and performance data
- Aggregated alerts
- Failover
 - Many-to-one failover
 - One-to-one failover

The Master Console and Failover servers can be configured with a Device Down trigger that generates an alert if communication is lost. In addition to generating an alert, the Master Console or Failover server can also send email or NMS notifications about the event.

Integrating OV3600 into the Network and Organizational Hierarchy

OV3600 generally resides in the NOC and communicates with various components of your WLAN infrastructure. In basic deployments, OV3600 communicates solely with indoor wireless access points (and WLAN controllers over the wired network). In more complex deployments, OV3600 seamlessly integrates and communicates with authentication servers, accounting servers, TACACS+ servers, routers, switches, network management servers, wireless IDS solutions, helpdesk systems, indoor wireless access points, mesh devices. OV3600 has the flexibility to manage devices on local networks, remote networks, and networks using Network Address Translation (NAT). OV3600 communicates over-the-air or over-the-wire using a variety of protocols.

The power, performance, and usability of the OV3600 solution become more apparent when considering the diverse components within a WLAN. [Table 4](#) itemizes such network components, as an example.

Table 4 *Components of a WLAN*

Component	Description
Autonomous AP	Standalone device which performs radio and authentication functions
Thin AP	Radio-only device coupled with WLAN controller to perform authentication
WLAN switch	Used in conjunction with thin APs to coordinate authentication and roaming
NMS	Network Management Systems and Event Correlation (OpenView, Tivoli, and so forth)
RADIUS Authentication	RADIUS authentication servers (Funk, FreeRADIUS, ACS, or IAS)
RADIUS Accounting	OV3600 itself serves as a RADIUS accounting client
Wireless Gateways	Provide HTML redirect and/or wireless VPNs
TACACS+	Used to authenticate OV3600 administrative users
Routers/Switches	Provide OV3600 with data for user information and AP and Rogue discovery
Help Desk Systems	Remedy EPICOR
Rogue APs	Unauthorized APs not registered in the OV3600 database of managed APs

The flexibility of OV3600 enables it to integrate seamlessly into your business hierarchy as well as your network topology. OV3600 facilitates various administrative roles to match each individual user's role and responsibility:

- A Help Desk user may be given read-only access to monitoring data without being permitted to make configuration changes.
- A U.S.-based network engineer may be given read-write access to manage device configurations in North America, but not to control devices in the rest of the world.
- A security auditor may be given read-write access to configure security policies across the entire WLAN.
- NOC personnel may be given read-only access to monitoring all devices from the Master Console.

Supported Browsers

Windows (XP, Vista, Windows 7)

- Internet Explorer 7/8/9
- Firefox 3.x
- Google Chrome 9.x (stable)

Mac (OS X, 10.5, 10.6)

- Safari 4.x and higher,
- Firefox 3.x
- Google Chrome 9.x

This chapter contains information and procedures for installing and launching OV3600, and includes the following topics:

- “OV3600 Hardware Requirements and Installation Media” on page 17
- “Installing Linux CentOS 5 (Phase 1)” on page 17
- “Installing OV3600 Software (Phase 2)” on page 18
- “Configuring and Mapping Port Usage for OV3600” on page 21
- “OV3600 Navigation Basics” on page 22
- “Getting Started with OV3600” on page 28



NOTE

OV3600 does not support downgrading to older versions. Significant data could be lost or compromised in such a downgrade. In unusual circumstances requiring that you return to an earlier version of OV3600, we recommend you perform a fresh installation of the earlier OV3600 version, and then restore data from a pre-upgrade backup.

OV3600 Hardware Requirements and Installation Media

The OV3600 installation CD includes all software (including the Linux OS) required to complete the installation of OV3600. OV3600 supports any hardware that is Red Hat Enterprise Linux 5 certified. By default, all installs are based on a 64-bit operating system.

OV3600 hardware requirements vary by version. As additional features are added to OV3600, increased hardware resources become necessary. For the most recent hardware requirements, refer to the *OmniVista 3600 Air Manager 7.3 Server Sizing Guide*.

OV3600 is intended to operate as a soft appliance. Other applications should not run on the same installation. Additionally, local shell users can access data on OV3600, so it is important to restrict access to the shell only to authorized users.

You can create sudo users in place of root for companies that don't allow root logins.

Installing Linux CentOS 5 (Phase 1)

Perform the following steps to install the Linux CentOS 5 operating system. The Linux installation is a prerequisite to installing OV3600 on the network management system.



CAUTION

This procedure erases the hard drive(s) on the server.

1. Insert the OV3600 installation CD-ROM into the drive and boot the server.
2. If this is a new installation of the OV3600 software, type **install** and press **Enter**.

To configure the partitions manually, type **expert** and press **Enter**.

The following message appears on the screen:

```
Welcome to OV3600 Installer Phase I
- To install a new OV3600, type install <ENTER>.
```

WARNING: This will ERASE all data on your hard drive.

- To install OV3600 and manually configure hard drive settings, type expert <ENTER>.

boot:

3. Allow the installation process to continue. Installing the CentOS software (Phase I) takes 10 to 20 minutes to complete. This process formats the hard drive and launches Anaconda to install all necessary packages. Anaconda gauges the progress of the installation.

Upon completion, the system will prompt you to eject the installation CD and reboot the system.

4. Remove the CD from the drive and store in a safe location.

Installing OV3600 Software (Phase 2)

Getting Started

After the reboot, the GRUB screen appears.

1. Press **Enter** or wait six seconds, and the system automatically loads the kernel.
2. When the kernel is loaded, log into the server using the following credentials:
 - login = **root**
 - password = **admin**
3. Start the OV3600 software installation script by executing the `./ov3600-install` command.
Type `./ov3600-install` at the command prompt and press **Enter** to execute the script.

Step 1: Configuring Date and Time, Checking for Prior Installations

Date and Time

The following message appears, and this step ensures the proper date and time are set on the server.

```
----- Date and Time Configuration -----  
Current Time: Fri Nov 21 09:18:12 PST 2008  
1) Change Date and Time  
2) Change Time Zone  
  
0) Finish
```

Ensure that you enter the accurate date and time during this process. *Errors will arise later in the installation if the specified date varies significantly from the actual date, **especially** if the specified date is in the future and it is fixed later.* It is recommended to configure ntpd to gradually adjust your clock to the correct time.

1. Select **1** to set the date and select **2** to set the time zone. Press **Enter** after each configuration to return to the message menu above.



Changing these settings after the installation can cause data loss, especially for time-series data such as bandwidth and user count graphs. Avoid delayed configuration.

2. Press **0** to complete the configuration of date and time information, and to continue to the next step.

Previous OV3600 Installations

The following message appears after date and time are set:

```
Welcome to OV3600 Installer Phase 2  
STEP 1: Checking for previous OV3600 installations
```

If a previous version of OV3600 software is not discovered, the installation program automatically proceeds to “[Step 2: Installing OV3600 Software](#)” on page 19. If a previous version of the software is discovered, the following message appears on the screen.

```
The installation program discovered a previous version of the software. Would you
like to reinstall OV3600? This will erase OV3600's database. Reinstall (y/n)?
```

Type **y** and press **Enter** to proceed.



This action erases the current database, including all historical information. To ensure that the OV3600 database is backed up prior to reinstallation, answer `n` at the prompt above and contact your Value Added Reseller or directly contact Alcatel-Lucent support.

Step 2: Installing OV3600 Software

The following message appears while OV3600 software is transferred and compiled.

```
STEP 2: Installing OV3600 software
This will take a few minutes.
Press Alt-F9 to see detailed messages.
Press Alt-F1 return to this screen.
```

This step requires no user input, but you can follow the instructions to monitor its progress and switch back to the installation screen.

Step 3: Checking the OV3600 Installation

After the OV3600 software installation is complete, the following message appears:

```
STEP 3: Checking OV3600 installation
Database is up.
OV3600 is running version: (version number)
```

This step requires no user input. Proceed to the next step as prompted to do so.

Step 4: Assigning an IP Address to the OV3600 System

While the OV3600 primary network interface accepts a DHCP address initially during installation, *OV3600 does not function when launched unless a static IP is assigned*. Complete these tasks to assign the static IP address. The following message appears:

```
STEP 4: Assigning OV3600's address
OV3600 must be configured with a static IP.

----- Primary Network Interface Configuration -----

1) IP Address   : xxx.xxx.xxx.xxx
2) Netmask     : xxx.xxx.xxx.xxx
3) Gateway     : xxx.xxx.xxx.xxx
4) Primary DNS : xxx.xxx.xxx.xxx
5) Secondary DNS: xxx.xxx.xxx.xxx

9) Commit Changes
0) Exit (discard changes)
```

If you want to configure a second network interface, please use OV3600's web interface, OV3600 Setup --> Network Tab

1. Enter the network information.



The Secondary DNS setting is an optional field.

2. Commit the changes by typing **9** and pressing **Enter**.
To discard the changes, type **0** and press **Enter**.

Step 5: Naming the OV3600 Network Administration System

Upon completion of the previous step, the following message appears.

```
STEP 5: Naming OV3600
OV3600 name is currently set to: New OV3600
Please enter a name for your OV3600:
```

At the prompt, enter a name for your OV3600 server and press **Enter**.

Step 6: Assigning a Host Name to OV3600

Upon completion of the previous step, the following message appears on the screen.

```
STEP 6: Assigning OV3600's hostname
Does OV3600 have a valid DNS name on your network (y/n)?
```

1. If OV3600 does not have a valid host name on the network, enter **n** at the prompt. The following appears:

```
Generating SSL certificate for < IP Address >
```

2. If OV3600 does have a valid host name on the network, enter **y** at the prompt. The following appears:

```
Enter OV3600's DNS name:
```

3. Type the OV3600 DNS name and press **Enter**. The following message appears:

```
Generating SSL certificate for < IP Address >
```

Proceed to the next step as the system prompts you.

Step 7: Changing the Default Root Password

Upon completion of the prior step, the following message appears.

```
STEP 7: Changing default root password.
You will now change the password for the 'root' shell user.
```

```
Changing password for user root.
New Password:
```

Enter the new root password and press **Enter**. The Linux root password is similar to a Windows administrator password. The root user is a super user who has full access to all commands and directories on the computer.

This password should be kept as secure as possible because it allows full access to the machine. This password is not often needed on a day-to-day basis, but is required to perform OV3600 upgrades and advanced troubleshooting. If you lose this password, contact Alcatel support for resetting instructions.

Completing the Installation

Upon completion of all previous steps, the following message appears.

```
CONGRATULATIONS! OV3600 is configured properly.
To access OV3600 web console, browse to https://<IP Address>
Login with the following credentials:
Username: admin
Password: admin
```

- To view the Phase 1 installation log file, type **cat /root/install.log**.
- To view the Phase 2 installation log file, type **cat /tmp/ov3600-install.log**.
- To access the OV3600 GUI, enter the OV3600 IP address in the address bar of any browser. The OV3600 GUI then prompts for your license key. If you are entering a dedicated **Master Console** or OV3600 **Failover** license, refer to [“Supporting OV3600 Servers with the Master Console” on page 233](#) for additional information.

Configuring and Mapping Port Usage for OV3600

The following diagram itemizes the communication protocols and ports necessary for OV3600 to communicate with wireless LAN infrastructure devices, including access points (APs), controllers, routers, switches, and RADIUS servers. Assign or adjust port usage on the network administration system as required to support these components.

Table 5 *OV3600 Protocol and Port Chart*

Port	Type	Protocol	Description	Direction	Device Type
21	TCP	FTP	Firmware distribution	>	APs or controllers
22	TCP	SSH	Configure devices	>	APs or controllers
22	TCP	SSH	Configure OV3600 from CLI	<	Laptop or workstation
22	TCP	VTUN	Support connection (optional)	>	Alcatel-Lucent support home office
22	TCP	SCP	Transfer configuration files or FW	<	APs or controllers
23	TCP	Telnet	Configure devices	>	APs or controllers
23	TCP	VTUN	Support connection (Optional)	>	Alcatel-Lucent support home office
25	TCP	SMTP	Support email (optional)	>	Alcatel-Lucent support email server
49	UDP	TACACS	OV3600 Administrative Authentication	>	Cisco TACACS+
53	UDP	DNS	DNS lookup from OV3600	>	DNS Server
69	UDP	TFTP	Transfer configuration files or FW	<	APs or controllers
80	TCP	HTTP	Configure devices	>	Legacy APs
80	TCP	VTUN	Support connection (optional)	>	Alcatel-Lucent support home office
161	UDP	SNMP	Get and Set operations	>	APs or controllers
162	UDP	SNMP	Traps from devices	<	APs or controllers
162	UDP	SNMP	Traps from OV3600	>	NMS
443	TCP	HTTPS	Web management	<	Laptop or workstation
443	TCP	HTTPS	WLSE polling	>	WLSE
443	TCP	VTUN	Support connection (optional)	>	Alcatel-Lucent support home office
1701	TCP	HTTPS	AP and rogue discovery	>	WLSE
1741	TCP	HTTP	WLSE polling	>	WLSE
1813	UDP	RADIUS	Retrieve client authentication info	<	Accounting Server

Table 5 OV3600 Protocol and Port Chart (Continued)

Port	Type	Protocol	Description	Direction	Device Type
1813	UDP	RADIUS	Retrieve client authentication info	<	APs or controllers
1813	UDP	RADIUS	Outbound from OV3600 to a RADIUS server for OV3600 admin authentication	>	RADIUS server
2002	TCP	HTTPS	Retrieve client authentication info	>	ACS
5050	UDP	RTLS	Real Time Location Feed	<	Alcatel-Lucent thin APs
8211	UDP	PAPI	Real Time Feed	< >	WLAN switches
		ICMP	Ping Probe	>	APs or controllers


OV3600 Navigation Basics

Every OV3600 page contains three basic sections, as illustrated in :

- Status Section
- Navigation Section
- Activity Section

The OV3600 pages also contain **Help** links with GUI-specific help information and certain standard buttons. [Figure 1](#)

Figure 1 Home > Overview Page Illustration

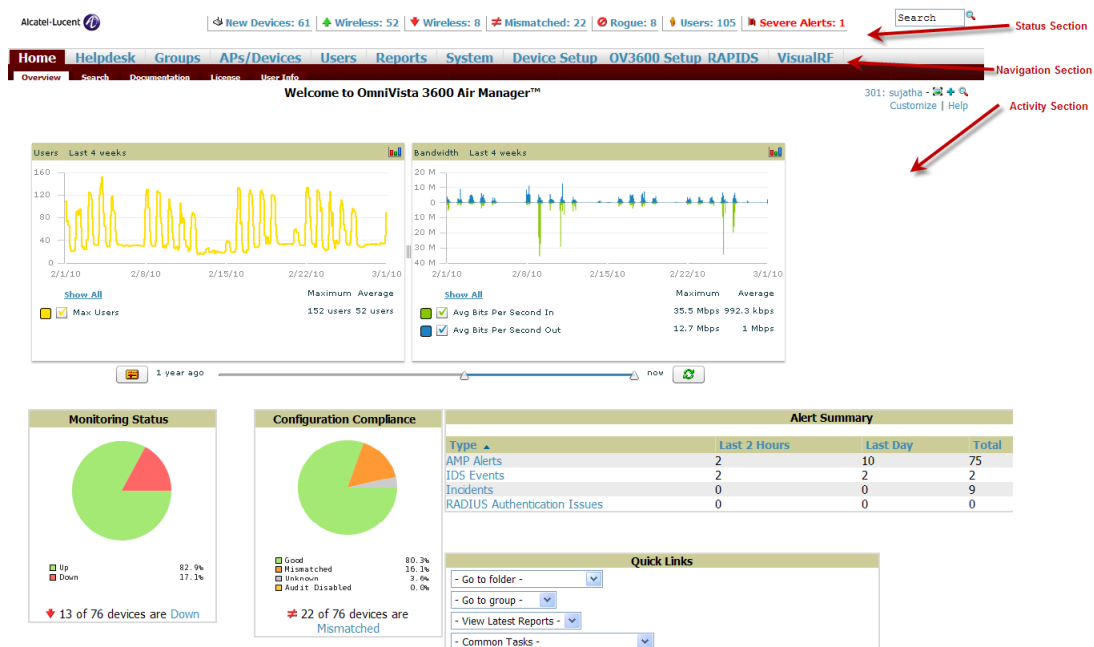

Status Section

The **Status** section is a snapshot view of overall WLAN performance and provides direct links for immediate access to key system components. OV3600 includes the ability to customize the contents of the Status section from the **Home > User Info** page, to include support for both wireless and wired network

components. Refer to “[Configuring Your Own User Information with the Home > User Info Page](#)” on page 225.

The table below describes these elements in further detail.

Table 6 Status Section Components of the OV3600 GUI

Field	Description
New Devices	The number of wireless APs or wireless LAN controllers that have been discovered by OV3600 but not yet managed by network administrators. When selected, OV3600 directs you to a page that displays a detailed list of devices awaiting authorization.
Up	The number of managed authorized devices that are currently responding to OV3600 requests. When selected, OV3600 shows a detailed list of all Up devices.
Down	The number of managed, authorized devices that are not currently responding to OV3600 SNMP requests. When selected, OV3600 shows a detailed list of all Down devices.
Mismatched	The total number of Mismatched devices. A device is considered mismatched when the desired configuration in OV3600 does not match the actual device configuration read from the device.
Rogue	The number of devices that have been classified by the RAPIDS rules engine above the threshold defined on the Home > User Info page.
Users	The number of wireless users currently associated to the wireless network via all the APs managed by OV3600. When selected, OV3600 shows a list of users that are associated.
Alerts	Displays the number of non-acknowledged OV3600 alerts generated by user-configured triggers. When selected, OV3600 shows a detailed list of active alerts.
Severe Alerts (conditional)	When triggers are given a severity of Critical , they generate Severe Alerts . When a Severe Alert exists, a new component appears at the right of the Status field in bold red font. Only users configured on the Home > User Info page to be enabled to view critical alerts can see Severe Alerts. The functionality of Severe Alerts is the same as that described above for Alerts. Unlike Alerts, the Severe Alerts section is hidden if there are no Severe Alerts.
Device Types to Include in Header Stats	You can support statistics for any combination of the following device types: <ul style="list-style-type: none"> ● Autonomous APs ● Controllers ● Routers/Switches ● Thin APs ● Universal Devices Refer to “ Configuring Your Own User Information with the Home > User Info Page ” on page 225.
Search	Search performs partial string searches on a large number of fields including the notes, version, secondary version, radio serial number, device serial number, LAN MAC, radio MAC and apparent IP of all the APs as well as the client MAC, VPN user, LAN IP, VPN IP fields.

Navigation Section

The **Navigation** Section displays tabs for all main GUI pages within OV3600. The top bar is a static navigation bar containing tabs for the main components of OV3600, while the lower bar is context-sensitive and displays the subtabs for the highlighted tab.

Table 7 Components and Subtabs of the OV3600 Navigation

Main Tab	Description	Subtabs
Home	<p>The Home tab provides basic OV3600 information including system name, host name, IP address, current time, running time, and software version.</p> <p>The Home page also provides a central point for network status information and monitoring tools, giving graphical display of network activity, and links to many of the most frequent tools in OV3600. For additional information, refer to “Monitoring and Supporting OV3600 with the Home Pages” on page 220.</p>	<ul style="list-style-type: none"> ● Overview ● Search ● Documentation ● License ● User Info
Helpdesk	<p>The Helpdesk pages provide an interface for support and diagnostic tools. For additional information refer to Chapter 10, “Using the OV3600 Helpdesk” on page 271.</p>	<ul style="list-style-type: none"> ● Incidents ● Setup
Groups	<p>The Groups pages provide information on the logical "groups" of devices that have been established for efficient monitoring and configuration. For additional information, see Chapter 4, “Configuring and Using Device Groups in OV3600” on page 75.</p> <p>NOTE: Some of the focused subtabs will not appear for all groups. Focused subtabs are visible based on the device type field on the Groups > Basic page. This subtab is the first page to appear when adding or editing groups.</p> <p>NOTE: When individual device configurations are specified, device-level settings override the Group-level settings to which a device belongs.</p>	<ul style="list-style-type: none"> ● List ● Focused Subtabs <ul style="list-style-type: none"> ■ Monitor ■ Basic ■ Templates ■ Security ■ SSIDs ■ AAA Servers ■ Radio ■ Alcatel-Lucent Config ■ Cisco WLC Config ■ PTMP ■ Proxim Mesh ■ MAC ACL ■ Firmware ■ Compare
APs/Devices	<p>The APs/Devices pages provide detailed information about all authorized APs and wireless LAN switches or controllers on the network, including all configuration and current monitoring data.</p> <p>These pages interact with several additional pages in OV3600. Refer to Chapter 5, “Discovering, Adding, and Managing Devices” on page 113.</p> <p>NOTE: When specified, device-level settings override the default Group-level settings.</p>	<ul style="list-style-type: none"> ● List ● New ● Up ● Down ● Mismatched ● Ignored ● Focused Subtabs <ul style="list-style-type: none"> ■ Monitor ■ Manage ■ Interfaces ■ Audit ■ Compliance ■ Containment Status
Users	<p>The Users pages provide detailed information about all client devices and users currently associated to the WLAN. For additional information, refer to “Monitoring and Supporting WLAN Users” on page 205.</p>	<ul style="list-style-type: none"> ● Connected ● All ● Guest Users <ul style="list-style-type: none"> ■ User Detail ■ Diagnostics ● Tags

Table 7 Components and Subtabs of the OV3600 Navigation (Continued)

Main Tab	Description	Subtabs
Reports	The Reports pages list all the standard and custom reports generated by OV3600. For additional information, refer to Chapter 9, “Creating, Running, and Emailing Reports” on page 241.	<ul style="list-style-type: none"> ● Generated ● Definition <ul style="list-style-type: none"> ■ Detail
System	The System page provides information about OV3600 operation and administration, including overall system status, the job scheduler, trigger/alert administration, and so forth. For additional information, refer to “Monitoring and Supporting OV3600 with the System Pages” on page 193.	<ul style="list-style-type: none"> ● Status ● Syslog & Traps ● Event Log ● Triggers ● Alerts ● Backups ● Configuration Change Jobs ● Firmware Upgrade Jobs ● Performance
Device Setup	The Device Setup pages provide the ability to add, configure, and monitor devices, to include setting AP discovery parameters, performing firmware management, defining VLANs, and so forth. For additional information, refer to “Enabling OV3600 to Manage Your Devices” on page 55.	<ul style="list-style-type: none"> ● Discover ● Add ● Communication ● Alcatel-Lucent Configuration <i>(if global Alcatel-Lucent Configuration is enabled)</i> ● Upload Firmware & Files
OV3600 Setup	The OV3600 Setup pages provide all information relating to the configuration of OV3600 itself and its connection to your network. This page entails several processes, configurations, or tools in OV3600. For additional information, start with Chapter 3, “Configuring OV3600” on page 31. NOTE: The OV3600 Setup pages may not be visible, depending on the role of the logged-in user set in OV3600.	<ul style="list-style-type: none"> ● General ● Network ● Users ● Roles ● Guest Users ● Authentication ● MDM Server ● Device Type Setup ● WLSE ● ACS ● NMS ● RADIUS Accounting ● PCI Compliance
RAPIDS	The RAPIDS pages provide all information relating to rogue access points, including methods of discovery and lists of discovered and possible rogues. For additional information, refer to Chapter 7, “Using RAPIDS and Rogue Classification” on page 175. NOTE: The RAPIDS pages may not be visible to the logged-in user, depending on their role set in OV3600.	<ul style="list-style-type: none"> ● Overview ● List ● IDS Events ● Setup ● Rules ● Score Override ● Audit Log
VisualRF	VisualRF pages provide graphical access to floor plans, client location, and RF visualization for floors, buildings, and campuses that host your network. Refer to Chapter 11, “Using VisualRF” on page 277.	<ul style="list-style-type: none"> ● Floor Plans ● Setup ● Import ● Audit Log



The **OV3600 Setup** tab varies with user role. The RAPIDS and VisualRF tabs appear based on the license entered on the **Home > License** page, and might not be visible on your OV3600 view.

Activity Section

The **Activity** section displays all detailed configuration and monitoring information, and is where you implement changes.

Help Links in the UI

The **Help** link is available on every page within OV3600. When selected, this launches the *OV3600 User Guide* PDF with information describing the OV3600 page that is currently displayed.




Adobe Reader must be installed to view the settings and default values in the PDF help file.

Common List Settings

All of the lists in OV3600 have some common options. All lists are paginated with a configurable number of items per page. Selecting the **Records Per Page** dropdown menu (which usually looks like a range such as 1-20 on the upper left hand side of a list table) enables you select or enter the number of rows that appear at a time in the list. The next down arrow displays a dropdown menu that allows you to select the exact page you would like to view, as shown in [Figure 2](#).

The **Choose Columns** option, illustrated on [Figure 2](#), allows you to configure the columns that are presented in the list and the order in which they are presented. To disable a column, clear its checkbox. To reorder the columns, drag a row to the appropriate new position. When you are satisfied with the enabled columns and their order, select **Save** at the top of the columns list.

Figure 2 Common List Settings **Choose Columns** Illustration

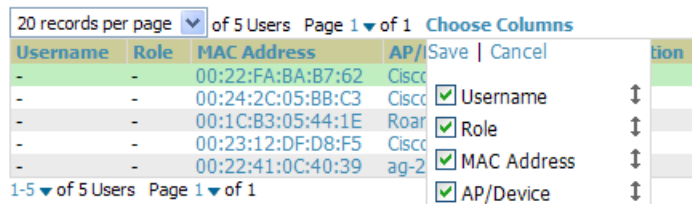

These settings are user specific. To reset them, select **Reset List Preferences** on **Home > User Info**.

Buttons and Icons

Standard buttons and icons are used throughout the OV3600 as follows:

Table 8 Standard Buttons and Icons of the OV3600 User Page

Function	Image ^a	Description
Acknowledge		Acknowledges and clears an OV3600 alert.
Add		Adds the object to both OV3600' database and the onscreen display list.
Add Folder		Adds a new folder to hierarchically organize APs.
Alert		Indicates an alert.
Apply		Applies all "saved" configuration changes to devices on the WLAN.
Attach		Attaches a snapshot of an OV3600 screen to a Helpdesk incident.

Table 8 Standard Buttons and Icons of the OV3600 User Page (Continued)



























Function	Image ^a	Description
Audit		Reads device configuration, compare to desired, and update status.
Bandwidth		Displays current bandwidth for group.
Choose		Chooses a new Helpdesk incident to be the Current Incident.
Create		Creates a new Helpdesk incident.
Customize		Ignores selected settings when calculating the configuration status.
Delete		Deletes an object from OV3600' database.
Down		Indicates down devices and radios.
Drag and Drop		Dragging and dropping objects with this icon changes the sequence of items in relation to each other. Refer to “Using RAPIDS and Rogue Classification” on page 175 as one example of drag-and-drop.
Duplicate		Duplicates or makes a copy of the configuration of an OV3600 object.
Edit		Edits the object properties.
Email		Links to email reports.
Filter (Funnel icon)		Filters list by values of the selected column. To reset all filters in all columns, click Reset filters link at the bottom of the table.
Google Earth		Views device's location in Google Earth (requires plug-in).
Manage		Manages the object properties.
Mismatched		Indicates mismatched device configuration, in which the most recent configuration in OV3600 and the current configuration on a device are mismatched.
Monitor		Indicates an access point is in “monitor only” mode.
Ignore		Ignores specific device(s) - devices selected with check boxes.
Import		Updates a Group's desired settings to match current settings.
New Devices		Indicates new access points and devices.
Poll Now		Polls device (or controller) immediately, override group polling settings.
Preview		Displays a preview of changes applicable to multiple groups.
Print		Prints the report.
Reboot		Reboots devices or OV3600.
Refresh		Refreshes the display of interactive graphs when settings have changed.
Relate		Relates an AP, Group or Client to a Helpdesk incident.

Table 8 Standard Buttons and Icons of the OV3600 User Page (Continued)

Function	Image ^a	Description
Replace Hardware		Confers configuration and history of one AP to a replacement device.
Revert		Returns all configurable data on the screen to its original status.
Rogue		Indicates a rogue access point and links to RAPIDS.
Run		Runs a new user-defined report.
Save		Saves the information on the page in the OV3600 database.
Save & Apply		Saves changes to OV3600's database and apply all changes to devices.
Scan		Scans for devices and rogues using selected networks.
Schedule		Schedules a window for reports, device changes, or maintenance.
Search		Searches OV3600 for the specified name, MAC or IP address.
Set Time Range		Sets the time range for interactive graphs to the range specified.
Up		Indicates access points which are in the up status.
Update Firmware		Applies a new firmware image to an AP/device.
User		Indicates a user.
View Historical Graph in New Window		Displays all data series for the selected graph over the last two hours, last day, last week, last month, and last year in one page.
VisualIRF		Links to VisualIRF - real time visualization.
XML		Links to export XHTML versions of reports.

a. Not all OV3600 GUI components are itemized in graphic format in this table.

Getting Started with OV3600

This topic describes how to perform an initial launch of the OV3600 network management solution on the session-based authentication scheme introduced in OV3600 7.3.0.


When an OV3600 URL is accessed either interactively using a browser or programmatically using an API, a sent cookie may match a session stored in the database, granting authentication (but not necessarily access, depending on how the user's role matches the required role for the URL). If the cookie is not present or the session in the database has expired, the request is denied.

For browser requests, this results in a login form being displayed. When you submit the login form, the supplied credentials are checked against the OV3600's user database, an external RADIUS server, or

external TACACS+ server per the OV3600's configuration. If the credentials are valid, the user's browser is sent a session cookie to use in subsequent requests.

Use your browser to navigate to the static IP address assigned to the internal page of the OV3600, as shown in [Figure 3](#). Enter the User Name and Password as **admin/admin** for your initial login, and then select **Log In**.

Figure 3 OV3600 Login Form

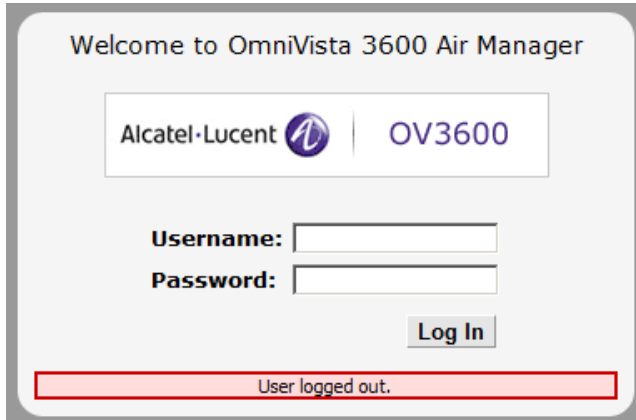

Welcome to OmniVista 3600 Air Manager

Alcatel-Lucent | OV3600

Username:

Password:

Log In

User logged out.

After successful authentication, your browser launches the OV3600 **Home > Overview** page.



OV3600 pages are protected via SSL. Some browsers will display a confirmation dialog for your self-signed certificate. Signing your certificate will prevent this dialog from displaying. Alcatel-Lucent recommends changing the default login and password on the **OV3600 Setup > Users** page. Refer to the procedure [“Creating OV3600 User Roles”](#) on page 48 for additional information.

This chapter contains the following procedures to deploy initial OV3600 configuration:

- “Formatting the Top Header” on page 31
- “Customizing Columns in Lists” on page 32
- “Resetting Pagination Records” on page 33
- “Using the Pagination Widget” on page 33
- “Using Export CSV for Lists and Reports” on page 34
- “Defining Graph Display Preferences” on page 34
- “Customizing the Dashboard” on page 34
- “Setting Severe Alert Warning Behavior” on page 36
- “Defining General OV3600 Server Settings” on page 37
- “Defining OV3600 Network Settings” on page 45
- “Creating OV3600 Users” on page 46
- “Creating OV3600 User Roles” on page 48
- “Configuring Timeout, Login Message, TACACS+ and RADIUS Authentication” on page 51
- “Enabling OV3600 to Manage Your Devices” on page 55
- “Setting Up Device Types” on page 61
- “Configuring Cisco WLSE and WLSE Rogue Scanning” on page 61
- “Configuring ACS Servers” on page 66
- “Integrating OV3600 with an Existing Network Management Solution (NMS)” on page 68
- “Auditing PCI Compliance on the Network” on page 69
- “Deploying WMS Offload” on page 72



Additional configurations of multiple types are available after basic configuration is complete.

Before You Begin


Remember to complete the required configurations in this chapter before proceeding. Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Formatting the Top Header

The OV3600 interface centers around a horizontal row of tabs with nested subtabs.

A row of statistics hyperlinks called Top Header Stats above the tabs represents many commonly used subtabs. These hyperlinks provide the ability to view certain key statistics by mousing over, such as number and type of **Down** devices, and serve as shortcuts to frequently viewed subtabs. [Figure 4](#) illustrates the navigation bar. For more details on hyperlinks, tabs and subtabs, see “[OV3600 Navigation Basics](#)” on [page 22](#).


Figure 4 Navigation Bar Displaying Home Subtabs and Down Device Statistics

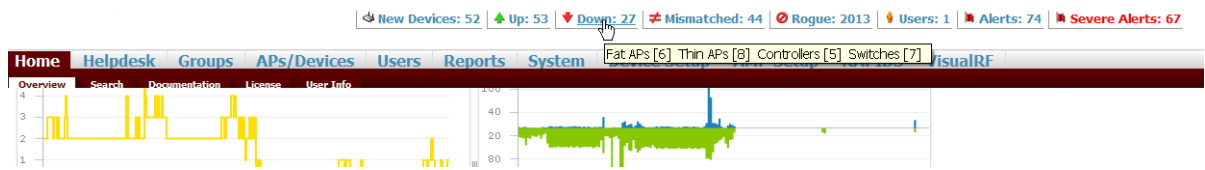

You can control which **Top Header Stats** links appear from the **OV3600 Setup > General** page, as described in “[Defining General OV3600 Server Settings](#)” on page 37. Top Header Stats can also be customized for individual user on the **Home > User Info** page. There you can select the statistics to display for certain device types, and override the **OV3600 Setup** page.

All possible display options for users are shown in [Figure 5](#), and these fields are described in detail in “[Configuring Your Own User Information with the Home > User Info Page](#)” on page 225.

Figure 5 Home > User Info Top Header Stats Display Options

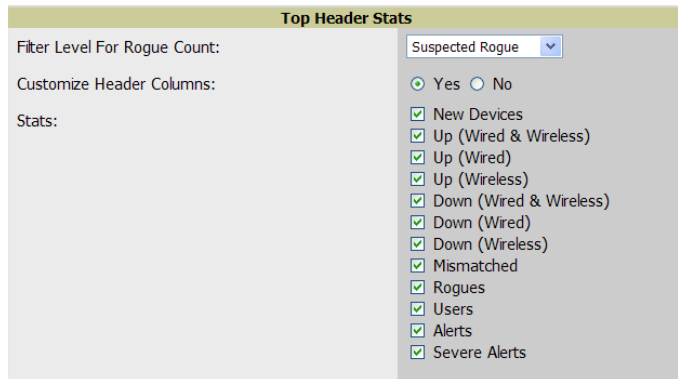


You can also set the severity level of critical alerts displayed for a user role. For details including a description of what constitutes a severe alert, see “[Setting Severe Alert Warning Behavior](#)” on page 36.

Customizing Columns in Lists

Customize the columns for any list table selecting **Choose Columns** as shown in [Figure 6](#). Use the up/down arrows to change the order in which the column heads appear.

Figure 6 Choose Columns Dropdown List

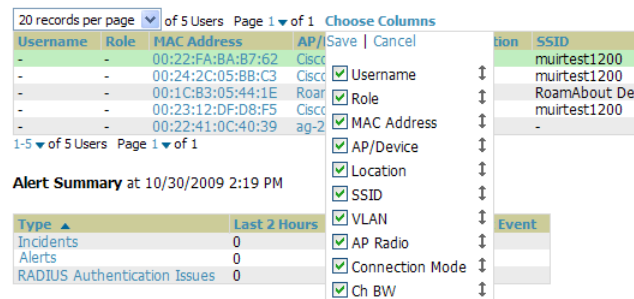


For more information on the universal list elements, see “[Common List Settings](#)” on page 26.

You can also control which column heads appear for each user role by selecting **Yes** in the **Customize Header Columns** field in **Home > User Info**, as also appears in [Figure 5](#). This exposes the **Choose Columns for Roles** dropdown menu in all tables shown in [Figure 7](#).

The first column shows the user roles that were customized, if any. The second column allows you to establish left to right columns and order them using the arrows.


Figure 7 Table With **Choose Columns for Roles** Menu Selected

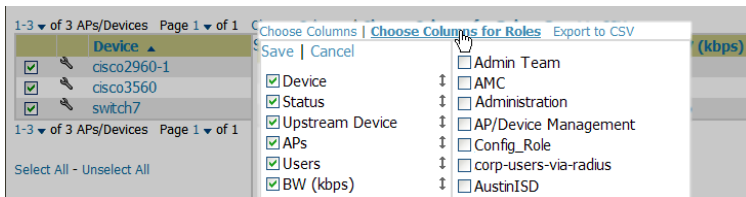

Resetting Pagination Records


To control the number of records in any individual list, select the link with **Records Per Page** mouseover text at the top left of the table, as shown in [Figure 8](#). OV3600 remembers each list table's pagination preferences.

Figure 8 **Records Per Page** Drop Down Menu

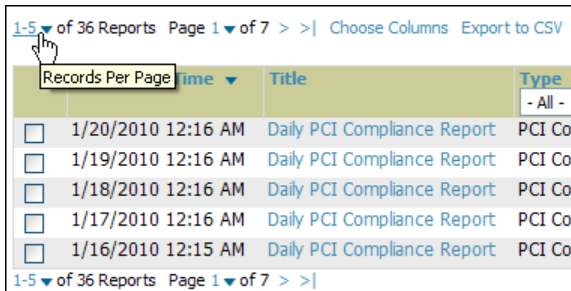

To reset all Records Per Page preferences, select **Reset** in the **Display Preferences** section of the **Home > User Info** page, as shown in [Figure 9](#).

Figure 9 **Home > User Info Display Preferences** section

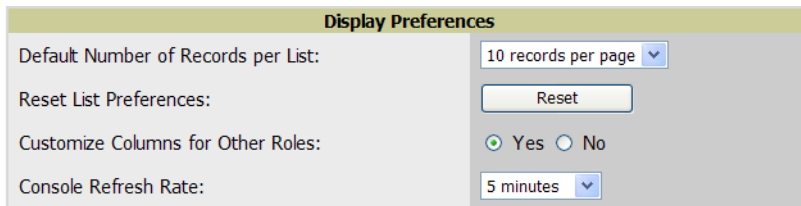

Using the Pagination Widget

The pagination widget is located at the top and bottom of every list table, as shown in [Figure 10](#).

Figure 10 **Pagination Widget**

Generated reports:

Visit the [Report Definitions](#) page to run new reports.

1-10 of 37 Reports Page 1 of 4 > >| Choose Columns Export to CSV


Generation Time	Title	Type	Su
-----------------	-------	------	----

Use the down arrow next to **Page 1** to see all the page numbers for that table in a dropdown menu. From here, you can jump to any portion of the table. Select the **>** symbol to jump to the next page, and **>|** to jump to the last page.

Using Export CSV for Lists and Reports

Some tables have a **Export CSV** setting you can use export the data as a spreadsheet. See [Figure 11](#) for an example of a list with the **Export CSV** option selected.

Figure 11 List with **CSV Export** Selected




Device	Type	Version	User
3Com-WX1200	3Com WX1200	7.0.4.4.0	0

OV3600 also enables CSV exporting of all report types. For more information, see “[Exporting Reports to XML or CSV](#)” on page 269.

Defining Graph Display Preferences

Many of the graphs in OV3600 are Flash-based which allows you adjust the graph settings attributes, as shown in [Figure 12](#).

Figure 12 Interactive Graphs on the **Home > Overview** Page

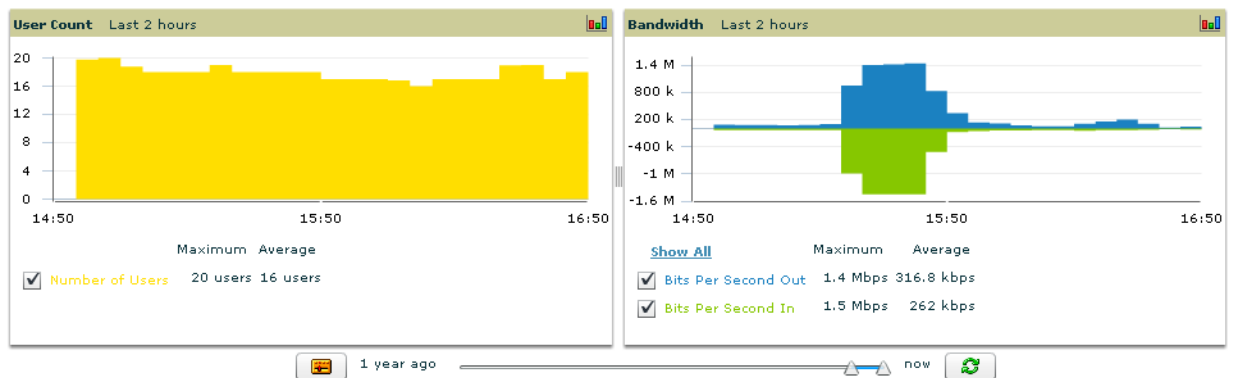

This Flash-enabled GUI allows for custom settings and adjustments, as follows:


- Drag the slider at the bottom of the screen to move the scope of the graph between one year ago and the current time.
- Drag the slider between graphs to change the relative sizes of each.
- Deselect checkboxes to change the data displayed on each graph. The button with green arrows refreshes data on the graph.
- The **Show All** link displays all of the available checkboxes supporting the Flash graphs.
- Once a change to the slider bars or to the display boxes has been made, the same change can be applied to all other Flash graphs with an **apply** button (appears on mouse-over only).
- For non-Flash graphs, select the graph to open a popup window that shows historical data.

A non-Flash version of the OV3600 user page is available if desired; instead of Flash it uses the RRD graphs that were used in earlier versions of OV3600. Contact Alcatel-Lucent support for more information on activating this feature in the OV3600 database.

Customizing the Dashboard

You can rearrange or remove widgets appearing on the **Home > Overview** dashboard by selecting the **Customize** link to the right of this window, as shown in [Figure 13](#).


Figure 13 **Customize** Button on the **Home > Overview** Page




The **Customize** workspace that appears is shown in Figure 14.

Figure 14 Customize Overview Page

Drag widgets from the Available Widgets list to the canvas on the right.

The title bar of a widget will be green when the layout is valid or red when invalid. Remove widgets by clicking the  icon.

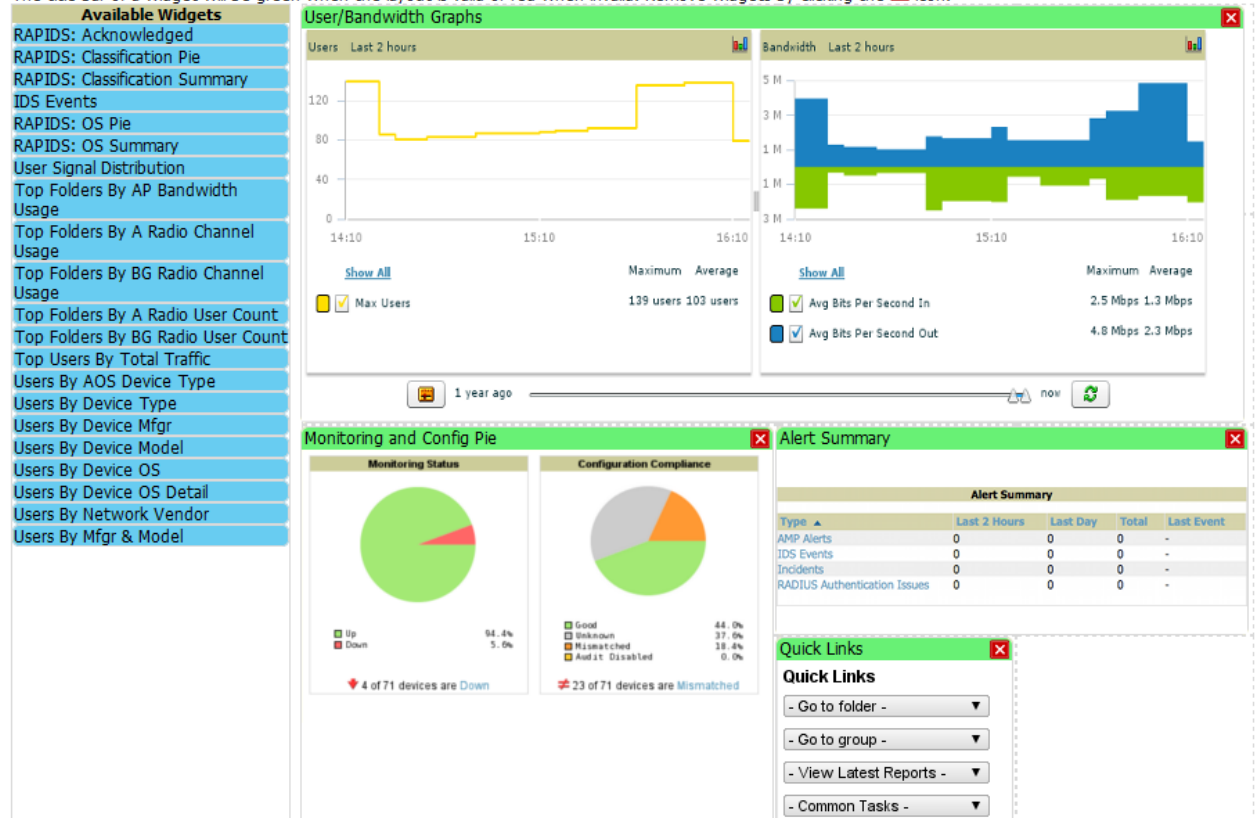

The **Available Widgets** section on the left with no gridlines holds all possible (available) graphical elements (widgets). Select any blue widget tile with a verbal description enclosed, and it immediately turns into a graphical element with a description.


Drag the widgets you want to appear on the **Overview** dashboard across to the gridlines and arrange them in the right section, within the gridlines. A widget snaps back to the nearest available gridline if you drop it across two or more lines, and turns red if you attempt to place it over gridlines already occupied by widgets.

Green widgets are properly placed and set to appear when you select **Save**. Widgets that remain in the left section will not appear (although they can be reinstated by selecting **Restore Defaults**).

Customized Search

You can customize search results to display only desired categories of matches on the **Home > User Info** page. Go to the **Search Preferences** section and select **Yes** in the **Customize Search** field, then select or unselect categories of results and save your changes. Customized search is turned off by default, and all boxes are selected.

Figure 15 Home > User Info Customized Search Preferences

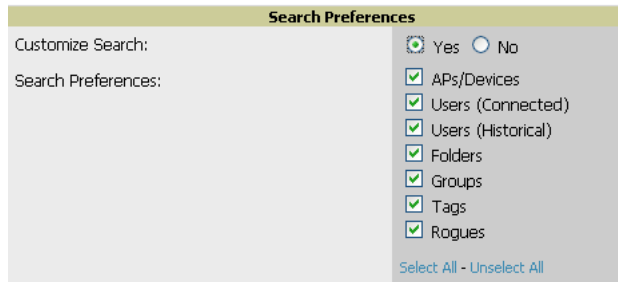


Setting Severe Alert Warning Behavior

You can control the alert levels you can see on the **Alerts** top header stats link from the **Home > User Info** page. When a trigger is assigned a severity of **Critical**, it generates a severe alert. When a severe alert exists, a new component named **Severe Alerts** appears at the right of the **Status** field in bold red font.

Only users who are enabled for viewing critical alerts on the **Home > User Info** page can see severe alerts. The **Severe Alert Threshold** dropdown menu, located in the **Top Header Stats** section of the **Home > User Info** page is shown in [Figure 16](#).

Figure 16 Home > User Info > Severe Alert Threshold Dropdown Menu

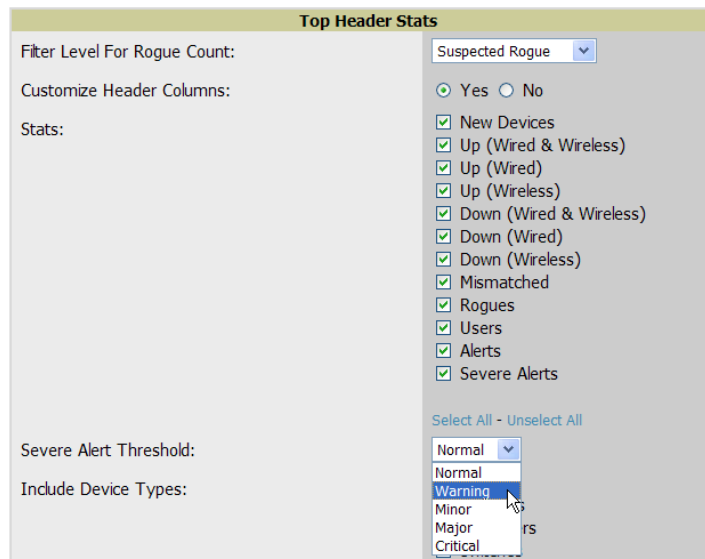

Defining General OV3600 Server Settings

This section describes all pages accessed from the **OV3600 Setup** tab and describes two pages in the **Device Setup** tab—the **Communication** and **Upload Files** pages. Once required and optional configurations in this chapter are complete, continue to later chapters in this document to create and deploy device groups and device configuration and discovery on the network.

The first step in configuring OV3600 is to specify the general settings for the OV3600 server. [Figure 17](#) illustrates the **OV3600 Setup > General** page:

Figure 17 *OV3600 Setup > General Page Illustration*

General		Historical Data Retention	
System Name:	Management Platform	Inactive User Data (0-1500 days, zero disables):	60
Automatically monitor/manage new devices:	No	User Association History (0-550 days, zero disables):	14
Default Group:	Access Points	Tag History (0-550 days, zero disables):	14
Device Configuration Audit Interval:	Daily	Rogue AP Discovery Events (2-550 days, zero disables):	14
Automatically repair misconfigured devices:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Unless this value is 0, it cannot be smaller than the 'Delete Rogues not detected for' window (0) configured on the RAPIDS Setup page.	
Send debugging messages to Alcatel-Lucent:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Reports (0-550 days, zero disables):	60
Nightly Maintenance Time (00:00 - 23:59):	04:15	Automatically acknowledge alerts (0-550 days, zero disables):	14
Top Header		Acknowledged Alerts (0-550 days, zero disables):	60
Stats:	<input checked="" type="checkbox"/> New Devices <input checked="" type="checkbox"/> Up (Wired & Wireless) <input type="checkbox"/> Up (Wired) <input type="checkbox"/> Up (Wireless) <input checked="" type="checkbox"/> Down (Wired & Wireless) <input type="checkbox"/> Down (Wired) <input type="checkbox"/> Down (Wireless) <input checked="" type="checkbox"/> Mismatched <input checked="" type="checkbox"/> Rogues <input checked="" type="checkbox"/> Users <input checked="" type="checkbox"/> Alerts Select All - Unselect All	Radius/ARM/IDS Events (0-550 days, zero disables):	14
Include device types:	<input checked="" type="checkbox"/> Fat APs <input checked="" type="checkbox"/> Thin APs <input checked="" type="checkbox"/> Controllers <input checked="" type="checkbox"/> Switches <input checked="" type="checkbox"/> Others Select All - Unselect All	Archived Device Configurations (0-100, zero disables):	10
Search Preferences		Archive device configs even if they only have rogue classifications:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Search Preferences:	<input checked="" type="checkbox"/> APs/Devices <input checked="" type="checkbox"/> Users (Connected) <input checked="" type="checkbox"/> Users (Historical) <input checked="" type="checkbox"/> Folders <input checked="" type="checkbox"/> Groups <input checked="" type="checkbox"/> Tags <input checked="" type="checkbox"/> Rogues Select All - Unselect All	Guest Users (0-550 days, zero disables):	30
Home Overview Preferences		Closed Helpdesk Incidents (0-550 days, zero disables):	30
Configure Channel Busy Threshold:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Inactive SSIDs (0-550 days, zero disables):	425
Display		Inactive Interfaces (0-550 days, zero disables):	425
Use fully qualified domain names: Cisco IOS/Aruba/Alcatel-Lucent only	<input type="radio"/> Yes <input checked="" type="radio"/> No	Interface Status History (0-550 days, zero disables):	425
Show vendor-specific device settings for:	Only devices on this OV3600	Interfering Devices (0-550 days, zero disables):	14
Selected Device Types:	3Com, Alcatel-Lucent, Alcatel-Lucent, AirMesh, Alcatel-Lucent Switch, Aruba, Cisco IOS AP, Cisco Switch, Cisco WLC, HP ProCurve 420, HP ProCurve MSM, HP ProCurve Switch, Juniper, Nortel, Symbol, Symbol Wireless Switch	Device Events (Syslog, Traps) (1-31 days):	2
Look up wireless user hostnames:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Firmware Upgrade Defaults	
DNS Hostname Lifetime:	1 hour	Allow firmware upgrades in monitor-only mode:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Device Troubleshooting Hint: Displayed along with the 'Down' reason if a device's upstream device is up.		Simultaneous Jobs (1-20):	20
Device Configuration		Simultaneous Devices Per Job (1-1000):	20
Guest User Configuration:	Enabled for devices in Ma	Failures before stopping (0-20, zero disables):	1
Allow WMS Offload configuration in monitor-only mode:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Additional OV3600 Services	
Allow disconnecting users while in monitor-only mode:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Enable FTP server: required to manage Cisco WLC APs; optional for FTP upgrades on supported devices.	<input type="radio"/> Yes <input checked="" type="radio"/> No
Allow non-UTF8 characters:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Enable RTLS collector: Aruba/Alcatel-Lucent only	<input type="radio"/> Yes <input checked="" type="radio"/> No
Use Global Alcatel-Lucent Configuration: Changing this setting may require importing configuration on your devices.	<input type="radio"/> Yes <input checked="" type="radio"/> No	Use embedded mail server:	<input checked="" type="radio"/> Yes <input type="radio"/> No Send Test Email
OV3600 Features		Process user roaming traps from Cisco WLC:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Display VisualRF:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Enable AMON Data Collection:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Display RAPIDS:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Performance	
Display Helpdesk:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Monitoring Processes (1-2):	2
External Logging		Maximum number of configuration processes (1-10):	5
Include event log messages:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Maximum number of audit processes (1-10):	3
Include audit log messages:	<input type="radio"/> Yes <input checked="" type="radio"/> No	SNMP Fetcher Count (2-6):	2
<div style="text-align: right;"> <input type="button" value="Save"/> <input type="button" value="Revert"/> </div>			

Perform the following steps to configure OV3600 server settings globally across the product (for all users).

1. Browse to the **OV3600 Setup > General** page, locate the **General** area, and enter the information described in [Table 9](#):

Table 9 *OV3600 Setup > General > General Section Fields and Default Values*

Setting	Default	Description
System Name		Defines your name for the OV3600 server, with a maximum limit of 20 alphanumeric characters.
Automatically monitor/manage new devices	No	<p>Launches a drop-down menu that specifies the behavior OV3600 should follow when it discovers a new device. Devices are placed in the default group which is defined in the next field. Choose one of these options:</p> <ul style="list-style-type: none"> • Monitor Only: OV3600 compares the current configuration with the policy, and displays any discrepancies on the APs/Devices > Audit page, but does not change the configuration of the device. • Manage Read/Write: OV3600 compares the device's current configuration settings with the Group configuration settings and automatically updates the device's configuration to match the Group policy. Automatically placing devices in Managed Read/Write mode will overwrite the configuration with the desired configuration in OV3600, and should only be used when you are certain OV3600 has the correct configuration. This can be risky, and generally, devices should be placed in Monitor Only mode as the default. • Thin APs Only: Only thin APs will be automatically authorized in Monitor Only mode. This setting is ideal for mixed environments of thin and autonomous APs, or for very large subnets in which you don't want to auto-monitor all switches.
Default Group	Access Points	Sets the device group that this OV3600 server uses as the default for device-level configuration. Select a device group from the drop-down menu. A group must first be defined on the Groups > List page to appear in this drop-down menu. For additional information, refer to Chapter 4, "Configuring and Using Device Groups in OV3600" on page 75.
Device Configuration Audit Interval	Daily	<p>If enabled, this setting defines the interval of queries which compares actual device settings to the Group configuration policies stored in the OV3600 database. If the settings do not match, the AP is flagged as mismatched and OV3600 sends an alert via email, log, or SNMP.</p> <p>Alcatel-Lucent recommends enabling this feature with a frequency of Daily or more frequently to ensure that your AP configurations comply with your established policies.</p>
Automatically Repair Misconfigured Devices	Disabled	If enabled, this setting automatically reconfigures the settings on the device when the device is in Manage mode and OV3600 detects a variance between actual device settings and the Group configuration policy in the OV3600 database.
Send Debugging Messages	Enabled	If enabled, OV3600 automatically emails any system errors to Alcatel-Lucent Support to assist in debugging.
Nightly Maintenance Time (00:00 - 23:59)	04:15	Specifies the local time of day OV3600 should perform daily maintenance. During maintenance, OV3600 cleans the database, performs backups, and completes a few other housekeeping tasks. Such processes should not be performed during peak hours of demand.
Check for Software Updates	Yes	Enables OV3600 to check automatically for multiple update types. Check daily for OV3600 updates, to include enhancements, device template files, important security updates, and other important news. This setting requires a direct internet connection via OV3600.

2. Select the **Top Header Stats** to be displayed at the top of the interface. For more detailed information about each option, refer to [Table 6 on page 23](#).
3. On the **OV3600 Setup > General** page, locate the **Home Overview Preferences** section. [Table 11](#) describes the settings and default values in this section.

Table 10 *OV3600 Setup > General > Home Overview Preferences Fields and Default Values*

Setting	Default	Description
Configure Channel Busy Threshold	Yes	Whether you want to configure the threshold at which a channel is considered to be busy at the Top Folders By Radio Channel Usage Overview widget.
Channel Busy Threshold (%)	10	The threshold percent at which the radio channel is considered busier than normal.

4. On the **OV3600 Setup > General** page, locate the **Display** section and select the **Group** tabs and options to appear by default in new device groups.



Changes to this section apply across all of OV3600. These changes affect all users and all new device groups.

[Table 11](#) describes the settings and default values in this section.

Table 11 *OV3600 Setup > General > Display Fields and Default Values*

Setting	Default	Description
Use fully qualified domain names	No	Sets OV3600 to use fully qualified domain names for APs instead of the AP name. For example, "testap.yourdomain.com" would be used instead of "testap." This option is supported only for Cisco IOS, Dell PowerConnect W, Alcatel-Lucent Networks, and Alcatel-Lucent devices.
Show vendor-specific device settings for	All Devices	Displays a drop-down menu that determines which Group tabs and options are viewable by default in new groups, and selects the device types that use fully qualified domain names. This field has three options, as follows: <ul style="list-style-type: none"> • All devices—When selected, OV3600 displays all Group tabs and setting options. • Only devices on this OV3600—When selected, OV3600 hides all options and tabs that do not apply to the APs and devices currently on OV3600. • Selected device type—When selected, a new field appears listing many device types. This option allows you to specify the device types for which OV3600 displays group settings. You can override this setting.
Look up wireless user hostnames	Yes	Enables OV3600 to look up the DNS for new user hostnames. This setting can be turned off to troubleshoot performance issues.
DNS Hostname Lifetime	24 hours	Defines the length of time, in hours, for which a DNS server hostname remains valid on OV3600, after which OV3600 refreshes DNS lookup: <ul style="list-style-type: none"> • 1 hour • 2 hours • 4 hours • 12 hours • 24 hours
Device Troubleshooting Hint	N/A	The message included in this field is displayed along with the Down if a device's upstream device is up. This applies to all APs and controllers but not to routers and switches.

5. Locate the **Device Configuration** section and adjust the settings. [Table 12](#) describes the settings and default values of this section.

Table 12 *OV3600 Setup > General > Device Configuration Section Fields and Default Values*

Setting	Default	Description
Guest User Configuration	Disabled	Enables or prevents guest users to/from pushing configurations to devices. Options are Disabled (default), Enabled for Devices in Manage (Read/Write) , Enabled for all Devices .
Allow WMS offload configuration in monitor-only mode	No	When Yes is selected, you can enable the AOS-W WMS offload feature on the Groups > Basic page for WLAN switches in Monitor Only mode. Enabling WMS offload does not cause a controller to reboot. This option is supported only for Alcatel-Lucent Networks and Dell PowerConnect W devices.
Allow disconnecting users while in monitor-only mode	No	Sets whether you can deauthenticate a user for a device in monitor-only mode. If set to No , the Deauthenticate User button for in a Users > User Detail page is enabled only for Managed devices.
Allow non-UTF8 characters	No	Whether OV3600 can use character sets other than UTF-8 for configuration settings.
Use Global Alcatel-Lucent Configuration	Yes	Enables Alcatel-Lucent configuration profile settings to be globally configured and then assigned to device groups. If disabled, settings can be defined entirely within Groups > Alcatel-Lucent Config instead of globally. NOTE: Changing this setting may require importing configuration on your devices. When an existing Alcatel-Lucent configuration setup is to be converted from global to group, follow these steps: <ol style="list-style-type: none"> 1. Set all the devices to Monitor Only mode before setting the flag. 2. Each device Group will need to have an import performed from the Audit page of a controller in the OV3600 group. 3. All of the thin APs need to have their settings imported after the device group settings have finished importing. 4. If the devices were set to Monitor Only mode, set them back to Managed mode.

5. Locate the **OV3600 Features** section and adjust settings to enable or disable VisualRF and RAPIDS. [Table 13](#) describes these settings and default values.

Table 13 *OV3600 Setup > General > OV3600 Features Fields and Default Values*

Setting	Default	Description
Display VisualRF	No	Enable or disable the VisualRF navigation tab.
Display RAPIDS	No	Enable or disable the RAPIDS navigation tab.
Display Helpdesk	No	Enable or disable the Helpdesk navigation tab and Helpdesk links

6. Locate the **External Logging** section and adjust settings to send audit and system events to an external syslog server. [Table 14](#) describes these settings and default values. You can send a test message using the Send Test Message button once any of the logging options are enabled.

Table 14 OV3600 Setup > General > External Logging Section Fields and Default Values

Setting	Default	Description
Include event log messages	No	Select Yes to send event log messages to an external syslog server.
Syslog Server	N/A	Enter the IP address of the syslog server.
Syslog Port	514	Enter the port of the syslog server.
Event log facility	local1	Select the facility for the event log from the drop-down menu.
Include audit log messages	No	Select Yes to send audit log messages to an external syslog server.
Audit log facility	local1	Select the facility for the audit log from the drop-down menu.

7. Locate the **Historical Data Retention** section and specify the number of days you wish to keep client session records and rogue discovery events. [Table 15](#) describes the settings and default values of this section. Many settings can be set to have no expiration date.

Table 15 OV3600 Setup > General > Historical Data Retention Fields and Default Values

Setting	Default	Description
Inactive User Data (2-1500 days)	60	Defines the number of days OV3600 stores basic information about inactive users. Alcatel-Lucent recommends a shorter setting of 60 days for customers with high user turnover such as hotels. The longer you store inactive user data, the more hard disk space you require.
User Association History (2-550 days)	14	Defines the number of days OV3600 stores client session records. The longer you store client session records, the more hard disk space you require.
Tag History (2-550 days)	14	Sets the number of days OV3600 retains location history for Wi-Fi tags.
Rogue AP Discovery Events (2-550 days)	14	Defines the number of days OV3600 stores Rogue Discovery Events. The longer you store discovery event records, the more hard disk space you require.
Reports (2-550 days)	60	Defines the number of days OV3600 stores Reports. Large numbers of reports, over 1000, can cause the Reports > Generated page to be slow to respond.
Automatically Acknowledged Alerts (0-550 days, zero disables)	14	Defines automatically acknowledged alerts as the number of days OV3600 retains alerts that have been automatically acknowledged. Setting this value to 0 disables this function, and alerts will never expire or be deleted from the database.
Acknowledged Alerts (2-550 days)	60	Defines the number of days OV3600 retains information about acknowledged alerts. Large numbers of Alerts, over 2000, can cause the System > Alerts page to be slow to respond.

Table 15 OV3600 Setup > General > Historical Data Retention Fields and Default Values (Continued)

Setting	Default	Description
Radius/ARM/IDS Events (0-550 days, zero disables)	14	Defines the number of days OV3600 retains information about RADIUS, ARM, and IDS events. Setting this value to 0 disables this function, and the information will never expire or be deleted from the database.
Archived Device Configurations (1-100)	10	Sets the number of archived configurations to retain for each device.
Guest Users (0-550 days, zero disables)	30	Sets the number of days that OV3600 is to support any guest user. A value of 0 disables this function, and guest users will never expire or be deleted from the OV3600 database.
Closed Helpdesk Incidents (0-550 days, zero disables)	30	Sets the number of days that OV3600 is to retain records of closed Helpdesk incidents once closed. Setting this value to 0 disables this function, and Helpdesk information will never expire or be deleted from the database. This field only appears if you have enabled Helpdesk in the OV3600 Features section.
Inactive SSIDs (0-550 days, zero disables)	425	Sets the number of days OV3600 retains historical information after OV3600 last saw a client on a specific SSID. Setting this value to 0 disables this function, and inactive SSIDs will never expire or be deleted from the database.
Inactive Interfaces (0-550 days, zero disables)	425	Sets the number of days OV3600 retains inactive interface information after the interface has been removed or deleted from the device. Setting this value to 0 disables this function, and inactive interface information will never expire or be deleted from the database.
Interface Status History (0-550 days, zero disables)	425	Sets the number of days OV3600 retains historical information on interface status. Setting this value to 0 disables this function.
Interfering Devices (0-550 days, zero disables)	14	Sets the number of days OV3600 retains historical information on interfering devices. Setting this value to 0 disables this function.
Device Events (Syslog, Traps)	2	Sets the number of days OV3600 retains historical information on device events such as syslog entries and SNMP traps. Setting this value to 0 disables this function. Refer to “Viewing Device Events in System > Syslog & Traps” on page 195.

- Locate the **Firmware Upgrade Defaults** section and adjust settings as required. This section allows you to configure the default firmware upgrade behavior for OV3600. [Table 16](#) describes the settings and default values of this section.

Table 16 OV3600 Setup > General > Firmware Upgrade Defaults Fields and Default Values

Setting	Default	Description
Allow firmware upgrades in monitor-only mode	No	If Yes is selected, OV3600 upgrades the firmware for APs in Monitor Only mode. When OV3600 upgrades the firmware in this mode, the desired configuration are not be pushed to OV3600. Only the firmware is applied. The firmware upgrade may result in configuration changes. OV3600 does not correct those changes when the AP is in Monitor Only mode.
Simultaneous Jobs (1-20)	20	Defines the number of jobs OV3600 runs at the same time. A job can include multiple APs.

Table 16 OV3600 Setup > General > Firmware Upgrade Defaults Fields and Default Values (Continued)

Setting	Default	Description
Simultaneous Devices Per Job (1-1000)	20	Defines the number of devices that can be in the process of upgrading at the same time. OV3600 only runs one TFTP transfer at a time. As soon as the transfer to a device has completed, the next transfer begins, even if the first device is still in the process of rebooting or verifying configuration.
Failures before stopping (0-20)	1	Sets the default number of upgrade failures before OV3600 pauses the upgrade process. User intervention is required to resume the upgrade process. Setting this value to 0 disables this function.

9. Locate the **Additional OV3600 Services** section, and adjust settings as required. [Table 17](#) describes the settings and default values of this section.

Table 17 OV3600 Setup > General > Additional OV3600 Services Fields and Default Values

Setting	Default	Description
Enable FTP Server	No	Enables or disables the FTP server on OV3600. The FTP server is only used to manage Cisco Aironet 4800 APs. Alcatel-Lucent recommends disabling the FTP server if you do not have any Cisco Aironet 4800 APs in the network.
Enable RTLS Collector	No	Enables or disables the RTLS Collector, which is used to allow AOS-W switches to send signed and encrypted RTLS (real time locating system) packets to VisualRF-- in other words, OV3600 becomes the acting RTLS server. The RTLS server IP address must be configured on each switch. This function is used for VisualRF to improve location accuracy and to locate chirping asset tags. This function is supported only for Dell PowerConnect W, Alcatel-Lucent and Alcatel-Lucent Networks devices. With selection of Yes , the following additional fields appear, which you should populate to match the settings configured on the switch: <ul style="list-style-type: none"> ● RTLS Port—Specify the port for the OV3600 RTLS server. ● RTLS Username—Enter the user name used by the switch to decode RTLS messages. ● RTLS Password—Enter the RTLS server password that matches the switches' value.
Use embedded mail server	Yes	Enables or disables the embedded mail server that is included with OV3600. This field supports a Send Test Email button for testing server functionality. This button prompts you with a To and From field in which you must enter valid email addresses, and a button to send a test email.
Process user roaming traps from Cisco WLC	Yes	Whether OV3600 should parse client association and authentication traps from Cisco WLC controllers to give real time information on users connected to the wireless network.
Enable AMON data collection	Yes	Allows OV3600 to collect enhanced data from Alcatel-Lucent devices on certain firmware versions; see the <i>Best Practices Guide</i> for more details.

10. Locate the **Performance** section. Performance tuning is unlikely to be necessary for many OV3600 implementations, and likely provides the most improvements for customers with extremely large Pro or

Enterprise installations. Please contact AlcatelAlcatel-Lucent support if you think you might need to change any of these settings. Table 18 describes the settings and default values of this section.

Table 18 OV3600 Setup > General > Performance Fields and Default Values

Setting	Default	Description
Monitoring Processes	Based on the number of cores for your server	Optional setting configures the throughput of monitoring data. Increasing this setting allows OV3600 to process more data per second, but it can take resources away from other OV3600 processes. Please contact AlcatelAlcatel-Lucent support if you think you might need to increase this setting for your network.
Maximum number of configuration processes	5	Increases the number of processes that are pushing configurations to your devices, as an option. The optimal setting for your network depends on the resources available, especially RAM. Please contact Alcatel-Lucent support if you think you might need to increase this setting for your network.
Maximum number of audit processes	3	Increases the number of processes that audit configurations for your devices, as an option. The optimal setting for your network depends on the resources available, especially RAM. Contact AlcatelAlcatel-Lucent support if you are considering increasing this setting for your network.
Verbose Logging of SNMP Configuration	No	Enables or disables logging detailed records of SNMP configuration information.
SNMP Rate Limiting for Monitored Devices	No	When enabled, OV3600 fetches SNMP data more slowly, potentially reducing device CPU load. Alcatel-Lucent recommends enabling this global setting when monitoring Alcatel-Lucent switches only if your network contains a majority of legacy switches (800, 2400, 5000, switches that use Supervisor Module II). If your network mainly uses newer processors (3000 series, 600 series, the M3 module in the 6000 series), Alcatel-Lucent strongly recommends disabling this setting.
RAPIDS Processing Priority	Low	Defines the processing and system resource priority for RAPIDS in relation to OV3600 as a whole. When OV3600 is processing data at or near its maximum capacity, reducing the priority of RAPIDS can ensure that processing of other data (such as client connections and bandwidth) is not adversely impacted. The default priority is Low . You can also tune your system performance by changing group poll periods.

11. Select **Save** when the **General Server** settings are complete and whenever making subsequent changes.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Defining OV3600 Network Settings

The next step in configuring OV3600 is to confirm the OV3600 network settings. Define these settings by navigating to the **OV3600 Setup > Network** page. [Figure 18](#) illustrates the contents of this page.

Figure 18 *OV3600 Setup > Network Page Illustration*

Perform the following steps to define the OV3600 network settings:

1. Locate the **Primary** and **Secondary Network Interface** sections. The information in these sections should match what you defined during initial network configuration and should not require changes. [Table 19](#) describes the settings and default values.

Table 19 *Primary and Secondary Network Interface Fields and Default Values*

Setting	Default	Description
IP Address	None	Sets the IP address of the OV3600 network interface. This address must be a static IP address.
Hostname	None	Sets the DNS name assigned to the OV3600 server.
Subnet Mask	None	Sets the subnet mask for the primary network interface.
Gateway	None	Sets the default gateway for the network interface.
Primary DNS IP	None	Sets the primary DNS IP address for the network interface.
Secondary DNS IP	None	Sets the secondary DNS IP address for the network interface.
Secondary Network Interface	No	Select Yes to enable a secondary network interface. You must also define the IP address and subnet mask.

2. On the **OV3600 Setup > Network** page, locate the **Network Time Protocol (NTP)** section. The Network Time Protocol is used to synchronize the time between OV3600 and your network reference NTP server. NTP servers synchronize with external reference time sources, such as satellites, radios, or modems.



Specifying NTP servers is optional. NTP servers synchronize the time on the OV3600 server, not on individual access points.

To disable NTP services, clear both the **Primary** and **Secondary** NTP server fields. Any problem related to communication between OV3600 and the NTP servers creates an entry in the event log. [Table 20](#)

describes the settings and default values in more detail. For more information on ensuring that OV3600 servers have the correct time, please see <http://support.ntp.org/bin/view/Servers/NTPPoolServers>.

Table 20 OV3600 Setup > Network > Secondary Network Fields and Default Values

Setting	Default	Description
Primary	ntp1.yourdomain.com	Sets the IP address or DNS name for the primary NTP server.
Secondary	ntp2.yourdomain.com	Sets the IP address or DNS name for the secondary NTP server.

3. On the **OV3600 Setup > Network** page, locate the **Static Routes** area. This section displays network, subnet mask, and gateway settings that you have defined elsewhere from a command-line interface.



This section does not enable you to configure new routes or remove existing routes.

4. Select **Save** when you have completed all changes on the **OV3600 Setup > Network** page, or select **Revert** to return to the last settings. **Save** restarts any affected services and may temporarily disrupt your network connection.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 configuration.

Creating OV3600 Users

OV3600 installs with only one OV3600 user—the **admin**, who is authorized to:

- define additional users with varying levels of privilege, be it manage read/write or monitoring.
- limit the viewable devices as well as the level of access a user has to the devices.

Each general user that you add needs a **Username**, a **Password**, and a **Role**. Use unique and meaningful user names as they are recorded in the log files when you or other users make changes in OV3600.



Username and password are not required if you configure OV3600 to use RADIUS or TACACS authentication. You do not need to add individual users to the OV3600 server if you use RADIUS or TACACS authentication.


The user *role* defines the user type, access level, and the top folder for that user. User roles are defined on the **OV3600 Setup > Roles** page. Refer to the next procedure in this chapter for additional information, “[Creating OV3600 User Roles](#)” on page 48.

The **admin** user can provide optional additional information about the user including the user's real name, email address, phone number, and so forth.

Perform the following steps to display, add, edit, or delete OV3600 users of any privilege level. You must be an **admin** user to complete these steps.

1. Go to the **OV3600 Setup > Users** page. This page displays all users currently configured in OV3600. [Figure 19](#) illustrates the contents and layout of this page.

Figure 19 *OV3600 Setup > Users Page Illustration*



2. Select **Add** to create a new user, select the pencil icon to edit an existing user, or select a user and select **Delete** to remove that user from OV3600. When you select **Add** or the edit icon, the **Add User** page appears, illustrated in [Figure 20](#).

Figure 20 *OV3600 Setup > Users > Add/Edit User Page Illustration*

3. Enter or edit the settings on this page. [Table 21](#) describes these settings in additional detail.

Table 21 *OV3600 Setup > User > Add/Edit User Fields and Default Values*

Setting	Default	Description
Username	None	Sets the username as an alphanumeric string. The Username is used when logging in to OV3600 and appears in OV3600 log files.
Role	None	Specifies the User Role that defines the Top viewable folder, type and access level of the user specified in the previous field. The admin user defines user roles on the OV3600 Setup > Roles page, and each user in the system is assigned to a role.
Password	None	Sets the password for the user being created or edited. Enter an alphanumeric string without spaces, and enter the password again in the Confirm Password field. NOTE: Because the default user's password is identical to the name, Alcatel-Lucent strongly recommends that you change this password.
Name	None	Allows you to define an optional and alphanumeric text field that takes note of the user's actual name.
Email Address	None	Allows you to specify a specific email address that will propagate throughout many additional pages in OV3600 for that user, including reports, triggers, and alerts.
Phone	None	Allows you to enter an optional phone number for the user.
Notes	None	Enables you to cite any additional notes about the user, including the reason they were granted access, the user's department, or job title.

4. Select **Add** to create the new user, **Save** to retain changes to an existing user, or **Cancel** to cancel out of this screen. The user information you have configured appears on the **OV3600 Setup > Users** page and the user propagates to all other OV3600 pages and relevant functions.



OV3600 enables user roles to be created with access to folders within multiple branches of the overall hierarchy. This feature assists non-administrator users who support a subset of accounts or sites within a single OV3600 deployment, such as help desk or IT staff.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Creating OV3600 User Roles

The **OV3600 Setup > Roles** page defines the viewable devices, the operations that can be performed on devices, and general OV3600 access. VisualRF uses the same user roles as defined for OV3600—users can see floor plans that contain an AP to which they have access in OV3600, although only visible APs appear on the floor plan.

Users can also see any building that contains a visible floor plan, and any campus that contains a visible building.



In **VisualRF > Setup > Server Settings**, a new flag added in OV3600 7.2 allows you to restrict the visibility of empty floor plans to the role of the user who created them. In previous versions, a floor plan without APs could be visible to all users. By default, this setting is set to No.

When a new role is added to OV3600, VisualRF must be restarted for the new user to be enabled. Refer to [Chapter 11, “Using VisualRF” on page 277](#) for additional information.

User **roles** can be created that have access to folders within multiple branches of the overall hierarchy. This feature assists non-administrative users, such as help desk or IT staff, who support a subset of accounts or sites within a single OV3600 deployment. You can restrict user roles to multiple folders within the overall hierarchy even if they do not share the same top-level folder. Non-admin users are only able to see data and users for devices within their assigned subset of folders.

Perform the following steps to view, add, edit, or delete user **roles**:

1. Go to the **OV3600 Setup > Roles** page. This page displays all roles currently configured in OV3600. [Figure 21](#) illustrates the contents and layout of this page.

Figure 21 *OV3600 Setup > Roles Page Illustration*

New Role

	Name ▲	Enabled	Type	Access Level	Top Folder	Visible Groups	RAPIDS	VisualRF	Helpdesk
<input type="checkbox"/>	My role	Yes	Guest Access Sponsor	-	Top	-	None	Read Only	No
<input type="checkbox"/>	Administration	Yes	Administrator		Top	All	Read/Write	Read/Write	Yes
<input type="checkbox"/>	Read-Only Monitoring & Auditing	Yes	AP/Device Manager	Audit (Read Only)	Top	All	None	Read Only	No

Select All - Unselect All

2. Select **Add** to create a new role, select the pencil icon to edit an existing role, or select a checkbox and select **Delete** to remove that role from OV3600. When you select **Add** or the edit icon, the **Add/Edit Role** page appears, illustrated in [Figure 22](#).

Figure 22 OV3600 Setup > Roles > Add/Edit Role Page Illustration

3. Enter or edit the settings on this page. [Table 22](#) describes these settings in additional detail.

As explained earlier in this section, **Roles** define the type of user-level access, the user-level privileges, and the view available to the user for device groups and devices in OV3600. [Table 22](#) describes the settings and default values of this section.

Table 22 OV3600 Setup > Roles > Add/Edit Roles Fields and Default Values

Setting	Default	Description
Name	None	Sets the administrator-definable string that names the role. Alcatel-Lucent recommends that the role name indicates the devices and groups that are viewable, as well as the privileges granted to that role.
Enabled	Yes	Disables or enables the role. Disabling a role prevents all users of that role from logging in to OV3600.
Type	AP/Device Manager	Defines the type of role. OV3600 supports the following role types: <ul style="list-style-type: none"> ● OV3600 Administrator—The OV3600 Administrator has full access to OV3600 and all of the devices. Only the OV3600 Administrator can create new users or access the OV3600 Setup page, the VisualRF > Setup page, VisualRF > Audit Log page, System > OV3600 Events, and System > Performance. ● AP/Device Manager—AP/Device Managers have access to a limited number of devices and groups based on the Top folder and varying levels of control based on the Access Level. ● Guest Access Sponsor—Limited-functionality role to allow helpdesk or reception desk staff to grant wireless access to temporary personnel. This role only has access to the defined top folder of APs.

Table 22 OV3600 Setup > Roles > Add/Edit Roles Fields and Default Values (Continued)

Setting	Default	Description
AP/Device Access Level	None	<p>Defines the privileges the role has over the viewable APs. OV3600 supports three privilege levels, as follows:</p> <ul style="list-style-type: none"> • Manage (Read/Write)—Manage users can view and modify devices and Groups. Selecting this option causes a new field, Allow authorization of APs/Devices, to appear on the page, and is enabled by default. • Audit (Read Only)—Audit users have read only access to the viewable devices and Groups. Audit users have access to the APs/Devices > Audit page, which may contain sensitive information including AP passwords. • Monitor (Read Only)—Monitor users have read-only access to devices and groups and VisualRF. Monitor users cannot view the APs/Devices > Audit page which may contain sensitive information, including passwords.
Top Folder	None	<p>Defines the Top viewable folder for the role. The role is able to view all devices and groups contained by the Top folder. The top folder and its subfolders must contain all of the devices in any of the groups it can view.</p> <p>NOTE: OV3600 enables user roles to be created with access to folders within multiple branches of the overall hierarchy. This feature assists non-administrator users who support a <i>subset of accounts or sites</i> within a single OV3600 deployment, such as help desk or IT staff.</p> <p>User roles can be restricted to multiple folders within the overall hierarchy, even if they do not share the same top-level folder. Non-administrator users are only able to see data and users for devices within their assigned subset of folders.</p>
RAPIDS	None	<p>Sets the RAPIDS privileges, which are set separately from the APs/Devices. This field specifies the RAPIDS privileges for the role, and options are as follows:</p> <ul style="list-style-type: none"> • None— Cannot view the RAPIDS tab or any Rogue APs. • Read Only—The user can view the RAPIDS pages but cannot make any changes to rogue APs or perform OS scans. • Read/Write—The user may edit individual rogues, classification, threat levels and notes, and perform OS scans. • Administrator—Has the same privileges as the Read/Write user, but can also set up RAPIDS rules, override scores, and is the only user who can access the RAPIDS > Setup page.
VisualRF	None	<p>Sets the VisualRF privileges, which are set separately from the APs/Devices, for this role. Options are as follows:</p> <ul style="list-style-type: none"> • Read Only—The user can view the VisualRF pages but cannot make any changes to floor plans. • Read/Write—The user may edit individual floor plans, buildings, and campuses.
Helpdesk	No	<p>Sets the role to support helpdesk users, with parameters that are specific to the needs of helpdesk personnel supporting users on a wireless network.</p>
Enable Adobe Flash	Yes	<p>Enables the Adobe Flash application for all users who are assigned this role. Adobe Flash supports interactive graphics on the Home > Overview page, VisualRF, Quickview functions, the Radio Statistics page for thin AP radios, and additional OV3600 pages.</p> <p>NOTE: This field is only visible if a specific flag is set in the OV3600 database. By default this option is hidden and Flash is enabled for all users.</p>
Allow creation of Guest Users	Yes	<p>If this option is enabled, users with an assigned role of Monitoring or Audit can be given access to guest user account creation along with the option to allow a sponsor to change its username. A custom message can also be included. The Guest User Preferences section does not appear if Guest User Configuration is disabled in OV3600 Setup > General.</p>

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.

- Complete the required configurations in this chapter before proceeding. Alcatel-Lucent support remains available to you for any phase of OV3600 configuration.

Configuring Timeout, Login Message, TACACS+ and RADIUS Authentication


As of 7.3, OV3600 uses session-based authentication with a configurable login message and idle timeout. As an option, you can set OV3600 to use an external user database to simplify password management for OV3600 administrators and users. This section contains the following procedures to be followed in **OV3600 Setup > Authentication**:

- [Setting Up Login Configuration Options](#)
- [Setting Up Login Configuration Options](#)
- [Configuring RADIUS Authentication and Authorization](#)
- [Integrating a RADIUS Accounting Server](#)

Setting Up Login Configuration Options

Administrators can optionally configure OV3600's user idle timeout or a message-of-the-day that appears across the top of **Home > Overview** when a user first logs in, as shown in [Figure 23](#):

Figure 23 Login configuration field and results in OV3600 Login page

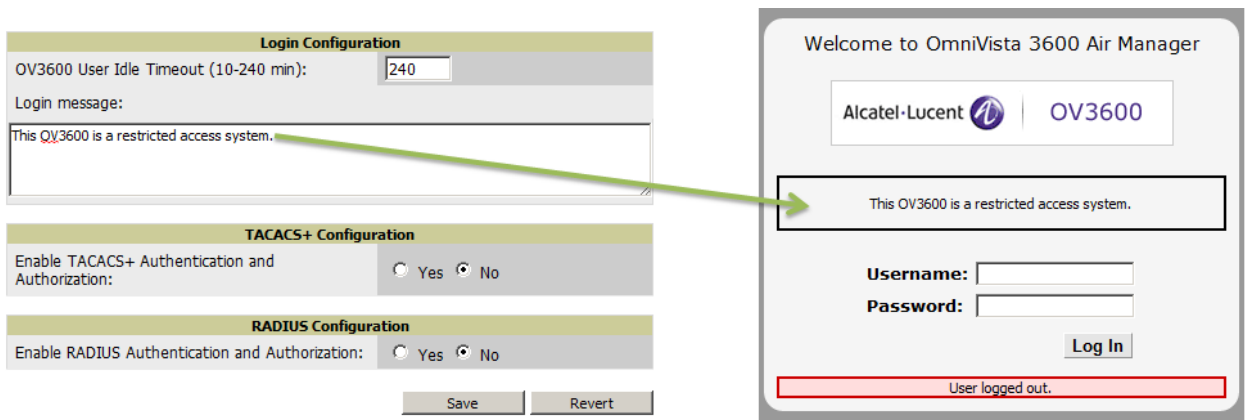

1. Go to **OV3600 Setup > Authentication**.
2. Complete the fields described on [Table 23](#):

Table 23 Login Configuration section of OV3600 Setup > Authentication

Field	Default	Description
OV3600 User Idle Timeout	60	Number of minutes of idle time until OV3600 automatically ends the user session. Affects all users of this OV3600. The range is 10-240 minutes.
Login message	blank	A persistent message that will appear for all of this OV3600's users after they log in.

3. Select Save if you are finished, or you can follow the next procedure to configure TACACS+ and RADIUS Authentication options.

Configuring TACACS+ Authentication

For TACACS+ capability, you must configure the IP/Hostname of the TACACS+ server, the TCP port, and the server shared secret. This TACACS+ configuration is for OV3600 users, and does not affect APs or users logging into APs.

1. Go to the **OV3600 Setup > Authentication** page. This page displays current status of TACACS+. [Figure 24](#) illustrates this page when neither TACACS+ nor RADIUS authentication is enabled in OV3600.

Figure 24 TACACS+ section of **OV3600 Setup > Authentication**

2. Select **No** to disable or **Yes** to enable TACACS+ authentication. If you select **Yes**, several new fields appear. Complete the fields described in [Table 24](#).

Table 24 **OV3600 Setup > Authentication** Fields and Default Values

Field	Default	Description
Primary Server Hostname/IP Address	N/A	Enter the IP address or the hostname of the primary TACACS+ server.
Primary Server Port	49	Enter the port for the primary TACACS+ server.
Primary Server Secret	N/A	Specify and confirm the primary shared secret for the primary TACACS+ server.
Secondary Server Hostname/IP Address	N/A	Enter the IP address or hostname of the secondary TACACS+ server.
Secondary Server Port	49	Enter the port for the secondary TACACS+ server.
Secondary Server Secret	N/A	Enter the shared secret for the secondary TACACS+ server.

3. Select **Save** and continue with additional steps.
4. To configure Cisco ACS to work with OV3600, you must define a new service named **OV3600** that uses https on the ACS server.
 - The OV3600 https service is added to the **TACACS+ (Cisco)** interface under the **Interface Configuration** tab.
 - Select a checkbox for a new service.
 - Enter **OV3600** in the service column and **https** in the protocol column.
 - Select **Save**.
5. Edit the existing groups or users in TACACS to use the “OV3600 service” and define a role for the group or user.

- The role defined on the **Group Setup** page in ACS must match the exact name of the role defined on the **OV3600 Setup > Roles** page.
- The defined role should use the following format: **role=<name_of_OV3600_role>**. One example is as follows:

role=DormMonitoring

As with routers and switches, OV3600 does not need to know usernames.

6. OV3600 also needs to be configured as an AAA client.
 - On the **Network Configuration** page, select **Add Entry**.
 - Enter the IP address of OV3600 as the **AAA Client IP Address**.
 - The secret should be the same value that was entered on the **OV3600 Setup > TACACS+** page.
7. Select **TACACS+** (Cisco IOS) in the **Authenticate Using** drop down menu and select **submit + restart**.



OV3600 checks the local username and password store before checking with the TACACS+ server. If the user is found locally, the local password and local role apply. When using TACAS+, it is not necessary or recommended to define users on the OV3600 server. The only recommended user is the backup administrator, in the event that the TACAS+ server goes down.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Configuring RADIUS Authentication and Authorization

For RADIUS capability, you must configure the IP/Hostname of the RADIUS server, the TCP port, and the server shared secret. Perform these steps to configuration RADIUS authentication:

1. Go to the **OV3600 Setup > Authentication** page. This page displays current status of RADIUS. [Figure 25](#) illustrates this page.

Figure 25 *OV3600 Setup > Authentication Page Illustration*

RADIUS Configuration	
Enable RADIUS Authentication and Authorization:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Primary Server Hostname/IP Address:	<input type="text" value="10.200.200.200"/>
Primary Server Port:	<input type="text" value="1645"/>
Primary Server Secret:	<input type="password" value="....."/>
Confirm Primary Server Secret:	<input type="password" value="....."/>
Secondary Server Hostname/IP Address:	<input type="text"/>
Secondary Server Port:	<input type="text" value="1812"/>
Secondary Server Secret:	<input type="password"/>
Confirm Secondary Server Secret:	<input type="password"/>

2. Select **No** to disable or **Yes** to enable TACACS+ or RADIUS authentication. If you select **Yes**, several new fields appear. Complete the fields described in [Table 25](#).

Table 25 *OV3600 Setup > Authentication Fields and Default Values*

Field	Default	Description
Primary Server Hostname/IP Address	N/A	Enter the IP address or the hostname of the primary RADIUS server.
Primary Server Port	1812	Enter the TCP port for the primary RADIUS server.
Primary Server Secret	N/A	Specify and confirm the primary shared secret for the primary RADIUS server.
Secondary Server Hostname/IP Address	N/A	Enter the IP address or the hostname of the secondary RADIUS server.
Secondary Server Port	1812	Enter the TCP port for the secondary RADIUS server.
Secondary Server Secret	N/A	Enter the shared secret for the secondary RADIUS server.

3. Select **Save** to retain these configurations, and continue with additional steps in the next procedure.

Integrating a RADIUS Accounting Server



OV3600 checks the local username and password before checking with the RADIUS server. If the user is found locally, the local password and role apply. When using RADIUS, it's not necessary or recommended to define users on the OV3600 server. The only recommended user is the backup admin, in case the RADIUS server goes down.

Optionally, you can configure RADIUS server accounting on **OV3600 Setup > RADIUS Accounting**. This capability is not required for basic OV3600 operation, but can increase the user-friendliness of OV3600 administration in large networks. [Figure 26](#) illustrates the settings of this optional configuration interface.

Perform the following steps and configurations to enable OV3600 to receive accounting records from a separate RADIUS server. [Figure 26](#) illustrates the display of RADIUS accounting clients already configured, and [Figure 27](#) illustrates the **Add RADIUS Accounting Client** page.

Figure 26 *OV3600 Setup > RADIUS Accounting Page Illustration*

New RADIUS Accounting Client [Import CSV](#)

	IP/Network	Nickname
<input type="checkbox"/>	10.0.0.0/8	test
<input type="checkbox"/>	10.11.0.0/16	off_site_network

[Check All](#) - [Uncheck All](#)

Figure 27 OV3600 Setup > RADIUS > Add RADIUS Accounting Client Page Illustration

1. To specify the RADIUS authentication server or network, browse to the **OV3600 Setup > RADIUS Accounting** page and select **Add**, illustrated in [Figure 27](#), and provide the information in [Table 26](#).
2. Select **Add**, then complete the following fields:

Table 26 OV3600 Setup > Radius Accounting Fields and Default Values

Setting	Default	Description
Nickname	None	Sets a user-defined name for the authentication server.
IP/Network	None	Cites the IP address or DNS Hostname for the authentication server if you only want to accept packets from one device. To accept packets from an entire network enter the IP/Netmask of the network (for example, 10.51.0.0/24).
Shared Secret (Confirm)	None	Sets the Shared Secret that is used to establish communication between OV3600 and the RADIUS authentication server.

What Next?

- Go to additional subtabs in **OV3600 Setup** to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Enabling OV3600 to Manage Your Devices

Once OV3600 is installed and active on the network, the next task is to define the basic settings that allow OV3600 to communicate with and manage your devices. Device-specific firmware files are often required or are highly desirable. Furthermore, the use of Web Auth bundles is advantageous for deployment of Cisco WLC wireless LAN controllers when they are present on the network.

This section contains the following procedures:

- [Configuring Communication Settings for Discovered Devices](#)
- [Loading Device Firmware Onto OV3600 \(optional\)](#)
 - [Overview of the Device Setup > Upload Firmware & Files Page](#)
 - [Loading Firmware Files to OV3600](#)

Configuring Communication Settings for Discovered Devices

To configure OV3600 to communicate with your devices, to define the default shared secrets, and to set SNMP polling information, navigate to the **Device Setup > Communication** page, illustrated in [Figure 28](#).

Figure 28 *Device Setup > Communication Page Illustration*

The screenshot shows the 'Device Setup > Communication' page. It is divided into several sections:

- Default Credentials:** A list of device models with 'Edit' and 'View' buttons for each. Models include 3Com, APC, Alcatel-Lucent, Aruba AirMesh, Alcatel-Lucent Switch, Aruba, Avaya, BelAir, Cisco Aironet 4800, Cisco IOS AP, Cisco Switch, Cisco VxWorks, Cisco WLC, Custom Device, and D-Link.
- SNMP Settings:** Fields for 'SNMP Timeout (3-60 sec):' (value 3) and 'SNMP Retries (1-20):' (value 3).
- SNMPv3 Informs:** An 'Add' button and a text field containing 'New SNMPv3 User'.
- Telnet/SSH Settings:** A field for 'Telnet/SSH Timeout (3-120 sec):' (value 10).
- HTTP Discovery Settings:** A field for 'HTTP Timeout (3-120 sec):' (value 5).
- ICMP Settings:** A radio button selection for 'Attempt to ping devices that were unreachable via SNMP:' with 'Yes' selected.
- Symbol 4131 and Cisco Aironet IOS SNMP Initialization:** Radio button options: 'Do not modify SNMP settings' (selected) and 'Enable read-write SNMP'.

At the bottom right, there are 'Save' and 'Revert' buttons.

Perform the following steps to define the default credentials and SNMP settings for the wireless network.

1. On the **Device Setup > Communication** page, locate the **Default Credentials** area. Enter the credentials for each device model on your network. The default credentials are assigned to all newly discovered APs.

The **Edit** button edits the default credentials for newly discovered devices. To modify the credentials for existing devices, use the **APs/Devices > Manage** page or the **Modify Devices** link on the **APs/Devices > List** page.



Community strings and shared secrets must have read-write access for OV3600 to configure the devices. Without read-write access, OV3600 may be able to monitor the devices but cannot apply any configuration changes.

2. Browse to the **Device Setup > Communication** page, locate the **SNMP Settings** section, and enter or revise the following information. [Table 27](#) lists the settings and default values.

Table 27 *Device Setup > Communication > SNMP Settings Fields and Default Values*

Setting	Default	Description
SNMP Timeout	3	Sets the time, in seconds, that OV3600 waits for a response from a device after sending an SNMP request.
SNMP Retries	3	Sets the number of times OV3600 tries to poll a device when it does not receive a response within the SNMP Timeout Period or the Group's Missed SNMP Poll Threshold setting (1-100). If OV3600 does not receive an SNMP response from the device after the specified number of retries, OV3600 classifies that device as Down .

3. Locate the **SNMP v3 Informs** section. Select **Add New SNMP v3 User** to reveal its configuration section. OV3600 users will need to configure all v3 users that are configured on the controller; the SNMP Inform receiver in the OV3600 will be restarted when users are changed or added to the controller.
 - **Username** - Username of the SNMP v3 user as configured on the controller.

- **Auth Protocol** - Can be MD5 or SHA. The default setting is SHA.
 - **Auth and Priv Passphrases** - Enter the auth and priv passphrases for the user as configured on the controller.
 - **Priv Protocol** - Can be DES or AES. The default setting is DES.
4. Locate the **Telnet/SSH Settings** section, and complete or adjust the default value for the field. [Table 28](#) shows the setting and default value.

Table 28 *Device Setup > Communication > Telnet/SSH Settings Fields and Default Values*

Setting	Default	Description
Telnet/SSH Timeout (3-120 sec)	10	Sets the timeout period in seconds used when performing Telnet and SSH commands.

5. Locate the **HTTP Discovery Settings** section and adjust the default value. [Table 29](#) shows the setting and default value.

Table 29 *Device Setup > Communication > HTTP Discovery Settings Fields and Default Values*

Setting	Default	Description
HTTP Timeout (3-120 sec)	5	Sets the timeout period in seconds used when running an HTTP discovery scan.

6. Locate the **ICMP Settings** section and adjust the default value as required. [Table 30](#) shows the setting and default value.

Table 30 *Device Setup > Communication > ICMP Settings Fields and Default Values*

Setting	Default	Description
Attempt to ping devices that were unreachable via SNMP	Yes	<ul style="list-style-type: none"> • When Yes is selected, OV3600 attempts to ping the AP device. • Select No if performance is affected in negative fashion by this function. If a large number of APs are unreachable by ICMP, likely to occur where there is in excess of 100 APs, the timeouts start to impede network performance. <p>NOTE: If ICMP is disabled on the network, select No to avoid the performance penalty caused by numerous ping requests.</p>

7. Locate the **Symbol 4131 and Cisco Aironet IOS SNMP Initialization** area. Select one of the options listed. [Table 31](#) describes the settings and default values:

Table 31 *Device Setup > Communication > Symbol 4131 and Cisco Aironet IOS SNMP Initialization Fields and Default Values*

Setting	Default	Description
Do Not Modify SNMP Settings	Yes	When selected, specifies that OV3600 not modify any SNMP settings. If SNMP is not already initialized on the Symbol, Nomadix, and Cisco IOS APs, OV3600 is not able to manage them.
Enable read-write SNMP	No	When selected, and when on networks where the Symbol, Nomadix, and Cisco IOS APs do not have SNMP initialized, this setting enables SNMP so the devices can be managed by OV3600.

Loading Device Firmware Onto OV3600 (optional)

Overview of the Device Setup > Upload Firmware & Files Page

OV3600 enables automated firmware distribution to the devices on your network. Once you have downloaded the firmware files from the vendor, you can upload this firmware to OV3600 for distribution to devices via the **Device Setup > Upload Firmware & Files** page.

This page lists all firmware files on OV3600 with file information. This page also enables you to add new firmware files, to delete firmware files, and to add **New Web Auth Bundle** files.

The following additional pages support firmware file information:

- Firmware files uploaded to OV3600 appear as options in the drop-down menus on the **Group > Firmware** page and on individual **APs/Devices > Manage** pages.
- Use the **OV3600 Setup** page to configure OV3600-wide default firmware options.

Table 32 below itemizes the contents, settings, and default values for the **Upload Firmware & Files** page.

Table 32 *Device Setup > Upload Firmware & Files Fields and Default Values*

Setting	Default	Description
Type	Alcatel-Lucent Switch (any model)	Displays a drop-down list of the primary AP makes and models that OV3600 supports with automated firmware distribution.
Owner Role	None	Displays the user role that uploaded the firmware file. This is the role that has access to the file when an upgrade is attempted.
Description	None	Displays a user-configurable text description of the firmware file.
Server Protocol	None	Displays the file transfer protocol by which the firmware file was obtained from the server.
Use Group File Server	None	Displays the name of the file server supporting the group.
Firmware Filename	None	Displays the name of the file that was uploaded to OV3600 and to be transferred to an AP when the file is used in an upgrade.
Firmware Version	None	Displays the firmware version number. This is a user-configurable field.
Firmware MD5 Checksum	None	Displays the MD5 checksum of the file after it was uploaded to OV3600. The MD5 checksum is used to verify that the file was uploaded to OV3600 without issue. The checksum should match the checksum of the file before it was uploaded.
Firmware File Size	None	Displays the size of the firmware file in bytes.
HTML Filename	None	Supporting HTML, displays the name of the file that was uploaded to OV3600 and to be transferred to an AP when the file is used in an upgrade.
HTML Version	None	Supporting HTML, displays the version of HTML used for file transfer.
HTML MD5 Checksum	None	Supporting HTML, displays the MD5 checksum of the file after it was uploaded to OV3600. The MD5 checksum is used to verify that the file was uploaded to OV3600 without issue. The checksum should match the checksum of the file before it was uploaded.

Table 32 *Device Setup > Upload Firmware & Files Fields and Default Values (Continued)*

Setting	Default	Description
HTML File Size	None	Supporting HTML, displays the size of the file in bytes.
Desired Firmware File for Specified Groups	None	The firmware file is set as the desired firmware version on the Groups > Firmware Files page of the specified groups. You cannot delete a firmware file that is set as the desired firmware version for a group.

Loading Firmware Files to OV3600

Perform the following steps to load a device firmware file onto OV3600:

1. Go to the **Device Setup > Upload Firmware & Files** page.
2. Select **Add**. The **Add Firmware File** page appears. [Figure 29](#) illustrates this page.

Figure 29 *Device Setup > Upload Firmware and Files > Add Page Illustration*

[Supported Firmware Versions and Features](#)

3. Select **Supported Firmware Versions and Features** to view supported firmware versions.



Unsupported and untested firmware may cause device mismatches and other problems. Please contact AlcatelAlcatel-Lucent support before installing non-certified firmware.

4. Enter the appropriate information and select **Add**. The file uploads to OV3600 and once complete, this file appears on the **Device Setup > Upload Firmware & Files** page. This file also appears on additional pages that display firmware files (such as the **Group > Firmware** page and on individual **APs/Devices > Manage** pages).
5. You can also import a CSV list of groups and their external TFTP firmware servers. [Table 33](#) itemizes the settings of this page.

Table 33 *Supported Firmware Versions and Features Fields and Default Values*

Setting	Default	Description
Type	Alcatel-Lucent Switch	Indicates the firmware file is used with the specified type. If you select an IOS device from the Type drop-down menu, you have the option of choosing a server protocol of TFTP or FTP. If you choose FTP, you may later notice that the firmware files are pushed to the device more quickly. With selection of some types, particularly Cisco controllers, you can specify the boot software version.

Table 33 Supported Firmware Versions and Features Fields and Default Values (Continued)

Setting	Default	Description
Firmware Version	None	Provides a user-configurable field to specify the firmware version number. Appears if you did not select the default Alcatel-Lucent Switch type.
Description	None	Provides a user-configurable text description of the firmware file.
Upload firmware files (and use built-in firmware)	Built-in	Selects the TFTP server that access points use to download their firmware. The built-in TFTP server is recommended. If you choose to use an external TFTP server, enter the File Server IP Address and the Firmware Filename .
Use an external firmware file server	N/A	You can also choose to assign the external TFTP server on a per-group basis. If you select this option, you must enter the IP address on the Groups > Firmware page. Complete the Firmware File Server IP Address field. NOTE: With selection of some Types, you are prompted with the Server Protocol field that lets you select which protocol to use, and this varies from device to device. If you select FTP, OV3600 uses an anonymous user for file upload.
Use Group File Server	Disabled	If you opt to use an external firmware file server, this additional option appears. This setting instructs OV3600 to use the server that is associated with the group instead of defining a server.
Firmware File Server IP Address	None	Provides the IP address of the External TFTP Server (like SolarWinds) used for the firmware upgrade. This option displays when the user selects the Use an external firmware file option.
Firmware Filename	None	Enter the name of the firmware file that needs to be uploaded. Ensure that the firmware file is in the TFTP root directory. If you are using a non-external server, you select Choose File to find your local copy of the file.



Additional fields may appear for multiple device types. OV3600 prompts you for additional firmware information as required. For example, Intel and Symbol distribute their firmware in two separate files: an image file and an HTML file. Both files must be uploaded to OV3600 for the firmware to be distributed successfully via OV3600.

6. Select **Add** to import the firmware file.

To delete a firmware file that has already been uploaded to OV3600, return to the **Device Setup > Upload Firmware & Files** page, select the checkbox for the firmware file and select **Delete**.



A firmware file may not be deleted if it is the desired version for a group. Use the **Group > Firmware** page to investigate this potential setting and status.

Using Web Auth Bundles in OV3600

Web authentication bundles are configuration files that support Cisco WLC wireless LAN controllers. This procedure requires that you have local or network access to a Web Auth configuration file for Cisco WLC devices.

Perform these steps to add or edit Web Auth bundles in OV3600.

1. Go to the **Device Setup > Upload Firmware & Files** page. This page displays any existing Web Auth bundles that are currently configured in OV3600, and allows you to add or delete Web Auth bundles.
2. Scroll to the bottom of the page. Select **Add New Web Auth Bundle** to create a new Web Auth bundle (see [Figure 30](#)), or select the pencil icon next to an existing bundle to edit. You may also delete Web Auth bundles by selecting that bundle with the checkbox, and selecting **Delete**.

Figure 30 Add Web Auth Bundle Page Illustration

Web Auth Bundle

Description:

Web Auth Bundle: Browse...

Add Cancel

3. Enter a descriptive label in the description field. This is the label used to identify and track Web Auth bundles on the page.
4. Enter the path and filename of the Web Auth configuration file in the **Web Auth Bundle** field or select **Choose File** to locate the file.
5. Select **Add** to complete the Web Auth bundle creation, or **Save** if replacing a previous Web Auth configuration file, or **Cancel** to abort the Web Auth integration.

For additional information and a case study that illustrates the use of Web Auth bundles with Cisco WLC controllers, refer to the following document on Cisco.com:

- Wireless LAN controller Web Authentication Configuration Example, Document ID: 69340
http://www.cisco.com/en/US/tech/tk722/tk809/technologies_configuration_example09186a008067489f.shtml

Setting Up Device Types

On **OV3600 Setup > Device Type Setup**, you can define how the Device Type displayed for users on your network is calculated from available data. The first matching property is used. These rules cannot be edited or deleted, but only reordered or enabled.

You can change the priority order of rules by dragging and dropping rows, as shown in [Figure 31](#).

Check or uncheck the checkbox under the **Enabled** column to turn device setup rules on or off.

Refer to “[Monitoring and Supporting WLAN Users](#)” on page 205 for more information on the **Device Type** column that appears in **Users** list tables.

Figure 31 OV3600 Setup > Device Type Setup Page Illustration

Device Type Rules

Name	Enabled	
AOS Device Type	<input checked="" type="checkbox"/>	↑↓
Manufacturer+Model	<input checked="" type="checkbox"/>	↕
OS	<input checked="" type="checkbox"/>	↕
OS Detail	<input checked="" type="checkbox"/>	↕
Manufacturer	<input checked="" type="checkbox"/>	↕
Model	<input checked="" type="checkbox"/>	↕
Network Interface Vendor (from OUI)	<input checked="" type="checkbox"/>	↕

7 Device Type Setups

Save and Apply Revert

Configuring Cisco WLSE and WLSE Rogue Scanning

The Cisco Wireless LAN Solution Engine (WLSE) includes rogue scanning functions that OV3600 supports. This section contains the following topics and procedures, and several of these sections have additional sub-procedures:

- [Introduction to Cisco WLSE](#)
- [Configuring WLSE Initially in OV3600](#)
- [Configuring IOS APs for WDS Participation](#)

- [Configuring ACS for WDS Authentication](#)
- [Configuring Cisco WLSE Rogue Scanning](#)

You must enter one or more CiscoWorks WLSE hosts to be polled for discovery of Cisco devices and rogue AP information.

Introduction to Cisco WLSE

Cisco WLSE functions as an integral part of the Cisco Structured Wireless-Aware Network (SWAN) architecture, which includes IOS Access Points, a Wireless Domain Service, an Access Control Server, and a WLSE. In order for OV3600 to obtain Rogue AP information from the WLSE, all SWAN components must be properly configured. [Table 34](#) describes these components.

Table 34 *Cisco SWAN Architecture Components*

SWAN Component	Requirements
WDS (Wireless Domain Services)	<ul style="list-style-type: none"> • WDS Name • Primary and backup IP address for WDS devices (IOS AP or WLSM) • WDS Credentials APs within WDS Group <p>NOTE: WDS can be either a WLSM or an IOS AP. WLSM (WDS) can control up to 250 access points. AP (WDS) can control up to 30 access points.</p>
WLSE (Wireless LAN Solution Engine)	<ul style="list-style-type: none"> • IP Address • Login
ACS (Access Control Server)	<ul style="list-style-type: none"> • IP Address • Login
APs	<ul style="list-style-type: none"> • APs within WDS Group

Configuring WLSE Initially in OV3600

Use the following general procedures to configure and deploy a WLSE device in OV3600:

- [Adding an ACS Server for WLSE](#)
- [Enabling Rogue Alerts for Cisco WLSE](#)
- [Configuring WLSE to Communicate with APs](#)
- [Discovering Devices](#)
- [Managing Devices](#)
- [Inventory Reporting](#)
- [Defining Access](#)
- [Grouping](#)
- [WDS Participation](#)
- [Primary or Secondary WDS](#)

Adding an ACS Server for WLSE

1. Go to the **Devices > Discover > AAA Server** page.
2. Select **New** from the drop-down list.
3. Enter the **Server Name**, **Server Port** (default 2002), **Username**, **Password**, and **Secret**.
4. Select **Save**.

Enabling Rogue Alerts for Cisco WLSE

1. Go to the **Faults > Network Wide Settings > Rogue AP Detection** page.
2. Select the **Enable**.
3. Select **Apply**.

Additional information about rogue device detection is available in “Configuring Cisco WLSE Rogue Scanning” on page 65.

Configuring WLSE to Communicate with APs

1. Go to the **Device Setup > Discover** page.
2. Configure SNMP Information.
3. Configure HTTP Information.
4. Configure Telnet/SSH Credentials.
5. Configure HTTP ports for IOS access points.
6. Configure WLCCP credentials.
7. Configure AAA information.

Discovering Devices

There are three methods to discover access points within WLSE, as follows:

- Using Cisco Discovery Protocol (CDP)
- Importing from a file
- Importing from CiscoWorks

Perform these steps to discover access points.

1. Go to the **Device > Managed Devices > Discovery Wizard** page.
2. Import devices from a file.
3. Import devices from Cisco Works.
4. Import using CDP.

Managing Devices

Prior to enabling radio resource management on IOS access points, the access points must be under WLSE management.



OV3600 becomes the primary management/monitoring vehicle for IOS access points, but for OV3600 to gather Rogue information, the WLSE must be an NMS manager to the APs.

Use these pages to make such configurations:

1. Go to **Device > Discover > Advanced Options**.
2. Select the method to bring APs into management **Auto**, or specify via filter.

Inventory Reporting

When new devices are managed, the WLSE generates an inventory report detailing the new APs. OV3600 accesses the inventory report via the SOAP API to auto-discover access points. This is an optional step to enable another form of AP discovery in addition to OV3600' CDP, SNMP scanning, and HTTP scanning discovery for Cisco IOS access points. Perform these steps for inventory reporting.

1. Go to **Devices > Inventory > Run Inventory**.
2. **Run Inventory** executes immediately between WLSE polling cycles.

Defining Access

OV3600 requires System Admin access to WLSE. Use these pages to make these configurations.

1. Go to **Administration > User Admin**.
2. Configure **Role** and **User**.

Grouping

It's much easier to generate reports or faults if APs are grouped in WLSE. Use these pages to make such configurations.

1. Go to **Devices > Group Management**.
2. Configure **Role** and **User**.

Configuring IOS APs for WDS Participation

IOS APs (1100, 1200) can function in three roles within SWAN:

- Primary WDS
- Backup WDS
- WDS Member

OV3600 monitors AP WDS role and displays this information on **AP Monitoring** page.



APs functioning as WDS Master or Primary WDS will no longer show up as Down if the radios are enabled.

WDS Participation

Perform these steps to configure WDS participation.

1. Log in to the AP.
2. Go to the **Wireless Services > AP** page.
3. Select **Enable participation in SWAN Infrastructure**.
4. **Select Specified Discovery** and enter the IP address of the Primary WDS device (AP or WLSM).
5. Enter the **Username** and **Password** for the WLSE server.

Primary or Secondary WDS

Perform these steps to configure primary or secondary functions for WDS.

1. Go to the **Wireless Services > WDS > General Setup** page.
2. If the AP is the Primary or Backup WDS, select **Use the AP as Wireless Domain Services**.
 - Select **Priority** (set **200** for Primary, **100** for Secondary).
 - Configure the **Wireless Network Manager** (configure the IP address of WLSE).
3. If the AP is Member Only, leave all options unchecked.
4. Go to the **Security > Server Manager** page.
5. Enter the **IP address** and **Shared Secret** for the ACS server and select **Apply**.
6. Go to the **Wireless Services > WDS > Server Group** page.
7. Enter the WDS Group of AP.
8. Select the **ACS server** in the **Priority 1** drop-down menu and select **Apply**.

Configuring ACS for WDS Authentication

ACS authenticates all components of the WDS and must be configured first. Perform these steps to make this configuration.

1. Login to the ACS.
2. Go to the **System Configuration > ACS Certificate Setup** page.
3. Install a New Certificate by selecting the **Install New Certificate** button, or skip to the next step if the certificate was previously installed.
4. Select **User Setup** in the left frame.
5. Enter the **Username** that will be used to authenticate into the WDS and select **Add/Edit**.
6. Enter the **Password** that will be used to authenticate into the WDS and select **Submit**.
7. Go to the **Network Configuration > Add AAA Client** page.
8. Add **AP Hostname**, **AP IP Address**, and **Community String** (for the key).
9. Enter the **Password** that will be used to authenticate into the WDS and select **Submit**.

For additional and more general information about ACS, refer to “[Configuring ACS Servers](#)” on page 66.

Configuring Cisco WLSE Rogue Scanning

The **OV3600 Setup > WLSE** page allows OV3600 to integrate with the Cisco Wireless LAN Solution Engine (WLSE). OV3600 can discover APs and gather rogue scanning data from the Cisco WLSE.

[Figure 32](#) illustrates and itemizes the OV3600 settings for communication that is enabled between OV3600 and WLSE.

Figure 32 *OV3600 Setup > WLSE > Add WLSE Page Illustration*

Perform the following steps for optional configuration of OV3600 for support of Cisco WLSE rogue scanning.

1. To add a Cisco WLSE server to OV3600, navigate to the **OV3600 Setup > WLSE** page and select **Add**. Complete the fields in this page. [Table 35](#) describes the settings and default values.

Table 35 *OV3600 Setup > WLSE Fields and Default Values*

Setting	Default	Description
Hostname/IP Address	None	Designates the IP address or DNS Hostname for the WLSE server, which must already be configured on the Cisco WLSE server.
Protocol	HTTP	Specifies the protocol to be used when polling the WLSE.
Port	1741	Defines the port OV3600 uses to communicate with the WLSE server.

Table 35 OV3600 Setup > WLSE Fields and Default Values (Continued)

Setting	Default	Description
Username	None	Defines the username OV3600 uses to communicate with the WLSE server. The username and password must be configured the same way on the WLSE server and on OV3600. The user needs permission to display faults to discover rogues and inventory API (XML API) to discover manageable APs. As derived from a Cisco limitation, only credentials with alphanumeric characters (that have only letters and numbers, not other symbols) allow OV3600 to pull the necessary XML APIs.
Password	None	Defines the password OV3600 uses to communicate with the WLSE server. The username and password must be configured the same way on the WLSE server and on OV3600. As derived from a Cisco limitation, only credentials with alphanumeric characters (that have only letters and numbers, not other symbols) allow OV3600 to pull the necessary XML APIs.
Poll for AP Discovery; Poll for Rogue Discovery	Yes	Sets the method by which OV3600 uses WLSE to poll for discovery of new APs and/or new rogue devices on the network.
Last Contacted	None	Displays the last time OV3600 was able to contact the WLSE server.
Polling Period	10 minutes	Determines how frequently OV3600 polls WLSE to gather rogue scanning data.

2. After you have completed all fields, select **Save**. OV3600 is now configured to gather rogue information from WLSE rogue scans. As a result of this configuration, any rogues found by WLSE appear on the **RAPIDS > List** page.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Configuring ACS Servers


This is an optional configuration. The **OV3600 Setup > ACS** page allows OV3600 to poll one or more Cisco ACS servers for wireless username information. When you specify an ACS server, OV3600 gathers information about your wireless users.

Refer to “[Configuring ACS for WDS Authentication](#)” on page 65 if you want to use your ACS server to manage your OV3600 users.

Perform these steps to configure ACS servers:

1. Go to the **OV3600 Setup > ACS** page. This page displays current ACS setup, as illustrated in [Figure 33](#).

Figure 33 OV3600 Setup > ACS Page Illustration

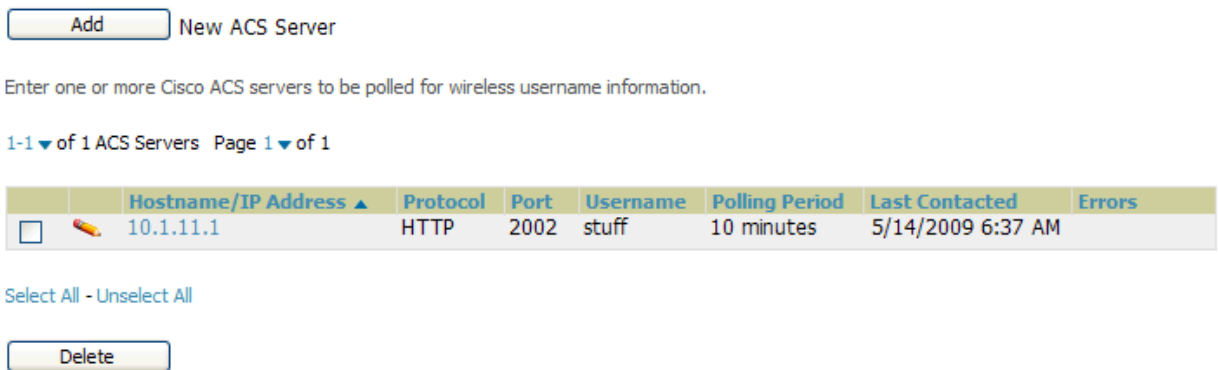

2. Select **Add** to create a new ACS server, or select a pencil icon to edit an existing server. To delete an ACS server, select that server and select **Delete**. When selecting **Add** or edit, the **Details** page appears, as illustrated in [Figure 34](#).

Figure 34 OV3600 Setup > ACS > Add/Edit Details Page Illustration

3. Complete the settings on **OV3600 Setup > ACS > Add/Edit Details**. [Table 36](#) describes these fields:

Table 36 OV3600 Setup > ACS > Add/Edit Details Fields and Default Values

Field	Default	Description
IP/Hostname	None	Sets the DNS name or the IP address of the ACS Server.
Protocol	HTTP	Launches a drop-down menu specifying the protocol OV3600 uses when it polls the ACS server.
Port	2002	Sets the port through which OV3600 communicates with the ACS. OV3600 generally communicates via SNMP traps on port 162.
Username	None	Sets the Username of the account OV3600 uses to poll the ACS server.
Password	None	Sets the password of the account OV3600 uses to poll the ACS server.
Polling Period	10 min	Launches a drop-down menu that specifies how frequently OV3600 polls the ACS server for username information.

4. Select **Add** to finish creating the new ACS server, or **Save** to finish editing an existing ACS server.
5. The ACS server must have logging enabled for passed authentications. Enable the **Log to CSV Passed Authentications report** option, as follows:
 - Log in to the ACS server, select **System Configuration**, then in the **Select** frame, select **Logging**.
 - Under **Enable Logging**, select **CSV Passed Authentications**. The default logging options function and support OV3600. These include the two columns OV3600 requires: **User-Name** and **Caller-ID**.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Integrating OV3600 with an Existing Network Management Solution (NMS)

This is an optional configuration. The **OV3600 Setup > NMS** configuration page allows OV3600 to integrate with other Network Management Solution (NMS) consoles. This configuration enables advanced and interoperable functionality as follows:

- OV3600 can forward WLAN-related SNMP traps to the NMS, or OV3600 can send SNMPv1 or SNMPv2 traps to the NMS.
- OV3600 can be used in conjunction with Hewlett-Packard's ProCurve Manager.
- The necessary files for either type of NMS interoperability are downloaded from the **OV3600 Setup > NMS** page as follows. For additional information, contact support.

Perform these steps to configure NMS support in OV3600:

1. Go to **OV3600 Setup > NMS**, illustrated in [Figure 35](#).

Figure 35 *OV3600 Setup > NMS* Page Illustration

NMS Integration

OV3600 can send SNMP traps to NMS servers. First, add one or more NMS servers below, then select *NMS* as a notification option for *triggers*.

The *Sync* action will send one trap for each device managed by OV3600 to inform an NMS of each one's up/down and configuration status.

[Download](#) the OV3600 MIB files.

NMS Server

Hostname:

Port (1-65535):

Community String:

Confirm Community String:

SNMP Version:

Enabled: Yes No

Send Configuration Traps: Yes No

No NMS servers for other roles found

2. Select **Add** to integrate a new NMS server, or select the pencil icon to edit an existing server. Provide the information described in [Table 37](#):

Table 37 OV3600 Setup > NMS Integration Add/Edit Fields and Default Values

Setting	Default	Description
Hostname	None	Cites the DNS name or the IP address of the NMS.
Port	162	Sets the port OV3600 uses to communicate with the NMS. NOTE: OV3600 generally communicates via SNMP traps on port 162.
Community String	None	Sets the community string used to communicate with the NMS.
SNMP Version	v2C	Sets the SNMP version of the traps sent to the Host.
Enabled	Yes	Enables or disables trap logging to the specified NMS.
Send Configuration Traps	Yes	Enables NMS servers to transmit SNMP configuration traps.

3. The **NMS Integration Add/Edit** page includes the **Netcool/OMNIbus Integration** link to information and instructions. The IBM Tivoli Netcool/OMNIbus operations management software enables automated event correlation and additional features resulting in optimized network uptime.
4. The **NMS Integration Add/Edit** page includes the **HP ProCurve Manager Integration** link. Select this link for additional information, zip file download, and brief instructions for installation with OV3600. Select **Add** to finish creating the NMS server, or **Save** to configure an existing NMS server.

What Next?

- Go to additional tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you for any phase of OV3600 installation.

Auditing PCI Compliance on the Network

This section describes PCI requirements and auditing functions in OV3600, with the following topics:

- [Introduction to PCI Requirements](#)
- [PCI Auditing in the OV3600 Interface](#)
- [Enabling or Disabling PCI Auditing](#)

Introduction to PCI Requirements

OV3600 supports wide security standards and functions in the wireless network. One component of network security is the optional deployment of Payment Card Industry (PCI) Auditing.

The Payment Card Industry (PCI) Data Security Standard (DSS) establishes multiple levels in which payment cardholder data is protected in a wireless network. OV3600 supports PCI requirements according to the standards and specifications set forth by the following authority:

- Payment Card Industry (PCI) Data Security Standard (DSS)
 - PCI Security Standards Council Website
<https://www.pcisecuritystandards.org>
 - *PCI Quick Reference Guide, Version 1.2 (October 2008)*
https://www.pcisecuritystandards.org/pdfs/pci_ssc_quick_guide.pdf

PCI Auditing in the OV3600 Interface

PCI Auditing in OV3600 allows you to monitor, audit, and demonstrate PCI compliance on the network. There are five primary pages in which you establish, monitor, and access PCI auditing, as follows:

- The **OV3600 Setup > PCI Compliance** page enables or disables PCI Compliance monitoring on the network, and displays the current compliance status on the network. See [“Enabling or Disabling PCI Auditing” on page 71](#).
- The **Reports > Definitions** page allows you to create custom-configured and custom-scheduled PCI Compliance reports. See [“Reports > Definitions Page Overview” on page 241](#).
- The **Reports > Generated** page lists PCI Compliance reports currently available, and allows you to generate the latest daily version of the PCI Compliance Report with a single select. Refer to [“Reports > Generated Page Overview” on page 243](#).
- The **APs/Devices > PCI Compliance** page enables you to analyze PCI Compliance for any specific device on the network. This page is accessible when you select a specific device from the **APs/Devices > Monitor** page. First, you must enable this function through **OV3600 Setup**. See [“Enabling or Disabling PCI Auditing” on page 71](#).
- The **PCI Compliance Report** offers additional information. Refer to [“Using the PCI Compliance Report” on page 259](#). This report not only contains **Pass** or **Fail** status for each PCI requirement, but cites the action required to resolve a **Fail** status when sufficient information is available.



When any PCI requirement is enabled on OV3600, then OV3600 grades the network as pass or fail for the respective PCI requirement. Whenever a PCI requirement is not enabled in OV3600, then OV3600 does not monitor the network’s status in relation to that requirement, and cannot designate Pass or Fail network status. OV3600 users without RAPIDS visibility enabled will not see the 11.1 PCI requirements in the PCI Compliance Report.

Table 38 *PCI Requirements and Support in OV3600*

Requirement	Description
1.1	Monitoring configuration standards for network firewall devices When Enabled: PCI Requirement 1.1 establishes firewall and router configuration standards. A device fails Requirement 1.1 if there are mismatches between the desired configuration and the configuration on the device. When Disabled: firewall router and device configurations are not checked for PCI compliance, and Pass or Fail status is not reported or monitored.
1.2.3	Monitoring firewall installation between any wireless networks and the cardholder data environment When Enabled: A device passes requirement 1.2.3 if it can function as a stateful firewall. When Disabled: firewall router and device installation are not checked for PCI compliance.
2.1	Monitoring the presence of vendor-supplied default security settings When Enabled: PCI Requirement 2 establishes the standard in which all vendor-supplied default passwords are changed prior to a device’s presence and operation in the network. A device fails requirement 2.1 if the username, passwords or SNMP credentials being used by OV3600 to communicate with the device are on a list of forbidden default credentials. The list includes common vendor default passwords, for example. When Disabled: device passwords and other vendor default settings are not checked for PCI compliance.

Table 38 PCI Requirements and Support in OV3600 (Continued)






Requirement	Description
2.1.1	<p>Changing vendor-supplied defaults for wireless environments</p> <p>When Enabled: A device fails requirement 2.1.1 if the passphrases, SSIDs, or other security-related settings are on a list of forbidden values that OV3600 establishes and tracks. The list includes common vendor default passwords. The user can input new values to achieve compliance.</p> <p>When Disabled: network devices are not checked for forbidden information and PCI Compliance is not established.</p>
4.1.1	<p>Using strong encryption in wireless networks</p> <p>When Enabled: PCI Requirement 4 establishes the standard by which payment cardholder data is encrypted prior to transmission across open public networks. PCI disallows WEP encryption as an approved encryption method after June 20, 2010. A device fails requirement 4.1.1 if the desired or actual configuration reflect that WEP is enabled on the network, or if associated users can connect with WEP.</p> <p>When Disabled: OV3600 cannot establish a pass or fail status with regard to PCI encryption requirements on the network.</p>
11.4	<p>Using intrusion-detection or intrusion-prevention systems to monitor all traffic.</p> <p>When Enabled: OV3600 reports pass or fail status when monitoring devices capable of reporting IDS events. Recent IDS events are summarized in the PCI Compliance report or the IDS Report.</p> <p>When Disabled: OV3600 does not monitor the presence of PCI-compliant intrusion detection or prevention systems, nor can it report Pass or Fail status with regard to IDS events.</p>

Enabling or Disabling PCI Auditing

Perform these steps to verify status and to enable or disable OV3600 support for PCI 1.2 requirements. enabling one or all PCI standards on OV3600 enables real-time information and generated reports that advise on Pass or Fail status. The PCI auditing supported in OV3600 is reported in [Table 38](#).

1. To determine what PCI Compliance standards are enabled or disabled on OV3600, navigate to the **OV3600 Setup > PCI Compliance** page, illustrated in [Figure 36](#).

Figure 36 OV3600 Setup > PCI Compliance Page Illustration

PCI Requirement ▲	Description
 1.1	Configuration standards for routers. A device fails if there are mismatches between the desired configuration and the configuration on the device.
 1.2.3	Install firewalls between any wireless networks and the cardholder data environment. A device passes if it can function as a stateful firewall.
 2.1	Always change vendor-supplied defaults. A device fails if the usernames, passwords or SNMP credentials being used by OV3600 to communicate with the device are on a list of forbidden credentials. The list includes common manufacturer defaults.
 2.1.1	Change vendor-supplied defaults for wireless environments. A device fails if the passphrases, SSIDs or other security-related settings are on a list of forbidden values. The list includes common manufacturer defaults.
 4.1.1	Use strong encryption in wireless networks. A device fails if the desired or actual configuration reflect that WEP is enabled or if associated users can connect with WEP.

2. To enable, disable, or edit any category of PCI Compliance monitoring in OV3600, select the pencil icon next to the category. The **Default Credential Compliance** page displays for the respective PCI standard.

3. Create changes as required. Specific credentials can be cited in the **Forbidden Credentials** section of any **Edit** page to enforce PCI requirements in OV3600. [Figure 37](#) shows one example.

Figure 37 *Default Credential Compliance for PCI Requirements*

Default Credential Compliance

Enabled: Yes No

Forbidden Credentials:
Enter one credential per line.

root
admin
public
private
Cisco
Motorola

Save Cancel

4. Select **Save**.
5. To view and monitor PCI auditing on the network, use generated or daily reports. See [Chapter 9, “Creating, Running, and Emailing Reports”](#). In addition, you can view the real-time PCI auditing of any given device online. Perform these steps:
 - a. Go to the **APs/Devices > List** page, select a specific device, and the **Monitor** page for that device displays. The **Monitor** page displays a **PCI Compliance** subtab in the menu bar.
 - b. Select **PCI Compliance** to view complete PCI compliance auditing for that specific device.

What Next?

- Go to other tabs in the **OV3600 Setup** section to continue additional setup configurations.
- *Complete the required configurations in this chapter before proceeding.* Alcatel-Lucent support remains available to you in any phase of OV3600 installation.

Deploying WMS Offload

Overview of WMS Offload in OV3600

This section describes the Wireless LAN Management Server (WMS) offload infrastructure. WMS Offload is supported with the following two requirements:

- AOS-W Version 2.5.4 or later
- OV3600 Version 6.0 or later

The WMS feature is an enterprise-level hardware device and server architecture with managing software for security and network policy. There are three primary components of the WMS deployment:

- Air Monitor AP devices establish and monitor RF activity on the network.
- The WMS server manages devices and network activity, to include rogue AP detection and enforcement of network policy.
- The OV3600 graphical user interface (GUI) allows users to access and use the WMS functionality.

WMS Offload is the ability to place the burden of the WMS server data and GUI functions on OV3600. WMS master switches provide this data so that OV3600 can support rigorous network monitoring capabilities.

General Configuration Tasks Supporting WMS Offload in OV3600

WMS Offload must be enabled with a six-fold process and related configuration tasks, as follows:

1. Configure WLAN switches for optimal OV3600 monitoring.
 - Disable debugging.
 - Ensure OV3600 server is a trap receiver host.
 - Ensure proper traps are enabled.
2. Configure OV3600 to optimally monitor the Alcatel-Lucent infrastructure.
 - Enable WMS offload.
 - Configure SNMP communication.
 - Create a proper policy for monitoring Alcatel-Lucent infrastructure.
 - Discover the infrastructure.
3. Configure device classification.
 - Set up rogue classification.
 - Set up rogue classification override.
 - Establish user classification override devices.
4. Deploy AOS-W-specific monitoring features.
 - Enable remote AP and wired network monitoring.
 - View switch license information.
5. Convert existing floor plans to VisualRF, to include the following elements:
 - AOS-W
 - RF Plan
6. Use RTLS for increasing location accuracy (optional).
 - Enable RTLS service on the OV3600 server.
 - Enable RTLS on AOS-W Infrastructure.

Additional Information Supporting WMS Offload

For additional information, including detailed concepts, configuration procedures, restrictions, AOS-W infrastructure, and OV3600 version differences in support of WMS Offload, refer to the *OmniVista 3600 Air Manager Best Practices Guide*.

This chapter describes the deployment of device groups within OV3600. The section below describes the pages or focused subtabs available on the Groups tab. Note that the available subtabs can vary significantly from one device group to another—one or more subtabs may not appear, depending on the **Default Group** display option selected on the **OV3600 Setup > General** page and the types of devices you add to OV3600.

Figure 38 Subtabs under the **Group** tab



- **List**—This page is the default page in the **Groups** section of OV3600. It lists all groups currently configured in OV3600 and provides the foundation for all group-level configurations. See “[Viewing All Defined Device Groups](#)” on page 77.
- **Monitor**—This page displays user and bandwidth information, lists devices in a given group, provides an **Alert Summary** table for monitoring alerts for the group, and provides a detailed **Audit Log** for group-level activity.



NOTE

The **Incidents** portion of the **Alert Summary** table only increments the counter for incidents that are open and associated to an AP in that group, associated with the group itself. It does not include incidents associated with any folder. To view all incidents including those not associated to an AP, go to the **Helpdesk > Incidents** page.

- **Basic**—This page appears when you create a new group on the **Groups > List** page. Once you define a group name, OV3600 displays the **Basic** page from which you configure many group-level settings. This page remains available for any device group configured in OV3600. Refer to “[Configuring Basic Group Settings](#)” on page 78.
- **Templates**—This page manages templates for any device group. Templates allow you to manage the configuration of Dell PowerConnect W, 3Com, Alcatel-Lucent, Alcatel-Lucent Networks, Cisco Aironet IOS, Cisco Catalyst switches, Enterasys, HP, Nortel, Symbol and Trapeze devices in a given group using a configuration file. Variables in such templates configure device-specific properties, such as name, IP address and channel. Variables also define group-level properties. For additional information about using the **Templates** page, refer to [Chapter 6, “Creating and Using Templates”](#) on page 159.
- **Security**—This page defines general security settings for device groups, to include RADIUS, encryption, and additional security settings on devices. Refer to “[Configuring Group Security Settings](#)” on page 87.
- **SSIDs**—This page sets SSIDs, VLANs, and related parameters in device groups. Refer to “[Configuring Group SSIDs and VLANs](#)” on page 90.
- **AAA Servers**—This page configures authentication, authorization, and accounting settings in support of RADIUS servers for device groups. Refer to “[Adding and Configuring Group AAA Servers](#)” on page 86.
- **Radio**—This page defines general 802.11 radio settings for device groups. Refer to “[Configuring Radio Settings for Device Groups](#)” on page 93.
- **Alcatel-Lucent Config**—This page manages AOS-W Device Groups, AP Overrides, and other profiles specific to Alcatel-Lucent devices on the network. Use this page as an alternative to the **Device Setup > Alcatel-Lucent Configuration** page. The appearance of this page varies depending on whether OV3600 is configured for global configuration or group configuration. For additional information, refer to the *AOS-W Configuration Guide*.
- **Cisco WLC Config**—This page consolidates controller-level settings from the Group Radio, Security, SSIDs, Cisco WLC Radio and AAA Server pages into one navigation tree that is easier to navigate, and has familiar layout and terminology. Bulk configuration for per-thin AP settings, previously configured

on the Group LWAPP APs tab, can now be performed from **Modify Devices** on the **APs/Devices > List** page. Refer to “Cisco WLC Group Configuration” on page 97.

- **PTMP**—This page defines settings specific to Proxim MP devices when present. Refer to “Configuring Group PTMP Settings” on page 102.
- **Proxim Mesh**—This page defines mesh AP settings specific to Proxim devices when present. Refer to “Configuring Proxim Mesh Radio Settings” on page 103.
- **MAC ACL**—This page defines MAC-specific settings that apply to Proxim, Symbol, and ProCurve 520 devices when present. Refer to “Configuring Group MAC Access Control Lists” on page 105.
- **Firmware**—This page manages firmware files for many devices. “Specifying Minimum Firmware Versions for APs in a Group” on page 105.
- **Compare**—This page allows you to compare line item-settings between two device groups. On the **Groups > List** page, select **Compare Two Groups**, select the two groups from the drop-down menus, then select **Compare**. “Comparing Device Groups” on page 106.

This chapter also provides the following additional procedures for group-level configurations:

- “Deleting a Group” on page 107
- “Changing Multiple Group Configurations” on page 107
- “Modifying Multiple Devices” on page 109
- “Using Global Groups for Group Configuration” on page 111

OV3600 Groups Overview

Enterprise APs, controllers, routers, and switches have hundreds of variable settings that must be configured precisely to achieve optimal performance and network security. Configuring all settings on each device individually is time consuming and error prone. OV3600 addresses this challenge by automating the processes of device configuration and compliance auditing. At the core of this approach is the concept of Device **Groups**, with the following functions and benefits:

- OV3600 allows certain settings to be managed efficiently at Group-level while others are managed at an individual device level.
- OV3600 defines a Group as a subset of the devices on the wireless LAN, ranging in size from one device to hundreds of devices that share certain common configuration settings.
- Groups may be defined based on geography (such as “5th Floor APs”), usage or security policies (such as “Guest Access APs”), function (such as “Manufacturing APs”), or any other appropriate variable.
- Devices within a group may be from different vendors or hardware models. All devices within a Group share certain basic configuration settings.

Typical group configuration variables include basic settings (SSID, SNMP polling interval, and so forth), security settings (VLANs, WEP, 802.1x, ACLs, and so forth), and some radio settings (data rates, fragmentation threshold, RTS threshold, DTIM, preamble, and so forth). When configuration changes are applied at a *group level*, they are assigned automatically to every device within that group. Such changes must be applied with every device in **Managed** mode. **Monitor** mode is the more common mode.



Always review the **Audit** page before pushing configuration to a device or group.

Individual device settings—such as device name, RF channel selection, RF transmission power, antenna settings, and so forth—typically should not be managed at a group level and must be individually configured for optimal performance. Individual AP settings are configured on the **APs/Devices > Manage** page.

You can create as many different groups as required. Administrators usually establish groups that range in size from five to 100 wireless devices.

Group configuration can be enhanced with the OV3600 **Global Groups** feature, which lets you create Global Groups with configurations that are pushed to individual Subscriber Groups.

Viewing All Defined Device Groups

To display a list of all defined groups, browse to the **Groups > List** page, illustrated in [Figure 39](#).

Figure 39 *Groups > List Page Illustration*

Name	Up/Down Status	Polling Period	Total Devices	Is Global Group	Global Group	Down	Mismatched	Ignored	Users	BW	Duplicate	SSID	Changes
ws5100	60 seconds		5	No	gauss three	4	4	0	0	0		-	Unapplied Changes
infrastructure	60 seconds		31	No	gauss two	9	16	0	0	0		Guest, RSN2OfficeWLAN	
airespace	60 seconds		5	No	gauss one	4	2	0	0	0		4000 8021x, 4000 guest(more...)	
GG-test	5 minutes		0	Yes	-	0	0	0	0	0		Guest, RSN2OfficeWLAN	

[Table 39](#) describes the columns in the **Groups > List** page.

Table 39 *Groups > List Columns*

Column	Description
Add New Group	Launches a page that enables you to add a new group by name and to define group parameters for devices in that group. For additional information, refer to “Configuring Basic Group Settings” on page 78 .
Manage (wrench icon)	Goes to the Groups > Basic configuration page for that group. Hover your mouse over the icon to see a list of shortcuts to group-specific subtabs that would appear across the navigation section if this group is selected.
Name	Uniquely identifies the group by location, vendor, department or any other identifier (such as "Accounting APs," "Floor 1 APs," "Cisco devices," "802.1x APs," and so forth).
Up/Down Status Polling Period	The time between Up/Down SNMP polling periods for each device in the group. Detailed SNMP polling period information is available on the Groups > Basic configuration page. Note that by default, most polling intervals do not match the up/down period.
Is Global Group	If a group is designated as global, it may not contain APs but it may be used as a template for other groups. This column may also indicate Yes if this group has been pushed to the OV3600 from a Master Console.
Global Group	Specifies which group this Subscriber Group is using as its template.
SSID	The SSID assigned to supported device types within the group.
Total Devices	Total number of devices contained in the group including APs, controllers, routers, or switches.
Down	The number of access points within the group that are not reachable via SNMP or are no longer associated to a controller. Note that thin APs are not directly polled with SNMP, but are polled through the controller. That controller may report that the thin AP is down or is no longer on the controller. At this point, OV3600 classifies the device as down.
Mismatched	The number of devices within the group that are in a mismatched state.
Ignored	The number of ignored devices in that group.
Users	The number of mobile users associated with all access points within the group. To avoid double counting of users, users are only listed in the group of the AP with which they are associated. Note that device groups with only controllers in them report no users.
BW	Bandwidth: A running average of the sum of bytes in and bytes out for the managed radio page.

Table 39 *Groups > List Columns (Continued)*

Column	Description
Duplicate	Creates a new group with the name Copy of <Group Name> with configuration settings. (Alcatel-Lucent configuration settings will have to be manually added back.)
Changes	Whether the group has unapplied changes.



When you first configure OV3600, there is only one default group labeled **Access Points**. If you have no other groups configured, refer to “[Configuring Basic Group Settings](#)” on page 78.


Configuring Basic Group Settings

The first default device group that OV3600 sets up is the **Access Points** group, but you can use this procedure to add and configure any device group. Perform these steps to configure basic group settings, then continue to additional procedures to define additional settings as required.

1. Go to the **Groups > List** page. Existing device groups appear on this page.
2. To create a new group, select **Add**. Enter a group name and select **Add**. The **Groups > Basic** page appears.

To edit an existing device group, select the **manage** (wrench) icon next to the group. The **Groups > Basic** page appears. If you mouse over an existing group’s wrench, a popup menu allows you to select **Basic**, **Templates**, **Security**, **SSIDs**, **AAA Servers**, **Radio**, **Alcatel-Lucent Config** or **Cisco WLC Config** to edit those pages as desired, as illustrated in [Figure 40](#).

Figure 40 *Pop-up When Hovering over Wrench Icon in Groups > List*

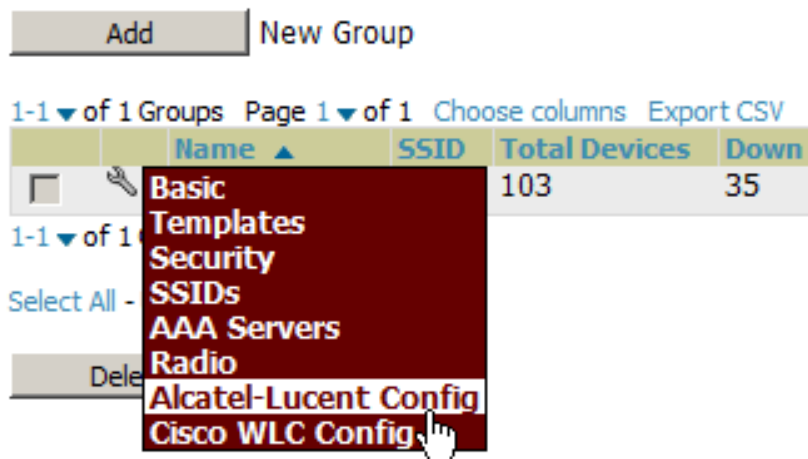

[Figure 41](#) illustrates an example **Groups > Basic** page.

Figure 41 Groups > Basic Page Illustration

Group: **Access Points**

Basic	
Name:	Access Points
Missed SNMP Poll Threshold (1-100):	1
Regulatory Domain:	United States
Timezone: For scheduling group configuration changes	OV3600 system time
Allow One-to-One NAT:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Audit Configuration on Devices: Toggling this will set all devices in this group to 'Monitor Only'	<input checked="" type="radio"/> Yes <input type="radio"/> No

SNMP Polling Periods	
Up/Down Status Polling Period:	5 minutes
Override Polling Period for Other Services:	<input type="radio"/> Yes <input checked="" type="radio"/> No
AP Interface Polling Period:	10 minutes
User Data Polling Period:	10 minutes
Thin AP Discovery Polling Period:	15 minutes
Device-to-Device Link Polling Period:	5 minutes
802.11 Counters Polling Period:	15 minutes
Rogue AP and Device Location Data Polling Period:	30 minutes
CDP Neighbor Data Polling Period:	30 minutes

Routers and Switches	
Read ARP Table:	4 hours
Read CDP Table for Device Discovery:	4 hours
Read Bridge Forwarding Table:	4 hours
Interface Up/Down Polling Period:	10 minutes
Interface Bandwidth Polling Period:	15 minutes
Interface Error Counter Polling Period:	30 minutes
Poll 802.3 error counters:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Poll Cisco interface error counters:	<input type="radio"/> Yes <input checked="" type="radio"/> No

Notes	
Notes:	<div style="border: 1px solid black; height: 30px;"></div>

Group Display Options	
Show device settings for:	Only devices on this OV3600
Selected Device Types:	3Com, Alcatel-Lucent, Alcatel-Lucent AirMesh, Alcatel-Lucent Switch, Aruba, Cisco IOS AP, Cisco Switch, Cisco WLC, HP ProCurve 420, HP ProCurve MSM, HP ProCurve Switch, Juniper, Nortel, Symbol, Symbol Wireless Switch

Spanning Tree Protocol	
Spanning Tree Protocol: Proxim only	<input checked="" type="radio"/> Yes <input type="radio"/> No
Bridge Priority (0-65535):	32768
Bridge Maximum Age (6-40):	20
Bridge Hello Time (1-10):	2
Bridge Forward Delay (4-30):	15

NTP	
NTP Server #1:	
NTP Server #2:	
NTP Server #3:	
UTC Time Zone:	0
Daylight Saving Time:	<input type="radio"/> Yes <input checked="" type="radio"/> No

Cisco IOS/Catalyst	
SNMP Version:	2c
Cisco IOS CLI Communication:	<input checked="" type="radio"/> Telnet <input type="radio"/> SSH
Cisco IOS Config File Communication:	<input checked="" type="radio"/> TFTP <input type="radio"/> SCP

Cisco WLC	
SNMP Version:	2c
CLI Communication:	<input type="radio"/> Telnet <input checked="" type="radio"/> SSH

HP ProCurve	
SNMP Version:	2c
Controller SNMP Version:	2c

Symbol	
SNMP Version:	2c
Client Inactivity Timeout (3-600 min):	3
Symbol Controller CLI Communication: WS5100, RFS4000, RFS6000, and RFS7000 controllers only	<input checked="" type="radio"/> Telnet <input type="radio"/> SSH
SSH Version: WS2000 controllers only	<input type="radio"/> v1 <input checked="" type="radio"/> v2
Web Config Interface:	<input checked="" type="radio"/> Yes <input type="radio"/> No

Aruba/Alcatel-Lucent	
SNMP Version:	2c
Offload WMS Database:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Alcatel-Lucent GUI Config:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Ignore Rogues Discovered by Remote APs:	<input type="radio"/> Yes <input checked="" type="radio"/> No

3Com/Enterasys/Nortel/Trapeze	
SNMP Version:	2c

Universal Devices, Routers and Switches	
SNMP Version:	2c

- Define the settings in the **Basic** and **Global Group** sections. [Table 40](#) describes several typical settings and default values of this **Basic** section.

Table 40 Basic and Global Groups Fields and Default Values

Setting	Default	Description
Name	Defined when first adding the group	Displays or changes the group name. As desired, use this field to set the name to uniquely identify the group by location, vendor, department, or any other identifier (such as “Accounting APs,” “Cisco devices,” “802.1x APs,” and so forth).
Missed SNMP Poll Threshold	1	Sets the number of Up/Down SNMP polls that must be missed before OV3600 considers a device to be down. The number of SNMP retries and the SNMP timeout of a poll can be set on the Device Setup > Communication page.
Regulatory Domain	United States	Sets the regulatory domain in OV3600, limiting the selectable channels for APs in the group.
Timezone	OV3600 System Time	Allows group configuration changes to be scheduled relative to the time zone in which the devices are located. This setting is used for scheduling group-level configuration changes.
Allow One-to-One NAT	No	Allows OV3600 to talk to the devices on a different IP address than the one configured on the device. NOTE: If enabled, the LAN IP Address listed on the AP/Devices > Manage configuration page under the Settings area is different than the IP Address under the Device Communication area.
Audit Configuration on Devices	Yes	Auditing and pushing of configuration to devices can be disabled on all the devices in the group. Once disabled, all the devices in the groups will not be counted towards mismatched devices.
Use Global Group	No	When enabled, this field allows you to define the device group to be a Global Group. Refer to “Using Global Groups for Group Configuration” on page 111 .

- Complete the **SNMP Polling Periods** section. The information in this section overrides default settings. [Table 41](#) describes the SNMP polling settings.

Table 41 SNMP Polling Periods Fields and Default Values

Setting	Default	Description
Up/Down Status Polling Period	5 minutes	Sets time between Up/Down SNMP polling for each device in the group. The Group SNMP Polling Interval overrides the global parameter configured on the Device Setup > Communication page. An initial polling interval of 5 minutes is best for most networks.
Override Polling Period for Other Services	No	Enables or disables overriding the base SNMP Polling Period. If you select Yes , the other settings in the SNMP Polling Periods section are activated, and you can override default values.
AP Interface Polling Period	5 minutes	Sets the interval at which OV3600 polls for radio monitoring and bandwidth being used by a device.
User Data Polling Period	5 minutes	Sets time between SNMP polls for User Data for devices in the group.
Thin AP Discovery Polling Period	5 minutes	Sets time between SNMP polls for Thin AP Device Discovery. Controllers are the only devices affected by this polling interval.
Device-to-Device link Polling Period	5 minutes	Sets time between SNMP polls for Device-to-Device link polling. Mesh APs are the only devices affected by this polling interval.

Table 41 SNMP Polling Periods Fields and Default Values (Continued)

Setting	Default	Description
802.11 Counters Polling Period	5 minutes	Sets time between SNMP polls for 802.11 Counter information.
Rogue AP and Device Location Data Polling Period	5 minutes	Sets time between SNMP polls for Rogue AP and Device Location Data polling.
CDP Neighbor Data Polling Period	30 minutes	Sets the frequency in which this group polls the network for Cisco Discovery Protocol (CDP) neighbors.

- Record additional information and comments about the group in the **Notes** section.
- To configure which options and tabs are visible for the group, complete the settings in the **Group Display Options** section. [Table 42](#) describes the settings and default values.

Table 42 Group Display Options Fields and Default Values

Setting	Default	Description
Show device settings for:	Only devices on this OV3600	Drop-down menu determines which Group tabs and options are to be viewable by default in new groups. Settings include the following: <ul style="list-style-type: none"> All Devices—OV3600 displays all Group tabs and setting options. Only devices in this group—OV3600 hides all options and tabs that do not apply to the devices in the group. If you use this setting, then to get the group list to display the correct SSIDs for the group, you must Save and Apply on the group. Only devices on this OV3600— hides all options and tabs that do not apply to the APs and devices currently on OV3600. Use system defaults—Use the default settings on OV3600 Setup > General Selected device types—Allows you to specify the device types for which OV3600 displays Group settings.
Selected Device Types	N/A	This option appears if you chose to display selected device types, allowing you to select the device types to display group settings. Use Select devices in this group to display only devices in the group being configured.

- To assign dynamically a range of static IP addresses to new devices as they are added into the group, locate the **Automatic Static IP Assignment** section on the **Groups > Basic** configuration page. If you select **Yes** in this section, additional fields appear. Complete these fields as required. [Table 43](#) describes the settings and default values This section is only relevant for a small number of device types, and will appear when they are present.

Table 43 Automatic Static IP Assignment Fields and Default Values

Setting	Default	Description
Assign Static IP Addresses to Devices	No	Enables OV3600 to statically assign IP addresses from a specified range to all devices in the Group.
Start IP Address	Blank	Sets the first address OV3600 assigns to the devices in the Group.
Number of Addresses	Blank	Sets the number of addresses in the pool from which OV3600 can assign IP addresses.

Table 43 Automatic Static IP Assignment Fields and Default Values (Continued)

Setting	Default	Description
Subnet Mask	Blank	Sets the subnet mask to be assigned to the devices in the Group.
Subnet Gateway	Blank	Sets the gateway to be assigned to the devices in the Group.
Next IP Address	Blank	Defines the next IP address queued for assignment. This field is disabled for the initial Access Points group.

8. To configure Spanning Tree Protocol on WLC devices and Proxim APs, locate the Spanning Tree Protocol section on the **Groups > Basic** configuration page. Adjust these settings as required. [Table 44](#) describes the settings and default values.

Table 44 Spanning Tree Protocol Fields and Default Values

Setting	Default	Description
Spanning Tree Protocol	No	Enables or disables Spanning Tree Protocol on Proxim APs.
Bridge Priority	32768	Sets the priority for the AP. Values range from 0 to 65535. Lower values have higher priority. The lowest value is the root of the spanning tree. If all devices are at default the device with the lowest MAC address will become the root.
Bridge Maximum Age	20	Sets the maximum time, in seconds, that the device stores protocol information. The supported range is from 6 to 40.
Bridge Hello Time	2	Sets the time, in seconds, between Hello message broadcasts.
Bridge Forward Delay	15	Sets the time, in seconds, that the port spends in listening and learning mode if the spanning tree has changed.

9. To configure NTP settings locate the **NTP** section and adjust these settings as required. [Table 45](#) describes the settings and default values.

Table 45 NTP Fields and Default Values

Setting	Default	Description
NTP Server #1,2,3	None	Sets the IP address of the NTP server to be configured on the AP.
UTC Time Zone	0	Sets the hour offset from UTC time to local time for the AP. Times displayed in OV3600 graphs and logs use the time set on the OV3600 server.
Daylight Saving Time	No	Enables or disables the advanced daylight saving time settings in the Proxim section of the Groups > Basic configuration page.

10. To configure settings specific to Cisco IOS/Catalyst, locate the **Cisco IOS/Catalyst** section and adjust these settings as required. [Table 46](#) describes the settings and default values.

Table 46 Cisco IOS/Catalyst Fields and Default Values

Setting	Default	Description
SNMP Version	2c	The version of SNMP used by OV3600 to communicate to the AP.
Cisco IOS CLI Communication	Telnet	The protocol OV3600 uses to communicate with Cisco IOS devices. Selecting SSH uses the secure shell for command line page (CLI) communication. Selecting Telnet sends the data in clear text via Telnet.
Cisco IOS Config File Communication	TFTP	The protocol OV3600 uses to communicate with Cisco IOS devices. Selecting SCP uses the secure copy protocol for file transfers and displays the SCP Version option. Selecting TFTP will use the insecure trivial file transfer protocol. The SCP login and password should be entered in the Telnet username and password fields.

11. To configure settings specific to Cisco WLC, locate the **Cisco WLC** section and adjust these settings as required. [Table 47](#) describes the settings and default values.

Table 47 Cisco WLC Fields and Default Values

Setting	Default	Description
SNMP Version	2c	Sets the version of SNMP used by OV3600 to communicate to WLC controllers.
CLI Communication	Telnet	Sets the protocol OV3600 uses to communicate with Cisco IOS devices. Selecting SSH uses the secure shell for command line page (CLI) communication. Selecting Telnet sends the data in clear text via Telnet.



When configuring Cisco WLC controllers, refer to [“Configuring Wireless Parameters for Cisco Controllers”](#) on [page 101](#).

12. To configure Proxim/Avaya specific settings locate the **Proxim/Avaya** section and adjust these settings as required. [Table 48](#) describes the settings and default values.

Table 48 Proxim/Avaya Fields and Default Values

Setting	Default	Description
SNMP Version	1	Sets the version of SNMP used by OV3600 to communicate to the AP.
Enable DNS Client	No	Enables the DNS client on the AP. Enabling the DNS client allows you to set some values on the AP by hostname instead of IP address. If you select Yes for this setting, additional DNS fields display.
Primary DNS server	Blank	Sets the IP address of the Primary DNS server.
Secondary DNS server	Blank	Sets the IP address of the Secondary DNS server.
Default DNS domains	Blank	Sets the default DNS domain used by the AP.

Table 48 Proxim/Avaya Fields and Default Values (Continued)

Setting	Default	Description
HTTP Server Port	80	Sets this port as the HTTP server port on all Proxim APs in the group.
Country Code	United States	Configures OV3600 to derive its time settings based on the country of location, as specified in this field.

13. To configure HP ProCurve specific settings, locate the **HP ProCurve** section and adjust these settings as required. [Table 49](#) describes the settings and default values.

Table 49 HP ProCurve Fields and Default Values

Setting	Default	Description
SNMP Version	2c	Sets the version of SNMP used by OV3600 to communicate to the AP.
ProCurve XL/ZWeSM CLI Communication	Telnet	Sets the protocol OV3600 uses to communicate with ProCurve XLWeSM devices. Selecting SSH will use the secure shell for command line (CLI) communication. Selecting Telnet will send the data in clear text via telnet.
Controller SNMP Version	2c	Specifies the version of SNMP used by OV3600 to communicate to the controller.



DST Start Month, Start Day, End Month, End Day, and DST Offset are only visible if Daylight Saving Time is enabled in the NTP section of the **Groups > Basic** configuration page.

14. To configure Symbol settings, locate the **Symbol** section and adjust these settings as required. [Table 50](#) describes the settings and default values of this section.

Table 50 Symbol Fields and Default Values

Setting	Default	Description
SNMP Version	2c	Specifies the version of SNMP used by OV3600 to communicate to the device.
Client Inactivity Timeout (3-600 min)	3	Sets the minutes of inactivity after which a client associated to a Symbol AP will be considered "inactive." A lower value typically provides a more accurate representation of current WLAN usage. NOTE: For other APs, OV3600 has more precise methods to determine when inactive clients are no longer associated to an AP.
Symbol Controller CLI Communication	Telnet	The connection type to support the command-line interface (CLI) connection. The options are Telnet and secure shell (SSH). This is supported for WS5100, RFS4000, RFS6000 and RFS7000 devices only.
Web Config Interface	Yes	Enables or disables the http/https configuration page for the Symbol 4131 devices.

15. To configure settings specific to , locate the **Alcatel-Lucent/Alcatel-Lucent** section and adjust these settings as required. Table 51 describes the settings and default values of this section.

Table 51 AOS-W Fields and Default Values

Setting	Default	Description
SNMP Version	2c	The version of SNMP used by OV3600 to communicate to the AP.
Offload WMS Database	No	Configures commands previously documented in the Alcatel-Lucent <i>Best Practices Guide</i> . When enabled, this feature allows OV3600 to display historical information for WLAN switches. Changing the setting to Yes pushes commands via SSH to all WLAN switches in Monitor Only mode without rebooting the switch. The command can be pushed to switches in manage mode (also without rebooting the switch) if the Allow WMS Offload setting on OV3600 Setup > General is changed to Yes .
Alcatel-Lucent/Alcatel-Lucent GUI Config	Yes	This setting selects whether you'd like to configure your Alcatel-Lucent/Alcatel-Lucent devices using the Groups > Alcatel-Lucent Config method (either global or group) or using Templates.

16. To configure settings for 3Com, Enterasys, Nortel, or Trapeze devices, locate the **3Com/Enterasys/Nortel/Trapeze** section and define the version of SNMP to be supported.
17. To configure support for routers and switches in the group, locate the **Routers and Switches** section and adjust these settings as required. This section defines the frequency in which all devices in the group polled. These settings can be disabled entirely as desired. Table 52 describes the settings and default values of this section.

Table 52 Routers and Switches Fields and Default Values

Setting	Default	Description
Read ARP Table	4 hours	Sets the frequency in which devices poll routers and switches for Address Resolution Protocol (ARP) table information. This setting can be disabled, or set to poll for ARP information in a range from every 15 seconds to 12 hours.
Read CDP Table for Device Discovery	4 hours	For Cisco devices, sets the frequency in which devices poll routers and switches for Cisco Discovery Protocol (CDP) information. This setting can be disabled, or set to poll for CDP neighbor information in a range from every 15 seconds to 12 hours.
Read Bridge Forwarding Table	4 hours	Sets the frequency in which devices poll the network for bridge forwarding information. This setting can be disabled, or set to poll bridge forwarding tables from switches in a range from every 15 seconds to 12 hours.
Interface Up/Down Polling Period	5 minutes	Sets the frequency in which network interfaces are polled for up/down status. This setting can be disabled, or set to poll from switches in a range from every 15 seconds to 30 minutes.
Interface Bandwidth Polling Period	15 minutes	Sets the frequency in which network interfaces are polled for bandwidth usage. This setting can be disabled, or set to poll from switches in a range from every 5 minutes to 30 minutes.
Interface Error Counter Polling Period	30 minutes	Sets the frequency in which network interfaces are polled for up/down status. This setting can be disabled, or set to poll bridge forwarding tables from switches in a range from every 5 minutes to 30 minutes.
Poll 802.3 error counters	No	Sets whether 802.3 error counters should be polled.

Table 52 Routers and Switches Fields and Default Values (Continued)

Setting	Default	Description
Poll Cisco interface error counters	No	Sets whether the interface error counters for Cisco devices should be polled.

18. To configure settings for universal devices on the network, including routers and switches that support both wired and wireless networks, locate the **Universal Devices, Routers and Switches** section of the **Groups > Basic** page and define the version of SNMP to be supported.

19. Select **Save** when the configurations of the **Groups > Basic** configuration page are complete to retain these settings, but without pushing these settings to all devices in the group. **Save** is a good option if you intend to make additional device changes in the group, and wish to wait until all configurations are complete before you push all configurations at one time.

Select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.

What Next?

Continue to additional sections in this chapter to create new groups or to edit existing groups.

Once general group-level configurations are complete, continue to later chapters in this document to add or edit additional device-level configurations and to use several additional OV3600 functions.

Adding and Configuring Group AAA Servers

Configure RADIUS servers on the **Groups > AAA Servers** page.

Once defined on this page, RADIUS servers are selectable in the drop-down menus on the **Groups > Security and Groups > SSIDs** configuration pages. Perform these steps to create RADIUS servers.



TACACS+ servers are configurable only for Cisco WLC devices. Refer to “[Configuring Cisco WLC Security Parameters and Functions](#)” on page 101.

1. Go to the **Groups > List** page and select the group for which to define AAA servers by selecting the group name. The **Monitor** page appears.
2. Select the **AAA Servers** page. The **AAA Servers** page appears, enabling you to add a RADIUS server. [Figure 42](#) illustrate this page for AAA RADIUS Servers:

Figure 42 Groups > AAA Servers Page Illustration

WLANs on a Cisco WLC can be configured on the [Cisco WLC Config](#) page.

New RADIUS Server

	Hostname/IP Address ▲	Authentication	Authentication Port	Accounting	Accounting Port	Timeout	Max Retries
<input checked="" type="checkbox"/>	10.180.180.180	Yes	1812	No	-	3	0
<input checked="" type="checkbox"/>	10.181.181.181	Yes	1812	No	-	4	0
<input type="checkbox"/>	10.183.183.183	Yes	1812	No	-	2	0
<input type="checkbox"/>	10.182.182.182	Yes	1812	No	-	2	0

4 RADIUS Servers

Select All - Unselect All

- To add a RADIUS server or edit an existing server, select **Add New RADIUS Server** or the corresponding pencil icon to edit an existing server. [Table 53](#) describes the settings and default values of the **Add/Edit** page.

Table 53 Adding a RADIUS Server Fields and Default Values

Setting	Default	Description
Hostname/IP Address	None	Sets the IP Address or DNS name for RADIUS Server. NOTE: IP Address is required for Proxim/ORiNOCO and Cisco Aironet IOS APs.
Secret and Confirm Secret	None	Sets the shared secret that is used to establish communication between OV3600 and the RADIUS server. NOTE: The shared secret entered in OV3600 must match the shared secret on the server.
Authentication	No	Sets the RADIUS server to perform authentication when this setting is enabled with Yes .
Authorization Port	1812	Appears when Authentication is enabled. Sets the port used for communication between the AP and the RADIUS server.
Accounting	No	Sets the RADIUS server to perform accounting functions when enabled with Yes .
Accounting Port	No	Appears when Accounting is enabled. Sets the port used for communication between the AP and the RADIUS server.
Timeout (0-86400)	None	Sets the time (in seconds) that the access point waits for a response from the RADIUS server.
Max Retries (0-20)	None	Sets the number of times a RADIUS request is resent to a RADIUS server before failing. NOTE: If a RADIUS server is not responding or appears to be responding slowly, consider increasing the number of retries.

- Select **Add** to complete the creation of the RADIUS server, or select **Save** if editing an existing RADIUS server. The **Groups > AAA Servers** page displays this new or edited server. You can now reference this server on the **Groups > Security** page.
OV3600 supports reports for subsequent RADIUS Authentication. These are viewable by selecting **Reports > Generated**, scrolling to the bottom of the page, and selecting **Latest RADIUS Authentication Issues Report**.
- To make additional RADIUS configurations for device groups, use the **Groups > Security** page and continue to the next topic.

Configuring Group Security Settings

The **Groups > Security** page allows you to set security policies for APs in a device group:

- Select the device group for which to define security settings from the **Groups > List** page.
- Go to **Groups > Security**. Some controls on this page interact with additional OV3600 pages. [Figure 43](#) illustrates this page and [Table 54](#) explains the fields and default values.

Figure 43 Groups > Security Page Illustration

The screenshot displays the configuration interface for a device group's security settings. It is organized into several sections:

- VLANs:** Includes options for 'VLAN Tagging and Multiple SSIDs' (set to Enabled), 'Management VLAN ID' (set to Untagged), 'Permit RADIUS-Assigned Dynamic VLANs' (set to No), 'VLAN ID Format' (set to Hex), and 'Ethernet Untagged VLAN ID' (set to 1).
- General:** Includes 'Create Closed Network' (set to No) and 'Block All Inter-Client Communication' (set to No).
- EAP Options:** Includes 'WEP Key Rotation Interval' (set to 300), 'Session Key Refresh Rate' (set to 0), 'Session Timeout' (set to 0), 'Cisco TKIP' (set to No), and 'Cisco MIC' (set to Disabled).
- RADIUS Authentication Servers:** Lists four servers with IP addresses (e.g., 10.2.32.151:1812/1813) and an authentication profile name 'Proxim Only'.
- RADIUS Accounting Servers:** Lists four servers with IP addresses and an accounting profile name 'Proxim Only'.
- MAC Address Authentication:** Includes 'MAC Address Authentication' (set to No), 'MAC Address Format' (set to Single Dash), 'Authorization Lifetime' (set to 1800), and 'Primary RADIUS Server Reattempt Period' (set to 0).

At the bottom right, there are three buttons: 'Save', 'Save and Apply', and 'Revert'.

Table 54 Groups > Security Page Fields and Default Values

Setting	Default	Description
VLANS Section		
VLAN Tagging and Multiple SSIDs	Enabled	This field enables support for VLANs and multiple SSIDs on the wireless network. If this setting is enabled, define additional VLANs and SSIDs on the Groups > SSIDs page. Refer to “ Configuring Group SSIDs and VLANs ” on page 90.
Management VLAN ID	Untagged	This setting sets the ID for the management VLAN when VLANs are enabled in OV3600. This setting is supported only for the following devices: <ul style="list-style-type: none"> ● Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000 ● Avaya OAW-AP3, Avaya OAW-AP7, OAW-AP4/5/6, OAW-AP8 ● ProCurve520WL
General Section		
Create Closed Network	No	If enabled, the APs in the Group do not broadcast their SSIDs. NOTE: Creating a closed network will make it more difficult for intruders to detect your wireless network.
Block All Inter-client Communication	No	If enabled, this setting blocks client devices associated with an AP from communicating with other client devices on the wireless network. NOTE: This option may also be identified as PSPF (Publicly Secure Packet Forwarding), which can be useful for enhanced security on public wireless networks.
EAP Options Section		
WEP Key Rotation Interval	300	Sets the frequency at which the Wired Equivalent Privacy (WEP) keys are rotated in the device group being configured. The supported range is from 0 to 10,000,000 seconds.
RADIUS Authentication Servers Section		

Table 54 Groups > Security Page Fields and Default Values (Continued)

Setting	Default	Description
RADIUS Authentication Server #1 - #4	Not selected	Defines one or more RADIUS Authentication servers to be supported in this device group. Select up to four RADIUS authentication servers from the four drop-down menus.
Authentication Profile Name	OV3600-Defined Server #1	For Proxim devices only, this field sets the name of the authentication profile to be supported in this device group.
Authentication Profile Index	1	For Proxim devices only, this field sets the name of the authentication profile index to be supported in this device group.
RADIUS Accounting Servers Section		
RADIUS Accounting Server #1 - #4	Not selected	Defines one or more RADIUS Accounting servers to be supported in this device group. Select up to four RADIUS accounting servers from the four drop-down menus.
Authentication Profile Name		For Proxim devices only, this field sets the name of the accounting profile to be supported in this device group.
Authentication Profile Index	3	For Proxim devices only, this field sets the name of the accounting profile index to be supported in this device group.
MAC Address Authentication Section		
MAC Address Authentication	No	If enabled, only MAC addresses known to the RADIUS server are permitted to associate to APs in the Group.
MAC Address Format	Single Dash	Allows selection of the format for MAC addresses used in RADIUS authentication and accounting requests: <ul style="list-style-type: none"> ■ Dash Delimited: xx-xx-xx-xx-xx-xx (default) ■ Colon Delimited: xx:xx:xx:xx:xx:xx ■ Single-Dash: xxxxxx-xxxxxx ■ No Delimiter: xxxxxxxxxxxx This option is supported only for Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000, Avaya AP3/4/5/6/7/8, HP ProCurve 520WL
Authorization Lifetime	1800	Sets the amount of time a user can be connected before reauthorization is required. The supported range is from 900 to 43,200 seconds.
Primary RADIUS Server Reattempt Period	0	Specifies the time (in minutes) that the AP awaits responses from the primary RADIUS server before communicating with the secondary RADIUS server, and so forth

3. Select **Save** to retain these security configurations for the group, select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.
4. Continue with additional security-related procedures in this document for additional RADIUS and SSID settings for device groups, as required.

Configuring Group SSIDs and VLANs

The **Groups > SSIDs** configuration page allows you to create and edit SSIDs and VLANs that apply to a device group. Perform these steps to create or edit VLANs and to set SSIDs.



WLANs that are supported from one or more Cisco WLC controllers can be configured on the **Groups > Cisco WLC Config** page.

Figure 44 illustrates an example of the **Groups > SSIDs** page.

Figure 44 *Groups > SSIDs Page Illustration*

Group: **Aruba HQ**

Configure WLANs for a Cisco WLC on the [Cisco WLC Config](#) page.

New SSID/VLAN

	SSID	VLAN ID	Name	Encryption Mode	1st Radio		2nd Radio		Native VLAN
					Enabled	Primary	Enabled	Primary	
<input type="checkbox"/>	wpa	51	wpa	No Encryption	<input checked="" type="checkbox"/>	<input type="radio"/>	<input checked="" type="checkbox"/>	<input type="radio"/>	<input type="radio"/>

[Select All](#) - [Unselect All](#)



OV3600 reports users by radio and by SSID. Graphs on the AP and controller monitoring pages display bandwidth in and out based on SSID. OV3600 reports can also be run and filtered by SSID. An option on the **OV3600 Setup > General** page can age out SSIDs and their associated graphical data; by default, this is set to 365 days.

1. Go to **Groups > List** and select the group name for which to define SSIDs/VLANs.
2. Select the **Groups > SSIDs** configuration page. [Table 55](#) describes the information that appears for SSIDs and VLANs that are currently configured for the device group.

Table 55 *Groups > SSIDs Fields and Descriptions*

Field	Description
SSID	Displays the SSID associated with the VLAN.
VLAN ID	Identifies the number of the primary VLAN SSID on which encrypted or unencrypted packets can pass between the AP and the switch.
Name	Displays the name of the VLAN.
Encryption Mode	Displays the encryption on the VLAN.
First or Second Radio Enabled	Enables the VLAN, SSID and Encryption Mode on the radio control.
First or Second Radio Primary	Specifies which VLAN to be used as the primary VLAN. A primary VLAN is required. NOTE: If you create an open network (see the Create Closed Network setting below) in which the APs broadcast an SSID, the primary SSID is broadcast.
Native VLAN	Sets this VLAN to be the native VLAN. Native VLANs are untagged and typically used for management traffic only. OV3600 requires a Native VLAN to be set. For AP types do not require a native VLAN, create a dummy VLAN, disable it on both radio controls, and ensure that it has the highest VLAN ID.

3. Select **Add** to create a new SSID or VLAN, or select the pencil icon next to an existing SSID/VLAN to edit that existing SSID or VLAN. The **Add SSID/VLAN** configuration page appears as illustrated in [Figure 45](#) and explained in [Table 56](#).

Figure 45 *Groups > SSIDs > Add SSID/VLAN Page Illustration*

4. Locate the **SSID/VLAN** section on the **Groups > SSIDs** configuration page and adjust these settings as required. This section encompasses the basic VLAN configuration. [Table 56](#) describes the settings and default values. Note that the displayed settings can vary.

Table 56 *Groups > SSIDs > SSID/VLAN Section Fields and Default Values*

Setting	Default	Description
Specify Interface Name	Yes	Enables or disables an interface name for the VLAN interface. Selecting No for this option displays the Enable VLAN Tagging and VLAN ID options.
Interface	None	Sets the interface to support the SSID/VLAN combination.
SSID	None	Sets the Service Set Identifier (SSID), which is a 32-character user-defined identifier attached to the header of packets sent over a WLAN. It acts as a password when a mobile device tries to connect to the network through the AP, and a device is not permitted to join the network unless it can provide the unique SSID.
Name	None	Sets a user-definable name associated with SSID/VLAN combination.
VLAN ID (1-4094)	None	Indicates the number of the VLAN designated as the Native VLAN, typically for management purposes
Maximum Allowed Associations (0-2007)	255	Indicates the maximum number of mobile users which can associate with the specified VLAN/SSID. NOTE: 0 means unlimited for Cisco.
Broadcast SSID (Cisco WLC, Proxim and Symbol 4131 only)	No	For specific devices as cited, this setting enables the AP to broadcast the SSID for the specified VLAN/SSID. This setting works in conjunction with the Create Closed Network setting on the Groups > Security configuration page. Proxim devices support a maximum of four SSIDs. NOTE: This option should be enabled to ensure support of legacy users.
Partial Closed System (Proxim only)	No	For Proxim only, this setting enables to AP to send its SSID in every beacon, but it does not respond to any probe requests.

Table 56 *Groups > SSIDs > SSID/VLAN Section Fields and Default Values (Continued)*

Setting	Default	Description
Unique Beacon (Proxim only)	No	For Proxim only, if more than one SSID is enabled, this option enables them to be sent in separate beacons.
Block All Inter-Client Communication	Yes	This setting blocks communication between client devices based on SSID.

5. Locate the **Encryption** area on the **Groups > SSIDs** page and adjust these settings as required. [Table 57](#) describes the settings and default values.

Table 57 *Groups > SSIDs > Encryption Section Fields and Default Values*

Setting	Default	Description
Encryption Mode	No Encryption	Drop-down menu determines the level of encryption required for devices to associate to the APs. The drop-down menu options are as follows. Each option displays additional encryption settings that must be defined. Complete the associated settings for any encryption type chosen: <ul style="list-style-type: none"> • No Encryption • Optional WEP—Wired Equivalent Privacy, not PCI compliant as of 2010 • Require WEP—Wired Equivalent Privacy, not PCI compliant as of 2010 • Require 802.1x—Based on the WEP algorithm • Require Leap—Lightweight Extensible Authentication Protocol • 802.1x+WEP—Combines the two encryption types shown • 802.1x+LEAP—Combines the two encryption types shown • LEAP+WEP—Combines the two encryption types shown • Static CKIP—Cisco Key Integrity Protocol • WPA—Wi-Fi Protected Access protocol • WPA/PSK—Combines WPA with Pre-Shared Key encryption • WPA2—Wi-Fi Protected Access 2 encryption • WPA2/PSK—Combines the two encryption methods shown • xSec—FIPS-compliant encryption including Layer 2 header info

6. Locate the **EAP Options** area on the **Groups > SSIDs** page, and complete the settings. [Table 58](#) describes the settings and default values.

Table 58 *Groups > SSIDs > EAP Options Section Fields and Default Values*

Setting	Default	Description
WEP Key Rotation Interval	120	Time (in seconds) between WEP key rotation on the AP.

7. Locate the **RADIUS Authentication Servers** area on the **Groups > SSIDs** configuration page and define the settings. [Table 59](#) describes the settings and default values.

Table 59 *Groups > SSIDs > RADIUS Authentication Servers Fields and Default Values*

Setting	Default	Description
RADIUS Authentication Server 1-3 (Cisco WLC, Proxim only)	None	Drop-down menu to select RADIUS Authentication servers previously entered on the Groups > RADIUS configuration page. These RADIUS servers dictate how wireless clients authenticate onto the network.

Table 59 *Groups > SSIDs > RADIUS Authentication Servers Fields and Default Values (Continued)*

Setting	Default	Description
Authentication Profile Name (Cisco WLC, Proxim Only)	None	Sets the Authentication Profile Name for Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000.
Authentication Profile Index (Cisco WLC, Proxim Only)	None	Sets the Authentication Profile Index for Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000.

8. Select **Save** when the security settings and configurations in this procedure are complete.



You may need to return to the **Groups > Security** configuration page to configure or reconfigure RADIUS servers.

9. Locate the **RADIUS Accounting Servers** area on the **Groups > SSIDs** configuration page and define the settings. [Table 60](#) describes the settings and default values.

Table 60 *Groups > SSIDs > Radius Accounting Servers Fields and Default Values*

Setting	Default	Description
RADIUS Accounting Server 1-3 (Cisco WLC, Proxim Only)	None	Pull-down menu selects RADIUS Accounting servers previously entered on the Groups > RADIUS configuration page. These RADIUS servers dictate where the AP sends RADIUS Accounting packets for this SSID/VLAN.
Accounting Profile Name (Cisco WLC, Proxim Only)	None	Sets the Accounting Profile Name for Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000.
Accounting Profile Index (Cisco WLC, Proxim Only)	None	Sets the Accounting Profile Index for Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000.

10. Select **Save** to retain these **Security** configurations for the group, select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.
11. Continue with additional security-related procedures in this document for additional RADIUS, and SSID settings for device groups, as required.

Configuring Radio Settings for Device Groups

The **Groups > Radio** configuration page allows you to specify detailed RF-related settings for devices in a particular group.



If you have existing deployed devices, you may want to use the current RF settings on those devices as a guide for configuring the settings in your default Group.

Perform the following steps to define RF-related radio settings for groups.

1. Go to the **Groups > List** page and select the group for which to define radio settings by selecting the group name. Alternatively, select **Add** from the **Groups > List** page to create a new group, define a group name. In either case, the **Monitor** page appears.
2. Go to the **Groups > Radio** page. [Figure 46](#) illustrates this page.

Figure 46 Groups > Radio Page Illustration

Group: Aruba HQ

3. Locate the **Radio Settings** area and adjust these settings as required. [Table 61](#) describes the settings and default values.

Table 61 Groups > Radio > Radio Settings Fields and Default Values

Setting	Default	Description
Allow Automatic Channel Selection (2.4, 5, and 4.9GHz Public Safety)	No	If enabled, whenever the AP is rebooted it uses its radio to scan the airspace and select its optimal RF channel based on observed signal strength from other radios. NOTE: If you enable this feature, OV3600 automatically reboots the APs in the group when the change is implemented.
802.11b Data Rates (Mbps)	Required: <ul style="list-style-type: none"> 1.0 2.0 Optional: <ul style="list-style-type: none"> 5.5 11.0 	Displays pull-down menus for various data rates for transmitting data. NOTE: This setting does not apply to Cisco LWAPP devices. The three values in each of the pull-down menus are as follows: <ul style="list-style-type: none"> Required—The AP transmits only unicast packets at the specified data rate; multicast packets are sent at a higher data rate set to optional. (Corresponds to a setting of yes on Cisco devices.) Optional—The AP transmits both unicast and multicast at the specified data rate. (Corresponds to a setting of basic on Cisco devices.) Not Used—The AP does not transmit data at the specified data rate. (Corresponds to a setting of no on Cisco devices.)
Frag Threshold Enabled	No	If enabled, this setting enables packets to be sent as several pieces instead of as one block. In most cases, leave this option disabled.
Threshold Value	2337	If Fragmentation Threshold is enabled, this specifies the size (in bytes) at which packets are fragmented. A lower Fragmentation Threshold setting might be required if there is a great deal of radio interference.
RTS/CTS Threshold Enabled	No	If enabled, this setting configures the AP to issue a RTS (Request to Send) before sending a packet. In most cases, leave this option disabled.
RTS/CTS Threshold Value	2338	If RTS/CTS is enabled, this specifies the size of the packet (in bytes) at which the AP sends the RTS before sending the packet.

Table 61 *Groups > Radio > Radio Settings Fields and Default Values (Continued)*

Setting	Default	Description
RTS/CTS Maximum Retries	32	If RTS/CTS is enabled, this specifies the maximum number of times the AP issues an RTS before stopping the attempt to send the packet through the radio. Acceptable values range from 1 to 128 .
Maximum Data Retries	32	The maximum number of attempts the AP makes to send a packet before giving up and dropping the packet. Acceptable values range from 1 to 255 .
Beacon Period (19-5000 msec)	100	Time between beacons (in microseconds).
DTIM Period (1-255)	2	DTIM alerts power-save devices that a packet is waiting for them. This setting configures DTIM packet frequency as a multiple of the number of beacon packets. The DTIM Interval indicates how many beacons equal one cycle.
Ethernet Encapsulation	RFC1042	This setting selects either the RFC1042 or 802.1h Ethernet encapsulation standard for use by the group.
Radio Preamble	Long	This setting determines whether the APs uses a short or long preamble. The preamble is generated by the AP and attached to the packet prior to transmission. The short preamble is 50 percent shorter than the long preamble and thus may improve wireless network performance. NOTE: Because older WLAN hardware may not support the "short" preamble, the "long" preamble is recommended as a default setting in most environments.

- Certain wireless access points offer proprietary settings or advanced functionality that differ from prevailing industry standards. If you use these APs in the device group, you may wish to take advantage of this proprietary functionality.

To configure these settings, locate the proprietary settings areas on the **Groups > Radio** page and continue with the additional steps in this procedure.



Proprietary settings are only applied to devices in the group from the specific vendor and are not configured on devices from vendors that do not support the functionality.

- To configure settings specific to the Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000; Avaya OAW-AP3/4/5/6/7/8, and ProCurve 520WL, locate the appropriate section of **Groups > Radio** page and define the required fields. [Table 62](#) describes the settings and default values.

Table 62 *Groups > Radio > Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000; Avaya OAW-AP3, Avaya OAW-AP7, OAW-AP4/5/6, OAW-AP8; ProCurve520WL Fields and Default Values*

Setting	Default	Description
Load Balancing	No	If enabled, this setting allows client devices associating to an AP with two radio cards to determine which card to associate with, based on the load (# of clients) on each card. NOTE: This feature is only available when two 802.11b wireless cards are used in an OAW-AP2000.
Interference Robustness	No	If enabled, this option will fragment packets greater than 500 bytes in size to reduce the impact of radio frequency interference on wireless data throughput.

Table 62 *Groups > Radio > Proxim AP-600, OAW-AP700, OAW-AP2000, OAW-AP4000; Avaya OAW-AP3, Avaya OAW-AP7, OAW-AP4/5/6, OAW-AP8; ProCurve520WL Fields and Default Values (Continued)*

Setting	Default	Description
Distance Between APs	Large	This setting adjusts the receiver sensitivity. Reducing receiver sensitivity from its maximum may help reduce the amount of crosstalk between wireless stations to better support roaming users. Reducing the receiver sensitivity, user stations will be more likely to connect with the nearest access point.
802.11g Operational Mode	802.11b +802.11g	This setting sets the operational mode of all g radios in the group to either b only, g only or b + g.
802.11abg Operational Mode	802.11b +802.11g	This setting sets the operational mode of all a/b/g radios in the group to either a only, b only, g only or b + g.
802.11b Transmit Rate	Auto Fallback	This setting specifies the minimum transmit rate required for the AP to permit a user device to associate.
802.11g Transmit Rate	Auto Fallback	This setting specifies the minimum transmit rate required for the AP to permit a user device to associate.
802.11a Transmit Rate	Auto Fallback	This setting specifies the minimum transmit rate required for the AP to permit a user device to associate.
Rogue Scanning	Yes	If enabled, any ORiNOCO or Avaya APs in the group (with the appropriate firmware) will passively scan for rogue access points at the specified interval. This rogue scan will not break users' association to the network. NOTE: This feature can affect the data performance of the access point.
Rogue Scanning Interval	15 minutes	If rogue scanning is enabled, this setting controls the frequency with which scans are conducted (in minutes). Frequent scans provide the greatest security, but AP performance and throughput available to user devices may be impacted modestly during a rogue scan.

- To configure settings specific to Proxim 4900M, locate the **Proxim 4900M** section and define the required fields. [Table 63](#) describes the settings and default values.

Table 63 *Groups > Radio > Proxim 4900M Fields and Default Values*

Setting	Default	Description
4.9GHz Public Safety Channel Bandwidth	20	This setting specifies the channel bandwidth for the 4.9 GHz radio. It is only applicable if you are running the 802.11a/4.9GHz radio in 4.9GHz mode.
802.11a/4.9GHz Public Safety Operational Mode	802.11a	This setting specifies if the AP will run the 802.11a/4.9GHz radio in 802.11a mode or in 4.9 GHz mode. Please note that 4.9 GHz is a licensed frequency used for public safety.

- To configure Symbol-only settings, locate the **Symbol** section and define the required fields. [Table 64](#) describes the settings and default values.

Table 64 *Groups > Radio > Symbol Fields and Default Values*

Setting	Default	Description
Rogue Scanning	Yes	If enabled, Symbol access points with 3.9.2 or later firmware in the group will passively scan for rogue access points at the specified interval. This rogue scan will not break a user's association to the network.

Table 64 *Groups > Radio > Symbol Fields and Default Values (Continued)*

Setting	Default	Description
Rogue Scanning Interval (5-480 min)	240	If rogue scanning is enabled, this setting controls the frequency with which scans are conducted (in minutes). Frequent scans provide the greatest security, but AP performance and throughput available to user devices may be impacted modestly during a rogue scan.

8. Select **Save** when radio configurations as described above are complete, select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.

Cisco WLC Group Configuration

The **Groups > Cisco WLC Config** page consolidates the settings for Cisco WLC devices from all group pages. The **Groups > SSIDs** subtab applies to all device types except for Cisco WLC, which have WLANs configured on the **Cisco WLC Config** page. It is not recommended to have Symbol 4131 and Proxim APs in the same group as Cisco devices. Also, it is recommended that users set device preferences to **Only devices in this group**. This topic describes how to access and navigate the **Groups > Cisco WLC Config** page.

Accessing Cisco WLC Configuration

Go to the **Cisco WLC Config** page in one of these two ways:

1. In **Groups > List**, select a group that has been defined to support Cisco devices and the **Cisco WLC Config** option appears in the subtabs.
2. In **Groups > List**, create a new group to support Cisco devices with these steps:
 - Select **Add** from the **Groups > List** page to create a new group, enter a group name, and select **Add**.
 - Once OV3600 prompts you with the **Groups > Basic** page, ensure that you enable device-specific settings for **Cisco WLC**.
 - Once you select **Save** or **Save and Apply**, then the **Groups > Cisco WLC Config** subtab appears in the navigation pane at the top in association with that group.

Navigating Cisco WLC Configuration

The navigation pane on the left side of the **Groups > Cisco WLC Config** page is expandable, and displays the Cisco configurations supported and deployed. [Figure 47](#) and [Figure 48](#) illustrate this navigation pane.

You can pre-populate the group WLC settings from a controller in the same group by performing an import on the controller's **Audit** page.

Figure 47 *Groups > Cisco WLC Config Page Illustration, collapsed view*





Figure 48 *Groups > Cisco WLC Config Page Illustration, expanded view*

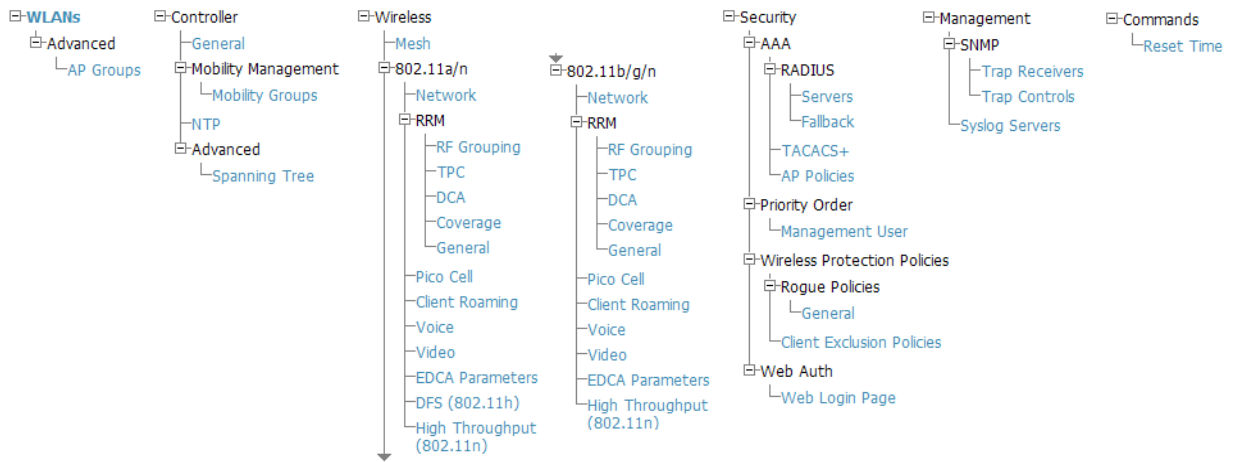

Configuring WLANs for Cisco WLC Devices

In **Cisco WLC Config**, WLANs are based on SSIDs or VLANs that are dedicated to Cisco WLC controllers. Perform the following steps to define and configure WLANs for Cisco WLC controllers.

1. Go to the **Groups > Cisco WLC Config** page, and select **WLANs** in the navigation pane at left. This page displays the SSIDs or VLANs that are available for use with Cisco WLC devices, and enables you to define new SSIDs or VLANs. [Figure 49](#) illustrates this page.
2. To change the ID/position of a WLAN on the controller by dragging and dropping, set the toggle to **yes**. Note that the by setting this flag to **yes**, OV3600 will display a mismatch if the WLANs in the desired and device config differ only on the order.

Figure 49 *Groups > Cisco WLC Config > WLANS page illustration*

Profile	SSID	Type	Admin Status	Encryption Mode	Radio Policy
5500 8021x	10.22.42.11	WLAN	Yes	Require 802.1X	All

3. To add or edit SSIDs or VLANs that are dedicated to Cisco WLC devices, either select the **Add New SSID/VLAN** button, or select the pencil icon for an existing SSID/VLAN. A new page appears comprised of four tabs, as follows:
 - **General**—Defines general administrative parameters for the Cisco WLC WLAN.
 - **Security**—Defines encryption and RADIUS servers.
 - **QoS**—Defines quality of service (QoS) parameters for the Cisco WLC WLAN.
 - **Advanced**—Defines advanced settings that are available only with Cisco WLC devices, for example, AAA override, coverage, DHCP and DTIM period.



Refer to Cisco documentation for additional information about Cisco WLC devices and related features.

Figure 50 *Groups > Cisco WLC Config > WLANs > Add New SSID/VLAN > General Tab Illustration*

The screenshot shows the 'General' tab of the configuration interface. It contains the following fields and options:

- Profile: [Text Input]
- SSID: [Text Input]
- Guest LAN: Yes No
- WLAN ID (1-512): [Text Input]
- Admin Status: Yes No
- Specify Interface Name: Yes No
- Interface: [Dropdown Menu] (selected: management)
- Radio Policy: [Dropdown Menu] (selected: All)
- Broadcast SSID: Yes No

Buttons: Add, Cancel

Figure 51 *Groups > Cisco WLC Config > WLANs > Add New SSID/VLAN > Security Tab Illustration*

The screenshot shows the 'Security' tab of the configuration interface. It contains the following fields and options:

- Encryption Mode: [Dropdown Menu] (selected: No Encryption)
- Web Policy: [Dropdown Menu] (selected: Authentication)
- Preauthentication ACL: [Text Input]
- Override Global Config: Yes No
- Web Authentication Type: [Dropdown Menu] (selected: External)
- External Web Authentication URL: [Text Input] (value: /cisco/auth/)

AAA Servers

- RADIUS Authentication Server #1: [Dropdown Menu] (selected: Select)
- RADIUS Authentication Server #2: [Dropdown Menu] (selected: Select)
- RADIUS Authentication Server #3: [Dropdown Menu] (selected: Select)
- Enable AAA Accounting Servers: Yes No
- RADIUS Accounting Server #1: [Dropdown Menu] (selected: Select)
- RADIUS Accounting Server #2: [Dropdown Menu] (selected: Select)
- RADIUS Accounting Server #3: [Dropdown Menu] (selected: Select)

Figure 52 *Groups > Cisco WLC Config > WLANs > Add New SSID/VLAN > QoS Tab Illustration*

The screenshot shows the 'QoS' tab of the configuration interface. It contains the following fields and options:

- Quality of Service: [Dropdown Menu] (selected: Platinum (voice))
- WMM Policy: [Dropdown Menu] (selected: Allowed)

Buttons: Add, Cancel

Figure 53 Groups > Cisco WLC Config > WLANs > Add New SSID/VLAN > Advanced Tab Illustration

Advanced

Allow AAA Override: Yes No

Coverage Hole Detection: Yes No

Session Timeout (0-86400):

Enable IPv6: Yes No

P2P Blocking Action:

Client Exclusion: Yes No

Media Session Snooping:
Requires Platinum QoS: Yes No

DHCP Server:

Require DHCP: Yes No

Aironet IE Support: Yes No

MFP Signature Generation: Yes No

H-REAP Local Switching: Yes No

Mobility Anchor #1:

Mobility Anchor #2:

Mobility Anchor #3:

Mobility Anchor #4:

DTIM Period 802.11a/n (1-255 beacon periods):

DTIM Period 802.11b/g/n (1-255 beacon periods):

Client Load Balancing: Yes No

Client Band Select:
Requires a Radio Policy of "All": Yes No

Defining and Configuring LWAPP AP Groups for Cisco Devices

The **Groups > Cisco WLC Config > WLANs > Advanced > AP Groups** page allows you to add/edit/delete AP Groups on the Cisco WLC. LWAPP AP Groups are used to limit the WLANs available on each AP. Cisco thin APs are assigned to LWAPP AP Groups.

Viewing and Creating Cisco AP Groups

1. Go to the **Groups > Cisco WLC Config** page, and select **WLANs > Advanced > AP Groups** in the navigation pane at left. This page displays the configured LWAPP APs. [Figure 54](#) illustrates this page.

Figure 54 Groups > Cisco WLC Config > WLANs > Advanced > AP Groups Page Illustration

Group: Access Points

AP Groups

LWAPP AP Groups VLAN Enabled: Yes No

LWAPP AP Group

Name:

Description:

LWAPP AP Group Interface Mapping

SSID:

Specify Interface Name: Yes No

Interface:

NAC State: Enabled Disabled


2. To add a new LWAPP AP group, select **Yes** in the **AP Groups** section. Additional controls appear.
3. Select **Add** to create a new LWAPP AP group. To edit an existing LWAPP AP group, select the pencil icon next to that group. Add one or more SSIDs and the interface/VLAN ID mapping on the **Add/Edit** page of the LWAPP AP Group.
4. Select **Save and Apply** to make these changes permanent, or select **Save** to retain these changes to be pushed to controllers at a later time.

Configuring Cisco Controller Settings

The **Groups > Cisco WLC Config > Controller** page defines general Cisco WLC settings, Multicast settings, Cisco mobility groups to be supported on Cisco controllers, Network Transfer Protocol (NTP), and Spanning Tree Protocol settings.

Go to the **Groups > Cisco WLC Config > Controller** page. This navigation is illustrated in [Figure 55](#).


Figure 55 *Groups > Cisco WLC Config > Controller Navigation*

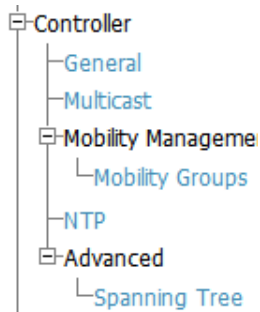

Configuring Wireless Parameters for Cisco Controllers

This section illustrates the configuration of **Wireless** settings in support of Cisco WLC controllers. The navigation for Wireless settings is illustrated in [Figure 56](#).

Figure 56 *Groups > Cisco WLC Config > Wireless Navigation Illustration*

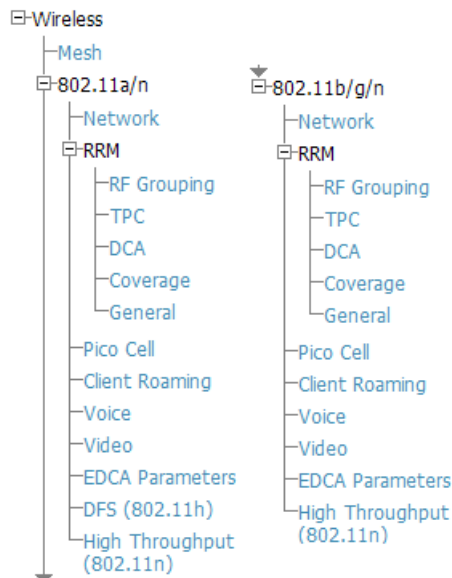

Configuring Cisco WLC Security Parameters and Functions


OV3600 enables you to configure many security settings that are specific to Cisco WLC controllers. This section supports four overriding types of configuration, as follows:

- **AAA**, to cover both RADIUS and TACACS+ server configuration

- **Priority Order**
- **Wireless Protection Policies**
- **Web Auth**

Figure 57 illustrates these components and this navigation:

Figure 57 *Groups > Cisco WLC Config > Security Navigation Illustration*

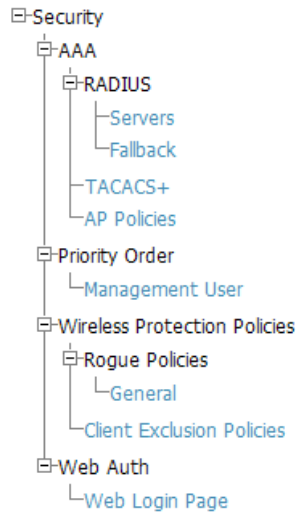

Configuring Management Settings for Cisco WLC

OV3600 allows you to configure of SNMP and Syslog Server settings for Cisco WLC controllers. Users should be able to configure up to four trap receivers on the Cisco WLC including the OV3600 IP that can be used in Global Groups. To define SNMP and server settings, go to the **Groups > Cisco WLC Config > Management** page, illustrated in Figure 58.

Figure 58 *Groups > Cisco WLC Config > Management Navigation Illustration*



Configuring Group PTMP Settings

The **Groups > PTMP** configuration page configures Point-to-Multipoint (PTMP) for all subscriber and base stations in the device group. Subscriber stations must be in the same group as all base stations with which they might connect.

Perform the following steps to configure these functions.

1. Go to the **Groups > List** page and select the group for which to define PTMP settings by selecting the group name. Alternatively, select **Add** from the **Groups > List** page to create a new group, define a group name. In either case, the **Monitor** page appears.
2. Select the PTMP tab in the OV3600 navigation menu. Figure 59 illustrates this page.

Figure 59 *Groups > PTMP Page Illustration*

3. Define the settings on this page. [Table 65](#) describes the settings and default values.

Table 65 *Groups > PTMP Fields and Default Values*

Setting	Default	Description
802.11a Radio Channel	58	Selects the channel used for 802.11a radios by the devices in this group.
802.11g Radio Channel	10	Selects the channel used for 802.11g radios by the devices in this group.
Channel Bandwidth	20	Defines the channel bandwidth used by the devices in this group.
Network Name	Wireless Network	Sets the Network name, with a range of length supported from two to 32 alphanumeric characters.
Network Secret	None	Sets a shared password to authenticate clients to the network.

4. Select **Save and Apply** when configurations are complete to make them permanent, or select **Save** to retain these settings prior to pushing to controllers at a later time.

Configuring Proxim Mesh Radio Settings

1. Go to the **Groups > Proxim Mesh** configuration page to configure Mesh-specific radio settings.
2. Define the settings as required for your network. [Figure 60](#) illustrates this page. [Table 66](#) and [Table 67](#) describe the settings and default values.

Figure 60 *Groups > Proxim Mesh Page Illustration*

The **General** section contains settings for mesh radio, number of mesh links, RSSI smoothing, roaming threshold and de-auth client.

Table 66 *Groups > Proxim Mesh > General Fields and Default Values*

Setting	Default	Description
Mesh Radio	4.9/5Ghz	Drop-down selects the radio that acts as the backhaul to the network.
Max Number of Mesh Links	6	Sets the maximum number of mesh links allowed on an AP. This number includes the uplink to the portal as well as downlinks to other mesh APs.
Neighbor RSSI Smoothing	16	Specifies the number of beacons to wait before switching to a new link.
Roaming Threshold	80	Specifies the difference in cost between two paths that must be exceeded before the AP roams. To switch to a new path it must have a cost that is less by at least the roaming threshold. A high threshold results in fewer mesh roams.
Deauth Client when Uplink is Down	Yes	With Yes selected, clients have authentication removed (are deauthenticated) if the uplink is lost.

The **Security** section contains settings for SSID and enabling AES encryption.

Table 67 *Groups > Proxim Mesh > Security Fields and Default Values*

Setting	Default	Description
SSID	None	Sets the SSID used by the Mesh Radio to connect to the mesh network.
Enable AES	No	Enable or disable AES encryption.

3. The **Mesh Cost Matrix** configuration section contains settings for hop factor and maximum hops to portal, RSSI factor and cut-off, medium occupancy factor and current medium occupancy weight. Adjust these settings as required for your network. [Table 68](#) describes these settings and default values.

Table 68 *Groups > Proxim Mesh > Mesh Cost Matrix Fields and Default Values*

Setting	Default	Description
Hop Factor	5	Sets the factor associated with each hop when calculating the best path to the portal AP. Higher factors will have more impact when deciding the best uplink.
Maximum Hops to Portal	4	Set the maximum number of hops for the AP to reach the Portal AP.
RSSI Factor	5	Sets the factor associated with the RSSI values used when calculating the best path to the portal AP. Higher factors will have more impact when deciding the best uplink.
RSSI Cutoff	10	Specifies the minimum RSSI needed to become a mesh neighbor.
Medium Occupancy Factor	5	Sets the factor associated with Medium Occupancy when calculating the best path to the portal AP. Higher factors will have more impact when deciding the best uplink.
Current Medium Occupancy Weight	7	Specifies the importance given to the most recently observed Medium Occupancy against all of the previously viewed medium occupancies. Lower values place more importance on previously observed Medium Occupancies.

4. Select **Save** when configurations are complete to retain these settings. Select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.

Configuring Group MAC Access Control Lists

This configuration is optional. If you use Symbol, Proxim, or ProCurve 520WL wireless access points, OV3600 enables you to specify the MAC addresses of devices that are permitted to associate with APs in the Group. Other devices are not able to associate to APs in the Group, even if the users of those devices are authorized users on the network.

Perform the following steps to use the MAC ACL function.

1. Browse to the **Groups > MAC ACL** configuration page. [Figure 61](#) illustrates this page.

Figure 61 *Groups > MAC ACL Page Illustration*

Group: **infrastructure**

These settings apply to Proxim, Cisco VxWorks, Symbol and ProCurve 520 devices.

MAC ACL

Use MAC ACL:

Authorized MAC Addresses:
This list will not be set on Cisco VxWorks APs.

--

2. Select **Yes** on the **Use MAC ACL** drop-down menu. Enter all authorized MAC addresses, separated by white spaces.
3. Select **Save** when configurations are complete to retain these settings. Select **Save and Apply** to make the changes permanent, or select **Revert** to discard all unapplied changes.

Specifying Minimum Firmware Versions for APs in a Group

This configuration is optional. OV3600 allows you the option of defining the minimum firmware version for each AP type in a group on the **Groups > Firmware** configuration page. At the time that you define the minimum version, OV3600 automatically upgrades all eligible APs. When you add APs into the group in the future, you will be able to upgrade APs in manual fashion. The firmware for an AP is not upgraded automatically when it is added to a group. Perform the following steps to make this firmware configuration.

1. Browse to the **Groups > Firmware** configuration page. [Figure 62](#) illustrates this page.

Figure 62 *Groups > Firmware* Page Illustration

Group: **Access Points**

The screenshot shows two configuration sections for a device group named 'Access Points'. The first section, 'Firmware Upgrade Options', contains a text box for 'Firmware File Server IP Address'. The second section, 'Desired Version', lists several device models with corresponding dropdown menus for selecting a firmware version. All dropdown menus are currently set to 'NONE'.

Device Model	Desired Version
3Com WX100:	NONE
3Com WX1200:	NONE
3Com WX2200:	NONE
3Com WX4400:	NONE
Alcatel-Lucent OAW-4302:	NONE
Alcatel-Lucent OAW-4304:	NONE

2. For each device type in the group, specify the minimum acceptable firmware version. If no firmware versions are listed, go to the **Device Setup > Firmware** configuration page to upload the firmware files to OV3600.
3. Select **Upgrade** to apply firmware preferences to devices in the group. Refer to the firmware upgrade help under **APs/Devices > Manage** configuration page for detailed help on Firmware job options.
4. Select **Save** to save the firmware file as the desired version for the group.
5. If you have opted to assign an external TFTP server on a per-group basis on the **Device Setup > Firmware** configuration page, you can enter the IP address in the **Firmware Upgrade Options** field on the top of this configuration page.
6. Once you have defined your first group, you can configure that group to be the **default** group on your network. When OV3600 discovers new devices that need to be assigned to a management group, the default group appears at the top of all drop-down menus and lists. Newly discovered devices are placed automatically in the default group if OV3600 is set to **Automatically Monitor/Manage New Devices** on the OV3600 configuration page.
7. Browse to the **Groups > List** configuration page.
8. From the list of groups, check the **Default** radio button next to the desired default group to make it the default.

Comparing Device Groups

You can compare two existing device groups with a detailed line-item comparison. Group comparison allows several levels of analysis to include the following:

- compare performance, bandwidth consumption, or troubleshooting metrics between two groups
- debug one device group against the settings of a similar and better performing device group
- use one group as a model by which to fine-tune configurations for additional device groups

This topic presumes that at least two device groups are at least partly configured in OV3600, each with saved configurations. Perform the following steps to compare two existing device groups:

1. From the **Groups > List** page, select **Compare two groups**. Two drop-down menus appear.
2. Select the two groups to compare to each other in the drop-down menus, and select **Compare**. The **Compare** page appears, displaying some or many configuration categories. [Figure 63](#) illustrates this page.

Figure 63 Comparing Two Devices Groups on the **Groups > List > Compare** Page (Partial View)

Comparing group **HQ-RemoteAP** to group **Outdoor**:

Show Similar Fields

	HQ-RemoteAP (edit)	Basic	Outdoor (edit)
802.11 Counters Polling Period:	30 minutes	➔	15 minutes
Allow One-to-One NAT:	No	➔	Yes
Bridge Forward Delay:	15	➔	16
Bridge Hello Time:	2	➔	4
Bridge Maximum Age:	20	➔	22
Bridge Priority:	32768	➔	32760
Cisco IOS CLI Communication:	Telnet	➔	SSH
Cisco IOS Config File Communication:	TFTP	➔	SCP
Device Bandwidth Polling Period:	10 minutes	➔	5 minutes
Device-to-Device Link Polling Period:	15 minutes	➔	30 minutes
NTP Polling Interval:	86400	➔	3600
NTP Server #1:	(empty string)	➔	10.2.25.162
Override Polling Period for Other Services:	Yes	➔	No
Read ARP Table:	4 hours	➔	8 hours
Read Bridge Forwarding Table:	4 hours	➔	8 hours
Read CDP Table for Device Discovery:	4 hours	➔	8 hours

3. Note the following factors when using the **Compare** page:

- The **Compare** page can be very long or very abbreviated, depending on how many configurations the device groups share or do not share.
- When a configuration differs between two groups, the setting is flagged in red text for the group on the right.
- The default setting of the **Compare** page is to highlight settings that differ between two groups.
 - To display settings that are similar or identical between two device groups, select **Show Similar Fields** at the top left of the page. The result may be a high volume of information.
 - Select **Hide Similar Fields** to return to the default display, emphasizing configuration settings that differ between two groups.
- You can change the configuration for either or both groups by selecting **Edit** in the corresponding column heading. The appropriate configuration page appears.
- If you make and save changes to either or both groups, go back to the **Groups > List** page and select **Compare two groups**. Select the same two groups again for updated information.
- Additional topics in this document describe the many fields that can appear on the **Groups > List > Compare** page.

Deleting a Group

Perform the following steps to delete an existing Group from the OV3600 database:

1. Browse to the **Groups > List** configuration page.
2. Ensure that the Group you wish to delete is not marked as the **default** group. OV3600 does not permit you to delete the current default Group.
3. Ensure that there are no devices in the Group you wish to delete. OV3600 does not permit you to delete a Group that still contains managed devices. You must move all devices to other Groups before deleting a Group.
4. Ensure that the Group is not a Global Group which has Subscriber Groups, and is not a Group that was pushed from a Master Console. OV3600 will not delete a Group in which either of those is true.
5. Select the checkbox and select **Delete**.

Changing Multiple Group Configurations

Perform the following steps to make any changes to an existing group's configuration:

1. Browse to the **Groups > List** configuration page.

2. Select the **Manage** link (the pencil icon) for the group you wish to edit. The **Groups > Basic** configuration page appears.
3. Select the fields to be edited on the **Basic** configuration page or go to **Radio, Security, VLANs, or MAC ACL** configuration page and edit the fields. Use the **Save** button to store the changes prior to applying them.
4. When all changes for the group are complete select the **Save and Apply** button to make the changes permanent. [Figure 64](#) illustrates the confirmation message that appears.

Figure 64 *Groups > Basic Configuration Change Confirmation Page Illustration*

Confirm changes:

Group "Access Points Not Managed by MC"			
CDP Neighbor Data Polling Period	5 minutes	➔	10 minutes
Device-to-Device Link Polling Period	60 seconds	➔	90 seconds
Interface Error Counter Polling Period	30 minutes	➔	15 minutes
Rogue AP and Device Location Data Polling Period	5 minutes	➔	10 minutes
Thin AP Discovery Polling Period	2 minutes	➔	5 minutes
Up/Down Status Polling Period	60 seconds	➔	90 seconds
Use MAC ACL	No	➔	Use manual setting on each device

Scheduling Options

Specify numeric dates with optional 24-hour times (like 7/4/2003 or 2003-07-04 for July 4th, 2003, or 7/4/2003 13:00 for July 4th, 2003 at 1:00 PM.), or specify relative times (like tomorrow at noon or next tuesday at 4am). Other input formats may be accepted.

Current Local Time: January 17, 2011 3:39 pm PST

Desired Start Date/Time:

Select other groups to change:

Group	Current Local Time
<input type="checkbox"/> 1111	January 17, 2011 3:39 pm PST
<input type="checkbox"/> ws5100	January 17, 2011 3:39 pm PST

[Select All - Unselect All](#)

5. OV3600 displays a **Configuration Change** screen confirming the changes that will be applied to the group's settings.
6. There are several action possibilities from within this confirmation configuration page.
 - **Apply Changes Now** — Applies the changes immediately to access points within the group. If you wish to edit multiple groups, you must use the **Preview** button.



You cannot apply Alcatel-Lucent Config changes to other groups. If the only changes on the configuration page are to Alcatel-Lucent devices, the list of groups and the preview button will not appear.

- **Schedule** — Schedules the changes to be applied to this group in the future. Enter the desired change date in the **Start Date/Time** field. OV3600 takes the time zone into account for the group if a time zone other than **OV3600 System Time** has been configured on the **Groups > Basic** configuration page.
- **Cancel** — Cancels the application of changes (immediately or scheduled).



To completely nullify the change request, select **Revert** on one of the group configuration pages after you have selected **Cancel**.

7. Apply changes to multiple groups by selecting the appropriate group or groups and selecting **Preview**.

Modifying Multiple Devices

OV3600 provides a very powerful utility that modifies all APs or a subset of access points unrelated to the typical OV3600 group construct. This utility provides the ability to delete simultaneously multiple devices, migrate multiple devices to another group and/or folder, update credentials and optimize channels. Perform these steps to modify multiple devices.

1. To modify multiple devices, go to one of the following pages with a device list:

- **APs/Devices > List**
- **APs/Devices > Up**
- **APs/Devices > Down**
- **APs/Devices > Mismatched**
- **Groups > Monitor** configuration pages

Each of these pages displays a list of devices. Controller monitoring pages also have lists of their thin APs which can be modified using **Modify Devices**.

2. Select **Modify Devices** to make the checkboxes at the left of all devices appear. In addition, a new section appears in this page location to display various settings that can be configured for multiple devices at one time (some operations cannot be performed on the selected devices). [Figure 65](#) illustrates this page.

Figure 65 *Modify Multiple Devices Section Illustration*

Modify Devices

1-3 of 19 APs/Devices Page 1 of 6 >> | Choose Columns CSV Export

Device	Status	Configuration	Type	Version	Controller	Group	APs	Users
<input checked="" type="checkbox"/> cisco-catalyst-500	Down	Good	Cisco Catalyst Express 500	12.2(25)SEG6	-	infrastructure	-	0
<input checked="" type="checkbox"/> Cisco-3750	Down	Error	Cisco Catalyst 3750-24TS	12.2(35)SE5	-	infrastructure	-	0
<input checked="" type="checkbox"/> Cisco-3750-2	Down	Verifying	Cisco Catalyst 3750-24TS	12.2(35)SE5	-	infrastructure	-	0

1-3 of 19 APs/Devices Page 1 of 6 >> |

Select All - Unselect All

Change properties of selected devices:

AMP Group/Folder: and/or

Aruba AP Group:

Management Level: Monitor Only + Firmware Upgrades Manage Read/Write

Desired Radio Status: Enable Disable

Cisco Thin AP Settings:

Perform actions:

Poll selected devices:

Audit selected devices:

Run report on selected devices:

Update the credentials AMP uses to communicate with these devices:

Import settings from selected devices (and discard current per-device desired settings):

Import unreferenced Aruba profiles from selected devices:

Reboot selected devices:

Reprovision selected Aruba devices:

Firmware:

Upgrade firmware for selected devices:

Cancel firmware upgrade for selected devices:

Ignore/Delete:

Ignore selected devices (that may be down for maintenance):

Delete selected devices from AMP:

3. Select one or more devices that are to share the configurations. Select the checkbox for each device to modify.
4. In the **Modify Multiple Devices** section, select any button or use any drop-down menu for the supported changes. Any action you take applies to all selected devices. Each action you take will direct you to a new configuration page, or prompt you with a confirmation page to confirm your changes.
5. You are taken to a confirmation configuration page that allows you to schedule the change for a time in the future. Enter a start date and time in the scheduling field and select when the change should occur from the drop-down menu (one time is the default, but you may select recurring options for many of the actions). Scheduled jobs can be viewed and edited in the **System > Configuration Change Jobs** tab.
6. Using the neighbor lists, OV3600 is able to optimize channel selection for APs. Select the APs to optimize and OV3600 minimizes the channel interference while giving channel priority to the most heavily used APs. [Table 69](#) describes these actions and controls.

Table 69 *Modify Multiple Devices Section Fields and Default Values*

Action	Description
OV3600 Group/Folder	Move the selected devices to a new group or folder. If the AP is in managed mode when it is moved to a new group, it will be reconfigured.
Alcatel-Lucent AP Group	Moves the selected APs to a new group or folder. If the AP is in managed mode when it is moved to a new group it will be reconfigured.
Desired Radio Status	Enables or disables the radios on the selected device. Does <i>not</i> apply Cisco IOS APs.
Update Cisco Thin AP Settings	Bulk configuration for per-thin AP settings, previously configured on the Group LWAPP AP tab, can be performed from Modify Devices on the APs/Devices List page. Make changes to LWAPP AP groups, including the option that was under Modify Devices .
Poll now	Polls selected devices for current user count and bandwidth data; overrides default poll settings for the group. Polling numerous devices may create a temporary performance load on your OV3600 server.
Audit selected devices	Fetches the current configuration from the device and compares it to the desired OV3600 configuration. The audit action updates the Configuration Status. NOTE: In versions of OV3600 previous to 7.3, the Audit button appeared on Groups > List for groups with audit disabled. Now, if a group has audit disabled for its devices, OV3600 doesn't show the Audit button in the Modify devices list.
Run report on selected devices	Takes you to the Reports > Definitions page where you can define or run a custom report for selected devices. For more details and a procedure, see "Using Custom Reports" on page 244.
Update the credentials OV3600 uses to communicate with these devices	Update changes the credentials OV3600 uses to communicate with the device. It does <i>not</i> change the credentials on the AP.
Import settings from selected devices (and discard current pre-device desired settings)	Audit updates a number of the AP specific settings OV3600 initially read off of the AP including channel, power, antenna settings and SSL certifications. OV3600 recommends using this setting if APs have been updated outside of OV3600. Most settings on the APs/Devices Manage configuration page are set to the values currently read off of the devices.
Reboot selected devices	Reboots the selected devices. Use caution when rebooting devices because this can disrupt wireless users.

Table 69 Modify Multiple Devices Section Fields and Default Values (Continued)

Action	Description
Reprovision selected AOS-W devices	Configures the switch to send provisioning parameters such as radio, antenna, and IP address settings to the selected APs. Please note that APs will be rebooted as part of reprovisioning.
Upgrade firmware for selected devices	Upgrades firmware for the selected devices. Refer to the firmware upgrade help under APs/Devices > Manage configuration page for detailed help on Firmware job options.
Cancel firmware upgrade for selected devices	Cancels any firmware upgrades that are scheduled or in progress for the selected APs.
Ignore selected devices	Ignores selected APs, preventing OV3600 from generating any alerts or including the AP in an up/down count. The device's history is preserved but it will not be polled. Ignored devices can be seen and taken out of ignore status by navigating to the New Devices configuration page and selecting View Ignored Devices link at the bottom.
Delete selected devices from OV3600	Removes the selected APs from OV3600. The deletes will be performed in the background and may take a minute to be removed from the list.

Using Global Groups for Group Configuration

To apply group configurations using the OV3600 Global Groups feature, first go to the **Groups > List** configuration page. Select **Add** to add a new group, or select the name of the group to edit settings for an existing group. Select the **Duplicate** icon (usually near the last column of the list) to create a new group with identical configuration to an existing group.

- To have Global Group status, a group must contain no devices; accordingly, access points can never be added to a Global Group. Global groups are visible to users of all roles, so they may not contain devices, which can be made visible only to certain roles. [Figure 66](#) illustrates the **Groups > List** page.

Figure 66 Groups > List Page Illustration

Name	Up/Down Status	Polling Period	Total Devices	Is Global Group	Global Group	Down	Mismatched	Ignored	Users	BW	Duplicate	SSID	Changes
ws5100	60 seconds	5	No	gauss three	4	4	0	0	0	0	-	Unapplied Changes	
infrastructure	60 seconds	31	No	gauss two	9	16	0	0	0	0	Guest, RSN2OfficeWLAN		
airespace	60 seconds	5	No	gauss one	4	2	0	0	0	0	4000 8021x, 4000 guest(more...)		
GG-test	5 minutes	0	Yes	-	0	0	0	0	0	0	Guest, RSN2OfficeWLAN		

- To set a group as a Global Group, go to the **Groups > Basic** configuration page for an existing or a newly created group. Select **Yes** for the **Is Global Group** field under the Global Group section.
- When the change is saved and applied, the group will have a checkbox next to fields. [Figure 67](#) illustrates this configuration page.

Figure 67 Groups > Basic Page for a Global Group (partial view)

Group: **gauss one**

Selecting a checkbox allows subscriber groups to override the corresponding setting.

Basic

Name:

Missed SNMP Poll Threshold (1-100):

Regulatory Domain:

Timezone:

For scheduling group configuration changes

Allow One-to-One NAT: Yes No

Audit Configuration on Devices: Yes No

- When a Global Group configuration is pushed to Subscriber Groups, all settings are static except for settings with the checkbox selected; for fields with checkboxes selected, the value or setting can be changed on the corresponding tab for each managed group. In the case of the **Groups > SSIDs** configuration page, override options are available only on the **Add** configuration page (go to the **Groups > SSIDs** configuration page and select **Add**). Global templates are also configurable as part of Global Groups; see “[Creating and Using Templates](#)” on page 159 for more information.
- Once Global Groups have been configured, groups may be created or configured to subscribe to a particular Global Group. Go to the **Groups > Basic** configuration page of a group and locate the **Use Global Groups** section. Select the **Yes** radio button and select the name of the Global Group from the drop-down menu. Then select **Save and Apply** to make the changes permanent. [Figure 68](#) illustrates this page.

Figure 68 *Groups > Basic > Managed Page Illustration*

Group: Access Points

Basic	
Name:	Access Points
Missed SNMP Poll Threshold (1-100):	1
Regulatory Domain:	United States
Timezone: For scheduling group configuration changes	AMP system time
Allow One-to-One NAT:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Global Groups	
Use Global Group:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Global Group:	globalgroupMC (SSID: -) globalgroupMC (SSID: -)

- Once the configuration is pushed, the unchecked fields from the Global Group appears on the Subscriber Group as static values and settings. Only fields that had the override checkbox selected in the Global Group appear as fields that can be set at the level of the Subscriber Group. Any changes to a static field must be made on the Global Group.
- If a Global Group has Subscriber Groups, it cannot be changed to a non-Global Group. A Global Group without Subscriber Groups can be changed to a regular Group by updating the setting on the **Groups > Basic** configuration interface. The Global Groups feature can also be used with the Master Console. For more information about this feature, refer to “[Supporting OV3600 Servers with the Master Console](#)” on page 233.

This chapter describes how to add, configure and monitor devices, both wired and wireless, and contains the following sections, corresponding to features of the **Device Setup** and **APs/Devices** tabs:

- “Device Discovery Overview” on page 113
- “Discovering and Adding Devices” on page 114
- “Monitoring Devices” on page 123
- “Configuring and Managing Devices” on page 141
- “Troubleshooting a Newly Discovered Down Device” on page 152
- “Setting up Alcatel-Lucent Spectrum Analysis in OV3600” on page 154

Device Discovery Overview

Once you have deployed OV3600 on the network, the next step is to discover all existing devices connected to your network.

OV3600 allows device discovery in the following ways, all of which are described in this chapter:

- **SNMP/HTTP discovery scanning**—This is the primary method to discover devices on your network, configured in the **Device Setup > Discover** page. See “SNMP/HTTP Scanning” on page 114.
- **Cisco Discovery Protocol (CDP)**—OV3600 enhances support for CDP by discovering a Cisco device’s CDP neighbors. See “Enabling Cisco Discovery Protocol (CDP)” on page 118.
- **Manual device entry**—This admin-supported method of discovery applies when you know of devices that are already on your network. See the following sections for information and procedures:
 - “Manually Adding Individual Devices” on page 118
 - “Adding Multiple Devices from a CSV File” on page 121
 - “Adding Universal Devices” on page 122
- **Controller-driven device discovery**—Thin APs will automatically be discovered in the network and added to the **New Devices** list when you add their controller to OV3600. To add the thin APs, refer to “Authorizing Devices to OV3600 from APs/Devices > New Page” on page 118.

Discovering and Adding Devices

This section describes the following topics:

- [SNMP/HTTP Scanning](#)
- [Enabling Cisco Discovery Protocol \(CDP\)](#)
- [Authorizing Devices to OV3600 from APs/Devices > New Page](#)
- [Manually Adding Individual Devices](#)

SNMP/HTTP Scanning

SNMP/HTTP discovery scanning is the primary method for discovering devices on your network, including rogue devices. Enable this scanning method from the **Device Setup > Discover** page.



This page is only visible to users with the OV3600 Administrator role, or roles that have “**Allow authorization of APs/Devices**” enabled in **OV3600 Setup > Roles**.

SNMP/HTTP scanning information is provided in these sections:

- [Adding Networks for SNMP/HTTP Scanning](#)—explains how to enable networks that have been defined for scanning.
- [Adding Credentials for Scanning](#)—explains how to define network credentials for scanning. Credentials must be defined before using them in scan sets.
- [Defining a Scan Set](#)—explains how to create a scan set by combining networks and credentials when scanning for devices.
- [Running a Scan Set](#)—provides a procedure for running a scan set.

Adding Networks for SNMP/HTTP Scanning

The first step when enabling SNMP/HTTP scanning for devices is to define the network segments to be scanned. Perform these steps.

1. Go to the **Device Setup > Discover** page, and locate the **Networks** section.
2. In the **Networks** section, select **Add New Scan Network**. The **Scan Network** page appears, as shown in [Figure 69](#). Alternatively, you can edit an existing scan network by selecting the corresponding pencil icon. The **New/Edit Networks** page also appears in this instance.

Figure 69 *Device Setup > Discover > New Network Section Illustration*

A screenshot of a web form titled "Networks" with a sub-section "Scan Network". It contains three input fields: "Name:", "Network:", and "Subnet Mask:". Below the fields are two buttons: "Add" and "Cancel".

Networks	
Scan Network	
Name:	<input type="text"/>
Network:	<input type="text"/>
Subnet Mask:	<input type="text"/>
<input type="button" value="Add"/> <input type="button" value="Cancel"/>	

3. In the **Name** field, provide a name for the network to be scanned (for example, **Accounting Network**).
4. In the **Network** field, define the IP network range, or the first IP address on the network, to be scanned. One example would be 10.52.0.0.
5. Enter the **Subnet Mask** for the network to be scanned (for example, 255.255.252.0). The largest subnet OV3600 supports is 255.255.0.0.
6. Select **Add**.
7. Repeat these steps to add as many networks for which to enable device scanning. All network segments configured in this way appear in the **Network** section of the **Device Setup > Discover** page.
8. Complete the configuration of scan credentials, then combine scan networks and scan credentials to create scan sets. The next two procedures in this section describe these tasks.


Adding Credentials for Scanning

The next step in SNMP/HTTP device discovery is to define the scan credentials that govern scanning of a given network. New APs inherit scan credentials from the System Credentials that you configure on the **Device Setup > Communications** page.

Perform these steps to define scan credentials for SNMP/HTTP scanning:

1. Locate the **Credentials** section on the **Device Setup > Discover** page. This page displays scan sets, networks, and credentials that have been configured so far, and allows you to define new elements for device scanning.
2. To create a new scan credential, select **Add New Scan Credential**. [Figure 70](#) illustrates this page.

Figure 70 *Device Setup > Discover > Add/Edit New Scan Credential Section Illustration*

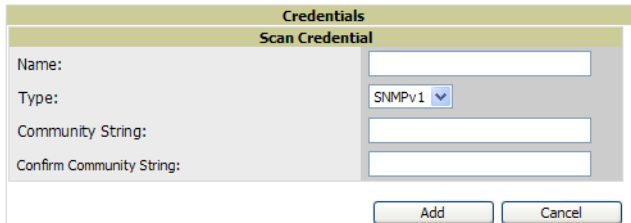

3. Enter a name for the credential in the **Name** field (for example, **Default**). This field supports alphanumeric characters, both upper and lower case, blank spaces, hyphens, and underscore characters.
4. Choose the type of scan to be completed (**SNMPv1**, **SNMPv2**, or **HTTP**). In most cases, perform scans using SNMP for device discovery, but consider the following factors in your decision:
 - SNMPv1 and SNMP v2 differ between in their supported traps, supported MIBs, and network query elements used in device scanning.
 - HTTP discovers devices using the HyperText Transfer Protocol in communications between servers and additional network components. HTTP is not as robust in processing network events as is SNMP, but HTTP may be sufficient, simpler, or preferable in certain scenarios.
5. Define and confirm the **Community String** to be used during scanning. In this section, the community string used can be either **read-only** or **read/write**, as OV3600 only uses it for discovering APs. To bring APs under management, OV3600 uses the credentials supplied in the **Device Setup > Communication SNMP** section. Once the device is authorized, it will use the non-scanning credentials.



OV3600 automatically appends the type of scan (SNMP or HTTP) to the Label.

6. Select **Add**. The **Device Setup > Discover** page displays the new scan credential or credentials just created or edited.
7. Repeat these steps to add as many credentials as you require.
8. Once scan networks and scan credentials are defined, combine them by creating scan sets using the next procedure: [“Defining a Scan Set” on page 115](#).

Defining a Scan Set

Once you have defined at least one network and one scan credential, you can create a scan set that combines the two for device discovery. Perform these steps to create a scan set.

1. Locate the **Scan Set** area at the top of the **Device Setup > Discover** page.
2. Select **Add New Scan Set** to see all scan components configured so far. If you wish to create a new network, or new scanning credentials, you can select **Add** in either of these fields to create new components prior to creating a scan set.

3. Select the **Network(s)** to be scanned and the **Credential(s)** to be used. OV3600 defines a unique scan for each **Network-Credential** combination.
4. Select **Add** to create the selected scans, which then appear in a list at the top of the **Device Setup > Discover** page.
5. To edit an existing scan, select the **pencil** icon next to the scan on the **Device Setup > Discover** page.
6. When ready, proceed to the next task, “[Running a Scan Set](#)” on page 116.



Scheduling an HTTP scan to run daily on your network can help you to discover rogues. Some consumer APs, like most D-Link, Linksys, and NetGear models, do not support SNMP and are found only on the wired side with an HTTP scan. These devices are discovered only if they have a valid IP address. Proper credentials are not required to discover these APs. Wireless scans and the AMC discover these rogues without any special changes.

Running a Scan Set

Once a scan has been defined on the **Device Setup > Discover** page, OV3600 can now scan for devices. Perform these steps.

1. Browse to the **Device Setup > Discover** page and locate the list of all scan sets that have been defined so far. [Figure 71](#) illustrates this page.

Figure 71 *Device Setup > Discover Executing a Scan Illustration*

To scan for manageable devices and rogue APs using SNMP and HTTP, choose one or more networks to scan below. SNMP and HTTP timeouts may be configured on the [Communication](#) page, *not* the credentials defined below for scanning.

Note: Discovered devices will use the default credentials configured on the [Communication](#) page, *not* the credentials defined below for scanning.

1-2 of 2 Scan Sets		Page 1 of 1	Choose Columns	CSV Export				
	Network	Credentials	Total Devices Found	New Devices Found	Start	Stop		
<input type="checkbox"/>	China	admin, default, private, public	0	0	5/24/2011 1:36 PM	5/24/2011 1:37 PM		
<input type="checkbox"/>	Static IP Dev Net	AA, admin, default, e, pe, private, public	41	0	5/24/2011 7:03 PM	5/24/2011 7:07 PM		

1-2 of 2 Scan Sets Page 1 of 1

Select All - Unselect All

Scan Delete Refresh this page for updated results.

Show Scheduling Options

2. Check the box next to the scan(s) that you would like to execute.
3. Select **Scan** to execute the selected scans, and the scan immediately begins. The **last** column indicates the scan is **In Progress**.
4. For future scans, select **Show Scheduling Options** and enter the desired date and time to schedule a future scan.
5. After several minutes have passed, refresh the browser page and view the results of the scan. When the **Start** and **Stop** columns display date and time information, the scan is available to display the results.
6. Select the **pencil** icon for the scan to display the results. [Table 70](#) describes the scan results and related information.

Table 70 *Device Setup > Discover > Discovery Execution Fields*

Column	Description
Network	Displays the network to be scanned.
Credentials	Displays the credentials used in the scan.
Total Devices Found	Displays the total number of APs detected during the scan that OV3600 can configure and monitor. Total includes both APs that are currently being managed by OV3600 as well as newly discovered APs that are not yet being managed.
New Devices Found	Displays the number of discovered APs that are not yet managed, but are available.

Table 70 *Device Setup > Discover > Discovery Execution Fields*

Column	Description
Total Rogues Found	Displays the total number of APs detected during the scan that OV3600 could not configure or monitor. Total includes both APs that have been discovered in earlier scans as well as newly discovered APs from the most recent scan.
New Rogues Found	Displays the number of rogue APs discovered on the most recent scan.
Start	Displays the date and time the most recent scan was started.
Stop	Displays the date and time the scan most recently completed.
Scheduled	Displays the scheduled date and time for scans that are scheduled to be run.

- Go to the **APs/Devices > New** page to see a full list of the newly discovered devices that the scan detected. [Figure 72](#) illustrates this page.



This page is only visible to users with the OV3600 Administrator role, or roles that have “**Allow authorization of APs/Devices**” enabled in **OV3600 Setup > Roles**.

Figure 72 *APs/Devices > New Page Illustration*

What Next?

- To authorize one or more devices to a group, see “[Authorizing Devices to OV3600 from APs/Devices > New Page](#)” on page 118.
- To delete a device altogether from OV3600, select the corresponding check box for each device, and select **Delete**.
- Alcatel-Lucent thin APs can have Alcatel-Lucent AP Group specified and Cisco thin APs can have LWAPP AP Group specified when they are authorized.

Enabling Cisco Discovery Protocol (CDP)

CDP uses the polling interval configured for each individual Cisco switch or router on the **Groups > List** page. OV3600 requires read-only access to a router or switch for all subnets that contain wired or wireless devices. The polling interval is specified on the **Group > Basic** page.

Authorizing Devices to OV3600 from APs/Devices > New Page

Once you have discovered devices on your network, add these devices to a group and specify whether the device is to be placed in **Manage Read/Write** or **Monitor Only** mode. To configure a new group, refer to “Configuring and Using Device Groups in OV3600” on page 75.

In **Manage Read/Write** mode, OV3600 compares the device's current configuration settings with the Group configuration settings and automatically updates the device's configuration to match the Group policy.

In **Monitor Only** mode, OV3600 updates the firmware, compares the current configuration with the policy, and displays any discrepancies on the **APs/Devices > Audit** page, but does not change the configuration of the device.



Put devices in **Monitor Only** mode when they are added to a newly established device group. This avoids overwriting any important existing configuration settings.

Once you have added several devices to the Group, and verified that no unexpected or undesired configuration changes will be made to the devices, you can begin to put the devices in **Manage Read/Write** mode using the **APs/Devices > Manage** or the **Modify these devices** link on any list page.

Perform the following steps to add a newly discovered device to a group:

1. Browse to the **APs/Devices > New** page. The **APs/Devices > New** page displays all newly discovered devices, the related controller (when known/applicable) and the device vendor, model, LAN MAC Address, IP Address, and the date/time of discovery.
2. Select the group and folder to which the device will be added from the drop-down menu (the default group appears at the top of the **Group** listing). Devices cannot be added to a Global Group; groups designated as Global Groups cannot contain access points.
3. Select either the **Monitor Only** or the **Manage Read/Write** radio button and select **Add**.
At this point, you can go to the **APs/Devices > List** page and select the folder(s) to which you have assigned one or more devices to verify that your device has been properly assigned. If you wish to assign a device to the **Ignored** page, or delete it entirely from OV3600, go to [step 4](#).



If you select **Manage Select Devices**, OV3600 automatically overwrites existing device settings with the specified Group settings. Alcatel-Lucent strongly recommends placing newly discovered devices in Monitor mode until you can confirm that all group configuration settings are appropriate for that device.

4. If you do not wish to manage or monitor a discovered device, you may select the device(s) from the list and select either **Ignore Selected Devices** or **Delete Selected Devices**. If you choose to **Ignore** the devices, they will not be displayed in the **APs/Devices > New** list, even if they are discovered in subsequent scans. You can view a list of all **Ignored** devices on the **APs/Devices > Ignored** page. If you choose to **Delete** the device, it will be listed on the **APs/Devices > New** list if discovered by OV3600 in a subsequent scan. Refer to “Assigning Devices to the Ignored Page” on page 122.

Manually Adding Individual Devices

Some deployment situations may require that you manually add devices to OV3600. You can add devices manually by uploading a CSV file, or from the **Device Setup > Add** page.

This section describes the following procedures:

- Adding Devices with the Device Setup > Add Page
- Adding Multiple Devices from a CSV File
- Adding Universal Devices

Adding Devices with the Device Setup > Add Page

Manually adding devices from the **Device Setup > Add** page to OV3600 is an option for adding all device types. You only need to select device vendor information from a drop down menu for Cisco and Alcatel-Lucent devices, and OV3600 automatically finds and adds specific make and model information into its database.

Perform these steps to manually add devices to OV3600:

1. The first step to add a device manually is to select the vendor and model. Browse to the **Device Setup > Add** page and select the vendor and model of the device to add. [Figure 73](#) illustrates this page.

Figure 73 Device Setup > Add Page Illustration

Select the type of device to add:

3Com 8750 Add Import Devices via CSV

- 3Com 8750
- 3Com WX100
- 3Com WX1200
- 3Com WX2200
- 3Com WX4400

2. Select **Add**, and the **Device Communications** and **Location** sections appear, illustrated in [Figure 74](#).

Figure 74 Device Setup > Add > Device Communications and Location Sections

Device Communications

Name:
Leave name blank to read it from device

IP Address:

SNMP Port:

Community String:

Confirm Community String:

SNMPv3 Username:

Auth Password:

Confirm Auth Password:

SNMPv3 Auth Protocol:

Privacy Password:

Confirm Privacy Password:

SNMPv3 Privacy Protocol:

Telnet/SSH Username:

Telnet/SSH Password:

Confirm Telnet/SSH Password:

"enable" Password:

Confirm "enable" Password:

Location

Group:

Folder:

Monitor Only (no changes will be made to device)

Manage read/write (group settings will be applied to device)

Add

Cancel

3. Complete these **Device Communications** and **Location** settings for the new device. [Table 71](#) further describes the contents of this page. Settings may differ from device to device. In several cases, the default values from any given device derive from the **Device Setup > Communication** page.

Table 71 Device Communication and Location Fields and Default Values

Setting	Default	Description
Name	None	User-configurable name for the AP (maximum of 20 characters).
IP Address	None	IP address of the device. This field is required.
SNMP Port	161	Port OV3600 uses to communicate with the AP using SNMP.
Community String (Confirm)	Taken from Device Setup > Communication	Community string used to communicate with the AP. NOTE: The Community String should have RW (Read-Write) capability. New, out-of-the-box Cisco devices typically have SNMP disabled and a blank username and password combination for HTTP and Telnet. Cisco supports multiple community strings per AP.
SNMPv3 Username	Taken from Device Setup > Communication	If you are going to manage configuration for the device, this field provides a read-write user account (SNMP, HTTP, and Telnet) within the Cisco Security System for access to existing APs. OV3600 initially uses this username and password combination to control the Cisco AP. OV3600 creates a user-specified account with which to manage the AP if the User Creation Options are set to Create and user Specified as User.
Auth Password (Confirm)		
Privacy Password (Confirm)	Taken from Device Setup > Communication	SNMPv3 privacy password.
SNMPv3 Auth Protocol	Taken from Device Setup > Communication	Drop-down menu that allows you to enable the SNMPv3 authentication protocol to the device being added.
SNMPv3 Privacy Protocol	Taken from Device Setup > Communication	Drop-down menu that allows you to enable SNMPv3 privacy protocol to the device being added.
Telnet/SSH Username & Password (Confirm)	Taken from Device Setup > Communication	Telnet username and password for existing Cisco IOS APs. OV3600 uses the Telnet username/password combination to manage the AP and to enable SNMP if desired. NOTE: New, out-of-the-box Cisco IOS-based APs typically have SNMP disabled with a default telnet username of Cisco and default password of Cisco . This value is required for management of any existing Cisco IOS-based APs.
“enable” Password (Confirm)	Taken from Device Setup > Communication	Password that allows OV3600 to enter enable mode on the device.
HTTP Username & Password	Taken from Device Setup > Communication	HTTP password used to manage the device initially, and to enable SNMP if desired.
Auth Password	Taken from Device Setup > Communication	SNMPv3 authentication password. NOTE: SNMPv3 supports three security levels: (1) no authentication and no encryption, (2) authentication and no encryption, and (3) authentication and encryption. OV3600 currently only supports authentication and encryption.

Table 71 Device Communication and Location Fields and Default Values (Continued)

Setting	Default	Description
Privacy Password	Taken from Device Setup > Communication	SNMPv3 privacy password. NOTE: SNMPv3 supports three security levels: (1) no authentication and no encryption, (2) authentication and no encryption, and (3) authentication and encryption. OV3600 currently only supports authentication and encryption.

4. In the **Location** field, select the appropriate group and folder for the device.
5. At the bottom of the page, select either the **Monitor Only** or **Management read/write** radio button. The choice depends on whether or not you wish to overwrite the **Group** settings for the device being added. For more information and a detailed procedure, see “[Authorizing Devices to OV3600 from APs/Devices > New Page](#)” on page 118.



If you select **Manage read/write**, OV3600 overwrites existing device settings with the **Group** settings. Alcatel-Lucent recommends placing newly discovered devices in **Monitor read/only** mode to enable auditing of actual settings instead of Group Policy settings.

6. Select **Add** to finish adding the devices to the network.

Adding Multiple Devices from a CSV File

You can add devices in bulk from a CSV file to OV3600. Here you also have the option of specifying vendor name only, and OV3600 will automatically determine the correct type while bringing up the device. If your CSV file includes make and model information, OV3600 will add the information provided in the CSV file as it did before. It will not override what you have specified in this file in any way.

The CSV list must contain the following columns:

- IP Address
- SNMP Community String
- Name
- Type
- Auth Password
- SNMPv3 Auth Protocol
- Privacy Password
- SNMPv3 Username
- Telnet Username
- Telnet Password
- Enable Password
- SNMP Port

You can download a CSV file and customize it as you like. A sample CSV file is illustrated in [Figure 75](#).

Figure 75 Sample CSV File

```
IP Address,SNMP Community String,Name,Type,Auth Password,SNMPv3 Auth Protocol,Privacy Password,SNMPv3 Privacy Protocol,SNMPv3 Username,Telnet Username,Telnet Password,Enable Password,SNMP Port
10.34.64.163,private,switch1.example.com,Router/Switch,nonradiance,md5,privacy123,aes,sv3user,telnetuser,telnetpwd,enable,161
10.172.97.172,private,switch2.example.com,router/switch,nonradiance,sha,privacy123,des,user
10.70.36.172,public,Cisco-WLC-4012-3,Cisco 4000 WLC,
10.46.111.48,,
```

1. To import a CSV file, go to the **Device Setup > Add** page.
2. Select the **Import Devices via CSV link**. The **Upload a list of devices** page displays; see [Figure 76](#).

Figure 76 Device Setup > Add > Import Devices via CSV Page Illustration

Upload a list of devices



import_devices.csv

The list must be in comma-separated values (CSV) format, containing the following columns:

1. IP Address
2. SNMP Community String
3. Name
4. Type
5. Auth Password
6. SNMPv3 Auth Protocol
7. Privacy Password
8. SNMPv3 Privacy Protocol
9. SNMPv3 Username
10. Telnet Username
11. Telnet Password
12. Enable Password
13. SNMP Port

IP Address is required, the others are optional.

Type is a case-insensitive string; you can [view a list of device types](#).

[Download a sample file](#) or see the example below:

```
IP Address,SNMP Community String,Name,Type,Auth Password,SNMPv3 Auth Protocol,SNMPv3 Privacy Protocol,SNMPv3 Username,Telnet Username,Telnet Password,Enable Password,SNMP Port
10.34.64.163,private,switch1.example.com,Router/Switch,nonradiance,md5,private,172.97.172.private,switch2.example.com,router/switch,nonradiance,sha,private
```

3. Select a group and folder into which to import the list of devices.
4. Select **Choose File** and select the CSV list file on your computer.
5. Select **Upload** to add the list of devices into OV3600.

Adding Universal Devices

OV3600 gets basic monitoring information from any device including switches, routers and APs whether or not they are supported devices. Entering SNMP credentials is optional. If no SNMP credentials are entered, OV3600 will provide ICMP monitoring of universal devices. This allows you to monitor key elements of the wired network infrastructure, including upstream switches, RADIUS servers and other devices. While OV3600 can manage most leading brands and models of wireless infrastructure, universal device support also enables basic monitoring of many of the less commonly used devices.

Perform the same steps to add universal devices to OV3600 that were detailed in “[Adding Devices with the Device Setup > Add Page](#)” on page 119.

OV3600 collects basic information about universal devices including name, contact, uptime and location. Once you have added a universal device, you can view a list of its interfaces on **APs/Devices > Manage**.

By selecting the **pencil** icon next to an interface, you can assign it to be non-monitored or monitored as Interface 1 or 2. OV3600 collects this information and displays it on the **APs/Devices > Monitor page in the Interface** section. OV3600 supports MIB-II interfaces and polls in/out byte counts for up to two interfaces. OV3600 also monitors sysUptime.

Assigning Devices to the Ignored Page

There are two ways a device can be assigned to the **Ignored** page: from the **APs/Devices > New** page, or from the **APs/Devices > Manage** page. The advantage of having the device be designated in this way, as in the case of a device that is temporarily down for a known reason, is that when you take it off the ignored list, it returns immediately to the location in OV3600 where it had resided before it was marked **Ignored**.

- Ignored devices are *not* displayed in **APs/Devices > New** if discovered in subsequent scans.
- Deleted devices *will* be listed on the **APs/Devices > New** if discovered in subsequent scans.

Perform these steps to further process or return an ignored device to a managed status.

1. To view all devices that are ignored, go to the **APs/Devices > Ignored** page, illustrated in [Figure 77](#).

Figure 77 APs/Devices > Ignored Page Illustration

4-6 ▼ of 17 Ignored APs/Devices | < > Page 2 ▼ of 6 > > | Choose Columns CSV Export

	Device	Controller	Type	IP Address	LAN MAC Address	Discovered ▼
<input type="checkbox"/>	Aruba6000	-	Aruba Controller	10.15.90.15	-	6/8/2010 4:14 AM
<input type="checkbox"/>	Cisco_2100_5B:60	-	Cisco 2100 WLC	10.50.100.2	-	3/29/2010 7:29 PM
<input type="checkbox"/>	hp-poe-switch	-	HP ProCurve 2626-PWR	10.51.0.22	00:13:21:AC:5E:40	10/26/2009 4:35 PM

4-6 ▼ of 17 Ignored APs/Devices | < > Page 2 ▼ of 6 > > |

Select All - Unselect All

View New Devices

This page provides the following information for any ignored device:

- device name or MAC address, when known
 - controller associated with that device
 - device type
 - device IP address
 - LAN MAC address for the LAN on which the device is located
 - date and time of device discovery
2. To change the device parameters for a given device, select its checkbox and adjust group, folder, monitor, and manage settings as desired.
 3. Select **Add** to add the device to OV3600 so that it appears on the **APs/Devices > New** list.
 4. The **Unignore** button will either return the device to its regular folder or group, or send it to the **APs/Devices > New** page.

Monitoring Devices

This section discusses various device monitoring options and includes the following sections:

- [Viewing Device Monitoring Statistics](#)
- [Understanding the APs/Devices > Monitor Pages for All Device Types](#)
- [Evaluating Radio Statistics for an AP](#)
- [Monitoring Data for Mesh Devices](#)
- [Monitoring Data for Wired Devices \(Routers and Switches\)](#)
- [Understanding the APs/Devices > Interfaces Page](#)
- [Auditing Device Configuration](#)
- [Using Device Folders \(Optional\)](#)


Viewing Device Monitoring Statistics

You can view many useful device monitoring statistics in the **APs/Devices > List** page. The **APs/Devices > List** page displays Users and Bandwidth interactive graphs and lists all devices that are managed or monitored by OV3600

To see only the Up devices, you can click the **Up** link in the Top Header Stats bar (next to the green arrow). This displays the **APs/Devices > Up** page with the same information, but only containing active devices. You can do the same with the **Down** and **Mismatched** top header stats links.

Use the **Go to folder** field to filter the list by folder, or click **Expand folders to show all APs/Devices** if you are looking at a filtered device list. A lock icon in the **Configuration** column indicates that the device in that row is in **Monitor only** mode. [Figure 78](#) illustrates this page.

Figure 78 APs/Devices > List (partial view)

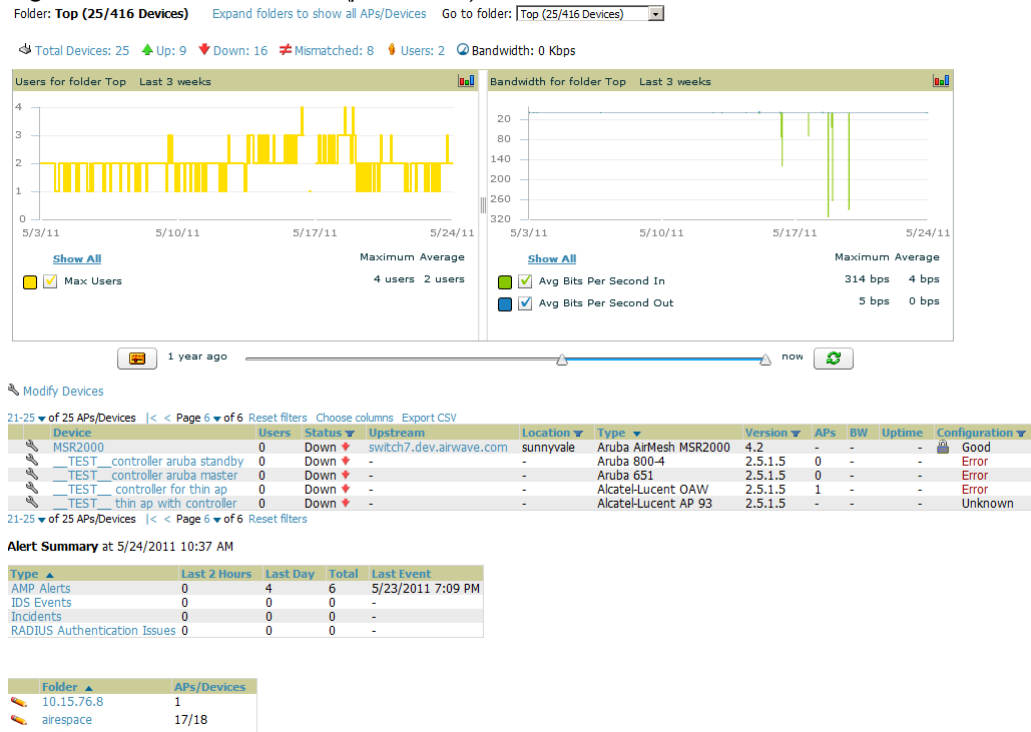

Verify that the devices you added are now appearing in the devices list with a Status of **Up**.



Newly added devices will be status **Down** until they have been polled the first time. They will be configuration **Unknown** until they have finished verification. The **Up** status is not contingent on verification.

The same section also appears on the **Groups > Monitor** page, and is hyperlinked from a controller's monitoring interface.

The **Alert Summary** section of **APs/Devices > List** cites the number of events that have occurred in the last two hours, the last 24 hours, and total. There are four categories of alerts as listed below:

- OV3600 Alerts
- IDS Events
- Incidents
- RADIUS Authentication Issues



The **Alert Summary** table is also a feature of the **Home > Overview** page, and has the same links in that location.

For more information on the **Alert Summary** table, refer to “[Viewing Alerts](#)” on page 204.

Understanding the APs/Devices > Monitor Pages for All Device Types

You can quickly go to any device’s monitoring page once you go to its specific folder or group on the **APs/Devices > List** page, by selecting its hyperlinked name in the **Device** column.

All **Monitor** pages include a section at the top displaying information such as monitoring/configuration status, serial number, total users, firmware version and so on, as shown in [Figure 79](#).

Figure 79 APs/Devices > Monitor Page Top Level Data Common to All Device Types

Monitoring **Talisker** in group **ARMSpectrum** in folder **Top > ARMSpectrum** Poll Controller Now
 This Device is in monitor-only-with-firmware-upgrades mode.

Device Info					
Status:	Up (OK)				
Configuration:	Mismatched (The settings on the device do not match the desired configuration policy.)				
Controller:	Aruba3400	Aruba AP Group:	default	Upstream Device:	-
Type:	Aruba AP 105	Remote Device:	No	Last Contacted:	12/30/2010 10:54 AM
LAN MAC Address:	00:24:6C:C0:00:F6	Serial:	AL0000314	Upstream Port:	-
IP Address:	10.51.55.231	Total Users:	0	Uptime:	8 days 17 hrs 46 mins
Bandwidth:	0 kbps				
Notes:					

The alert summary, recent events, and audit log sections are also the same regardless of device type and these sections appear at the bottom of these pages, a portion of which is shown in [Figure 80](#).

Figure 80 APs/Devices > Monitor Page Bottom Level Data Common to All Device Types
Alert Summary at 2/3/2010 5:23 PM

Type ▲	Last 2 Hours	Last Day	Total	Last Event
Alerts	0	0	0	-
IDS Events	0	0	0	-
Incidents	0	0	0	-
RADIUS Authentication Issues	0	0	0	-

Recent Events ([view system event log](#))

Time	User	Event
Wed Feb 3 16:46:28 2010	System	Configuration verification succeeded; configuration is good ...omitted 19 duplicate messages...
Fri Jan 29 08:31:38 2010	System	Configuration verification succeeded; configuration is good
Fri Jan 29 08:30:08 2010	System	Status changed to 'OK'
Fri Jan 29 08:30:08 2010	System	Up

Audit Log

Time	User	Event
Mon Jan 25 17:23:47 2010	admin	ap (id 15365): monitor_only: '0' => '1'
Mon Jan 25 13:04:35 2010	burton	ap (id 15365): monitor_only: '1' => '0'

Monitoring pages vary according to whether they are wired routers/switches or controllers/WLAN switches, or thin or fat APs, whether the device is a Mesh device, and whether Spectrum is enabled. These differences are discussed in the sections that follow.

Monitoring Data Specific to Wireless Devices

The **APs/Devices > Monitor** page for controllers and APs include a graph for users and bandwidth. The controller graph lists the APs connected to it, while the APs include a list of users it has connected.

When available, lists of CDP and RF neighbors are also listed.

A sample monitoring page for wireless devices is shown in [Figure 81](#).

Figure 81 APs/Devices > Monitor Page for Wireless Devices (partial view of an AP)

Monitoring 1154-Q in group aruba corp in folder Top > corp

Poll Controller Now

This Device is in monitor-only-with-firmware-upgrades mode.


Device Info					
Status:	Up (OK)				
Configuration:	-				
Controller:	ethersphere-1322	Aruba AP Group:	-	Upstream Device:	-
Type:	Aruba AP 125	Remote Device:	No	Last Contacted:	5/25/2011 10:34 AM
LAN MAC Address:	00:1A:1E:64:11:E0	Serial:	AJ0139055	Upstream Port:	-
IP Address:	10.100.139.219	Total Users:	14	Uptime:	14 hrs 19 mins
Quick Links:	Open controller web UI...	Run a command...			
Notes:					

Radios

Name	MAC Address	Users	BW (Kbps)	Channel	Tx Power	Antenna Type	Radio Role	Active SSIDs
802.11an	00:1A:1E:64:11:F0	10	162.82	153	19 dBm	Internal	-	-
802.11bgn	00:1A:1E:64:11:E0	4	0.00	1	20.5 dBm	Internal	-	-

Wired Interfaces

Name	MAC Address	Users	Admin Status	Operational Status	Type	Duplex	Aruba Port Mode	Input Capacity	Output Capacity
Enet0	00:1A:1E:CE:41:1E	0	Up	Down	gigabitEthernet	Half	N/A	10 Mbps	10 Mbps
Enet1	00:1A:1E:CE:41:1F	0	Up	Up	gigabitEthernet	Full	Active Standby	1000 Mbps	1000 Mbps

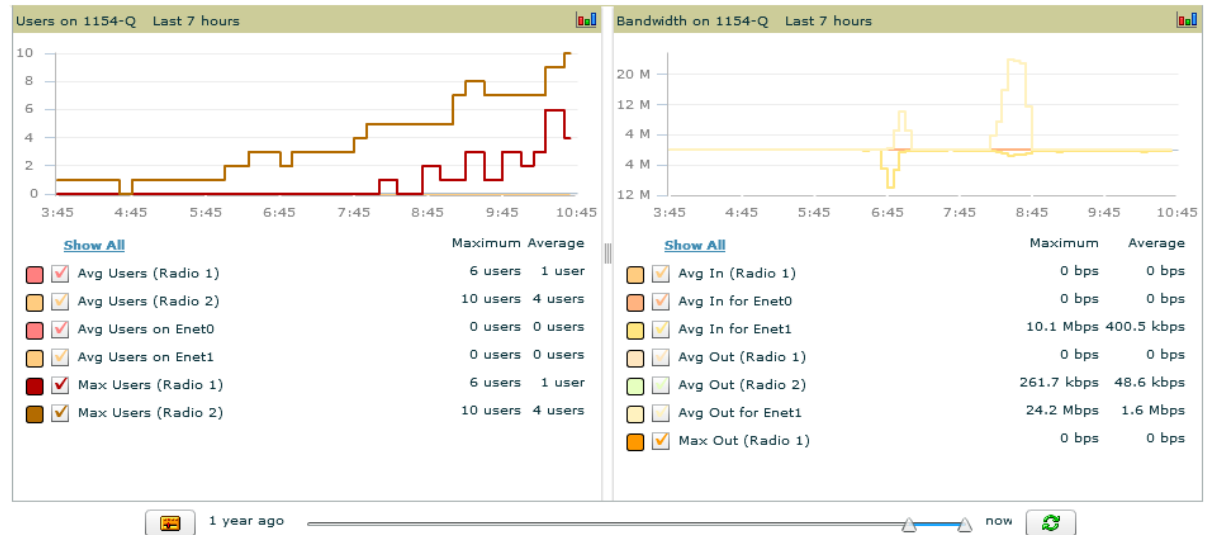

Connected Users

1-3 of 12 Connected Users Page 1 of 4 > > | Reset filters Choose columns Export CSV

Device Type	Role	VLAN	Interface	Connection Mode	Forward Mode	Association Time	Duration	Auth. Type	Cipher	Auth. Time	BW
Apple	logon	66	802.11bgn	802.11n (2.4 GHz)	Tunnel Encrypted	5/25/2011 10:48 AM	0 mins	WPA2	AES	-0 mins	-
Apple	employee	66	802.11an	802.11n (5 GHz)	Tunnel Encrypted	5/25/2011 10:35 AM	12 mins	EAP	AES	12 mins	26.06 K
Apple Mac	employee	105	802.11an	802.11n (5 GHz)	Tunnel Encrypted	5/25/2011 10:24 AM	24 mins	EAP	AES	24 mins	1.41 Kb

1-3 of 12 Connected Users Page 1 of 4 > > | Reset filters

No RF Neighbors

Alert Summary at 5/25/2011 10:47 AM

Type	Last 2 Hours	Last Day	Total	Last Event
AMP Alerts	8	38	38	5/25/2011 10:24 AM
IDS Events	0	0	0	-
Incidents	0	0	0	-
RADIUS Authentication Issues	0	0	0	-

No Device Events

Recent Events (view system event log)

Time	User	Event
Wed May 25 10:24:09 2011	System	New User: Device: 1154-Q: New User Association (Warning)
Wed May 25 10:24:09 2011	System	New User: Device: 1154-Q: New User Association (Warning)

Table 72 describes the fields and information displayed in the **Device Info** section. The displayed fields vary from device to device.

Table 72 APs/Devices > Monitor > Device Info Fields and Default Values

Field	Description
Poll Now	Button above the Device Info section that, when pressed, immediately polls the individual AP or the controller for a thin AP; this overrides the group's preset polling intervals to force an immediate update of all data except for rogue information. Shows "attempt" status and last polling times.
Status	Displays ability of OV3600 to connect to the AP. Up (no issue) means everything is working as it should. Down (SNMP "get" failed) means OV3600 can get to the device but not speak with it using SNMP. Check the SNMP credentials OV3600 is using the view secrets link on the APs/Devices > Manage page and verify SNMP is enabled on the AP. Many APs ship with SNMP disabled. Down (ICMP ping failed after SNMP get failed) means OV3600 is unable to connect to the AP using SNMP and is unable to ping the AP. This usually means OV3600 is blocked from connecting to the AP or the AP needs to be rebooted or reset.
Configuration	Good means all the settings on the AP agree with the settings OV3600 wants them to have. Mismatched means there is a configuration mismatch between what is on the AP and what OV3600 wants to push to the AP. The Mismatched link directs you to this specific APs/Devices > Audit page where each mismatch is highlighted. Unknown means the device configuration has not yet been fetched (possible issue with credentials). Verifying means it's fetching configuration to be compared to desired settings.
Firmware	Displays the firmware version running on the AP.
Licenses <i>(Appears for Alcatel-Lucent switches)</i>	Selecting this link opens a pop-up window that lists the licenses installed for this controller, and whether they have expired.
Controller <i>(Appears for APs)</i>	Displays the controller for the associated AP device as a link. Select the link to display the APs/Devices > Monitor page for that controller.
Mesh Gateway *	Specifies the mesh AP acting as the wired connection to the network.
Mesh Mode*	Specifies whether the AP is a portal device or a mesh node. The portal device is connected to the network over a wired connection. A node is a device downstream of the portal that uses wireless connections to reach the portal device.
Mesh ID *	The name of the mesh device.
View in Google Earth*	Selecting the Google Earth icon opens the mesh network view in Google Earth.
Type	Displays the make and model of the device.
Last Contacted	Displays the most recent time OV3600 has polled the AP for information. The polling interval can be set on the Groups > Basic page.
Uptime	Displays the amount of time since the AP has been rebooted. This is the amount of time the AP reports and is not based on any connectivity with OV3600.
LAN MAC Address	Displays the MAC address of the Ethernet interface on the device.
Serial	Displays the serial number of the device.
Radio Serial	Displays the serial number of the radios in the device. This field is not available for all APs.
Location	Displays the SNMP location of the device.

Table 72 APs/Devices > Monitor > Device Info Fields and Default Values

Field	Description
Contact	Displays the SNMP contact of the device.
IP Address	Displays the IP address that OV3600 uses to communicate to the device. This number is also a link to the AP web interface. When the link is moused over a pop-up menu will appear allowing you to http, https, telnet or SSH to the device.
Quick Links	<ul style="list-style-type: none"> ● Open controller web UI: A drop-down menu that allows you to jump to the controller's UI in a new window. ● Run a command: A drop-down menu with a list of CLI commands you can run directly from the APs/Devices > Monitor page.
Total Users	Displays the total number of users associated to the AP regardless of which radio they are associated to, at the time of the last polling.

*This field is only available for mesh APs. To see an example of mesh monitoring, see ["Monitoring Data for Mesh Devices"](#) on page 135.

Table 73 describes the information in the **Radio** table for APs:

Table 73 APs/Devices > Monitor > Radio Fields and Descriptions

Field	Description
Name	Shows the Radio type of the first radio (802.11a, 802.11b or 802.11g) as a link to the Radio Statistics page for that radio. If the device has more than one of the same radio, it will show a number in parentheses like (1) or (2).
MAC Address	Displays the MAC address of the corresponding radio in the AP.
Tx Power	Some devices report transmit power reduction rather than transmit power; no value is reported for those devices.
Antenna Type	Indicates Internal or External radio. For devices where antenna type is defined per AP, including Alcatel-Lucent devices, the same antenna type will be listed for each radio.
Channel	Displays the channel of the corresponding radio.
Users	Displays the number of users associated to the corresponding radio at the time of the last polling.
Bridge Links	Displays the number of bridge links for devices that are point-to-multi-point (see the Groups > PTMP page for more details).
Mesh Links *	Displays the total number of mesh links to the device including uplinks and downlinks.
BW	Displays the amount of bandwidth being pushed through the corresponding radio interface or device at the time of the last polling.
Active SSIDs	Displays the SSID(s) of the radio(s).
Notes	A free-form text field for entering fixed asset numbers or other device information. This information is printed on the nightly inventory report. Notes can be entered on the APs/Devices > Manage page.

Devices with wired interfaces (except Alcatel-Lucent Instant OAW-IAPs) will display the **Wired Interfaces** table, which is described in [Table 74](#):

Table 74 APs/Devices > Monitor > Wired Interfaces Fields and Descriptions

Field	Description
Name	Displays the name of the interface.
MAC Address	Displays the MAC address of the corresponding interface in the device.
Users	Displays the number of users associated to the corresponding interface at the time of the last polling.
Type	Indicates the type of interface - gigabitEthernet or fastEther for wired interfaces.
Admin Status	Up or down
Operational Status	Displays the current status of the interface. If an interface is Up , then OV3600 is able to ping it and fetch SNMP information. If the AP is listed Down then OV3600 is either unable to ping the interface or unable to read the necessary SNMP information from the device.
Duplex	Full or half
Alcatel-Lucent Port Mode	Tunnel
Input Capacity	The input capacity of the interface
Output Capacity	The output capacity of the interface

[Table 75](#) describes interactive graph information on this page.

Table 75 APs/Devices > Monitor Graphical Data

Graph	Description
Users	Shows the max and average user count reported by the device radios for a configurable period of time. User count for controllers are the sum of the user count on the associated APs. Checkboxes below the graph can be used to limit the data displayed.
Bandwidth	Shows the bandwidth in and out reported by the device for a configurable period of time. Bandwidth for controllers is the sum of the associated APs. Checkboxes below the graph can be used to limit the data displayed.
CPU Utilization (controllers only)	Reports overall CPU utilization (not on a per-CPU basis) of the device.
Memory Utilization (controllers only)	Reports average used and free memory and average max memory for the device.

[Table 76](#) describes the fields and information displayed for the **Connected Users** display.

Table 76 APs/Devices > Monitor > Connected Users Fields and Default Values

Field	Description
Username	Provides the name of the User associated to the AP. OV3600 gathers this data in a variety of ways. It can be taken from RADIUS accounting data or traps.
Device Type	The type of device the user is using as determined by the Device Type Rules set up by an administrator in OV3600 Setup > Device Type Setup . Refer to “Setting Up Device Types” on page 61 for more information.

Table 76 APs/Devices > Monitor > Connected Users Fields and Default Values

Field	Description
Role	The role of the connected user.
MAC Address	Displays the Radio MAC address of the user associated to the AP. Also provides a link that redirects to the Users > Detail page.
Radio	Displays the radio to which the user is associated.
Association Time	Displays the first time OV3600 recorded the MAC address as being associated.
Duration	Displays the length of time the MAC address has been associated.
Auth. Type	<p>Displays the type of authentication employed by the user. Supported auth types are as follows:</p> <ul style="list-style-type: none"> ● EAP—Extensible Authentication Protocol, only reported by Cisco VxWorks using SNMP traps. ● RADIUS accounting—RADIUS accounting servers integrated with OV3600 provide the RADIUS Accounting Auth type. ● Authenticated—a general category supporting additional authentication types. <p>OV3600 considers all other types as not authenticated.</p> <p>The information OV3600 displays in Auth Type and Cipher columns depends on what information the server receives from the devices it is monitoring. The client devices may all be similar, but if the APs to which they are associated are of different models, or if security is set up differently between them, then different Auth Type or Cipher values may be reported to OV3600.</p> <p>If all APs are the same model and all are set up the same way, then another reason for differing Auth Types might be the use of multiple VLANs or SSIDs. One client device might authenticate on one SSID using one Auth Type and another client device might authenticate on a second SSID using a different Auth Type.</p>
Cipher	Displays the encryption or decryption cipher supporting the user, when this information is available. The client devices may all be similar, but if the APs to which they are associated are of different models, or if security is set up differently between them, then different Auth Type or Cipher values may be reported to the OV3600 server.
Auth. Time	Shows how long the user has been authenticated. A negative number indicates that the user has not authenticated for the duration displayed.
Signal Quality	Displays the average signal quality the user experienced.
BW	Displays the average bandwidth consumed by the MAC address.
Location	Displays the QuickView box allows users to view features including heatmap for a device and location history for a user.
LAN IP	Displays the IP assigned to the user MAC. This information is not always available. OV3600 can gather it from the ARP cache of switches discovered by OV3600.
VPN IP	Displays the VPN IP of the user MAC. This information can be obtained from VPN servers that send RADIUS accounting packets to OV3600.

The **Recent Events** area lists the most recent events specific to the device. This information also appears on the **System > Events Log** page (refer to “Using the System > Event Log Page” on page 196). Table 77 describes the fields in this page that display in the **Recent Events** table.

Table 77 APs/Devices > Monitor > Recent Events Fields and Default Values

Field	Description
Time	Displays the day and time the event was recorded.
User	Displays the user that triggered the event. Configuration changes are logged as the OV3600 user that submitted them. Automated OV3600 events are logged as the System user.
Event	Displays a short text description of the event.

Evaluating Radio Statistics for an AP

The **APs/Devices > Monitor > Radio Statistics** page contains useful data for pinpointing network issues at the AP radio level for Alcatel-Lucent APs and Cisco WLC thin APs (firmware 4.2 or greater).

To see radio statistics details, navigate to the **APs/Devices > Monitoring** page for a supported AP and select the linked radio under the **Name** column in the **Radios** list table, as illustrated in Figure 82.

Figure 82 Links to the Radio Statistics page on **APs/Devices > Monitoring** for an AP

Radios

Name ▲	MAC Address	Users	BW (Kbps)	Channel	Tx Power	Antenna Type	Active SSIDs
802.11an ▼	00:1A:1E:85:54:70	-	-	-	-	Internal	-
802.11bgn ▼	00:1A:1E:85:54:60	-	-	-	-	Internal	-

Overview of the Radio Statistics Page


The Radio Statistics page displays transmit and receive statistics about the communication quality of individual radios. Depending on the AP, assigned group profiles, and recent activity on this radio, this data gives visibility into recent and historical changes in the network, fetches real-time statistics from the AP’s controller, indicates actively interfering devices (requires Alcatel-Lucent APs set to Spectrum mode), and summarizes major issues.

Viewing Real-Time ARM Statistics

Alcatel-Lucent AP Groups that have the **Adaptive Radio Management (ARM)** feature enabled continuously optimize each AP to use the best channel and transmission power settings available. An AP configured with ARM will automatically adjust to a better channel if it reaches a configured threshold for noise, MAC errors, or PHY errors; additionally, it can attenuate transmit power and switch between radio modes as needed. See the ARM chapter in the *AOS-W User Guide* for more information.

Complete ARM statistics from Alcatel-Lucent switches can be retrieved from the Radio Statistics page by selecting the **Run a command...** drop-down menu and choosing button, as illustrated in Figure 83.

Figure 83 Fetch additional radio stats by running a show command



When this button is selected, a new browser window launches with the statistics in plain text. Other ARM-tracked metrics are visible in the **Radio Statistics** page for Alcatel-Lucent APs.

Issues Summary section

The **Issues Summary** section only displays when noise, user count, non-802.11 interfering devices, channel utilization, bandwidth, and MAC and PHY errors reach a certain threshold of concern, as described in [Table 78](#) and illustrated in [Figure 84](#):

Table 78 *Issues Summary labels and thresholds*

Issue	Triggering Threshold
High Noise	> -80
High Number of Users	> 15
High Channel Utilization	> 75%
High Bandwidth	> 75% of max
Interfering Devices Detected	Detected within the last 5 minutes
High MAC/Phy Errors	> 1000 frames/sec

Figure 84 *Issues Summary Section Illustration*

Monitoring 802.11bg radio for AP AP0018.19bd.b1d0

Issues Summary	
Issue:	Description
High Noise:	Noise > -80
High Channel Utilization:	Channel Utilization > 75%

These issues highlighted in this section can be examined in detail using the corresponding interactive graphs on the same page. See the [Radio Statistics Interactive Graphs](#) section of this chapter for details.

802.11 Radio Counters Summary

This table appears for radios with 802.11 counters and summarizes the number of times an expected acknowledgement frame was not received, the number of duplicate frames, the number of frames containing Frame Check Sequence (FCS) errors, and the number of frame/packet transmission retries and failures. These aggregate error counts are broken down by Current, Last Hour, Last Day, and Last Week time frames, as illustrated in [Figure 85](#).

Figure 85 *802.11 Radio Counters Summary table*
802.11 Radio Counters Summary (frames/sec)

	Current	Last Hour	Last Day	Last Week
Unacked	0	0	0	1
Retries	0	0	0	0
Failures	0	0	0	1
Dup Frames	0	0	0	0
FCS Errors	380	380	386	464

The frame- per-second rate of these and other 802.11 errors over time are tracked and compared in the **802.11 Counters** graph on the same page.

Radio Statistics Interactive Graphs

Time-series graphs for the radio are displayed across a tabbed, dual-pane interface to show changes recorded at every polling interval over time. Users and Bandwidth data are polled based on the AP's group's **User Data Polling Period**. Channel, Noise, and Power are based on **AP Interface Polling Period**. 802.11 Counters data are based on the AP's group's **802.11 Counters Polling Period**.

You can adjust the attributes of these graphs as follows:

- Drag the horizontal slider under the graphs to move the scope of all graphs between one year ago and the current time.


- Drag the vertical slider between graphs to change the relative width of each.
- The **Show All** link displays all of the available data series.
- The bar-graph icon on the upper right-hand corner of each graph opens a new window and displays all data series for the selected graph over the last two hours, last day, last week, last month, and last year in one page. The graphs that display depend on the AP and/or its controller.
- Select the checkbox next to any metric to remove its data from the graph. Select **Collapse** to remove unchecked metrics from the legend, and **Show All** to restore them.

The two graph panes enable simultaneous display of two different information sets, as detailed in [Table 79](#):

Table 79 *Radio Statistics Interactive Graphs Descriptions*

Graph Title	Description
Users	A line graph that displays the maximum users associated to the corresponding radio at polling intervals over the time range set in the slider. Select Show All for other metrics such as average users and max users for various individual devices.
Bandwidth	An area graph displaying the average bandwidth in each direction for the radio. Select Show All for other metrics such as max bandwidth in and out, average and max mesh/overhead or overhead bandwidth, and average/max Enet0.
Channel	An area graph that displays the channel changes (if any) of the radio over time. Frequent, regular channel changes on an Alcatel-Lucent or Cisco WLC AP radio usually indicate that the Adaptive Radio Management feature (ARM) in AOS-W is compensating for high noise levels from interfering devices.
Noise	An area graph that displays signal interference (noise floor) levels in units of dBm. Noise from interfering devices above your AP's noise threshold can result in dropped packets. For ARM-enabled Alcatel-Lucent APs, crossing the noise threshold triggers an automatic channel change.
Power	A line graph that displays the average and maximum radio transmit power, between 0 and 30 dBm, over the time range set in the slider. You can adjust the transmit power manually in the APs/Devices > Manage page for this radio's AP, or enable ARM on Alcatel-Lucent APs to dynamically adjust the power toward your acceptable Coverage Index as needed. See the "Adaptive Radio Management" chapter of the <i>AOS-W User Guide</i> for more information.
MAC/Phy Errors	A line graph displaying the frame reception rate, physical layer error rate (resulting from poor signal reception or broken antennas), and the data link (MAC) layer (corrupt frames, driver decoding issues) for the radio.
802.11 Counters	A line graph that displays statistics such as frame rate, fragment rate, retry rate, duplicate frame rate, and other metrics tracked by 802.11 counters.
Utilization <i>(Alcatel-Lucent and Cisco WLC thin APs on supported firmware versions only)</i>	Displays max and average percentages on this radio for busy, interfering receiving and transmitting signals. Special configuration on the controller is required to enable this data; consult the <i>OV3600 Best Practices Guide</i> for details.

Figure 86 Radio Statistics Interactive Graphs Illustration – Bandwidth and 802.11 Counters displayed

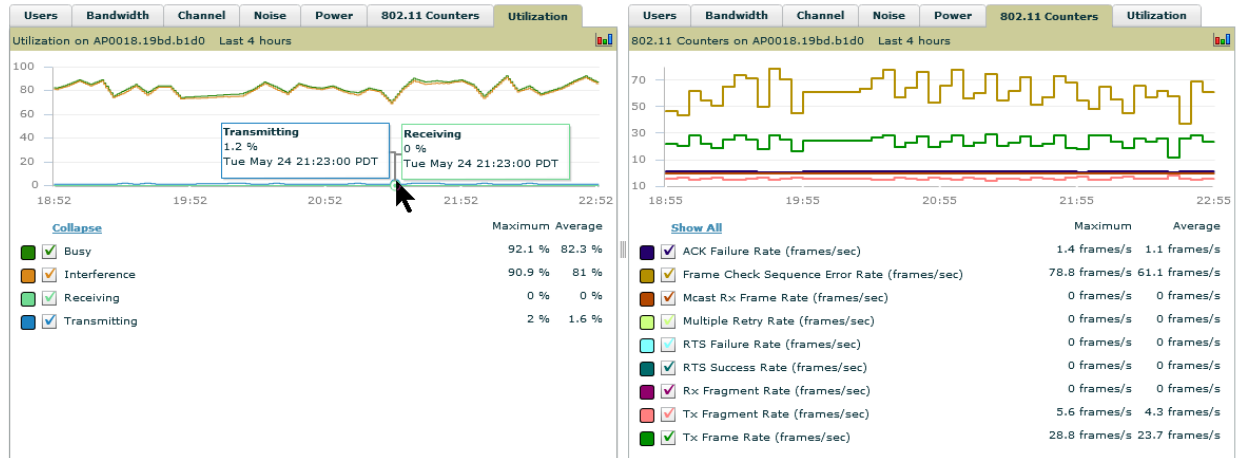

Recent ARM Events Log

If this radio references an active and enabled ARM profile, and if your OV3600 is enabled as a trap host (see *Best Practices Guide* for instructions), ARM-initiated events such as automatic channel changes, power changes, and mode changes are displayed in the ARM Events table with the original and modified values; these values can be selected for filtering the results. You can export the table in CSV format. The columns and values are described in [Table 80](#), and illustrated in [Figure 87](#).

Figure 87 ARM Events Table Illustration

ARM Events

1-10 of 23 ARM Events Page 1 of 3 >> | Choose Columns CSV Export

Time	Trap Type	Previous Tx Power	Current Tx Power	Previous Radio Mode	Current Radio Mode	Previous Channel	Current Channel	Previous Secondary Channel	Current Secondary Channel
1/4/2011 10:55 AM	Channel Change	-	-	-	-	1	7	Above	Above
1/4/2011 10:51 AM	Power Change	6	3	-	-	-	-	-	-
1/4/2011 10:51 AM	Channel Change	-	-	-	-	7	1	Above	Above
1/4/2011 9:55 AM	Channel Change	-	-	-	-	1	7	Above	Above
1/4/2011 9:51 AM	Power Change	6	3	-	-	-	-	-	-
1/4/2011 9:50 AM	Channel Change	-	-	-	-	7	1	Above	Above
1/4/2011 4:38 AM	Channel Change	-	-	-	-	1	7	Above	Above
1/4/2011 4:34 AM	Power Change	6	3	-	-	-	-	-	-

Table 80 ARM Events table Columns and Values

Column	Description
Time	The time of the ARM event.
Trap Type	The type of trap that delivered the change information. Current ARM trap types that display in OV3600 are: <ul style="list-style-type: none"> Power Change Mode Change Channel Change Values that display in the following columns depend on the Trap Type.
Previous Tx Power	Old value for transmit power before the Power Change event took place.
Current Tx Power	New transmit power value after the change.
Previous Radio Mode	Old value for radio mode before the Mode Change event took place.
Current Radio Mode	New radio mode value after the change.
Previous Channel	Old primary channel value before the Channel Change event took place.
Current Channel	New primary channel value after the change.

Column	Description
Previous Secondary Channel	Old secondary channel value (for 40Mhz channels on 802.11n devices) before the Channel Change event took place.
Current Secondary Channel	New secondary channel value after the change.
Change Reason	If the noise and interference cause for the change can be determined, they will be displayed here. Mode change reasons are not yet tracked.

Detected Interfering Devices Table

For Alcatel-Lucent APs running in Spectrum mode, the same non-802.11 interfering devices identified in the **Issues Summary** section are classified in the **Detected Interfering Devices** table along with the timestamp of its last detection, the start and end channels of the interference, the signal to noise ratio, and the percentage of time the interference takes place, as illustrated in [Figure 88](#). This table can be exported to CSV format, and the displayed columns can be moved or hidden as needed.

Figure 88 *Detected Interfering Devices Table Illustration*

1-7 of 7 Interfering Devices Page 1 of 1 Choose Columns CSV Export

Device Type ▲	Last Seen	Start Channel	End Channel	SNR	Duty Cycle
Cordless Base Freq Hopper	1/14/2011 3:31 PM	1	14	69	5
XBox Freq Hopper	1/14/2011 3:17 PM	1	14	63	5
Cordless Phone Freq Hopper	1/14/2011 2:10 PM	1	14	80	5
Generic Freq Hopper	1/14/2011 3:52 PM	1	14	73	5
Video Device Fixed Freq	1/14/2011 9:25 AM	10	13	72	99

Possible device types for the Detected Interfering Devices table are:

- Wi-Fi
- Microwave
- Bluetooth
- Generic Fixed Freq
- Cordless Phone Fixed Freq
- Video Device Fixed Freq
- Audio Device Fixed Freq
- Generic Freq Hopper
- Cordless Phone Freq Hopper
- Xbox Freq Hopper
- Microwave Inverter
- Cordless Base Freq Hopper
- Unknown

Active BSSIDs Table

The Active BSSIDs table maps the BSSIDs on a radio with the SSID it broadcasts to the network, as illustrated in [Figure 89](#). This table appears only for Alcatel-Lucent AP radios.

Figure 89 *Active BSSIDs Table Illustration*

Active BSSIDs

BSSID ▲	SSID
00:1A:1E:86:C4:60	aruba-ap
00:1A:1E:86:C4:61	3600_wpa2_psk

Monitoring Data for Mesh Devices

The monitoring page for mesh devices includes basic device information at the top, two tables for Radios and Wired Interfaces, a Users interactive graph and a Bandwidth interactive graph. Under these graphs are a list of associated Users, Mesh Links, RF Neighbors, and other common event logs and information.

Figure 90 APs/Devices > Monitor page for a Mesh Device

Monitoring **Mesh-Portal-124-2b:3e** in group **Access Points** in folder **Top** Poll Controller Now
 This Device is in monitor-only mode.


Device Info					
Status:	Up (OK)				
Configuration:	Error (Too many errors fetching existing configuration)				
Controller:	Srin651	Aruba AP Group:	-	Upstream Device:	-
Mesh Portal:	Mesh-Portal-124-2b:3e	Mesh Mode:	Portal AP	Mesh ID:	-
Type:	Aruba AP 124	Remote Device:	No	Last Contacted:	5/23/2011 6:44 PM
LAN MAC Address:	00:1A:1E:C0:2B:3E	Serial:	AD0006035	Upstream Port:	-
View in Google Earth:					
IP Address:	192.168.1.253	Total Users:	0	Bandwidth:	-
Quick Links:	Open controller web UI...	Run a command...			
Notes:					

Radios

Name	MAC Address	Users	BW (Kbps)	Channel	Tx Power	Mesh Links	Radio Role	Active SSIDs
802.11an	00:1A:1E:82:B3:F0	0	0.00	149	12 dBm	1	Mesh Portal	-
802.11bgn	00:1A:1E:82:B3:F0	0	0.00	6	15 dBm	-	-	-

Wired Interfaces

Name	MAC Address	Users	Admin Status	Operational Status	Type	Duplex	Aruba Port Mode	Input Capacity	Output Capacity
Enet0	00:1A:1E:C0:2B:3E	0	Up	Up	gigabitEthernet	Full	N/A	100 Mbps	100 Mbps
Enet1	00:1A:1E:C0:2B:3F	0	Up	Down	gigabitEthernet	Half	Active Standby	10 Mbps	10 Mbps

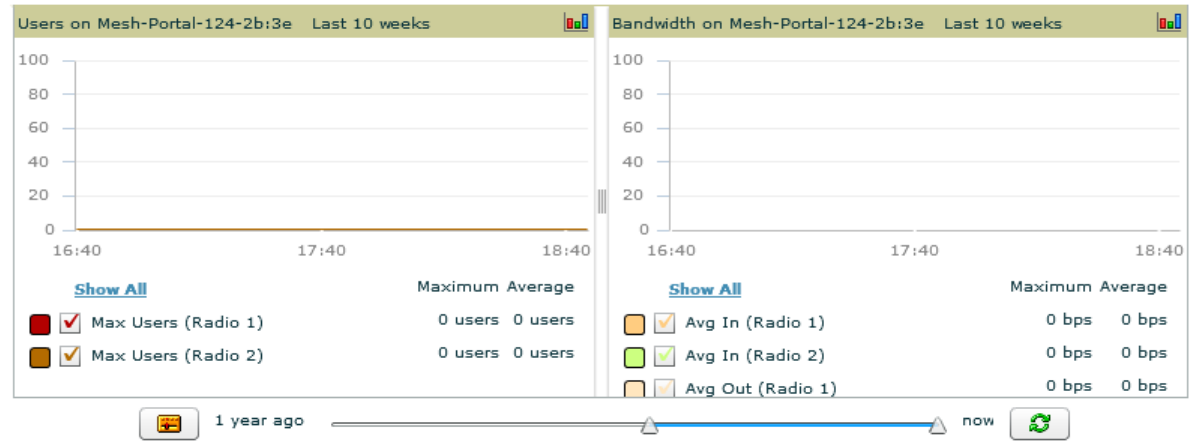

No users associated to this device.

Mesh Links


AP Name	Device Address	Link Time	Duration	Link Type
Mesh-Point-35:a6	00:24:6C:C8:35:A6	5/19/2011 11:52 AM	4 days 6 hrs 54 mins	Downlink

These fields are described in detail in “Viewing Device Monitoring Statistics” on page 123.

Monitoring Data for Wired Devices (Routers and Switches)

The monitoring page for routers and switches includes basic device information at the top, a bandwidth graph depicting the sum of all the physical interfaces, and beneath that, CPU/Memory usage graphs as shown in Figure 91.

Figure 91 APs/Devices > Monitor Page for a Switch

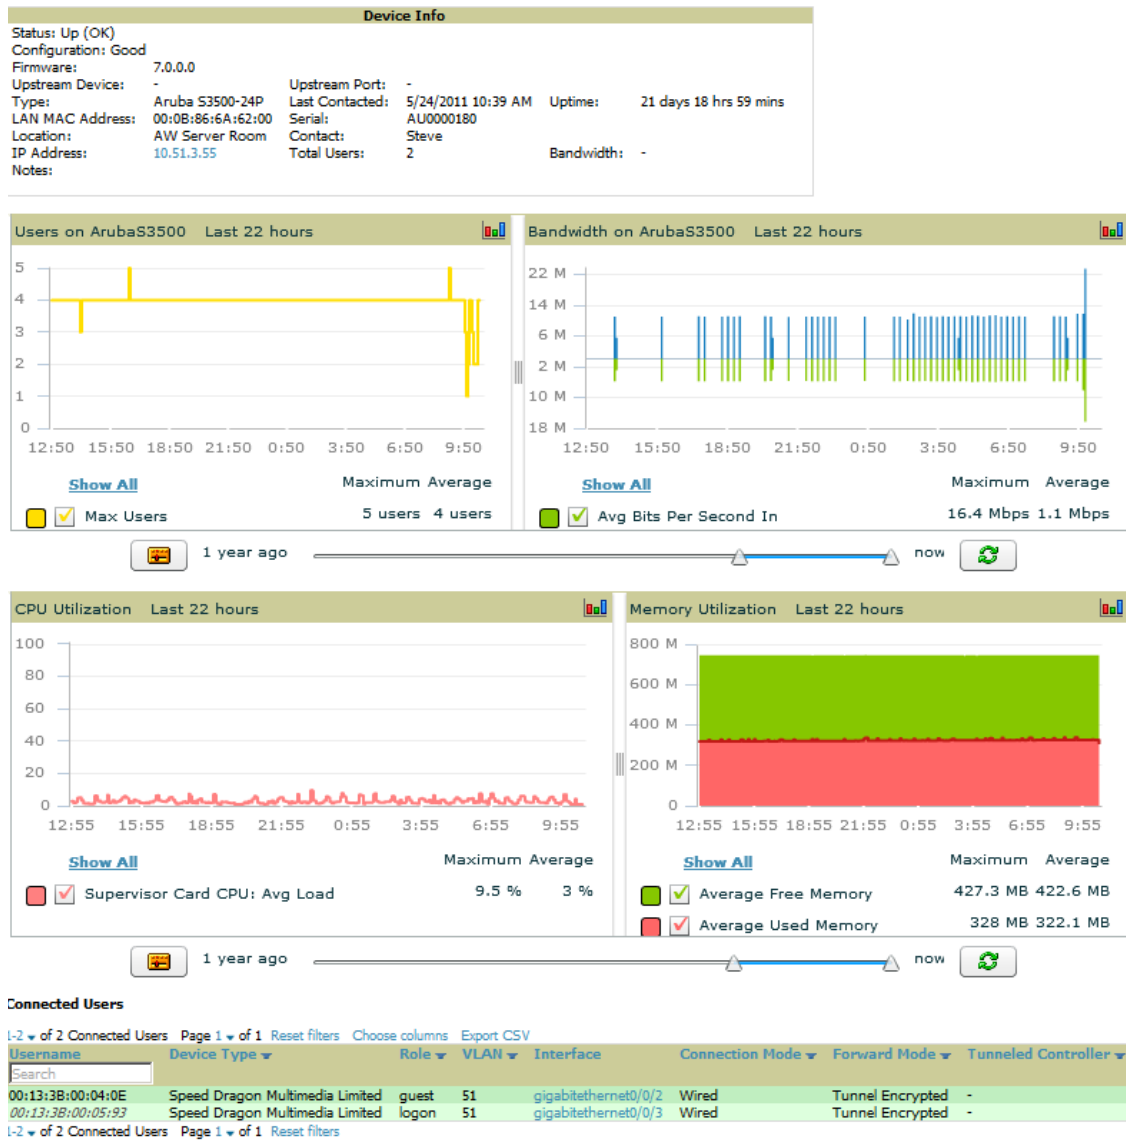

All managed wired devices also include an **Interfaces** subtab, as shown in Figure 92.

Figure 92 *APs/Devices > Interfaces Page for Wired Devices (partial view).*

Switch ▲	Total	Up	Down	Access	Up	Down	Distribution	Up	Down
ArubaS3500	27	16	11	26	15	11	1	1	0

Physical Interfaces

[Edit Interfaces](#)

1-10 ▼ of 24 Interfaces Page 1 ▼ of 3 > > | [Reset filters](#) [Choose columns](#) [Export CSV](#)

Interface ▲	Mode	Name	Operational Status ▼	Type ▼
gigabitethernet0/0/1	Distribution	corvina uplink	Up	ethernetCsmacc
gigabitethernet0/0/20	Access	GE0/0/20	Down	ethernetCsmacc
gigabitethernet0/0/21	Access	GE0/0/21	Down	ethernetCsmacc
gigabitethernet0/0/22	Access	GE0/0/22	Down	ethernetCsmacc
gigabitethernet0/0/3	Access	Locally Authed Port	Up	ethernetCsmacc
gigabitethernet0/0/5	Access	Locally Authed Port	Up	ethernetCsmacc
gigabitethernet0/0/7	Access	Locally Authed Port	Up	ethernetCsmacc
gigabitethernet0/0/14	Access	GE0/0/14	Down	ethernetCsmacc
gigabitethernet0/0/0	Access	a3200-1.dev.airwave.com uplink	Up	ethernetCsmacc
gigabitethernet0/0/2	Access	Locally Authed Port	Up	ethernetCsmacc

1-10 ▼ of 24 Interfaces Page 1 ▼ of 3 > > | [Reset filters](#)

Virtual Interfaces

[Edit Interfaces](#)

1-3 ▼ of 3 Interfaces Page 1 ▼ of 1 [Reset filters](#) [Choose columns](#) [Export CSV](#)

Interface ▲	Name	Type ▼	MAC Address	Admin Status ▼	Operational Status ▼	Link
mgmt	MGMT	rfc877x25	00:0B:86:6A:62:01	Up	Down	0
tunnel0	Tunnel Interface	tunnel	00:0B:86:6A:62:00	Up	Up	0
vlan51	802.1Q VLAN	l3vlan	00:0B:86:6A:62:00	Up	Up	0

1-3 ▼ of 3 Interfaces Page 1 ▼ of 1 [Reset filters](#)

VLANs

Name ▲	VLAN	Tagged Ports	Untagged Ports
VLAN0001	1	-	-
VLAN0051	51	gigabitethernet0/0/0-7,14-23	gigabitethernet0/0/0-7,14-23
VLAN4089	4089	gigabitethernet0/0/13	gigabitethernet0/0/13
VLAN4090	4090	gigabitethernet0/0/12	gigabitethernet0/0/12
VLAN4091	4091	gigabitethernet0/0/11	gigabitethernet0/0/11
VLAN4092	4092	gigabitethernet0/0/10	gigabitethernet0/0/10
VLAN4093	4093	gigabitethernet0/0/9	gigabitethernet0/0/9
VLAN4094	4094	gigabitethernet0/0/8	gigabitethernet0/0/8

8 VLANs


The **Interfaces** page includes a summary of all the interfaces at the top. In case of the stacked switches, the master includes the interfaces of all the members including its own. The physical and the virtual interfaces are displayed in separate tables, labeled **Physical Interfaces** and **Virtual Interfaces**. VLANs are listed below the interface.

OV3600 monitors **Up/Down** status and bandwidth information on all interfaces. You can edit multiple interfaces concurrently by selecting one of the two **Edit Interfaces** hyperlinks. Interface labels are used to group one or more interfaces for the purpose of defining interface bandwidth triggers.

Understanding the APs/Devices > Interfaces Page

“Monitoring Data for Wired Devices (Routers and Switches)” on page 137 showed you how to view high-level interface information for all physical and virtual interfaces on an entire router or switch. Select any interface hotlink in the **Interface** column of the Physical or Virtual Interfaces tables on the stacked switches to go to an **Interface Monitoring** page displaying data relevant to that specific interface, as shown Figure 93.

Figure 93 *Interface Monitoring Page for a Wired Device*

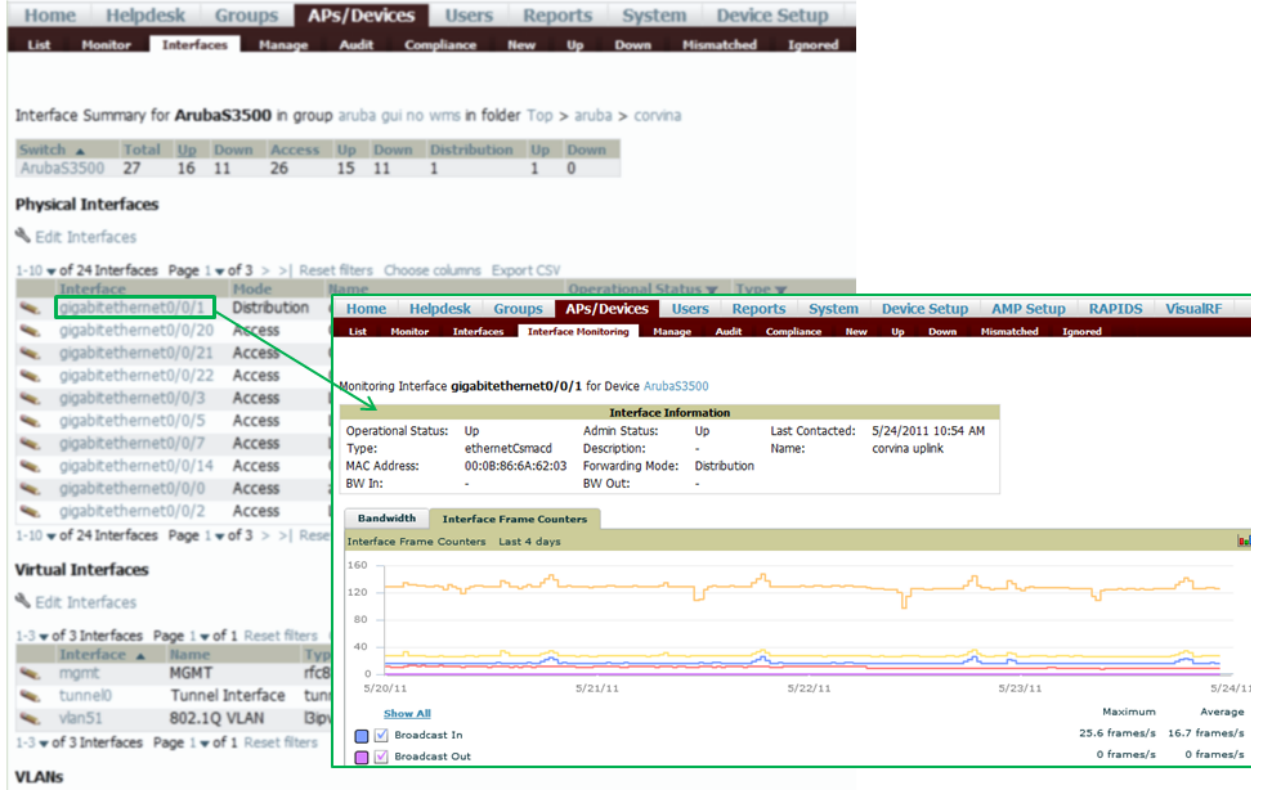

An **Interface Monitoring** page is comprised of three sections: Interface Information, Bandwidth and Interface Frame Counters graphs, and Connected Users.

Specifics of the interface are in the Interface Information section, as depicted in Figure 94.

Figure 94 *Individual Interface Information Section*

Interface Information					
Operational Status:	Down	Admin Status:	Up	Last Contacted:	1/26/2010 3:50 PM
Type:	ethernetCsmacd	Alias:	-	Description:	FastEthernet0/4
MAC Address:	00:18:18:8D:40:06				
BW In (kbps):	0	BW Out (kbps):	0		

Bandwidth, and various standard and enterprise specific error counting information is displayed in the lower section in a tabbed graph, which are shown in Figure 93 above.

Connected Users, if any, are listed in a table below the interactive graphs as shown in Figure 95.

Figure 95 *Connected Users list in APs/Devices > Interface Monitoring for a selected interface*

Connected Users

1-1 of 1 Connected Users Page 1 of 1 Reset filters Choose columns Export CSV

Device Type	Role	MAC Address	VLAN	Interface	Connection Mode	Forward Mode	Tunneled Controller
Speed Dragon Multimedia Limited	logon	00112233445566778899	51	gigabitethernet0/0/9	Wired	Tunnel Encrypted	Aruba3200

1-1 of 1 Connected Users Page 1 of 1 Reset filters

What Next?

All device lists in OV3600 act as portals to management pages if you have the proper read/write privileges. Selecting the wrench or pencil icon next to a device table entry, or selecting **Modify Devices** where appropriate above a device table, will take you to the appropriate Management page (**APs/Devices > Manage**). See “[Configuring and Managing Devices](#)” on page 141 for more information.

Auditing Device Configuration

When you have added a newly discovered device successfully to a Group in **Monitor** mode, the next step is to verify device configuration status. Determine whether any changes will be applied to that device when you convert it to **Managed read/write** mode.

OV3600 uses SNMP or Telnet to read a device’s configuration. SNMP is used for Cisco controllers. Alcatel-Lucent devices and wired routers and switches use Telnet/SSH to read device configuration. See “[Individual Device Support and Firmware Upgrades](#)” on page 150 for more details.

Perform these steps to verify the device configuration status:

1. Browse to the **APs/Devices > List** page.
2. Locate the device in the list and check the information in the **Configuration** column.
3. If the device is in **Monitor** mode, the **lock** symbol appears in the **Configuration** column, indicating that the device is locked and will not be configured by OV3600.
4. Verify the additional information in the **Configuration** column for that device.
 - A status of **Good** indicates that all of the device's current settings match the group policy settings, and that no changes will be applied when the device is shifted to **Manage** mode.
 - A status of **Mismatched** indicates that at least one of the device's current configuration settings do not match the group policy, and will be changed when the device is shifted to **Manage** mode.
5. If the device configuration is **Mismatched**, select the **Mismatched** link to go to the **APs/Devices > Audit** page. The **APs/Devices > Audit** page lists detailed information on all existing configuration parameters and settings for an individual device.

The group configuration settings are displayed on the right side of the page. If the device is moved from **Monitor** to **Manage** mode, the settings on the right side of the page overwrite the settings on the left. [Figure 96](#) illustrates this page.

Figure 96 *APs/Devices > Audit Page Illustration*

This Device is in monitor-only-with-firmware-upgrades mode.
Configuration read from device at 5/24/2011 4:43 PM

Configuration: Good

Audit | Audit the device's current configuration.

[Show Archived Device Configuration](#)

[Show only mismatched settings](#)

[Refresh this page](#)

Device Settings	
Current Device Configuration	
Name	corvina-qa-1
Serial Number	AU0000180
Uptime	22 days 0 hrs 52 mins
System Properties	
Current Device Configuration	
Contact	Steve
Description	ArubaOS (MODEL: ArubaS3500-24T), Version 7.0.0.0 (28131)
Location	AW Server Room
ObjectID	.1.3.6.1.4.1.14823.1.1.25

6. Review the list of changes to be applied to the device to determine whether the changes are appropriate. If not, you need to change the Group settings or reassign the device to another Group.

Using Device Folders (Optional)

The devices on the **APs/Devices List** pages include **List**, **Up**, **Down**, and **Mismatched** fields. These devices are arranged in groups called folders. Folders provide a logical organization of devices unrelated to the configuration groups of the devices. Using folders, you can quickly view basic statistics about devices. You *must* use folders if you want to limit the APs and devices OV3600 users can see.


Folder views are persistent in OV3600. If you select the **Top** folder and then select the **Down** link at the top of the page, you are taken to all of the down devices in the folder.

If you want to see every **down** device, select the **Expand folders to show all devices** link. When the folders are expanded, you see all of the devices on OV3600 that satisfy the criteria of the page. You also see an additional column that lists the folder containing the AP.

Perform the following steps to add a device folder to OV3600.

1. To add a folder, select the **Add New Folder** link at the bottom of **APs/Devices > List**, **> Up**, **> Down**, or **> Mismatched**. [Figure 97](#) illustrates the page.

Figure 97 Folder Creation Page Illustration

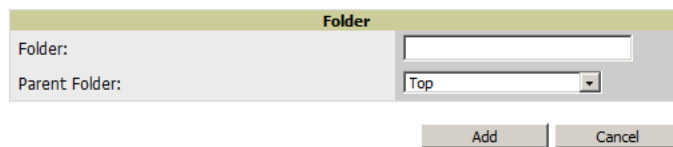

2. Enter the name of the new folder.
3. Select the **Parent** folder.
4. Select **Add**.

Once a new folder has been created, devices can be moved into it using the **Modify Devices** link or when **New Devices** are added into OV3600.

Configuring and Managing Devices

This section contains the following topics describing individual device configuration within device groups:

- [Moving a Device from Monitor Only to Manage Read/Write Mode](#)
- [Configuring AP Settings](#)
- [Configuring Device Interfaces for Switches](#)
- [Individual Device Support and Firmware Upgrades](#)

While most device configuration settings can be efficiently managed by OV3600 at a Group level, certain settings must be managed at the individual device level. For example, because devices within a Group are often contiguous with one another, and have overlapping coverage areas, it makes sense to manage these devices individually to avoid RF interference.



Any changes made at an individual device level will automatically override Group level settings.

OV3600 automatically saves the last 10 device configurations for reference and compliance purposes. Archived device configurations are linked on the **APs/Devices > Audit** page and identified by name. By default, configuration is tracked by the date and time it was created; device configurations are also archived by date.

It is not possible to push archived configurations to devices, but archived configurations can be compared to the current configuration, the desired configuration, or to other archived configurations using the drop-down menus on the **APs/Devices > Audit** page. This applies to startup or to running configuration files.

Compare two configurations to highlight the specific lines that are mismatched. The Audit page provides links to the OV3600 pages where any mismatched settings can be configured.



These procedures assume you are familiar with the function buttons available to save, apply, revert, and so on. For details on button functions, see “Buttons and Icons” on page 26.

Moving a Device from Monitor Only to Manage Read/Write Mode

Once the device configuration status is **Good** on the **APs/Devices > List** page, or once you have verified all changes that will be applied to the device on the **APs/Devices > Audit** page, you can safely shift the device from **Monitor Only** mode to **Manage Read/Write** mode.



Once a device is in Manage mode, OV3600 will push a new configuration to the device in the event that the actual device configuration does not match the OV3600 configuration for that device.

To move a device from **Monitor Only** to **Manage Read/Write** mode, perform the following steps.

1. Go to the **APs/Devices > List** page and select the **wrench** icon next to the name of the AP to be shifted from **Monitor Only** mode to **Manage Read/Write** mode. This directs you to the **APs/Devices > Manage** page.
2. Locate the **General** area as shown in [Figure 98](#).

Figure 98 *APs/Devices > Manage > General Section Illustration*

General	
Name:	symbol-3021-1
Status:	Up (OK)
Configuration:	Good (Ignoring mismatches)
Last Contacted:	5/19/2009 12:21 PM
Type:	Symbol 3021
Firmware:	04.02-19
Group:	HQ
Folder:	Top > HQ
Management Mode:	<input type="radio"/> Monitor Only + Firmware Upgrades <input checked="" type="radio"/> Manage Read/Write

3. Select **Manage Read/Write** on the **Management Mode** field.
4. Select **Save and Apply, then Confirm Edit on the confirmation page** to retain these settings and to push configuration to the device.
5. For device configuration changes that require the device to reboot, use the **Schedule** function to push the changes at a time when WLAN users will not be affected.
6. To move multiple devices into managed mode at once, use the **Modify these devices** link. Refer to “[Modifying Multiple Devices](#)” on page 109 for more information.

Configuring AP Settings

1. Browse to the **APs/Devices > List** page and select the wrench icon next to the device whose AP settings you want to edit. This directs you to the **Manage** page for that device. [Figure 99](#) illustrates this page.

Figure 99 APs/Devices > Manage Page Illustration

General	
Name:	ap125-meshportal-karen
Status:	Up (OK)
Configuration:	Good
Last Contacted:	2/12/2010 10:29 AM
Type:	AP 125
Controller:	sphere-lms
Group:	sphere-lms
Folder:	Top > HQ
Management Mode:	<input type="radio"/> Monitor Only + Firmware Upgrades <input checked="" type="radio"/> Manage Read/Write

Settings	
Name:	ap125-meshportal-karen
Domain Name:	
Location:	
Contact:	
Latitude:	10.02450899096407
Longitude:	0.7395866645358211
Altitude (m):	0
Group:	sphere-lms3
Folder:	HQ
Auto Detect Upstream Device:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Upstream device will automatically be updated when the device is polled.	
Automatically clear Down Status Message when device comes back up:	<input type="radio"/> Yes <input checked="" type="radio"/> No
Down Status Message:	
<div style="border: 1px solid #ccc; height: 20px;"></div>	
Aruba AP Group:	default
Installation:	Default
Mesh Mode:	Portal AP

Authentication Method	
PPPoE Authentication:	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Remote AP:	<input type="radio"/> Yes <input checked="" type="radio"/> No

Master Discovery	
Master Discovery Type:	Host Controller (IP)
Host Controller IP Address:	16.2.250
Master Controller IP Address/DNS Name:	16.2.250

Link Priority Settings	
Link Priority Ethernet (0-255):	
Link Priority Celular (0-255):	

USB Settings	
USB User Name:	
USB Password:	
Confirm USB Password:	
USB Device Type:	any
USB Device Identifier:	
USB Dial String:	
USB Initialization String:	
USB TTY Device Path:	

Network Settings	
Use DHCP:	<input type="radio"/> Yes <input checked="" type="radio"/> No
LAN IP Address:	
Subnet Mask:	
Gateway:	
DNS IP Address:	

Save and Apply

Revert

Delete

Ignore

Import Settings

Replace Hardware

If any changes are scheduled for this AP, they appear in a **Scheduled Changes** section at the top of the page above the other fields. The linked name of the job takes you to its **System > Configuration Change Job Detail** page.

2. Locate the **General** section for information about the APs current status. [Table 81](#) describes the fields, information, and settings.

Table 81 *APs/Devices > Manage > General Fields and Descriptions*

Field	Description
Name	Displays the name currently set on the device.
Status	Displays the current status of an AP. If an AP is Up , then OV3600 is able to ping it and fetch SNMP information from the AP. If the AP is listed Down then OV3600 is either unable to ping the AP or unable to read the necessary SNMP information from the device.
Configuration	Displays the current configuration status of the AP. To update the status, select Audit on the APs/Devices > Audit page.
Last Contacted	Displays the last time OV3600 successfully contacted the AP.
Type	Displays the type of AP.
Firmware	Displays the version of firmware running on the AP.
Group	Links to the Group > Monitoring page for the AP.
Template	Displays the name of the group template currently configuring the AP. Also displays a link to the Groups > Template page. This is only visible for APs that are managed by templates.
Folder	Displays the name of the folder containing the AP. Also displays a link to the APs/Devices > List page for the folder.
Management Mode	Displays the current management mode of the AP. No changes are made to the AP when it is in Monitor Only mode. OV3600 pushes configurations and makes changes to an AP when it is in Manage Read/Write mode.
Notes	Provides a free-form text field to describe device information.

3. Review and provide the following information in the **Settings** area. Devices with dual radios display radio-specific settings in the Slot A and Slot B area. If a device is dual-radio capable but only has one device installed, OV3600 manages that device as if it were a single slot device.



Devices from different vendors have different RF settings and capabilities. The fields in the **Settings** section of the **APs/Devices > Manage** page are context-sensitive and only present the information relevant for the particular device vendor and model.

[Table 82](#) describes field settings, default values, and information for the **Settings** section of this page.

Table 82 *APs/Devices > Manage > Settings Fields and Default Values*

Setting	Default	Device Type	Description
Name	None	All	User-configurable name for the device (max. 20 characters)
Domain Name	None	IOS	Field populated upon initial device discovery or upon refreshing settings. Enable this option from OV3600 Setup > Network page to display this field on the APs/Devices > Manage page, with fully-qualified domain names for IOS APs. This field is used in conjunction with Domain variable in IOS templates.
Location	Read from the device	All	The SNMP location set on the device.

Table 82 APs/Devices > Manage > Settings Fields and Default Values

Setting	Default	Device Type	Description
Latitude	None	All	Text field for entering the latitude of the device. The latitude is used with the Google Earth integration.
Longitude	None	All	Text field for entering the longitude of the device. The longitude is used with the Google Earth integration.
Altitude (meters)	None	All	Text field for entering the altitude of the device when known. This setting is used with the Google Earth integration. Specify altitude in meters.
Group	Default Group	All	Drop-down menu that can be used to assign the device to another Group.
Folder	Top	All	Drop-down menu that can be used to assign the device to another Group.
Auto Detect Upstream Device	Yes	All	Selecting Yes enables automatic detection of upstream device, which is automatically updated when the device is polled. Selecting No displays a drop-down menu of upstream devices.
Down Status Message	None	All	Enter a text message that provides information to be conveyed if the device goes down.
Administrative Status	Enable	All	Enables or disables administrative mode for the device.
Mode	Local	All	Designates the mode in which the device should operate. Options include the following: <ul style="list-style-type: none"> • Local • H-REAP • Monitor • Rogue Detector • Sniffer

4. Complete additional settings on the **APs/Devices > Manage** page, to include H-REAP, certificates, radio settings, and network settings. [Table 83](#) describes many of the possible fields.



For complete listing and discussion of settings applicable only to Alcatel-Lucent devices, see the *Alcatel-Lucent Configuration Guide*.

Table 83 APs/Devices > Manage, Additional Settings

Setting	Default	Device Type	Description
Mesh Role	Mesh AP	Mesh Devices	Drop-down menu specifies the mesh role for the AP as shown: <ul style="list-style-type: none"> • Mesh AP —The AP will act like a mesh client. It will use other APs as its uplink to the network. • Portal AP —The AP will become a portal AP. It will use a wired connection as its uplink to the network and serve it over the radio to other APs. • None —The AP will act like a standard AP. It will not perform meshing functions

Table 83 APs/Devices > Manage, Additional Settings (Continued)

Setting	Default	Device Type	Description
Mesh Mobility	Static	Mesh Devices	Select Static if the AP is static, as in the case of a device mounted on a light pole or in the ceiling. Select Roaming if the AP is mobile. Two examples would be an AP mounted in a police car or utility truck.
Receive Antenna	Diversity	Cisco	Drop-down menu for the receive antenna provides three options: Diversity — Device will use the antenna that receives the best signal. If the device has two fixed (non-removable) antennas, the Diversity setting should be used for both receive and transmit antennas. Right — If your device has removable antennas and you install a high-gain antenna on the device's right connector (the connector on the right side when viewing the back panel of the device), use this setting for receive and transmit. Left — If your device has removable antennas and you install a high-gain antenna on the device's left connector, use this setting for both receive and transmit.
Transmit Antenna	Diversity	Cisco	See description in Receive Antenna above.
Antenna Diversity	Primary Only	Symbol 4131	Drop-down menu provides the following options: Full Diversity — The AP receives information on the antenna with the best signal strength and quality. The AP transmits on the antenna from which it last received information. Primary Only — The AP transmits and receives on the primary antenna only. Secondary Only: The AP transmits and receives on the secondary antenna only. Rx Diversity — The AP receives information on the antenna with the best signal strength and quality. The AP transmits information on the primary antenna only.
Transmit Power Reduction	0	Proxim	Transmit Power Reduction determines the APs transmit power. The max transmit power is reduced by the number of decibels specified.
Channel	6	All	Represents the AP's current RF channel setting. The number relates to the center frequency output by the AP's RF synthesizer. Contiguous APs should be set to different channels to minimize "crosstalk," which occurs when the signals from APs overlap and interfere with each other. This RF interference negatively influences WLAN performance. 802.11b's 2.4-GHz range has a total bandwidth of 80-MHz, separated into 11 center channels. Of these channels, only 3 are non-overlapping (1, 6, and 11). In the United States, most organizations use only these non-overlapping channels.
Transmit Power Level	Highest power level supported by the radio in the regulatory domain (country)	Cisco, Symbol, Proxim AP-600, AP-700, AP-2000 (802.11g)	Determines the power level of radio transmission. Government regulations define the highest allowable power level for radio devices. This setting must conform to established standards for the country in which you use the device. You can increase the coverage radius of the access point by increasing the Transmit Power Level. However, while this increases the zone of coverage, it also makes it more likely that the AP will interfere with neighboring APs. Supported values are: Cisco (100mW, 50mW, 30mW, 20mW, 5mW, 1mW) Symbol (Full or 50mW, 30mW, 15mW, 5mW, 1mW)

Table 83 APs/Devices > Manage, Additional Settings (Continued)

Setting	Default	Device Type	Description
Radio Enabled	Yes	All	The Radio Enabled option allows you to disable the radio's ability to transmit or receive data while still maintaining Ethernet connectivity to the network. OV3600 will still monitor the Ethernet page and ensure the AP stays online. Customers typically use this option to temporarily disable wireless access in particular locations. This setting can be scheduled at an AP level or Group-Level. NOTE: You cannot disable radios unless rogue scanning is disabled in Groups > Radio .
Use DHCP	Yes	All	If enabled, the AP will be assigned a new IP address using DHCP. If disabled, the AP will use a static IP address. For improved security and manageability, Alcatel-Lucent recommends disabling DHCP and using static IP addresses.
LAN IP	None	All	The IP Address of the AP Ethernet interface. If One-to-One NAT is enabled, OV3600 will communicate with the AP on a different address (the IP Address defined in the "Device Communication" area). If DHCP is enabled, the current assigned address will appear grayed out and the field cannot be updated in this area.
Subnet Mask	None	All	Provides the IP subnet mask to identify the sub-network so the IP address can be recognized on the LAN. If DHCP is enabled, the current assigned address will appear grayed out and the field cannot be updated in this area.
Gateway	None	All	The IP address of the default internet gateway. If DHCP is enabled, the current assigned address will appear grayed out and the field cannot be updated in this area.

5. Locate the **Template Options** area on the **APs/Devices > Manage** page.



This section only appears for IOS APs, Symbol and Alcatel-Lucent switches in groups with Alcatel-Lucent GUI Config disabled.

Table 84 describes field settings, default values, and additional information for this page.

Table 84 APs/Devices > Manage > Template Options Fields and Default Values

Setting	Default	Device Type	Description
WDS Role	Client	Cisco IOS Wireless LAN Controllers only	Set the WDS role for this AP. Select Master for the WDS master APs and Client for the WDS Client. Once this is done you can use the %if wds_role= % to push the client, master, or backup lines to appropriate WDS APs.
SSL Certificate	None	Cisco IOS	OV3600 will read the SSL Certificate off of the AP when it comes UP in OV3600. The information in this field will defines what will be used in place of %certificate%.
Extra Device Commands	None	Cisco IOS	Defines the lines that will replace the %ap_include_1% variable in the IOS template. This field allows for unique commands to be run on individual APs. If you have any settings that are unique per AP like a MOTD you can set them here.
switch_command	None	Cisco Catalyst switches	Defines lines included for each of the members in the stack. This field appears only on the master's Manage page. The information in this field will determine what is used in place of the %switch_command% variable.

- For Cisco WLC devices, go to the interfaces section of the **APs/Devices > Manage** page. Select **Add new Interface** to add another controller interface, or select the **pencil** icon to edit an existing controller interface. [Table 85](#) describes the settings and default values. For detailed descriptions of Cisco WLC devices supported by OV3600, refer to the Cisco WLC product documentation.

Table 85 *APs/Devices > Manage > Interface Fields and Descriptions for Cisco WLC Devices*

Field	Default	Description
Name	None	The name of the interface on the controller.
VLAN ID	None	The VLAN ID for the interface on the controller.
Port	None	The port on the controller to access the interface.
IP Address	None	The IP address of the controller.
Subnet Mask	None	The subnet mask for the controller.
Gateway	None	The controller's gateway.
Primary and Secondary DHCP Servers	None	The DHCP servers for the controller.
Guest LAN	Disabled	Indicates a guest LAN.
Quarantine VLAN ID	Disabled	Enabled indicates it is a quarantine VLAN; used only for H-REAP-associated clients.
Dynamic Device Management	Enabled	When enabled, makes the interface an AP-manager interface. Cisco calls this feature Dynamic AP Management.

Configuring Device Interfaces for Switches

When you go to the **APs/Devices > Interfaces** page for a switch, you can add a Virtual interface by selecting **Add** and entering the appropriate information in the page that then appears, as shown in [Figure 100](#).

Figure 100 *Add Virtual Interfaces Page for Wired Devices*

Interface Monitoring

Auto Detect Interface Capacity: Yes No
Interface capacities will automatically be updated when the device is polled.

Combined Bandwidth: Yes No

Interface Labels:

Interface Configuration

Description:

Include in template: Yes No

Shutdown: Yes No

Cisco Interface Type: ▼

Index Tag:

Additional Commands:

New physical and virtual interfaces are discovered using SNMP polling as described in “SNMP/HTTP Scanning” on page 114. To refresh and reload all current interface information from a device, select **Import Interfaces** on the bottom of the page as shown in Figure 101.

Figure 101 *Import Interfaces for Refresh and Reload (lower portion of page)*

	Interface	Name	Type ▲	Interface Type	Description	Interface Labels	Shutd
	Nu0	Null0	other	-	Null0	Nu0	-
<input type="checkbox"/>	V150	Vlan50	propVirtual	Catalyst VLAN	-	V150	No
<input type="checkbox"/>	V151	Vlan51	propVirtual	Catalyst VLAN	-	V151	No
<input type="checkbox"/>	V159	Vlan59	propVirtual	Catalyst VLAN	-	V159	No
<input type="checkbox"/>	V150	Vlan50	propVirtual	Catalyst VLAN	Vlan50	V150	No
<input type="checkbox"/>	V1	Vlan1	propVirtual	Catalyst VLAN	Vlan1	V1	No
<input type="checkbox"/>	V159	Vlan59	propVirtual	Catalyst VLAN	Vlan59	V159	No
<input type="checkbox"/>	V151	Vlan51	propVirtual	Catalyst VLAN	Vlan51	V151	No
<input type="checkbox"/>	V1	Vlan1	propVirtual	Catalyst VLAN	-	V1	No

1-9 ▼ of 9 Interfaces Page 1 ▼ of 1

Select All - Unselect All

Delete

Import Interfaces

You can view details for each interface on a wired device from its individual interface page as well. For details, see “Understanding the APs/Devices > Interfaces Page” on page 139.

You can configure interface settings individually or in groups. For individual settings, select the pencil icon next the interface name in **AP/Devices > Interfaces**.

This takes you to the **Interfaces Monitoring and Configuration** window which has a slightly different appearance depending on whether you are configuring a physical or virtual interface, as shown in Figure 102 and Figure 103.

Figure 102 *Physical Interfaces Monitoring and Configuration Sections*

Interface Monitoring

Auto Detect Interface Capacity: Yes No
 Interface capacities will automatically be updated when the device is polled.

Combined Bandwidth: Yes No

Interface Labels:

Mode:

Interface Configuration

Description:

Shutdown: Yes No

Interface Type: FastEthernet IEEE 802.3

Switchport Access VLAN:

Switchport Mode:

Switchport Trunk Native VLAN:

Switchport Trunk Allowed VLANs:

Switchport Trunk Pruning VLANs:

Switchport Trunk Encapsulation:

Speed:

Additional Commands:

Save Cancel

Figure 103 *Virtual Individual Interfaces Configuration Section*

Interface Configuration

Description:

Interface Type: Catalyst VLAN

Save Cancel


To configure interfaces as a group, select **Edit Interfaces** above the Physical or Virtual Interfaces table as shown in [Figure 104](#).

Figure 104 *Edit Multiple Interfaces*



Interface Summary for **ArubaS3500** in group **aruba gui no wms** in folder **Top > aruba > corvina**

Switch ▲	Total	Up	Down	Access	Up	Down	Distribution	Up	Down
ArubaS3500	27	16	11	26	15	11	1	1	0

Physical Interfaces


 [Edit Interfaces](#)

1-3 ▼ of 24 Interfaces Page 1 ▼ of 8 > > | [Reset filters](#) [Choose columns](#) [Export CSV](#)



Interface	Mode	Name	Operational Status ▼	Type ▼
 gigabitethernet0/0/1	Distribution	corvina uplink	Up	ethernetCs
 gigabitethernet0/0/20	Access	GE0/0/20	Down	ethernetCs
 gigabitethernet0/0/21	Access	GE0/0/21	Down	ethernetCs

1-3 ▼ of 24 Interfaces Page 1 ▼ of 8 > > | [Reset filters](#)

Virtual Interfaces

 [Edit Interfaces](#)

1-3 ▼ of 3 Interfaces Page 1 ▼ of 1 [Reset filters](#) [Choose columns](#) [Export CSV](#)










Interface	Name	Type ▼	MAC Address	Admin Status ▼	0
 mgmt	MGMT	rfc877x25	00:0B:86:6A:62:01	Up	D
 tunnel0	Tunnel Interface	tunnel	00:0B:86:6A:62:00	Up	U
 vlan51	802.1Q VLAN	l3ipvlan	00:0B:86:6A:62:00	Up	U

1-3 ▼ of 3 Interfaces Page 1 ▼ of 1 [Reset filters](#)

VLANs

You will remain on the same page, but will have the option to make changes to the most commonly edited settings in batch mode, as shown in [Figure 105](#).

Figure 105 *Multiple Interface Editing Page Illustration*

	Interface	Name	Type	Interface Type	Description	Interface Labels	Shutdown	IP Address
<input type="checkbox"/>	 V150	Vlan50	propVirtual	Catalyst VLAN		V150	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 V151	Vlan51	propVirtual	Catalyst VLAN		V151	<input type="radio"/> Yes <input checked="" type="radio"/> No	10.51.0.26
<input type="checkbox"/>	 V159	Vlan59	propVirtual	Catalyst VLAN		V159	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 V150	Vlan50	propVirtual	Catalyst VLAN	Vlan50	V150	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 V11	Vlan1	propVirtual	Catalyst VLAN	Vlan1	V11	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 V159	Vlan59	propVirtual	Catalyst VLAN	Vlan59	V159	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 Nu0	Null0	other	-	Null0	Nu0	<input type="radio"/> Yes <input type="radio"/> No	-
<input type="checkbox"/>	 V151	Vlan51	propVirtual	Catalyst VLAN	Vlan51	V151	<input type="radio"/> Yes <input checked="" type="radio"/> No	-
<input type="checkbox"/>	 V11	Vlan1	propVirtual	Catalyst VLAN		V11	<input type="radio"/> Yes <input checked="" type="radio"/> No	-

1-9 ▼ of 9 Interfaces Page 1 ▼ of 1

[Select All](#) - [Unselect All](#)

OV3600 assembles the entire running configuration using templates and your modifications to these pages. For a more detailed discussion on templates, see [Chapter 6, “Creating and Using Templates”](#) on page 159.

Individual Device Support and Firmware Upgrades

Perform the following steps to configure AP communication settings for individual Alcatel-Lucent device types.

1. Locate the **Device Communication** area on the **APs/Devices > Manage** page.
2. Specify the credentials to be used to manage the AP. [Figure 106](#) illustrates this page.

Figure 106 APs/Devices > Manage > Device Communication

Device Communication

[View Device Credentials](#)

If this device is down because its IP address or management ports have changed, update the fields below with the correct information.

IP Address:

SNMP Port:

If this device is down because the credentials on the device have changed, update the fields below with the correct information.

This device is currently using SNMP version 1

Community String:

Confirm Community String:

Auth Password:

Confirm Auth Password:

Privacy Password:

Confirm Privacy Password:



The **Device Communication** area may appear slightly different depending on the particular vendor and model of the APs being used.

3. Enter and confirm the appropriate **Auth Password** and **Privacy Password**.
4. You can disable the **View AP Credentials** link in OV3600 by the root user. Contact Alcatel support for detailed instructions to disable the link.
5. (Optional.) Enter the appropriate SSH and Telnet credentials if you are configuring Dell, Alcatel-Lucent Networks, Alcatel-Lucent or any Cisco device except Cisco WLAN controllers.
6. Select **Apply**, then **Confirm Edit** to apply the changes to the AP immediately, **Schedule** to schedule the changes during a specific time, or **Cancel** to return to **APs/Devices > Manage**.



Some AP configuration changes may require the AP to be rebooted. Use the **Schedule** function to schedule these changes to occur at a time when WLAN users will not be affected.

Select the **Update Firmware** button at the bottom right of the page to upgrade the device's firmware.

[Figure 107](#) illustrates the page that opens and [Table 86](#) describes the settings and default values.



The **Update Firmware** button only appears if 1) the OV3600 Administrator has enabled **Allow firmware upgrades in monitor-only mode** in **OV3600 Setup > General**, 2) if you are looking at an **APs/Devices > Manage** page for a controller or autonomous AP that supports firmware upgrades in OV3600. See the “Supported Wireless Firmware Versions” document (the OV3600 Firmware Matrix) in to see all of the OV3600-supported devices that can perform firmware upgrades. In most cases, you cannot upgrade firmware directly on thin APs.



Note that for Alcatel-Lucent firmware upgrades, OV3600 does not check whether a device is in **Master** or **Local** configuration, and it does not schedule rebooting after the upgrade. OV3600 users should consult Alcatel-Lucent’s best practices for firmware upgrades and plan their upgrades using OV3600 accordingly.

Table 86 APs/Devices > Manage > Firmware Upgrade Fields and Default Values

Setting	Default	Description
Desired Version	None	Specifies the firmware to be used in the upgrade. Firmware can be added to this drop-down menu on the Device Setup > Upload Firmware & Files page.
Job Name	None	Sets a user-defined name for the upgrade job. Alcatel-Lucent recommends using a meaningful and descriptive name.
Use "/safe" flag for Cisco IOS firmware upgrade command	No	Enables or disables the /safe flag when upgrading IOS APs. The /safe flag must be disabled on older APs for the firmware file to fit in flash memory.
Email Recipients	None	Displays a list of email addresses that should receive alert emails if a firmware upgrade fails.
Sender Address	None	Displays the From address in the alert email.

Figure 107 APs/Devices > Manage Firmware Upgrades

The screenshot shows the configuration interface for a firmware upgrade. It is divided into three main sections:

- Desired Version:** This section includes instructions to choose a firmware version for a Cisco-19:5F:2B (10.51.3.128) device. It shows the current version as 12.4(21a)JA1 and a dropdown menu for the desired version set to "-- Select firmware version".
- Firmware Upgrade Job Options:** This section allows setting a job name ("Firmware upgrade for Cisco-19"), a checkbox for the "/safe" flag (set to "Yes"), and a dropdown for the interface to serve files from (set to "10.2.32.10").
- Failure Notification Options:** This section provides instructions on how to enter email addresses. It shows a text area with "user@example.com" and a "Sender Address" field set to "me@networks.com".

Initiating a firmware upgrade will change the **Firmware Status** column for the device to Pending in APs/Devices > List. You can review the status of all recent firmware upgrade jobs in **System > Firmware Upgrade Jobs**.

Troubleshooting a Newly Discovered Down Device

If the device status on the **APs/Devices > List** page remains **Down** after it has been added to a group, the most likely source of the problem is an error in the SNMP community string being used to manage the device. Perform the following steps to troubleshoot this scenario.

1. Select the **Name** of the down device in the list of devices on the **APs/Devices > List** or **APs/Devices > Down** page. This automatically directs you to the **APs/Device > Monitor** page for that device.

2. Locate the **Status** field in the **Device Info** section. If the Status is **Down**, it includes a description of the cause of the problem. Some of the common system messages are as follows in [Table 87](#):

Table 87 Common System Messages for Down Status


Message	Meaning
AP is no longer associated with controller	This means the AP no longer shows up in any controller's AP list (on the OV3600 server). Either the AP was removed from the controller, or it has roamed to another controller that OV3600 does not have visibility of, or it is offline.
Controller is Down	When a controller goes down, OV3600 automatically marks all associated thin APs down (because communication to thin APs are via the controller and OV3600 assumes that if the Controller has gone offline then all associated APs are down as well until reassociated another Controller).
Downloading	The AP is in the process of downloading firmware or configuration (only applies to Cisco WLC thin APs and some Symbol APs).
Error fetching existing configuration	OV3600 could not fetch a config for the AP. Usually this is because the OV3600 has incorrect credentials and was not able to log in.
ICMP Ping Failed (after SNMP Get Failed)	The device is not responding and is likely offline.
SNMP Get Failed	SNMP credentials and/or configuration may be incorrect. Verify that SNMP is enabled and that credentials and access ports are configured correctly on both the target device and in OV3600.
SNMP Trap	OV3600 received an SNMP trap from the controller indicating that the AP is no longer associated to the controller.
Telnet Error: command timed out	Telnet/SSH username and password specified for that device is incorrect.
Unexpected LAN MAC Address found at this device's IP address	If OV3600 detects that the LAN MAC address of a device has changed this error message will appear. This usually indicates that a physical hardware change has occurred (while reusing the same IP Address) without using the Replace Hardware feature in OV3600. This error may also indicate an IP address conflict between two or more devices. When an unexpected LAN MAC address is seen in a device's IP address, its APs/ Devices > Manage page displays the message "Click Replace Hardware (preferred) or Reset MAC Address to reset the LAN MAC address if this device has been replaced with new hardware" at the top of the page. Alcatel-Lucent recommends always using the Replace Hardware button at the bottom of that page in order to avoid this message.



To view the detailed status of all your down devices at once, navigate to **APs/Devices > Down** (try the **Down** top header stats link) and look at the **Detailed Status** column for the list of down devices. This column can be sorted using the **Filter** icon (🔍).

3. If the **SNMP Get Failed** message appears, select the **APs/Devices > Manage** tab to go to the management page for that device.
4. If visible, select the **View Device Credentials** link in the **Device Communications** section of **APs/ Devices > Manage**. This displays the credentials OV3600 is using unsuccessfully to communicate with the device. This link can be removed from OV3600 for security reasons by setting a flag in OV3600. Only users with root access to the OV3600 command line can show or hide this link. To disable this feature, please contact Alcatel support. . [Figure 108](#) illustrates this page.

Figure 108 View Device Credentials Window

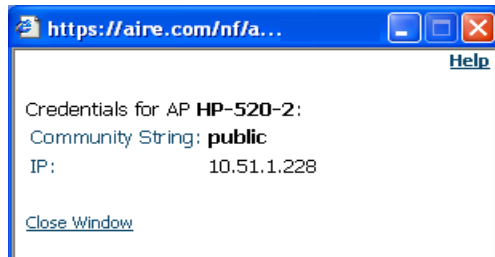

The **View Device Credentials** message may appear slightly different depending on the vendor and model.

5. If the credentials are incorrect, return to the **Device Communications** area on the **APs/Devices > Manage** page. Enter the appropriate credentials, and select **Apply**.
6. Return to the **APs/Devices > List** page to see if the device appears with a Status of **Up**.

Setting up Alcatel-Lucent Spectrum Analysis in OV3600

The spectrum analysis software modules on Alcatel-Lucent AP models OAW-AP105, ROAW-AP5WN, the OAW-AP12x series, the OAW-AP13x series and the OAW-AP9x series can examine the radio frequency (RF) environment in which the Wi-Fi network is operating, identify interference and classify its sources.

The spectrum analyzer is used in conjunction with Alcatel-Lucent's Adaptive Radio Management (ARM) technology. While the spectrum analyzer identifies and classifies Wi-Fi and non-Wi-Fi sources of interference, ARM automatically ensures that APs serving clients will stay clear of interference.

Individual APs or groups of APs can be converted to dedicated spectrum monitors through the dot11a and dot11g radio profiles of that AP or AP group, or through a special spectrum override profile.

Each 802.11a and 802.11g radio profile references a spectrum profile, which identifies the spectrum band the radio will monitor and analyze, and defines the default ageout times for each monitored device type. By default, an 802.11a radio profile references a spectrum profile named **default-a** (which configures the radio to monitor the upper channels of the 5 GHz radio band), and an 802.11g radio profile references a spectrum profile named **default-g** (which configures the radio to monitor all channels the 2.4 GHz radio band).

Most interference will occur in the 2.4 GHz radio band.

For more information about Spectrum analysis and ARM technology, refer to the *AOS-W 6.0 User Guide*.

Spectrum Configurations and Prerequisites

The following prerequisites must be in place to configure an AP to run in spectrum mode in OV3600:

- The AP must be in **Manage Read/Write** mode.
- The AP's associated switch must have an RFprotect license, and must run AOS-W 6.0 or later.
- Alcatel-Lucent GUI Config must be enabled for that AP's group in the **Groups > Basic** page.

There are three main situations in which you would set one or more devices to Spectrum mode in OV3600:

- Alcatel-Lucent AP Groups running permanently with the default Spectrum profile
- Individual APs running temporarily in Spectrum mode while part of an Alcatel-Lucent AP Group set to ap-mode
- Switch-level Spectrum Overrides (an alternative to creating new Alcatel-Lucent AP groups or new radio profiles for temporary changes)

Setting up a Permanent Spectrum Alcatel-Lucent AP Group

If you have multiple supported Alcatel-Lucent APs in multiple switches that you want to run in Spectrum mode over the long run, you create a special Alcatel-Lucent AP group and set up a profile that is set to **spectrum-mode** and references the default **Spectrum** profile. Set up more than one profile if you want to utilize both radio bands in Spectrum mode.


If you use an 802.11a or 802.11g radio profile to create a group of spectrum monitors, all APs in any AP group referencing that radio profile will be set to spectrum mode. Therefore, best practices are to create a new 802.11a or 802.11g radio profile just for spectrum monitors.

If you have Global Alcatel-Lucent Configuration enabled in **OV3600 Setup > General**, create the configuration below, then go to the switch's group's **Alcatel-Lucent Config** page and select the newly created Alcatel-Lucent AP Group.

Perform these steps to set the AP group to use the default Spectrum profile settings:

1. In **Groups > Alcatel-Lucent Config**, select **Add New Alcatel-Lucent AP Group**.
2. Give the new Group a name (like "Spectrum APs") and select the plus sign next to the **802.11a Radio Profile** to create a new radio profile.
3. Enter a name under the General Settings section of **Profiles > RF > 802.11a/g Radio**.
4. In the **Other Settings** section, change the **Mode** field from ap-mode to **spectrum-mode**, as illustrated in [Figure 109](#). Then select **Save**.

Figure 109 Spectrum mode in Alcatel-Lucent Configuration

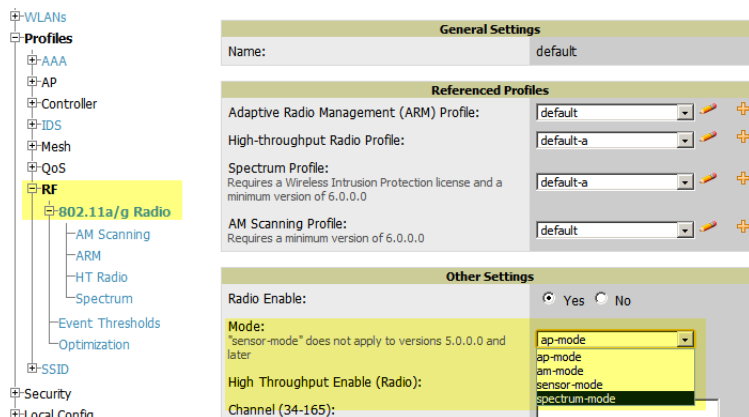

The above steps will use the defaults in the referenced **Spectrum Profile**. To change the defaults, navigate to **Groups > Alcatel-Lucent Config > Profiles > RF > 802.11a/g Radio > Spectrum** and create a new Spectrum profile with non-default settings. In most cases, you should not change the settings in the default profile.

If all of the devices in this Alcatel-Lucent AP Group are managed by the same switch and you want to temporarily override one or more profile settings in your spectrum-mode APs, you can set up a switch override.

To disable spectrum mode in this group, change the referenced radio profile back to **default**.

Configuring an Individual AP to run in Spectrum Mode

If you want to temporarily set an individual radio in an AP to run in Spectrum mode without creating or changing Alcatel-Lucent AP Groups or radio profiles, perform these steps to set up a Spectrum Override on a supported Alcatel-Lucent AP:

1. Go to the **APs/Devices > Manage** page for a Spectrum-supported Alcatel-Lucent AP (-105, -120, -130, -90).
2. After checking the Audit page, set the AP to **Manage Read/Write** mode.


3. Select **Yes** on the **Spectrum Override** field for one or both radios, depending on the band and channels you want it to analyze.
4. Select the band that should run in spectrum. If you selected the 5GHz band in the 802.11an Radio section, choose the lower, middle, or upper range of channels that you want to be analyzed by this radio.
5. Select **Save and Apply** and confirm your edit.

This overrides the current **Mode** setting for that AP (ap-mode or am-mode).

After making this change, you can view the new **Radio Role** field that will appear in the **Radios** section of the **APs/Devices > Monitor** page.

The new role, **Spectrum Sensor**, is a link to the Spectrum Analysis page for the switch that manages this AP, as illustrated in [Figure 110](#).

Figure 110 Spectrum Analysis on Switch Dashboard

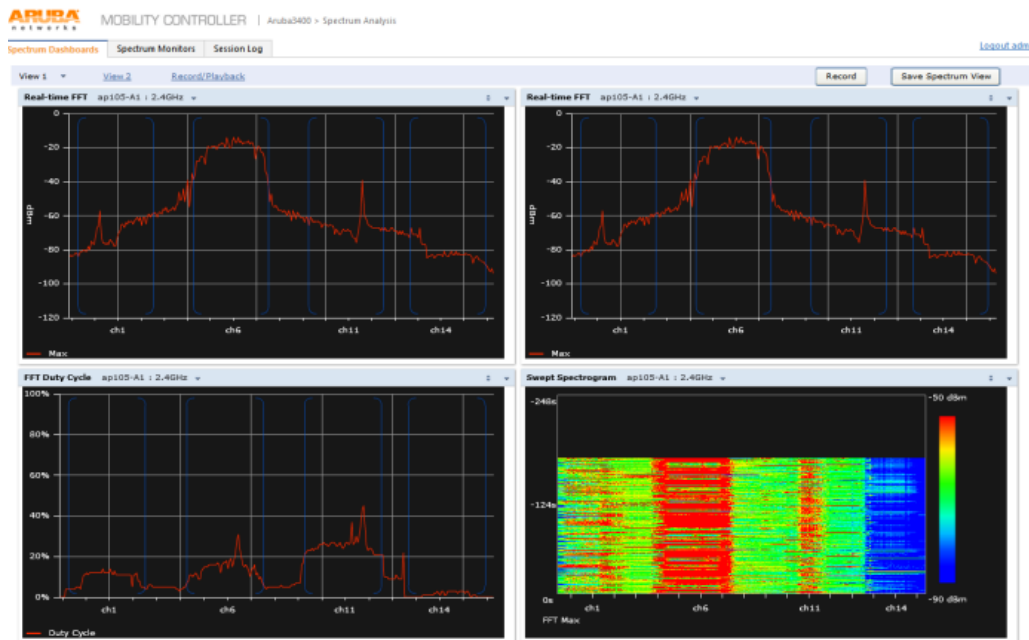

NOTE: This chart is only available for AP models OAW-AP105, OAW-AP90, and the OAW-AP130 Series.

To disable Spectrum mode on this individual AP after it has collected data, return to the **APs/Devices > Manage** page for this AP and set the **Spectrum Override** field back to **No**.

Configuring a Switch to use the Spectrum Profile

You can use OV3600 to customize individual fields in the profile instance used by a particular switch without having to create a new Alcatel-Lucent AP groups and new radio profiles. To do this, you can set a switch-level override for its referenced Spectrum profile, as illustrated in [Figure 111](#). This will affect all Spectrum-supported APs managed by this switch.

Figure 111 *Override Section of a Supported Switch's Manage Page*

Aruba Overrides				
Add New Aruba Controller Override				
1-1 of 1 Aruba Controller Overrides Page 1 of 1 Choose Columns				
	Profile	Instance	Field	Value
<input type="checkbox"/>	Spectrum Profile	default-a	Bluetooth	12

1-1 of 1 Aruba Controller Overrides Page 1 of 1

Select All - Unselect All

Delete

Perform these steps to override individual profile settings for an Alcatel-Lucent switch that is part of a spectrum-mode Alcatel-Lucent AP group:

1. Select a Spectrum-supported Alcatel-Lucent switch that is referencing a Spectrum profile, and go to its **APs/Devices > Manage** page. Set it to **Manage Read/Write** mode.
2. Under the **Alcatel-Lucent Overrides** section, select **Add New Alcatel-Lucent Switch Override**.
3. In the **Profile** drop-down menu, select the **Spectrum Profile** type.
4. In the **Profile Instance** drop-down menu, select the instance of the Spectrum profile used by the switch.
5. In the **Field** drop-down menu, select the setting you would like to change (such as an Age-Out setting or a Spectrum Band), and enter the overriding value below it.
6. Select **Add** to save your changes.
7. To create additional overrides for this switch, select **Add New Alcatel-Lucent Switch Override** again.
8. When you have finished, select **Save and Apply**.

You can also use the above procedure to turn on Spectrum mode for radio profiles on one particular switch, or use the overrides to point your radio profile to a non-default Spectrum profile for just this switch.

This chapter provides an overview and several tasks supporting the use of device configuration templates in OV3600, and contains the following topics:

- “Group Templates” on page 159
- “Viewing and Adding Templates” on page 160
- “Configuring General Template Files and Variables” on page 164
- “Configuring Cisco IOS Templates” on page 169
- “Configuring Cisco Catalyst Switch Templates” on page 171
- “Configuring Symbol Controller / HP WESM Templates” on page 171
- “Configuring a Global Template” on page 173

Group Templates

Supported Device Templates

Templates are helpful configuration tools that allow OV3600 to manage virtually all device settings. A template uses variables to adjust for minor configuration differences between devices.

The **Groups > Templates** configuration page allows you to create configuration templates for the following types of devices:

- Alcatel-Lucent



NOTE

Using the graphical Alcatel-Lucent Config feature in support of Alcatel-Lucent devices is recommended, particularly for AOS-W 3.3.2.x and later. Refer to the *Alcatel-Lucent Configuration Guide* for additional information.

- Cisco Aironet IOS autonomous APs
- Cisco Catalyst switches
- HP ProCurve 530 and WeSM controllers
- Nomadix
- Symbol
- Trapeze
 - 3Com
 - Nortel
 - Enterasys

Template Variables

Variables in templates configure device-specific properties, such as name, IP address and channel. Variables can also be used to configure group-level properties, such as SSID and RADIUS server, which may differ from one group to the next. The OV3600 template understands many variables including the following:

- %ap_include_1% through %ap_include_10%
- %channel%
- %hostname%

- %ip_address%
- %ofdm_power%

The variable settings correspond to device-specific values on the **APs/Devices > Manage** configuration page for the specific AP that is getting configured.



Changes made on the other **Group** pages (Radio, Security, VLANs, SSIDs, and so forth) are not applied to any APs that are configured by templates.

Viewing and Adding Templates

Perform these steps to display, add, or edit templates.

1. Go to the **Groups > List** page, and select a group for which to add or edit templates. This can be a new group, created with the **Add** button, or you can edit an existing group by selecting the corresponding pencil icon. The **Groups > Basic** page for that group appears. Additional information about adding and editing groups is described in “Configuring and Using Device Groups in OV3600” on page 75.
2. From the OV3600 navigation pane, select **Templates**. The **Templates** page appears. Figure 112 illustrates the **Groups > Templates** configuration page, and Table 88 describes the columns.

Figure 112 *Groups > Templates Page Illustration for a Sample Device Group*

Group: **Acme Corporation**

Note: No template is available for Cisco Aironet 1200 IOS devices with firmware version 12.3(8)JA2.
Note: No template is available for Cisco Aironet 1200 IOS devices with firmware version 12.3(8)JEC.
Note: No template is available for Cisco Aironet 1240 IOS devices with firmware version 12.4(10b)JDA.
Note: No template is available for Aruba 5000 devices with firmware version 3.3.2.10.
Note: No template is available for Aruba 5000 devices with firmware version 3.3.2.4.
Note: No template is available for Aruba 2400 devices with firmware version 3.3.2.10.
Note: No template is available for Symbol WS5100 devices with firmware version 3.2.0.0-040R.
Note: No template is available for Aruba 3600 devices with firmware version 3.3.2.7.
Note: No template is available for Cisco Aironet 1250 IOS devices with firmware version 12.4(10b)JA3.
Note: No template is available for Aruba 3400 devices with firmware version 3.3.2.7.
Note: No template is available for Aruba 3200 devices with firmware version 3.3.2.8-m-3.0.
Note: No template is available for Symbol RFS7000 devices with firmware version 1.1.1.0-003R.
Note: No template is available for Cisco Aironet 871W devices with firmware version 12.4(4)T7.

New Template

Templates allow you to manage the configuration of 3Com, Alcatel-Lucent, Aruba, Cisco Aironet IOS, Enterasys, HP, Hirschmann, LANCOM, Nomadix, Nortel, Symbol and Trapeze devices in this group using a configuration file. Variables in the templates are used to configure device-specific properties (like name, IP address and channel) as well as group level properties (ssid, radius server, etc).

	Name	Device Type	Status	Fetch Date	Version Restriction
<input type="checkbox"/>	Aruba 200	Aruba 200	Template saved	1/19/2008 11:43 PM	3.2.0.3
<input type="checkbox"/>	Aruba 200 - 3.3.1.1	Aruba 200	Template saved	2/28/2008 6:24 AM	None
<input type="checkbox"/>	Aruba 3600 - 3.2.0.3	Aruba 3600	Template saved	1/18/2008 11:06 AM	3.2.0.3
<input type="checkbox"/>	Aruba 800	Aruba 800	Template saved	2/27/2008 10:58 PM	None
<input type="checkbox"/>	Aruba 800 - 3.1.1.7	Aruba 800	Template saved	1/20/2008 2:09 AM	3.1.1.7

Table 88 *Groups > Templates Fields and Default Values*

Setting	Description
Notes	When applicable, this section lists devices that are active on the network with no template available for the respective firmware. Select the link from such a note to launch the Add Template configuration page for that device.
Name	Displays the template name.
Device Type	Displays the template that applies to APs or devices of the specified type. If vendor (Any Model) is selected, the template applies to all models from that vendor that do not have a version specific template defined. If there are two templates that might apply to a device, the template with the most restrictions takes precedence.
Status	Displays the status of the template.
Fetch Date	Sets the date that the template was originally fetched from a device.

Table 88 *Groups > Templates Fields and Default Values (Continued)*

Setting	Description
Version Restriction	Designates that the template only applies to APs running the version of firmware specified. If the restriction is None , then the template applies to all the devices of the specified type in the group. If there are two templates that might apply to a device the template with the most restrictions takes precedence. If there is a template that matches a devices firmware it will be used instead of a template that does not have a version restriction.

3. To create a new template and add it to the OV3600 template inventory, go to the **Groups > List** page, and select the group name, and the **Details** page appears. Select **Templates**, then **Add**.
4. Complete the configurations illustrated in [Figure 113](#), and the settings described in [Table 89](#).

Figure 113 Groups > Templates > Add Template Page Illustration

Group: **Routers/Switches**

Cisco Catalyst (Any Model)

Name:

Device Type: Cisco Catalyst (Any Model) ▾

Reboot devices after configuration changes: Yes No

Restrict to this version: Yes No

Template firmware version:

Template Select

Fetch template from device: -- Select Device -- ▾

Template

The following variables may be used in the template value of each variable is configured on the APs/IC Manage page for each device in the group. Each must be surrounded by percent signs: `%hostname %if...%` statements must be terminated by `%end` cannot be nested.

`<ignore_and_do_not_push></ignore_and_do_not_push>`, `<push_and_exclude></push_and_exclude>` tags can be used to achieve a good configuration refer to the User Guide for more information.

Available Variables:

ap_include_1	contact
ap_include_10	domain
ap_include_2	gateway
ap_include_3	hostname
ap_include_4	interfaces
ap_include_5	location
ap_include_6	manager_ip
ap_include_7	ssl_cert
ap_include_8	
ap_include_9	
chassis_id	

Credentials

Change credentials the AMP uses to contact devices after successful config push.

Community String:

Confirm Community String:

Telnet/SSH Username:

Telnet/SSH Password:

Confirm Telnet/SSH Password:

"enable" Password:

Confirm "enable" Password:

SNMPv3 Username:

Auth Password:

Confirm Auth Password:

SNMPv3 Auth Protocol: MD5 ▾

Privacy Password:

Confirm Privacy Password:

SNMPv3 Privacy Protocol: DES ▾

Table 89 Groups > Templates > Add Template Fields and Default Values

Setting	Default	Description
Use Global Template	No	Uses a global template that has been previously configured on the Groups > Templates configuration page. Available templates will appear in the drop-down menu. If Yes is selected you can also configure global template variables. For Symbol devices you can select the groups of thin APs to which the template should be applied. For more information about global templates, see the Groups > Templates section of the <i>User Guide</i> .

Table 89 Groups > Templates > Add Template Fields and Default Values (Continued)

Setting	Default	Description
Fetch	None	Selects an AP from which to fetch a configuration. The configuration will be turned into a template with basic AP specific settings like channel and power turned into variables. The variables are filled with the data on the APs/Devices > Manage page for each AP.
Name	None	Defines the template display name.
AP Type	Cisco IOS (Any Model)	Determines that the template applies to APs or devices of the specified type. If Cisco IOS (Any Model) is selected, the template applies to all IOS APs that do not have a version specific template specified.
Reboot APs After Configuration Changes	No	Determines reboot when OV3600 applies the template, copied from the new configuration file to the startup configuration file on the AP. If No is selected, OV3600 uses the AP to merge the startup and running configurations. If Yes is selected, the configuration is copied to the startup configuration file and the AP is rebooted. This field is only visible for some devices.
Restrict to this version	No	Restricts the template to APs of the specified firmware version. If Yes is selected, the template only applies to APs on the version of firmware specified in the Template Firmware Version field.
Template firmware version	None	Designates that the template only applies to APs running the version of firmware specified.
Community String	None	If the template is updating the community strings on the AP, enter the new community string OV3600 should use here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
Telnet/SSH Username	None	If the template is updating the Telnet/SSH Username on the AP, enter the new username OV3600 should use here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
Telnet/SSH Password	None	If the template is updating the Telnet/SSH password on the AP, enter the new Telnet/SSH password OV3600 should use here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
"enable" Password	None	If the template is updating the enable password on the AP, enter the new enable password OV3600 should use here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
SNMPv3 Username	None	If the template is updating the SNMP v3 Username password on the AP, enter the new SNMP Username password here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
Auth Password	None	If the template is updating the SNMP v3 Auth password on the AP, enter the new SNMP Username password here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
Privacy Password	None	If the template is updating the SNMP v3 Privacy password on the AP, enter the new SNMP Username password here. OV3600 updates the credentials it is using to communicate to the device after the device has been managed.
SNMPv3 Auth Protocol	MD5	Specifies the SNMPv3 Auth protocol, either MD5 or SHA-1 .
SNMPv3 Privacy Protocol	DES	Specifies the SNMPv3 Privacy protocol, either DES or AES .

Configuring General Template Files and Variables

This section describes the most general aspects of configuring AP device templates and the most common variables:

- [Configuring General Templates](#)
- [Using Template Syntax](#)
- [Using Directives to Eliminate Reporting of Configuration Mismatches](#)
- [Using Conditional Variables in Templates](#)
- [Using Substitution Variables in Templates](#)
- [Using OAW-APSpecific Variables](#)

Configuring General Templates

Perform the following steps to configure Templates within a Group.

1. Select a Group to configure.



Alcatel-Lucent recommends starting with a small group of access points and placing these APs in Monitor Only mode, which is read-only. Do this using the **Modify Devices** link until you are fully familiar with the template configuration process. This prevents configuration changes from being applied to the APs until you are sure you have the correct configuration specified.

2. Select an AP from the Group to serve as a *model* AP for the others in the Group. You should select a device that is configured currently with all the desired settings. If any APs in the group have two radios, make sure to select a model AP that has two radios and that both are configured in proper and operational fashion.
3. Go to the **Groups > Templates** configuration page. Select **Add** to add a new template.
4. Select the type of device that will be configured by this template.
5. Select the model AP from the drop-down list, and select **Fetch**.
6. OV3600 automatically attempts to replace some values from the configuration of that AP with *variables* to enable OAW-APspecific options to be set on an OAW-APby-AP basis. Refer to “[Using Template Syntax](#)” on page 165

These variables are always encapsulated between % signs. On the right side of the configuration page is the **Additional Variables** section. This section lists all available variables for your template. Variables that are in use in a template are green, while variables that are not yet in use are black. Verify these substitutions to ensure that all of the settings that you believe should be managed on an OAW-APby-AP basis are labeled as variables in this fashion. If you believe that any AP level settings are not marked correctly, please contact Alcatel support before proceeding.

7. Specify the device types for the template. The templates only apply to devices of the specified type.
 - Specify whether OV3600 should reboot the devices after a configuration push. If the **Reboot Devices after Configuration Changes** option is selected, then OV3600 instructs the AP to copy the configuration from OV3600 to the startup configuration file of the AP and reboot the AP.
 - If the **Reboot Devices after Configuration Changes** option is not selected, then OV3600 instructs the AP to copy the configuration to the startup configuration file and then tell the AP to copy the startup configuration file to the running configuration file.
 - Alcatel-Lucent recommends using the **reboot** option when there are changes requiring reboot to take effect, for example, removing a new SSID from a Cisco IOS device. Copying the configuration from startup configuration file to running configuration file merges the two configurations and can cause undesired configuration lines to remain active on the AP.

8. Restrict the template to apply only to the specified version of firmware. If the template should only apply to a specific version of firmware, select **Yes** and enter the firmware version in the **Template Firmware Version** text field.
9. Select **Save and Apply** to push the configuration to all of the devices in the group. If the devices are in monitor-only mode (which is recommended while you are crafting changes to a template or creating a new one), then OV3600 will audit the devices and compare their current configuration to the one defined in the template.



If you set the reboot flag to **No**, then some changes could result in configuration mismatches until the AP is rebooted.

For example, changing the SSID on Cisco IOS APs requires the AP to be rebooted. Two other settings that require the AP to be rebooted for configuration change are Logging and NTP. A configuration mismatch results if the AP is not rebooted.

If logging and NTP service are not required according to the Group configuration, but are enabled on the AP, you would see a configuration file mismatch as follows if the AP is not rebooted:

IOS Configuration File Template

```
...
(no logging queue-limit)
...
```

Device Configuration File on APs/Devices > Audit Configuration Page

```
...
    line con 0
    line vty 5 15
actual logging 10.51.2.1
actual logging 10.51.2.5
actual logging facility local6
actual logging queue-limit 100
actual logging trap debugging
    no service pad
actual ntp clock-period 2861929
actual ntp server 209.172.117.194
    radius-server attribute 32 include-in-access-req format %h
...
```

10. Once the template is correct and all mismatches are verified on the **APs/Devices > Audit** configuration page, use the **Modify Devices** link on the **Groups > Monitor** configuration page to place the desired devices into **Management** mode. This removes the APs from Monitor mode (read-only) and instructs the AP to pull down its new startup configuration file from OV3600.



Devices can be placed into Management mode individually from the **APs/Devices > Manage** configuration page.

Using Template Syntax

Template syntax is comprised of the following components, described in this section:

- [Using OAW-APSpecific Variables](#)
- [Using Directives to Eliminate Reporting of Configuration Mismatches](#)
- [Using Conditional Variables in Templates](#)
- [Using Substitution Variables in Templates](#)

Using Directives to Eliminate Reporting of Configuration Mismatches

OV3600 is designed to audit AP configurations to ensure that the actual configuration of the access point exactly matches the Group template. When a configuration mismatch is detected, OV3600 generates an automatic alert and flags the AP as having a **Mismatched** configuration status on the user page.

However, when using the templates configuration function, there will be times when the running-config file and the startup-config file do not match under normal circumstances. For example, the `ntp clock-period` setting is almost never identical in the running-config file and the startup-config file. You can use directives such as `<ignore_and_do_not_push>` to customize the template to keep OV3600 from reporting mismatches for this type of variance.

OV3600 provides two types of directives that can be used within a template to control how OV3600 constructs the startup-config file to send to each AP and whether it reports variances between the running-config file and the startup-config file as "configuration mismatches." Lines enclosed in `<push_and_exclude>` are included in the AP startup-config file but OV3600 ignores them when verifying configurations. Lines enclosed in `<ignore_and_do_not_push>` cause OV3600 to ignore those lines during configuration verification.

Ignore_and_do_not_push Command

The `ignore` and `do not push` directive should typically be used when a value cannot be configured on the device, but always appears in the running-config file. Lines enclosed in the `ignore` and `do not push` directive will not be included in the startup-config file that is copied to each AP.

When OV3600 is comparing the running-config file to the startup-config file for configuration verification, it will ignore any lines in the running-config file that start with the text within the directive. Lines belonging to an ignored and unpushed line, the lines immediately below the line and indented, are ignored as well. In the example below, if you were to bracket NTP server, the NTP clock period would behave as if it were bracketed because it belongs or is associated with the NTP server line.



The line `<ignore_and_do_not_push>ntp clock-period</ignore_and_do_not_push>` will cause lines starting with "ntp clock-period" to be ignored. However, the line `<ignore_and_do_not_push>ntp </ignore_and_do_not_push>` causes all lines starting with "ntp" to be ignored, so it is important to be as specific as possible.

Push_and_exclude Command

Instead of using the full tags you may use the parenthesis shorthand, (substring). The `push` and `exclude` directive is used to push commands to the AP that will not appear in the running-config file. For example, some **no** commands that are used to remove SSIDs or remove configuration parameters do not appear in the running-config file of a device. A command inside the `push` and `exclude` directive are included in the startup-config file pushed to a device, but OV3600 excludes them when calculating and reporting configuration mismatches.



The opening tag may have leading spaces.

Below are some examples of using directives:

```
...
line con 0
  </push_and_exclude>no stopbits</push_and_exclude>
line vty 5 15
!
ntp server 209.172.117.194
<ignore_and_do_not_push>ntp clock-period</ignore_and_do_not_push>
end
```

Using Conditional Variables in Templates

Conditional variables allow lines in the template to be applied only to access points where the enclosed commands will be applicable and not to any other access points within the Group. For example, if a group of APs consists of dual-radio Cisco 1200 devices (802.11a/b) and single-radio Cisco 1100 (802.11b) devices, it is necessary to make commands related to the 802.11a device in the 1200 APs conditional. Conditional variables are listed in the table below.

The syntax for conditional variables is as follows, and syntax components are described in [Table 90](#):

```
%if variable=value%  
...  
%endif%
```

Table 90 Conditional Variable Syntax Components

Variable	Values	Meaning
interface	Dot11Radio0	2.4GHz radio module is installed
	Dot11Radio1	5GHz external radio module is installed
radio_type	a	Installed 5GHz radio module is 802.11a
	b	Installed 2.4GHz radio module is 802.11b only
	g	Installed 2.4GHz radio module is 802.11g capable
wds_role	backup	The WDS role of the AP is the value selected in the dropdown menu on the APs/Devices > Manage configuration page for the device.
	client	
	master	
IP	Static	IP address of the device is set statically on the AP Manage configuration page.
	DHCP	IP address of the device is set dynamically using DHCP

Using Substitution Variables in Templates

Substitution variables are used to set AP specific values on each AP in the group. It is obviously not desirable to set the IP address, hostname, and channel to the same values on every AP within a Group. The variables in [Table 91](#) are substituted with values specified on each access point's **APs/Devices > Manage** configuration page within the **OV3600 User** page.

Sometimes, the running-config file on the AP does not include the command for one of these variables because the value is set to the default. For example, when the "transmission power" is set to maximum (the default), the line "power local maximum" will not appear in the AP running-config file, although it will appear in the startup-config file. OV3600 would typically detect and flag this variance between the running-config file and startup-config file as a configuration mismatch.

To prevent OV3600 from reporting a configuration mismatch between the desired startup-config file and the running-config file on the AP, OV3600 suppresses the lines in the desired configuration when auditing the AP configuration (similar to the way OV3600 suppresses lines enclosed in parentheses, which is explained

below). A list of the default values that causes lines to be suppressed when reporting configuration mismatches is shown in [Table 91](#).

Table 91 *Substitution Variables in Templates*

Variable	Meaning	Command	Suppressed Default
hostname	Name	hostname %hostname%	-
channel	Channel	channel %channel%	-
ip_address netmask	IP address Subnet mask	ip address %ip_address% %netmask% or ip address dhcp ...	
gateway	Gateway	ip default-gateway %gateway%	-
antenna_receive	Receive antenna	antenna receive %antenna_receive%	diversity
antenna_transmit	Transmit antenna	antenna transmit %antenna_transmit%	diversity
cck_power	802.11g radio module CCK power level	power local cck %cck_power%	maximum
ofdm_power	802.11g radio module OFDM power level	power local ofdm %ofdm_power%	maximum
power	802.11a and 802.11b radio module power level	power local %power%	maximum
location	The location of the SNMP server.	snmp-server location %location%	-
contact	The SNMP server contact.	snmp-server contact %contact%	
certificate	The SSL Certificate used by the AP	%certificate%	-
ap include	The AP include fields allow for configurable variables. Any lines placed in the AP Include field on the APs/Devices > Manage configuration page replace this variable.	%ap_include_1% through %ap_include_10%	-
chassis id			
domain			
interfaces			
location			

Using OAW-APSpecific Variables

When a template is applied to an AP all variables are replaced with the corresponding settings from the **APs/Devices > Manage** configuration page. This enables OAW-APspecific settings (such as Channel) to be managed effectively on an OAW-APby-AP basis. The list of used and available variables appears on the

template detail configuration page. Variables are always encapsulated between % signs. The following example illustrates this usage:

```
hostname %hostname%
...
interface Dot11Radio0
...
power local cck %CCK_POWER%
power local ofdm %OFDM_POWER%
channel %CHANNEL%
...
```

The `hostname` line sets the AP hostname to the hostname stored in OV3600.

The `power` lines set the `power local cck` and `ofdm` values to the numerical values that are stored in OV3600.

Configuring Cisco IOS Templates

Cisco IOS access points have hundreds of configurable settings. OV3600 enables you to control them via the **Groups > Templates** configuration page. This page defines the startup-config file of the devices rather than using the OV3600 normal **Group** configuration pages. OV3600 no longer supports making changes for these devices via the browser-based page, but rather uses templates to configure all settings, including settings that were controlled formerly on the OV3600 **Group** configuration pages. Perform these steps to configure a Cisco IOS Template for use with one or more groups, and the associated devices.

This section includes the following topics:

- [Applying Startup-config Files](#)
- [WDS Settings in Templates](#)
- [SCP Required Settings in Templates](#)
- [Supporting Multiple Radio Types via a Single IOS Template](#)
- [Configuring Single and Dual-Radio APs via a Single IOS Template](#)

Applying Startup-config Files

Each of the APs in the Group copies its unique startup-config file from OV3600 via TFTP or SCP.

- If the **Reboot Devices after Configuration Changes** option is selected, then OV3600 instructs the AP to copy the configuration from OV3600 to the startup-config file of the AP and reboot the AP.
- If the **Reboot Devices after Configuration Changes** option is not selected, then OV3600 instructs the AP to copy the configuration to the startup-config file and then tell the AP to copy the startup config file to the running-config file. Use the reboot option when possible. Copying the configuration from startup to running merges the two configurations and can cause undesired configuration lines to remain active on the AP.



Changes made on the standard OV3600 Group configuration pages, to include Basic, Radio, Security, VLANs, and so forth, are not applied to any template-based APs.

WDS Settings in Templates

A group template supports Cisco WDS settings. APs functioning in a WDS environment communicate with the Cisco WLSE via a WDS master. IOS APs can function in Master or Slave mode. Slave APs report their rogue findings to the WDS Master (AP or WLSM which reports the data back to the WLSE. On the **APs/ Devices > Manage** configuration page, select the proper role for the AP in the WDS Role drop down menu.

The following example sets an AP as a WDS Slave with the following lines:

```
%if wds_role=client%
```

```
wlccp ap username wlse password 7 XXXXXXXXXXXX
%endif%
```

The following example sets an AP as a WDS Master with the following lines:

```
%if wds_role=master%
aaa authentication login method_wds group wds
aaa group server radius wds server
10.2.25.162 auth-port 1645 acct-port 1646
wlccp authentication-server infrastructure method_wds
wlccp wds priority 200 interface BVI1
wlccp ap username wlse password 7 095B421A1C
%endif%
```

The following example sets an AP as a WDS Master Backup with the following lines:

```
%if wds_role=backup%
aaa authentication login method_wds group wds
aaa group server radius wds server
10.2.25.162 auth-port 1645 acct-port 1646
wlccp authentication-server infrastructure method_wds
wlccp wds priority 250 interface BVI1
wlccp ap username wlse password 7 095B421A1C
%endif%
```

SCP Required Settings in Templates

A few things must be set up before enabling SCP on the **Groups > Basic** configuration page. The credentials used by OV3600 to login to the AP must have level 15 privileges. Without them OV3600 is not able to communicate with the AP via SCP. The line "aaa authorization exec default local" must be in the APs configuration file and the AP must have the SCP server enabled. These three settings correspond to the following lines in the AP's configuration file:

- username Cisco privilege 15 password 7 0802455D0A16
- aaa authorization exec default local
- ip scp server enable

The username line is a guideline and will vary based on the username being set, in this case Cisco, and the password and encoding type, in this case 0802455D0A16 and 7 respectively.

These values can be set on a group wide level using Templates and TFTP. Once these lines are set, SCP can be enabled on the **Groups > Basic** configuration page without problems.

Supporting Multiple Radio Types via a Single IOS Template

Some lines in an IOS configuration file should only apply to 802.11g vs. 802.11b. For instance, lines related to speed rates that mention rates above 11.0Mb/s do not work for 802.11b radios that cannot support these data rates. Use the "%IF variable=value% ... %ENDIF%" construct to allow a single IOS configuration template to configure APs with different radio types within the same Group as illustrated below:

```
interface Dot11Radio0
...
%IF radio_type=g%
speed basic-1.0 basic-2.0 basic-5.5 6.0 9.0 11.0 12.0 18.0 24.0 36.0 48.0 54.0
%ENDIF%
%IF radio_type=b%
speed basic-1.0 2.0 5.5 11.0
%ENDIF%
%IF radio_type=g%
power local cck %CCK_POWER%
power local ofdm %OFDM_POWER%
%ENDIF%
...
```

Configuring Single and Dual-Radio APs via a Single IOS Template

To configure single and dual-radio APs using the same IOS config template, you can use the interface variable within the %IF...% construct. The below example illustrates this usage:

```
%IF interface=Dot11Radio1%
interface Dot11Radio1
  bridge-group 1
  bridge-group 1 block-unknown-source
  bridge-group 1 spanning-disabled
  bridge-group 1 subscriber-loop-control
  no bridge-group 1 source-learning
  no bridge-group 1 unicast-flooding
  no ip address
  no ip route-cache
  rts threshold 2312
  speed basic-6.0 basic-9.0 basic-12.0 basic-18.0 basic-24.0 36.0 48.0 54.0
  ssid decibel-ios-a
  authentication open
  guest-mode
  station-role root
%ENDIF%
```

Configuring Cisco Catalyst Switch Templates

Cisco Catalyst Switch templates are configured much like Cisco IOS templates with the addition of the interfaces and switch_command (for stacked switches) variables. Interfaces can be configured on the Device Interface pages, as shown in “[Configuring Device Interfaces for Switches](#)” on page 148. You can import interface information as described in this section or by fetching a template from that device, as described in “[Configuring General Templates](#)” on page 164.



Just one template is used for any type of Cisco IOS device, and another is used for any type of Catalyst Switch regardless of individual model.

Configuring Symbol Controller / HP WESM Templates

This section describes the configuration of templates for Symbol controllers and HP WESM devices.

Symbol switches (RFS x000, 5100 and 2000) can be configured in OV3600 using templates. OV3600 supports Symbol thin AP firmware upgrades from the controller’s manage page.

A sample running-configuration file template is provided in this topic for reference. A template can be fetched from a model device using the Cisco IOS device procedure described in “[Configuring Cisco IOS Templates](#)” on page 169. Cisco IOS template directives such as ignore_and_do_not_push can also be applied to Symbol templates.

Certain parameters such as hostname and location are turned into variables with the % tags so that device-specific values can be read from the individual manage pages and inserted into the template. They are listed in Available Variable boxes on the right-hand side of the template fields.

Certain settings have integrated variables, including ap-license and adoption-preference-id. The radio preamble has been template-integrated as well. An option on the **Group > Templates** page reboots the device after pushing a configuration to it.

A sample Symbol controller partial template is included below for reference.

```
!
! configuration of RFS4000 version 4.2.1.0-005R
!
version 1.4
!
!
aaa authentication login default local none
```

```

service prompt crash-info
!
network-element-id RFS4000
!
username admin password 1 5baa61e4c9b93f3f0682250b6cf8331b7ee68fd8
username admin privilege superuser
username operator password 1 fe96dd39756ac41b74283a9292652d366d73931f
!
!
access-list 100 permit ip 192.168.0.0/24 any rule-precedence 10
!
spanning-tree mst cisco-interopability enable
spanning-tree mst configuration
  name My Name
!
ip dns-server-forward
wwan auth-type chap
no bridge multiple-spanning-tree enable bridge-forward
country-code us
aap-ipfilter-list no port 3333 plz
aap-ipfilter-list no port 3333 tcp plz
deny tcp src-start-ip 0.0.0.0 src-end-ip 255.255.255.255 dst-start-ip 0.0.0.0 dst-end-ip
255.255.255.255 dst-start-port 3333 dst-end-port 3334 rule 1
%redundancy_config%
logging buffered 4
logging console 4
snmp-server engineid netsnmp 6b8b45674b30f176
snmp-server location %location%
snmp-server contact %contact%
snmp-server sysname %hostname%
snmp-server manager v2
snmp-server manager v3
snmp-server user snmptrap v3 encrypted auth md5 0x1aa491f4ca7c55df0f57801bece9044c
snmp-server user snmpmanager v3 encrypted auth md5 0x1aa491f4ca7c55df0f57801bece9044c
snmp-server user snmpoperator v3 encrypted auth md5 0xb03b1ebfa0e3d02f50e2b1c092ab7c9f

```

A sample Symbol Smart RF template is provided below for reference:

```

radio %radio_index% radio-mac %radio_mac%
%if radio_type=11a%
  radio %radio_index% coverage-rate 18
%endif%
%if radio_type=11an%
  radio %radio_index% coverage-rate 18
%endif%
%if radio_type=11b%
  radio %radio_index% coverage-rate 5p5
%endif%
%if radio_type=11bg%
  radio %radio_index% coverage-rate 6
%endif%
%if radio_type=11bgn%
  radio %radio_index% coverage-rate 18
%endif%

```

A sample Symbol thin AP template is provided below for reference and for the formatting of `if` statements.

```

radio add %radio_index% %lan_mac% %radio_type% %ap_type%
radio %radio_index% radio-number %radio_number%
radio %radio_index% description %description%
%if radio_type=11a%
radio %radio_index% speed basic6 9 basic12 18 basic24 36 48 54
radio %radio_index% antenna-mode primary
radio %radio_index% self-heal-offset 1
radio %radio_index% beacon-interval 99
radio %radio_index% rts-threshold 2345
radio %radio_index% max-mobile-units 25
radio %radio_index% admission-control voice max-perc 76
radio %radio_index% admission-control voice res-roam-perc 11
radio %radio_index% admission-control voice max-mus 101
radio %radio_index% admission-control voice max-roamed-mus 11
%endif%
%if radio_type=11an%

```

```

radio %radio_index% speed basic11a 9 18 36 48 54 mcs
0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15
%endif%
%if radio_type=11b%
radio %radio_index% speed basic1 basic2 basic5p5 basic11
%endif%
%if radio_type=11bg%
radio %radio_index% speed basic1 basic2 basic5p5 6 9 basic11 12 18 24 36 48 54
radio %radio_index% on-channel-scan
radio %radio_index% adoption-pref-id 7
radio %radio_index% enhanced-beacon-table
radio %radio_index% enhanced-probe-table
%endif%
%if radio_type=11bgn%
radio %radio_index% speed basic11b2 6 9 12 18 24 36 48 54 mcs
0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15
%endif%
radio %radio_index% channel-power indoor %channel% %transmit_power% %channel_attribute%
%detector%
%adoption_pref_id%
radio %radio_index% enhanced-beacon-table
radio %radio_index% on-channel-scan
%ap_include_4%

```

Configuring a Global Template

Global templates allow OV3600 users to define a single template in a global group that can be used to manage APs in subscriber groups. They turn settings like group RADIUS servers and encryption keys into variables that can be configured on a per-group basis.

Perform the following steps to create a global template, or to view or edit an existing global template:

1. Go to the **Group > Templates** configuration page for the global group that owns it.
2. Select **Add** to add a new template, or select the **pencil** icon next to an existing template to edit it.
3. Examine the configurations illustrated in [Figure 114](#).

Figure 114 *Group > Templates > Add Page Illustration*

The screenshot shows the 'Add' page for creating a global template. At the top, there is a 'Group: global group' header and a 'New Template' button. Below this is a table of existing templates with columns for Name, Device Type, Status, Date Saved, and Variable CSV Upload. The table lists several templates for various devices like Aruba 3600, Aruba 800, Cisco Aironet 1200 IOS, and HP ProCurve 530. Below the table are buttons for 'Delete', 'Save', 'Save and Apply', and 'Event'. The main section is titled 'Group: global group' and contains a 'Template Select' dropdown menu. Below the dropdown is a 'Fetch template from device' section with a 'Fetch' button. The 'Template Variables' section includes checkboxes for 'Name', 'Device Type', 'Reboot device after configuration changes', and 'Restrict to the version', along with radio buttons for 'Yes' and 'No'. At the bottom, there is a 'Template Variables' table with columns for Variable Name, Variable Value, and Delete, and an 'Add' button.

4. Use the drop-down menu to select a device from which to build the global template and select **Fetch**. The menus are populated with all devices that are contained in any group that subscribes to the global group. The fetched configuration populates the template field. Global template variables can be configured with the **Add** button in the **Template Variables** box, illustrated in [Figure 115](#).

Figure 115 *Template Variables Illustration*

Template Variables		
Variable Name	Variable Value	Delete
<input type="text"/>	<input type="text"/>	

The variable name cannot have any spaces or non-alphanumeric characters. The initial variable value entered is the default value, but can be changed on a per-group basis later. You can also populate global template variables by uploading a CSV file (see below).

5. Once you have configured your global template, select **Add**. You are taken to a confirmation configuration page where you can review your changes.
6. If you want to add the global template, select **Apply Changes Now**. If you do not want to add the template, select **Cancel and Discard Changes**. Canceling from the confirmation configuration page causes the template and all of the template variables to be lost.
7. Once you have added a new global template, you can use a CSV upload option to configure global template variables. Go to the **Groups > Templates** configuration page and select the **CSV** upload icon for the template. The CSV file must contain columns for **Group Name** and **Variable Name**. All fields must be completed.
 - **Group Name**—the name of the subscriber group that you wish to update.
 - **Variable Name**—the name of the group template variable you wish to update.
 - **Variable Value**—the value to set.

For example, for a global template with a variable called "ssid_1", the CSV file might resemble what follows:

```
Group Name, ssid_1
Subscriber 1, Value 0
```

8. Once you have defined and saved a global template, it is available for use by any local group that subscribes to the global group. Go to the **Groups > Template** configuration page for the local group and select the pencil icon next to the global template in the list. [Figure 116](#) illustrates this page.

Figure 116 *Groups > Templates Edit, Upper Portion*

Group: **SG aruba**

Aruba 3600	
Name:	Aruba 3600 - 3.3.1.11
Device Type:	Aruba 3600
Restrict to this version:	Yes
Template firmware version:	3.3.1.11

Group Template Variables	
location:	<input type="text" value="Building1.floor1"/>

9. To make template changes, go to the **Groups > Template** configuration page for the global group and select the **pencil** icon next to the template you wish to edit. Note that you cannot edit the template itself from the subscriber group's **Groups > Templates** tab.
10. If group template variables have been defined, you are able to edit the value for the group on the **Groups > Templates, Add** configuration page in the **Group Template Variables** box. For Symbol devices, you are also able to define the template per group of APs.

For more information on using templates in OV3600, see the previous section of this chapter. It is also possible to create local templates in a subscriber group—using global groups does not mean that global templates are mandatory.

This chapter provides an overview to rogue device and IDS event detection, alerting, and analysis using RAPIDS, and contains the following sections:

- “Introduction to RAPIDS” on page 175
- “Viewing Rogues on the RAPIDS > List Page” on page 185
- “Setting Up RAPIDS” on page 177
- “Defining RAPIDS Rules” on page 181
- “Score Override” on page 189
- “Using the Audit Log” on page 190
- “Additional Resources” on page 191

Introduction to RAPIDS

Rogue device detection is a core component of wireless security. With RAPIDS rules engine and containment options, you can create a detailed definition of what constitutes a rogue device, and quickly act on a rogue AP for investigation, restrictive action, or both. Once rogue devices are discovered, RAPIDS alerts your security team of the possible threat and provides essential information needed to locate and manage the threat.

RAPIDS discovers unauthorized devices in your WLAN network in the following ways:

- Over the Air
 - Using your existing enterprise APs
 - Optional Alcatel-Lucent Management Client (AMC)
- On the Wire
 - Polling routers and switches to identify, classify, and locate unknown APs
 - Using HTTP and SNMP scanning



NOTE

To set up a scan, refer to “Discovering and Adding Devices” on page 114.

- Using the controller’s wired discovery information

Furthermore, RAPIDS integrates with external intrusion detection systems (IDS), as follows:

- **Alcatel-Lucent WIP**—Alcatel-Lucent, Inc.’s Wireless Intrusion Protection (WIP) module integrates wireless intrusion protection into the mobile edge infrastructure. The WIP module provides wired and wireless AP detection, classification and containment; detects DoS and impersonation attacks; and prevents client and network intrusions.
- **Cisco WLSE** (1100 and 1200 IOS)—OV3600 fetches rogue information from the HTTP interface and gets new AP information from SOAP API. This system provides wireless discovery information rather than rogue detection information.
- **AirMagnet Enterprise**—Retrieves a list of managed APs from OV3600.
- **AirDefense**—Uses the OV3600 XML API to keep its list of managed devices up to date.
- **WildPackets OmniPeek**—Retrieves a list of managed APs from OV3600.

Viewing Overall Network Health on RAPIDS > Overview

The **RAPIDS > Overview** page displays a page of RAPIDS summary information (see [Figure 117](#)). [Table 92](#) defines the summary information that appears on the page.

Figure 117 *RAPIDS > Overview Page Illustration*

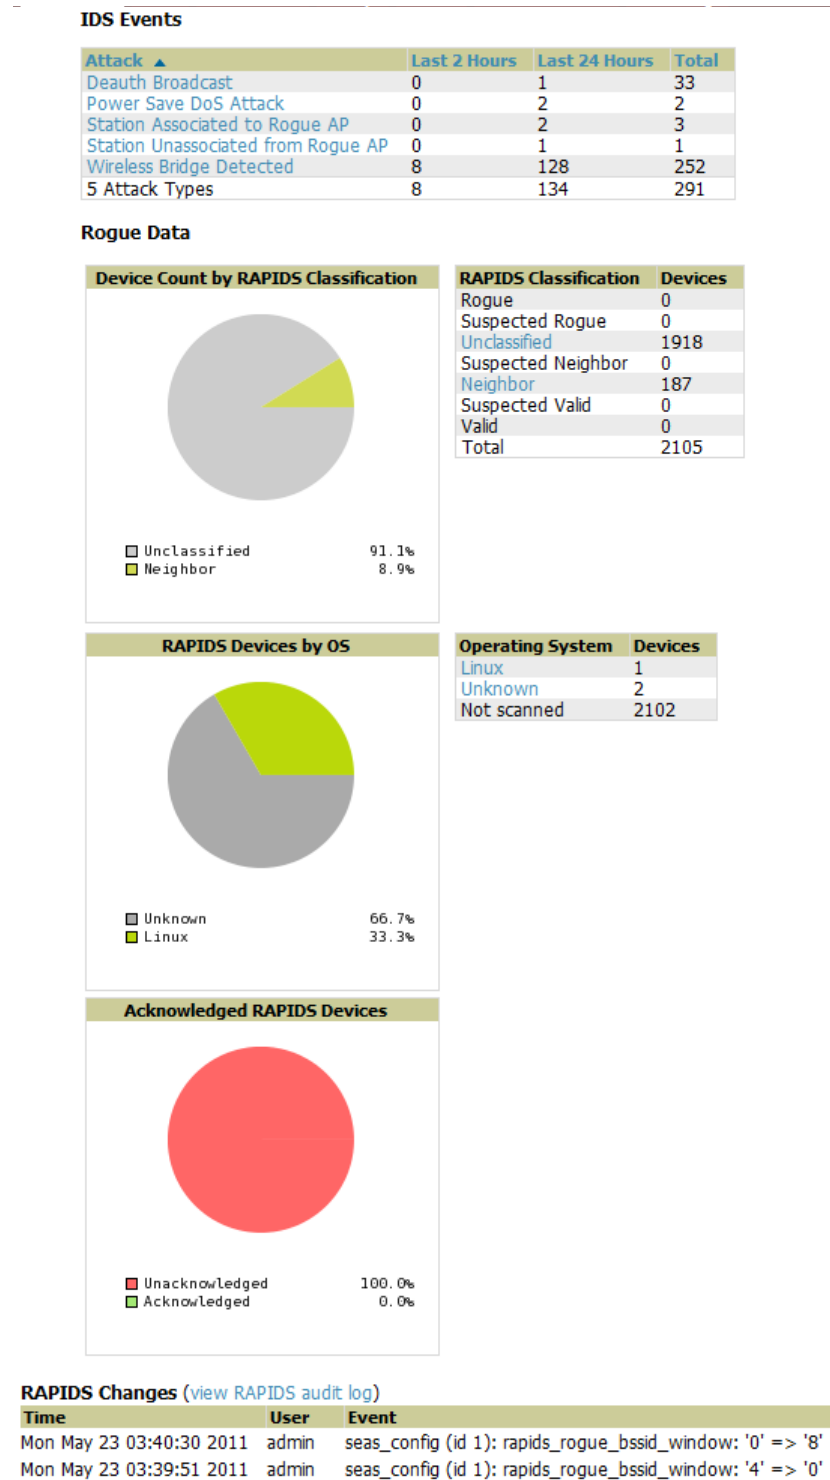


Table 92 *RAPIDS > Overview* Fields and Descriptions

Summary	Description
IDS Events	Displays a list of attack types for the designated folder and subfolders. Field displays events from the past two hours, the past 24 hours, and total IDS events. Names of attacks link to summary pages with more details. Note: OV3600 should be configured as the SNMP trap receiver on the controllers to receive IDS traps. See the <i>Alcatel-Lucent Best Practices Guide</i> for details.
Device Count by RAPIDS Classification	A pie chart of rogue device percentages by RAPIDS classification.
RAPIDS Classification	A summary list with details of the statistics depicted in the Device Count by RAPIDS Classification pie chart. Click the linked classification name to be taken to a filtered rogue list.
RAPIDS Devices by OS	A pie chart of RAPIDS percentages by the detected operating system.
Operating System	Detected operating systems represented in this summary listing. Click on the linked Operating System name to see the rogues list filtered by that classification. OS scans can be run manually or enabled to run automatically on the RAPIDS > Setup page.
Acknowledged RAPIDS Devices	A color coded pie chart comparing the number of acknowledged devices to the unacknowledged devices.
RAPIDS Changes	Tracks every change made to RAPIDS including changes to rules, manual classification, and components on the RAPIDS > Setup page. A link at the top of the list directs you to the RAPIDS > Audit Log page.

Setting Up RAPIDS

The **RAPIDS > Setup** page allows you to configure your OV3600 server for RAPIDS. Complete the settings on this page as desired, and select **Save**. Most of the settings are internal to how OV3600 will process rogues.

Basic Configuration

On the **RAPIDS > Setup** page, the **Basic Configuration** section allows you to define RAPIDS behavior settings. [Figure 118](#) illustrates this page and [Table 93](#) describes the fields:

Figure 118 **RAPIDS > Setup Page Illustration**

Basic Configuration		Containment Options	
ARP IP Match Timeout (1-168 hours):	<input type="text" value="24"/>	Manage rogue AP containment: When enabled, RAPIDS will manage the classification of rogue APs on Cisco WLC and Aruba controllers to match the classification of those rogues in RAPIDS, including the "Contain" classification.	<input checked="" type="radio"/> Yes <input type="radio"/> No
RAPIDS Export Threshold:	<input type="text" value="Suspected Rogue"/>	Manage rogue AP containment in monitor-only mode: Containment updates will always be pushed to devices running WMS offload, regardless of this setting.	<input checked="" type="radio"/> Yes <input type="radio"/> No
Wired-to-Wireless MAC Address Correlation (0-8 bits): Discovered BSSIDs and LAN MAC addresses which are within this bitmask will be combined into one device. 4 requires all but the last digit match (aa:bb:cc:dd:ee:fx). 8 requires all but the last two digits match (aa:bb:cc:dd:ee:XX).	<input type="text" value="4"/>	Maximum number of APs to contain a rogue: The maximum number of APs that will contain a rogue on Cisco WLC controllers.	<input type="text" value="3"/>
Wireless BSSID Correlation (0-8 bits): Similar BSSIDs will be combined into one device when they fall within this bitmask. Setting this value too high may result in identifying two different physical devices as the same rogue. Note: When you change this value, RAPIDS will not immediately combine (or un-combine) rogue records. Changes will occur during subsequent processing of discovery events.	<input type="text" value="4"/>		
Delete Rogues not detected for (0-14 days, zero disables): Cannot be larger than the rogue discovery event expiration (14) configured on the AMP Setup page, unless that value is set to 0.	<input type="text" value="0"/>		
Automatically OS scan rogue devices:	<input checked="" type="radio"/> Yes <input type="radio"/> No		
Classification Options		Filtering Options	
Acknowledge Rogues by Default:	<input type="radio"/> Yes <input checked="" type="radio"/> No	Filter Ad-hoc Rogues:	<input checked="" type="radio"/> Yes <input type="radio"/> No
Manually Classifying Rogues Automatically Acknowledges Them:	<input checked="" type="radio"/> Yes <input type="radio"/> No	Filter Rogues by Signal Strength:	<input checked="" type="radio"/> Yes <input type="radio"/> No
		Minimum Signal Strength (Less than or equal to 0): Enter minimum signal strength in dBm. Rogues will not be recorded until they exceed this signal strength.	<input type="text"/>
		Filter Rogues Discovered by Remote APs:	<input checked="" type="radio"/> Yes <input type="radio"/> No
		Filter IDS Events from Remote APs:	<input checked="" type="radio"/> Yes <input type="radio"/> No
		<input type="button" value="Save"/> <input type="button" value="Save and Apply"/> <input type="button" value="Revert"/>	

Table 93 **RAPIDS > Setup > Basic Configuration Fields**

Field	Default	Description
ARP IP Match Timeout	24	If you have routers and switches on the OV3600, and it's scanning them for ARP tables, this can assign a rogue IP address information. This timeout specifies how recent that information needs to be for the IP address to be considered valid. Note that the default ARP poll period is long (several hours).
RAPIDS Export Threshold	Suspected Rogue	Exported rogues will be sent to VisualRF for location calculation.
Wired-to-Wireless MAC Address Correlation	4	Discovered BSSIDs and LAN MAC addresses which are within this bitmask will be combined into one device. 4 requires all but the last digit match (aa:bb:cc:dd:ee:fx). 8 requires all but the last two digits match (aa:bb:cc:dd:ee:XX).
Wireless BSSID Correlation	4	Similar BSSIDs will be combined into one device when they fall within this bitmask. Setting this value too high may result in identifying two different physical devices as the same rogue. Note: When you change this value, RAPIDS will not immediately combine (or un-combine) rogue records. Changes will occur during subsequent processing of discovery events.
Delete Rogues not detected for (0-14 days, zero disables):	0	This value cannot be larger than the rogue discovery event expiration (14) configured on the OV3600 Setup page, unless that value is set to 0.
Automatically OS scan rogue devices	No	Whether to scan the operating system of rogues. Enabling this feature will cause RAPIDS to perform an OS scan when it gets in IP address for a rogue device. The OS scan will be run when a rogue gets an IP address for the first time or if the IP address changes.

Table 94 RAPIDS > Setup > Classification Options Fields

Field	Default	Description
Acknowledge Rogues by Default	No	Sets RAPIDS to acknowledge rogue devices upon initial detection, prior to their classification.
Manually Classifying Rogues Automatically Acknowledges them	Yes	Defines whether acknowledgement happens automatically whenever a rogue device receives a manual classification.

Filtered rogues are dropped from the system before they are processed through the rules engine. This can speed up overall performance but will eliminate all visibility into these types of devices.

Table 95 RAPIDS > Setup > Filtering Options

Field	Default	Description
Ignore Ad-hoc rogues	No	Filters rogues according to ad-hoc status.
Ignore Rogues by Signal Strength	No	Filters rogues according to signal strength. Since anything below the established threshold will be ignored and possibly dangerous, Alcatel-Lucent does not recommend enabling this setting. Instead, Alcatel-Lucent recommends incorporating signal strength into the classification rules on the RAPIDS > Rules page.
Ignore Rogues Discovered by Remote APs	No	Filters rogues according to the remote AP that discovers them. Enabling this option causes OV3600 to drop all rogue discovery information coming from remote APs.
Ignore IDS Events from Remote APs	No	Filters IDS Events discovered by remote APs.

Rogue Containment Options

Using RAPIDS, OV3600 can shield rogue devices from associating to Cisco WLC controllers (versions 4.2.114 and later), and Alcatel-Lucent switches (running AOS-W versions 3.x and later). OV3600 will alert you to the appearance of the rogue device and identify any mismatch between switch configuration and the desired configuration.



WMS Offload is not required to manage containment in OV3600.

Table 96 shows the Containment Options section of the **RAPIDS > Setup** page.

Table 96 RAPIDS > Setup > Containment Options Fields and Default Values

Field	Default	Description
Manage rogue AP Containment	Yes	Rogue APs on Cisco WLC and Alcatel-Lucent controllers as defined by the Rules engine will be classified as a Contained Rogue. OV3600 pushes the containment status of a rogue device to the controller and the controller takes the appropriate action. For the rogue device to be contained, you may need to configure containment on the controller.


Table 96 RAPIDS > Setup > Containment Options Fields and Default Values (Continued)

Field	Default	Description
Manage rogue AP containment in monitor-only mode	No	If disabled, OV3600 will display the desired containment settings but will not push them to devices. This may result in mismatches in device classifications. This can be useful for administrators that want to see what RAPIDS would push to the controller without making any changes to their network. If enabled, OV3600 will push the desired containment settings to the controllers in Monitor-Only mode, as well as the devices in Managed mode.
Maximum number of APs to contain a rogue	3	Sets the maximum number of APs that will contain a rogue on Cisco WLC controllers.

1. Navigate to the **RAPIDS > Setup** page.
2. From the **Containment Options** section, select **Yes** in the **Manage rogue AP containment** field. Once this is done, the Contained Rogue classification will appear as an option in the classification drop down menu as shown in [Figure 119](#).

Additionally, once this option been enabled, the option to manage contained APs in **Monitor-Only** mode becomes available. Containment in Monitor-Only mode means configuration changes will still be pushed to the controller, even though it is in monitor-only mode.

Figure 119 RAPIDS > Classification Rule Menu with Containment

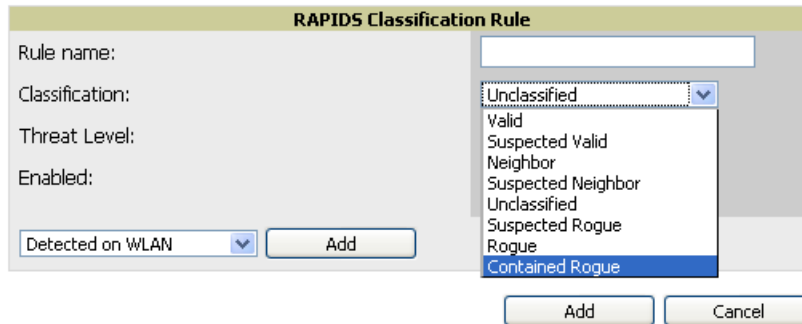

From the **APs/Devices > Rogues Contained** page, you can see the containment status information, as shown in [Figure 120](#).



The Rogue Containment device tab is only present for devices that support containment.

Figure 120 Rogue Containment Status Page

Rogue Containment Status

1-5 of 5 Rogue BSSIDs Page 1 of 1 Choose Columns Export to CSV

Rogue	BSSID	Containment State	Desired Containment State	Classifying Rule	Location
Cisco-9F:75:90	00:1D:45:9F:75:90	Not Contained	Contained	Manual Classification Override	-
Enterasys-36:5C:18	00:01:F4:36:5C:18	Contained	Not Contained	Signal strength > -75 dBm	-
Enterasys-37:4A:C3	00:01:F4:37:4A:C3	Contained	Not Contained	Signal strength > -75 dBm	-
Locally Ad-71:BA:90	02:20:A6:71:BA:90	Contained	Not Contained	Signal strength > -75 dBm	-
Locally Ad-71:BA:90	02:20:A6:71:BA:91	Contained	Not Contained	Signal strength > -75 dBm	-

1-5 of 5 Rogue BSSIDs Page 1 of 1

Additional Settings

Additional RAPIDS settings such as role filtering and performance tuning are available in the following locations:

- Use the **OV3600 Setup > Roles > Add/Edit Role Page** to define the ability to use RAPIDS by user role. Refer to [“Creating OV3600 User Roles”](#) on page 48.

- Use the **OV3600 Setup > General > Performance Tuning** page to define the processing priority of RAPIDS in relation to OV3600 as a whole (see [Table 18 on page 44](#)).

Defining RAPIDS Rules

The **RAPIDS > Rules** page is one of the core components of RAPIDS. This feature allows you to define rules by which any detected device on the network is classified.

This section describes how to define, use, and monitor RAPIDS rules, provides examples of such rules, and demonstrates how they are helpful.

This section contains the following topics:

- “[Switch Classification with WMS Offload](#)” on page 181
- “[Device OUI Score](#)” on page 182
- “[Rogue Device Threat Level](#)” on page 182
- “[Viewing and Configuring RAPIDS Rules](#)” on page 182
- “[Recommended RAPIDS Rules](#)” on page 185
- “[Using RAPIDS Rules with Additional OV3600 Functions](#)” on page 185

Switch Classification with WMS Offload

This classification method is supported only when WMS offload is enabled on Alcatel-Lucent WLAN switches. Switch classification of this type remains distinct from RAPIDS classification. WLAN switches feed wireless device information to OV3600, which OV3600 then processes. OV3600 then pushes the WMS classification to all of the AOS-W switches that are WMS offload enabled.

WMS Offload ensures that a particular BSSID has the same classification on all of the switches. WMS Offload removes some load from master switches and feeds 'connected-to-lan' information to the RAPIDS classification engine. RAPIDS classifications and switch classifications are separate and often are not synchronized.



RAPIDS classification is not pushed to the devices.

The following table compares how default classification may differ between OV3600 and AOS-W for scenarios involving WMS Offload.

Table 97 *Rogue Device Classification Matrix*

OV3600	AOS-W (ARM)
Unclassified (default state)	Unknown
Rogue	Rogue
Suspected Neighbor	Interfering
Neighbor	Known Interfering
Valid	Valid
Contained Rogue	DOS

For additional information about WMS Offload, refer to the *Alcatel-Lucent and OV3600 Best Practices Guide* in **Home > Documentation**.

Device OUI Score

The Organizationally Unique Identifier (OUI) score is based on the LAN MAC address of a device. RAPIDS can be configured to poll your routers and switches for the bridge forwarding tables. RAPIDS then takes the MAC addresses from those tables and runs them through a proprietary database to derive the OUI score. The OUI score of each device is viewable from each rogue's detail page. [Table 98](#) provides list the OUI scores definitions.

Table 98 Device OUI Scores

Score	Description
Score of 1	Indicates any device on the network; this is the lowest threat level on the network.
Score of 2	Indicates any device in which the OUI belongs to a manufacturer that produces wireless (802.11) equipment.
Score of 3	Indicates that the OUI matches a block that contains APs from vendors in the Enterprise and small office/ small home market.
Score of 4	Indicates that the OUI matches a block that belonged to a manufacturer that produces small office/ small home access points.

Rogue Device Threat Level

The threat level classification adds granularity for each general RAPIDS classification. Devices of the same classification can have differing threat scores based on the classifying rule, ranging from 1 to 10 with a default value of 5. This classification process can help identify the greater threat. Alerts can be defined and sorted by threat level.

Threat level and classification are both assigned to a device when a device matches a rule. Once classified, a device's classification and threat level change only if it is classified by a new rule or is manually changed. Threats levels can be manually defined on the **RAPIDS > Detail** page when the RAPIDS classification is manually overridden or you can edit the rule to have a higher threat level.

Viewing and Configuring RAPIDS Rules

To view the RAPIDS rules that are currently configured on OV3600, navigate to the **RAPIDS > Rules** page ([Figure 121](#)).

Figure 121 RAPIDS > Rules Page Illustration

Default RAPIDS Classification: Unclassified

Change the priority order of rules by dragging and dropping rows.

New RAPIDS Classification Rule


<input type="checkbox"/>	Rule name	Classification	Threat Level	Enabled	
<input type="checkbox"/>	Protect my SSID	Rogue	10	Yes	↕
<input type="checkbox"/>	Fingerprint scan	Rogue	5	Yes	↕
<input type="checkbox"/>	Detected wirelessly and on LAN	Rogue	5	Yes	↕
<input type="checkbox"/>	Signal strength > -75 dBm	Suspected Rogue	5	Yes	↕
<input type="checkbox"/>	Detected Wirelessly	Suspected Neighbor	5	Yes	↕
<input type="checkbox"/>	OUI block contains SOHO or enterprise APs	Suspected Neighbor	5	Yes	↕
<input type="checkbox"/>	OUI block does not contain APs	Suspected Valid	5	Yes	↕

7 RAPIDS Classification Rules

[Select All](#) - [Unselect All](#)


Table 99 defines the fields in the **RAPIDS > Rules** page.

Table 99 *RAPIDS > Rules Page*

Field	Description
Default Classification	Sets the classification that a rogue device receives when it does not match any rules.
Add New RAPIDS Classification Rule	Select this button to create a RAPIDS classification rule.
Rule Name	Displays the name of any rule that has been configured. Rule names should be descriptive and should convey the core purpose for which it was created.
Classification	Displays the classification that devices receive if they meeting the rule criteria.
Threat Level	Displays the numeric threat level for the rogue device that pertains to the rule. Refer to "Rogue Device Threat Level" on page 182 for additional information.
Enabled	Displays the status of the rule, whether enabled or disabled.
Reorder Drag and Drop Icon 	Changes the sequence of rules in relation to each other. Select, then drag and drop, the icon for any rule to move it up or down in relation to other rules. A revised sequence of rules must be saved before rogues are classified in the revised sequence. NOTE: The sequence of rules is very important for proper rogue classification. A device gets classified by the first rule to which it complies, even if it conforms to additional rules later in the sequence.

To create a new rule, select the **Add** button next to **New RAPIDS Classification Rule** to launch the **RAPIDS Classification Rule** page (see [Figure 122](#)).

Figure 122 *Classification Rule Page*

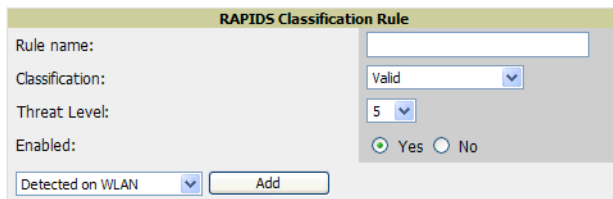

Fill in the settings described in [Table 99](#) then select an option from the drop down menu.

[Table 100](#) defines the drop down menu options that are at the bottom left of the RAPIDS Classification Rule dialog box (see [Figure 122](#)). Once all rule settings are defined, select **Add**. The new rule automatically appears in the **RAPIDS > Rules** page.

Table 100 *Properties Drop Down Menu*

Option	Description
Wireless Properties	
Detected on WLAN	Classifies based on how the rogue is detected on the wireless LAN.
Detecting AP Count	Classifies based on the number of managed devices that can hear the rogue. Enter a numeric value and select At Least or At Most .
Encryption	Classifies based on the rogue matching a specified encryption method. Note that you can select for 'no encryption' with a rule that says "Encryption does not match WEP or better".

Table 100 *Properties Drop Down Menu*

Option	Description
Network type	Rogue is running on the selected network type, either Ad-hoc or Infrastructure .
Signal Strength	Rogue matches signal strength parameters. Specify a minimum and maximum value in dBm.
SSID	Classifies the rogue when it matches or does not match the specified string for the SSID or a specified regular expression. NOTE: For SSID matching functions, OV3600 processes only alpha-numeric characters and the asterisk wildcard character (*). OV3600 ignores all other non-alpha-numeric characters. For example, the string of ethersphere-* matches the SSID of ethersphere-wpa2 but also the SSID of ethersphere_this_is_an_example (without any dashes).
Wireline Properties	
Detected on LAN	Rogue is detected on the wired network. Select Yes or No .
Fingerprint Scan	Rogue matches fingerprint parameters.
IP Address	Rogue matches a specified IP address or subnet. Enter IP address or subnet information as explained by the fields.
OUI Score	Rogue matches manufacturer OUI criteria. You can specify minimum and maximum OUI score settings from two drop-down lists. Select remove to remove one or both criteria, as desired.
Operating System	Rogue matches OS criteria. Specify matching or non-matching OS criteria as prompted by the fields.
Wireless/Wireline Properties	
Manufacturer	Rogue matches the manufacturer information of the rogue device. Specify matching or non-matching manufacturer criteria.
MAC Address	Rogue matches the MAC address. Specify matching or non-matching address criteria, or use a wildcard (*) for partial matches.
Alcatel-Lucent Controller Properties	
Controller Classification	Rogue matches the specified controller classification.
Confidence	Rogue falls within a specified minimum and maximum confidence level, ranging from 1 to 100.

After creating a new rule, select **Add** to return to the **RAPIDS > Rules** page. Select **Save and Apply** to have the new rule take effect.

Deleting or Editing a Rule

To delete a rule from the RAPIDS rules list, go to the **RAPIDS > Rules** page. Select the check box next to the rule you want to delete, and select **Delete**. The rule is automatically deleted from **RAPIDS > Rules**.

To edit any existing rule, select its pencil icon to launch the **RAPIDS Classification Rule** page (see [Figure 122](#)). Edit or revise the fields as necessary, then select **Save**.

To change the sequence in which rules apply to any rogue device, drag and drop the rule to a new position in the rules sequence.

Recommended RAPIDS Rules

- **If Any Device Has Your SSID, Then Classify as Rogue**

The only devices broadcasting your corporate SSID should be devices that you are aware of and are managed by OV3600. Rogue devices often broadcast your official SSID in an attempt to get access to your users, or to trick your users into providing their authentication credentials. Devices with your SSID generally pose a severe threat. This rule helps to discover, flag, and emphasize such a device for prompt response on your part.

- **If Any Device Has Your SSID and is Not an Ad-Hoc Network Type, Then Classify as Rogue**

This rule classifies a device as a rogue when the SSID for a given device is your SSID and is not an Ad-Hoc device. Windows XP automatically tries to create an Ad-hoc network if it can not find the SSID for which it is searching. This means that user's laptops on your network may appear as Ad-Hoc devices that are broadcasting your SSID. If this happens too frequently, you can restrict the rule to apply to non-ad-hoc devices.

- **If More Than Four APs Have Discovered a Device, Then Classify as Rogue**

By default, OV3600 tries to use Signal Strength to determine if a device is on your premises. Hearing device count is another metric that can be used.

The important concept in this scenario is that legitimate neighboring devices are only heard by a few APs on the edge of your network. Devices that are heard by a large number of your APs are likely to be in the heart of your campus. This rule works best for scenarios in large campuses or that occupy an entire building. For additional rules that may help you in your specific network scenario, contact Alcatel support.

Using RAPIDS Rules with Additional OV3600 Functions

Rules that you configure on the **RAPIDS > Rules** page establish an important way of processing rogue devices on your network, and flagging them for attention as required. Such devices appear on the following pages in OV3600, with additional information:

- **RAPIDS > List**—Lists rogue devices as classified by rules.
- **RAPIDS > Rules**—Displays the rules that classify rogue devices.
- **RAPIDS > Overview**—Displays general rogue device count and statistical information.
- **System > Triggers**—Displays triggers that are currently configured, including any triggers that have been defined for rogue events.
- **Reports > Definitions**—Allows you to run New Rogue Devices Report with custom settings.
- **VisualRF**—Displays physical location information for rogue devices.

Viewing Rogues on the RAPIDS > List Page

To view a rogue AP, select the **RAPIDS > List** tab and select a rogue device type from the **Minimum Classification** drop-down menu (see [Figure 123](#)).

You can sort the table columns (up/down) by selecting the column head. Most columns can be filtered using the funnel icon (). The active links on this page launch additional pages for RAPIDS configuration or device processing.

Figure 123 RAPIDS > List Page Illustration (partial view)

Minimum Classification:

[Modify Devices](#)

1-2 of 2 Rogue APs Page 1 of 1 [Choose Columns](#) [CSV Export](#)

Ack	RAPIDS Classification	Threat Level	Name	Classifying Rule	Controller Classification	WMS Classification AP	WMS
No	Rogue	5	HANGZHOU H-49:17:C0	Detected Wirelessly and on LAN	Valid	00:1a:1e:c0:1a:dc	1/7/2
No	Rogue	5	HANGZHOU H-32:1F:60	Detected Wirelessly and on LAN	Valid	00:24:6c:c8:70:b5	1/7/2

1-2 of 2 Rogue APs Page 1 of 1

[View Ignored Rogues](#)

Table 101 details the column information displayed in Figure 123. For additional information about RAPIDS rules, refer to “Defining RAPIDS Rules” on page 181.

Table 101 RAPIDS > List Column Definitions

Column	Description
Ack	Displays whether or not the rogue device has been acknowledged. Devices can be acknowledged manually or you can configure RAPIDS so that manually classifying rogues will automatically acknowledges them. Additionally, devices can be acknowledged by using Modify Devices link at the top of the RAPIDS > List page. Rogues should be acknowledged when the OV3600 user has investigated them and determined that they are not a threat (see “Basic Configuration” on page 177).
RAPIDS Classification	Displays the current RAPIDS classification. This classification is determined by the rules defined on the RAPIDS > Rules page.
Threat Level	This field displays the numeric threat level of the device, in a range from 1 to 10. The definition of threat level is configurable, as described in “Rogue Device Threat Level” on page 182. The threat level is also supported with Triggers (see “Monitoring and Supporting OV3600 with the System Pages” on page 193).
Name	Displays the alpha-numeric name of the rogue device, as known. By default, OV3600 assigns each rogue device a name derived from the OUI vendor and the final six digits of the MAC address. Clicking the linked name will redirect you to the RAPIDS > Detail page for that rogue device. Refer to “Overview of the RAPIDS > Detail Page” on page 188.
Classifying Rule	Displays the RAPIDS Rule that classified the rogue device (see “Viewing and Configuring RAPIDS Rules” on page 182).
Controller Classification	Displays the classification of the device based on the controller’s hard-coded rules. NOTE: This column is hidden unless Offload WMS Database is enabled by at least one group on the Groups > Basic page.
WMS Classification AP	The AP that provided the information used to classify the device. Click the linked device name to be redirected to the APs/Devices > Monitor page for that AP.
WMS Classification Date	The date that WMS decided the classification
Confidence	The confidence level of the suspected rogue. How confidence is calculated varies based on the version of AOS-W. When an AOS-W switch sees evidence that a device might be on the wire it will up the confidence level. If AOS-W is completely sure that it is on the wire, it gets classified as a rogue.
Wired	Displays whether the rogue device has been discovered on one of your wired networks by polling routers/switches, your SNMP/HTTP scans, or Alcatel-Lucent WIP information. This column displays Yes or is blank if wired information was not detected.

Table 101 RAPIDS > List Column Definitions

Column	Description
Detecting APs	Displays the number of AP devices that have wirelessly detected the rogue device. A designation of heard implies the device was heard over the air.
Location	If the rogue has been placed in VisualRF, this column will display the name of the floor plan the rogue is on as a link to the VisualRF Floor Plan View page.
SSID	Displays the most recent SSID that was heard from the rogue device.
Signal	Displays the strongest signal strength detected for the rogue device.
RSSI	Displays Received Signal Strength Indication (RSSI) designation, a measure of the power present in a received radio signal.
Network Type	Displays the type of network in which the rogue is present, for example: <ul style="list-style-type: none"> ● Ad-hoc—This type of network usually indicates that the rogue is a laptop that attempts to create a network with neighboring laptops, and is less likely to be a threat. ● AP—This type of network usually indicates an infrastructure network, for example. This may be more of a threat. ● Unknown—The network type is not known.
Encryption Type	Displays the encryption that is used by the device. Possible contents of this field include the following encryption types: <ul style="list-style-type: none"> ● Open—No encryption ● WEP—Wired Equivalent Privacy ● WPA—Wi-Fi Protected Access <p>Generally, this field alone does not provide enough information to determine if a device is a rogue, but it is a useful attribute. If a rogue is not running any encryption method, you have a wider security hole than with an AP that is using encryption.</p>
Ch	Indicates the most recent RF channel on which the rogue was detected. Note: it may be detected on more than one channel if it contains more than one radio.
LAN MAC Address	The LAN MAC address of the rogue device.
LAN Vendor	Indicates the LAN vendor of the rogue device, when known.
Radio MAC Address	Displays the MAC address for the radio device, when known.
Radio Vendor	Indicates the radio vendor of the rogue device, when known.
OS	This field displays the OS of the device, as known. OS is the result of a running an OS port scan on a device. An IP addresses is required to run an OS scan. The OS reported here is based on the results of the scan.
Model	Displays the model of rogue device, if known. This is determined with a fingerprint scan, and this information may not always be available.
IP Address	Displays the IP address of the rogue device. The IP address data comes from fingerprint scans or ARP polling of routers and switches.
Last Discovering AP	Displays the most recent AP to discover the rogue device. The device name in this column is taken from the device name in OV3600. Click the linked device name to be redirected to the APs/Devices > Monitor page for that AP.
Switch/Router	Displays the switch or router where the device's LAN MAC address was last seen.
Port	Indicates the physical port of the switch or router where the rogue was last seen.

Table 101 RAPIDS > List Column Definitions

Column	Description
Notes	Indicates any notes about the rogue device that may have been added.
Last Seen	Indicates the date and time the rogue device was last seen.

Overview of the RAPIDS > Detail Page

Select a device **Name** in the **RAPIDS > List** page to view the **Detail** page (Figure 124).

Figure 124 RAPIDS > Detail Page Illustration

Name:	Cisco-6C:D9:F0	Model:	-	First Discovered:	6/8/2011 7:22 PM
Acknowledge:	<input type="radio"/> Yes <input checked="" type="radio"/> No	IP Address:	-	First Discovery Method:	Wireless AP scan
Controller Classification:	Suspected Rogue	Confidence:	20	Last Discovered:	6/8/2011 7:52 PM
SSID:	qa-mv-gnn	First Discovery Agent:	00:24:6c:c8:6e:e7	Last Discovery Method:	Wireless AP scan
RAPIDS Classification:	Suspected Rogue	Channel:	40	Last Discovery Agent:	00:24:9c:c8:6e:e9
Classification Rule:	Signal strength > -75 dBm	WEP:	No		
RAPIDS Classification Override:	-No Override -	WPA:	Yes		
Threat Level:	5	Network Type:	AP		
Threat Level Override:	1				
Radio MAC Address:	00:0B:16:6C:D9:F0				
Radio Vendor:	Cisco				
LAN MAC Address:	-				
LAN Vendor:	-				
OUI Score:	-				
Operating System:	-				
OS Detail:	-				
Last Scan:	-				
Notes:	<div style="border: 1px solid #ccc; height: 20px;"></div>				
<input type="button" value="Update"/> <input type="button" value="Ignore"/> <input type="button" value="Delete"/> Refresh this page for updated results.					

Discovery Events

1-3 of 3 Discovery Events Page 1 of 1 [Reset filters](#) [Choose columns](#) [Export CSV](#)

RSSI	Signal	Channel	SSID	WEP	WPA	BSSID	Network Type	IP Address	Time	Discovery Method	Discovery Agent	Port
12	-77	40	-	No	Yes	00:0B:86:6C:D9:F1	AP	-	6/8/2011 7:52 PM	Wireless AP scan	00:24:6c:c8:6e:e7	-
10	-79	40	-	No	Yes	00:0B:86:6C:D9:F2	AP	-	6/8/2011 7:52 PM	Wireless AP scan	00:24:6c:c8:6e:e7	-
11	-78	40	qa-mv-gnn	No	Yes	00:0B:86:6C:D9:F0	AP	-	6/8/2011 7:52 PM	Wireless AP scan	00:24:6c:c8:6e:e7	-

1-3 of 3 Discovery Events Page 1 of 1 [Reset filters](#)

Important things to remember regarding the information in the device detail page are:

- Users with the role of **Admin** can see all rogue AP devices.
- Users with roles limited by folder can *see* a rogue AP if there is at least one discovering device that they can see.
- The discovery events displayed are from APs that you can see on the network. There may be additional discovery events that remain hidden to certain user roles.
- Each rogue device frequently has multiple discovery methods, all of which are listed.
- As you work through the rogue devices, use the **Name** and **Notes** fields to identify the AP and document its location.
- You can use the global filtering options on the **RAPIDS > Setup** page to filter rogue devices according to signal strength, ad-hoc status, and discovered by remote APs.
- VisualRF uses the heard signal information to calculate the physical location of the device.
- If the device is seen on the wire, RAPIDS reports the switch and port for easy isolation.
- If you find that the rogue belongs to a neighboring business, for example, you can override the classification to a neighbor and acknowledge the device. Otherwise, Alcatel-Lucent strongly recommends that you extract the device from your building and delete the rogue device from your system. If you delete a rogue, you will be notified the next time it is discovered.
- Most columns in the **Discovery Events** list table on this page can be filtered using the funnel icon (🔍).

To update a rogue device:

1. Select the **Identify OS for Suspected Rogues** option if an IP address is available to obtain operating system information using an nmap scan. Note that if you are running wireline security software on your network, it may identify your OV3600 as a threat, which you can ignore.
2. Select the **Ignore** button if the rogue device is to be ignored. Ignored devices will not trigger alerts if they are rediscovered or reclassified.
3. Select the **Delete** button if the rogue device is to be removed from OV3600 processing.

Viewing Ignored Rogue Devices

The **RAPIDS > List** page allows you to view ignored rogues—devices that have been removed from the rogue count displayed by OV3600. Such devices do not trigger alerts and do not display on lists of rogue devices. To display ignored rogue devices, select **View Ignored Rogues** at the bottom left of the page.

Once a classification that has rogue devices is chosen from the drop-down menu, a detailed table displays all known information.

Using RAPIDS Workflow to Process Rogue Devices

One suggested workflow for using RAPIDS is as follows:

- Start from the **RAPIDS > List** page. Sort the devices on this page based on classification type. Begin with Rogue APs, working your way through the devices listed.
- Select **Modify Devices**, then select all devices that have an IP address and select **Identify OS**. OV3600 performs a port scan on the device and attempts to determine the operating system (see “[Setting Up RAPIDS](#)” on page 177)

You should investigate devices running an embedded Linux OS installation. The OS scan can help identify false positives and isolate some devices that should receive the most attention.

- Find the port and switch at which the device is located and shut down the port or follow wiring to the device.
- To manage the rogue, remove it from the network and acknowledge the rogue record. If you want to allow it on the network, classify the device as valid and update with notes that describe it.



Not all rogue discovery methods will have all information required for resolution. For example, the switch/router information, port, or IP address are found only through switch or router polling. Furthermore, RSSI, signal, channel, SSID, WEP, or network type information only appear through wireless scanning. Such information can vary according to the device type that performs the scan.

Score Override

On **RAPIDS > Score Override** page you can change the OUI scores that are given to MAC addresses detected during scans of bridge forwarding tables on routers or switches. [Figure 125](#), [Figure 126](#), and [Table 102](#) illustrate and describe RAPIDS Score Override. Perform these steps to create a score override.


Once a new score is assigned, all devices with the specified MAC address prefix receive the new score.



Note that rescoreing a MAC Address Prefix poses a security risk. The block has received its score for a reason. Any devices that fall within this block receive the new score.

1. Navigate to the **RAPIDS > Score Override** page. This page lists all existing overrides if they have been created.

Figure 125 RAPIDS > Score Override Page

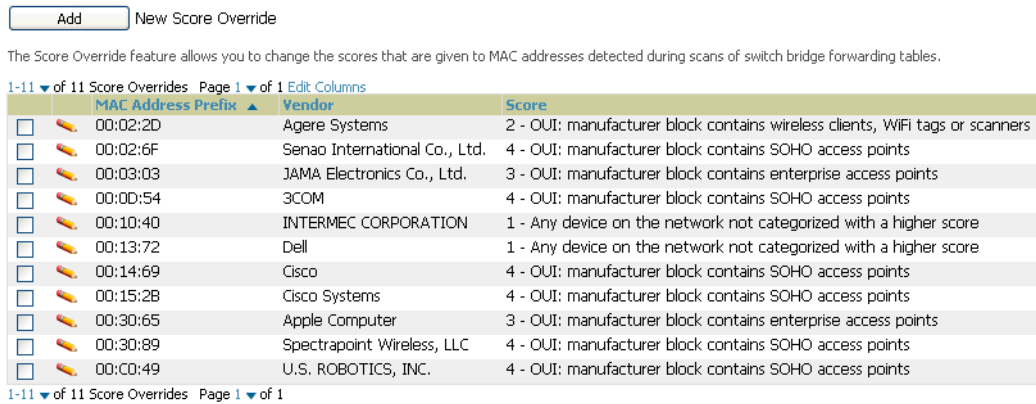

2. Select **Add** to create a new override or select the pencil icon next to an existing override to edit that override. The **Score Override** add or edit page appears (Figure 126).

Figure 126 Add/Edit Score Override Page

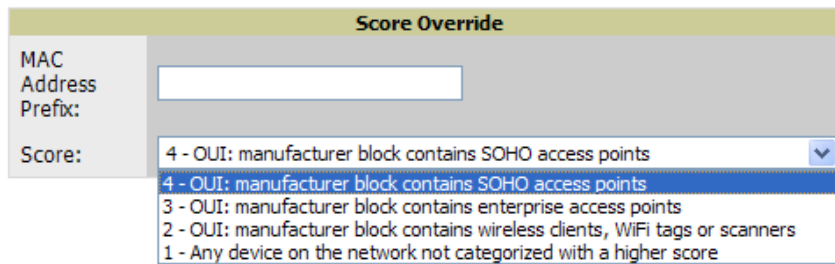


Table 102 RAPIDS > Add/Edit Score Override Page Fields

Field	Description
MAC Address Prefix	Use this field to define the OUI prefix to be re-scored.
Score	Use this field to set the score that a device, with the specified MAC address prefix, will receive.

3. Enter in the six-digit MAC prefix for which to define a score, and select the desired score. Once the new score has been saved, all detected devices with that prefix receive the new score.
4. Select **Add** to create the new override, or select **Save** to retain changes to an existing override. The new or revised override appears on the **RAPIDS > Score Override** page.
5. To remove any override, select that override in the checkbox and select **Delete**.

Using the Audit Log

The Audit Log is a record of any changes made to the RAPIDS rules, setup page, and manual changes to specific rogues. This allows you to see how something is changes, when it changed, and who made the alteration. The Audit Log can be found at **RAPIDS > Audit Log**. See Figure 127 for more information.

Figure 127 Audit Log Page Illustration

RAPIDS Changes

Time	User	Event
Wed Feb 17 10:21:12 2010	admin	rapids_classification_rule (id 39): classification: '70' => '80'
Wed Feb 17 10:20:20 2010	admin	seas_config (id 1): rapids_manage_containment: '0' => '1'
Fri Feb 12 08:19:00 2010	jason	rapids_classification_rule (id 39): classification: '80' => '70'
Fri Feb 12 08:19:00 2010	jason	seas_config (id 1): rapids_manage_containment: '1' => '0'
Tue Feb 9 15:53:57 2010	admin	rapids_classification_rule (id 39): manufacturer: 'proxim*' => '3Com*', name: 'Contain Proxim' => 'Contain 3Com'
Tue Feb 9 15:53:03 2010	admin	rapids_classification_rule (id 39): classification: '70' => '80'
Thu Feb 4 15:59:12 2010	admin	seas_config (id 1): rapids_manage_containment: '0' => '1'
Mon Feb 1 13:55:36 2010	admin	rapids_classification_rule (id 39): classification: '80' => '70'
Mon Feb 1 13:55:36 2010	admin	seas_config (id 1): rapids_manage_containment: '1' => '0'
Thu Jan 28 15:48:54 2010	admin	rogue_ap (id 154880): Cisco-AD:61:FE: 'Identify Operating System'

Additional Resources

The following OV3600 tools support RAPIDS:

- **System Triggers and Alerts**—Triggers and Alerts that are associated with rogue devices follow the classification-based system described in this chapter. For additional information about triggers that support rogue device detection, see to [“Viewing, Delivering and Responding to Triggers and Alerts”](#) on page 197.
- **Reports**—The **New Rogue Devices Report** displays summary and detail information about all rogues first discovered in a given time period. For more information, see [“Using the New Rogue Devices Report”](#) on page 256.

For additional security-related features and functions, see the following topics in this guide.

- [“Configuring Group Security Settings”](#) on page 87
- [“Configuring Cisco WLC Security Parameters and Functions”](#) on page 101
- [“Configuring Group SSIDs and VLANs”](#) on page 90
- [“Monitoring and Supporting OV3600 with the System Pages”](#) on page 193

Daily WLAN administration often entails network monitoring, supporting WLAN and OV3600 users, and monitoring OV3600 system operations.

This chapter contains the following administration procedures:

- “Monitoring and Supporting OV3600 with the System Pages” on page 193
- “Monitoring and Supporting WLAN Users” on page 205
- “Evaluating and Diagnosing User Status and Issues” on page 212
- “Managing Mobile Devices with SOTI MobiControl and OV3600” on page 219
- “Monitoring and Supporting OV3600 with the Home Pages” on page 220
- “Supporting OV3600 Servers with the Master Console” on page 233
- “Upgrading OV3600” on page 237
- “Backing Up OV3600” on page 235
- “Using OV3600 Failover for Backup” on page 238
- “Backing Up OV3600” on page 237
- “Logging out of OV3600” on page 240

Monitoring and Supporting OV3600 with the System Pages

The **System** pages provide a centralized location for system-wide OV3600 data and settings. Apart from **Triggers**, **Alerts**, and **Backups** pages that are described elsewhere in this chapter, the remaining pages of the **System** section are as follows:

- **System > Status**—Displays status of all OV3600 services and links to their log pages. Refer to “Using the System > Status Page” on page 194.
- **System > Syslog & Traps**—Displays all syslog messages and SNMP traps that OV3600 receives. Refer to “Viewing Device Events in System > Syslog & Traps” on page 195.
- **System > Event Log**—This useful debugging tool keeps a list of recent OV3600 events, including APs coming up and down, services restarting, and most OV3600-related errors as well as the user that initiated the action. Refer to “Using the System > Event Log Page” on page 196.
- **System > Triggers**—View and edit triggering conditions that cause OV3600 to send out alert notifications. Refer to “Viewing, Delivering and Responding to Triggers and Alerts” on page 197.
- **System > Alerts**—View or acknowledge alerts sent out by the system and use the Triggering Agent links to drill down to the device that triggered the alert. Refer to “Viewing Alerts” on page 204.
- **System > Backups**—View the backup files that are run nightly. Refer to “Backing Up OV3600” on page 235.
- **System > Configuration Change Jobs**—Manages configuration changes in OV3600. Refer to “Using the System > Configuration Change Jobs Page” on page 227.
- **System > Firmware Upgrade Jobs**—Displays information about current and scheduled firmware upgrades. Refer to “Loading Firmware Files to OV3600” on page 59.
- **System > Performance**—Displays basic OV3600 hardware information as well as resource usage over time. Refer to “Using the System > Firmware Upgrade Jobs Page” on page 228.

Using the System > Status Page

The **System > Status** page displays the status of all of OV3600 services. Services will either be **OK**, **Disabled**, or **Down**. If any service is **Down** (displayed in red) please contact Alcatel-Lucent support. The **Reboot System** button provides a graceful way to power cycle your OV3600 remotely when it is needed. The **Restart OV3600** button will restart the OV3600 services without power cycling the server or reloading the OS. [Figure 128](#) illustrates this page.

Figure 128 System > Status Page Illustration

Refresh

D diagnostic report file for sending to customer support: [diagnostics.tar.gz](#)
 VisualRF diagnostics report file: [VisualRFdiag.tar.gz](#)

Service ▲	Status	Log
Airbus Message Server	OK	/var/log/airbus.log
Alert Cache Builder	OK	/var/log/alerts_stats_cacher
Alert Monitor	OK	/var/log/alertd
Asynchronous Work Scheduler	OK	/var/log/tuple_scheduler
At	OK	/var/log/at
AWMS News Fetcher	OK	/var/log/awms_news_fetcher
Cisco ACS	OK	/var/log/acs
Cisco WLSE Poller	OK	/var/log/wlse
Client Monitor Worker	OK	/var/log/async_logger_client
Configuration Monitor	OK	/var/log/config_verifier
Configuration Server	OK	/var/log/config_pusher
Cron	OK	/var/log/amp_cron
Database	OK	/var/log/pgsql
Device List Cacher	OK	/var/log/ap_list_cacher
Device Monitor	OK	/var/log/ap_watcher
Device Monitor (Poll Now)	OK	/var/log/ap_watcher_poll_now
Discovery Event Existing-AP Cacher	OK	/var/log/discovery_event_cacher
DNS Fetcher	OK	/var/log/dns_fetcher
DNS Refresh	OK	/var/log/dns_refresh
Fallover Monitor	Disabled	/var/log/amp_watcher
Firmware Server	OK	/var/log/firmware_enforcer
FTP Server	Disabled	/var/log/xferlog
Guest User Credential Enabler	OK	/var/log/guest_user_pusher
HTTP/SNMP Scanner	OK	/var/log/ap_scanner
LWAPP Managed Certificate Builder	OK	/var/log/lwapp_rebuild
Master Console	Disabled	/var/log/mc_stat_collector
MC Report Runner	OK	/var/log/mc_report_runner
Mobile Device Management Engine	Disabled	/var/log/mdm.log
NTP Client	OK	
PAPI Message Processor	OK	/var/log/papi
PAPI Message Router	OK	/var/log/msgHandler.log
Parallel HTTP Fetcher	Disabled	/var/log/http_fetcher
Performance Monitor	OK	/var/log/perf_collector
Persistent TupleSpaces Server	OK	/var/log/persistent_tuple_spaces
Postfix Mail Server	OK	/var/log/maillog
RADIUS Accounting Server	OK	/var/log/radius/radius.log
Report Runner	OK	/var/log/amp_report_runner
Rogue Filter	OK	/var/log/rogue_filter
RTLS Collector	OK	/var/log/rtls
SNMP Enabler	OK	/var/log/snmp_enabler
SNMP Fetcher	OK	/var/log/snmp_fetcher
SNMP v2 Fetcher	OK	/var/log/snmp_v2_fetcher
SNMP Trap Handler	OK	/var/log/snmp_trap_handler
Synchronous Event Handler	OK	/var/log/syncd
Tag Expiration	OK	/var/log/expire_wifi_tags
TupleSpaces Server	OK	/var/log/tuple_spaces
VisualRF Engine	OK	/var/log/visualrf.log
Web Server	OK	/var/log/httpd/ssl_error_log
WEP Key Setter	OK	/var/log/wep_key_setter
Whitelist Collector	Disabled	/var/log/whitelist_collector
Work Queue Collision Logger	OK	/var/log/work_queue_clobber_logger

Additional Log Files

Description ▲	Log
Nightly Maintenance	/var/log/nightly_maintenance
System Audit Log	/var/log/system_audit_log
Telnet Commands	/var/log/telnet_cmds
Upgrade to 6.4_beta6	/tmp/AMP-6.4_beta6-upgrade.log

4 Additional Log Files

Restart AWMS Reboot System


- The link **diagnostics.tar.gz** contains reports and logs that are helpful to Alcatel-Lucent support in troubleshooting and solving problems. Your Alcatel-Lucent support representative may ask for this file along with other logs that are linked on this page.
- Similarly, the **VisualRFdiag.zip** link contains VisualRF diagnostic information that might be requested by Alcatel-Lucent support.
- A summary table lists logs that appear on the **System > Status** page. These are used to diagnose OV3600 problems. Additional logs are available via SSH access in the /var/log and /tmp directories; Alcatel-Lucent support engineers may request these logs for help in troubleshooting problems and will

provide detailed instructions on how to retrieve them. [Table 103](#) describes some of the most important logs:

Table 103 A Sample of Important Status Logs

Log	Description
pgsql	Logs database activity.
error_log	Reports problems with the web server. Also linked from the internal server error page that displays on the web page; please send this log to Alcatel-Lucent support whenever reporting an internal server error.
maillog	Applies in cases where emailed reports or alerts do not arrive at the intended recipient's address.
radius	Displays error messages associated with RADIUS accounting.
async_logger	Tracks many device monitoring processes, including user-AP association.
async_logger_client	Logs device configuration checks.
config_pusher	Logs errors in pushing configuration to devices.
visualrf.log	Details errors and messages associated with the VisualRF application.

Viewing Device Events in System > Syslog & Traps

Admins can use the **System > Syslog & Traps** page to review all syslog messages and SNMP traps that OV3600 receives from the trigger type **Device Event**. These device events are listed by time, type, source device, AP, severity, facility, category, and message. Most columns can be filtered using the funnel icon () , and messages can be filtered by substring using the **Search** field, as seen in [Figure 129](#).

You can change the historical data retention from the **Device Events (Syslog,Traps)** field in **OV3600 Setup > General**.

Figure 129 System > Syslog & Traps Page Illustration

Device Events

1-10 ▼ of 41967 Device Events Page 1 ▼ of 4197 > > | Reset filters Choose columns

Time ▼	Type ▼	Source Device ▼	AP ▼	User	Severity ▼	Facility ▼	Category ▼	Message
5/24/2011 7:40 PM	SNMP Trap	<Unknown>	00:24:6c:c4:c1:50.testdomain	-	-	-	AP Status	<input type="text" value="Search"/>
5/24/2011 7:40 PM	SNMP Trap	<Unknown>	ap125-c0:50:78	-	-	-	AP Status	wlsxNAccessPointIsDown wlsxTrapAPM wlsxTrapTime: 5/24/2011 22:41:25 U1
5/24/2011 7:40 PM	SNMP Trap	<Unknown>	00:24:6c:c4:c1:50.testdomain	-	-	-	Rogue Detection	wlsxNAccessPointIsDown wlsxTrapAPM wlsxTrapTime: 5/24/2011 22:41:25 U1
5/24/2011 7:40 PM	SNMP Trap	<Unknown>	ap125-c0:50:78	-	-	-	Rogue Detection	wlsxAPEntryChanged wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:41:25 U1
5/24/2011 7:39 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:2b:34	-	-	-	AP Status	wlsxAPEntryChanged wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:40:29 U1
5/24/2011 7:39 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:2b:34	-	-	-	Rogue Detection	wlsxAPEntryChanged wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:40:29 U1
5/24/2011 7:39 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:2b:34	-	-	-	Rogue Detection	wlsxAPEntryChanged wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:40:29 U1
5/24/2011 7:39 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:2b:34	-	-	-	Rogue Detection	wlsxAPEntryChanged wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:40:29 U1
5/24/2011 7:39 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:2b:34	-	-	-	AP Status	wlsxNAccessPointIsDown wlsxTrapAPM wlsxTrapTime: 5/24/2011 22:40:25 U1
5/24/2011 7:38 PM	SNMP Trap	<Unknown>	00:1a:1e:c0:55:46	-	-	-	AP Status	wlsxNAccessPointIsUp wlsxTrapAPMacA wlsxTrapTime: 5/24/2011 22:39:49 U1

1-10 ▼ of 41967 Device Events Page 1 ▼ of 4197 > > | Reset filters

Table 104 describes the columns and the information provided in each:

Table 104 System > Syslog & Traps Columns and Descriptions

Column	Description
Time	The timestamp of the device event.
Type	Either Syslog or SNMP Trap.
Source Device	The name of the device that sent the message. Will be a link if you have visibility to the device. Can be empty if OV3600 could not correlate the source IP.
AP	Contains a link to the APs/Devices > Monitor page for a device other than the source device that was correlated from some data contained in the message (by LAN MAC, BSSID, or IP Address). Can be blank, and will only be a link if you have visibility to the device.
User	Displays a user's MAC address if one was found in the message. Can be blank, and will be a link if you have visibility to the user's AP.
Severity	The severity level of the event: Emergency, Alert, Critical, Bug, Error, Warning, Notice, or Info
Facility	Part of the syslog spec - sort of the logical source of the message. From controllers, will always be one of local0-local7 (you can configure on the controller when sending syslog messages to a particular receiver which facility you want to use in the messages).
Category	If SNMP Trap: Hardware, IDS, Client Security, AP Security, AP Status, Software, or Rogue Detection. For Syslog messages the category is based on the process name on the switch that sent the syslog message. The categorization for traps and syslog messages only works for events from an Alcatel-Lucent switch.
Message	The raw trap message including the AP MAC Address, time sent, and other information. For syslogs, OV3600 does not display the numbers at the beginning of the message that indicate the severity and facility. For traps, OV3600 will attempt to translate them to human-readable format when possible. OV3600 will not receive processed SNMP traps into the Device Event framework if the OV3600 doesn't have MIB file to translate the trap. Use the Search field at the top of the column to filter the messages by a substring.

Syslog messages also appear in the **APs/Devices > Monitor** page for controllers and in **Users > User Detail** pages under the **Association History** section.

Using the System > Event Log Page

The **System > Event Log** page is a very useful debugging tool containing a list of recent OV3600 events including APs coming up and down, services restarting, and most OV3600-related errors as well as the user that initiated the action. [Figure 130](#) illustrates this page, and [Table 105](#) describes the page components.

Figure 130 System > Event Log Page Illustration

Time	User	Type	Event	Device ID	Folder
Tue Jan 18 19:33:34 2011	System	Device	Symbol 7131 AP-7131N-1 Error in SNMP polling: Counter length too long (5 bytes)	59914	Top > symbol > fat aps
Tue Jan 18 19:31:00 2011	System	Device	HP ProCurve 2626-PWR other-hp-poe-switch.dev Un-setting upstream device	51805	Top > Routers and switches
Tue Jan 18 19:30:40 2011	System	Device	Dell PowerConnect W-3400 Aruba-3400 Configuration verification: configuration on device does not match desired configuration	60081	Top > aruba > guest user
Tue Jan 18 19:28:48 2011	System	Device	Aruba 651 intel-a651-medium Configuration verification: configuration on device does not match desired configuration	60301	Top > aruba
Tue Jan 18 19:28:45 2011	System	Device	Aruba 3200 Aruba3200-3.121 Configuration verification: configuration on device does not match desired configuration	60123	Top > aruba > arm
Tue Jan 18 19:28:37 2011	System	Device	Symbol 7131 AP-7131N-1 Error in SNMP polling: Counter length too long (5 bytes)	59914	Top > symbol > fat aps
Tue Jan 18 19:28:14 2011	System	Device	Aruba 651 Aruba651 Telnet/SSH Error: pattern match timed-out	60215	Top > aruba

Table 105 Event Log Fields

Column	Description
Time	Date and time of the event.
User	The OV3600 user that triggered the event. When OV3600 itself is responsible, System is displayed.
Type	Displays the Type of event recorded, which is one of four types, as follows: <ul style="list-style-type: none"> ● Device—An event localized to one specific device. ● Group—A group-wide event. ● System—A system-wide event. ● Alert—If a trigger is configured to report to the log, an Alert type event will be logged here.
Event	The event OV3600 observed; useful for debugging, user tracking, and change tracking.

Viewing, Delivering and Responding to Triggers and Alerts

This section describes triggers and alerts and contain the following topics:

- [Viewing Triggers](#)
- [Creating New Triggers](#)
- [Delivering Triggered Alerts](#)
- [Viewing Alerts](#)
- [Responding to Alerts](#)

OV3600 monitors key aspects of wireless LAN performance. When certain parameters or conditions arise that are outside normal bounds, OV3600 generates (or triggers) alerts that enable you to address problems, frequently before users have a chance to report them.

Viewing Triggers

To view defined system triggers, navigate to the **System > Triggers** page. [Figure 131](#) illustrates this page.

Figure 131 System > Triggers Page Illustration (partial view)

Triggers:

New Trigger

	Type	Trigger	Additional Notification Options	NMS Trap Destinations
<input type="checkbox"/>	Device Resources	Percent CPU Utilization >= 85 % for 15	Email	-
<input type="checkbox"/>	Device Up	Device Type is Access Point	-	-
<input type="checkbox"/>	Inactive Tag	for >= 2 hrs 0 mins	-	-
<input type="checkbox"/>	Device IDS Events	Count > 100 for 30 minutes	-	-
<input type="checkbox"/>	New User	New User Association	NMS	10.51.1.7
<input type="checkbox"/>	Device Down	All device types	NMS	-
<input type="checkbox"/>	Device RADIUS Authentication Issues	Count >= 20 for 15 secs	NMS	10.51.1.7
<input type="checkbox"/>	802.11 Frame Counters	WEP Undecryptable Rate >= 100 frames/sec for 1 hour	-	-
<input type="checkbox"/>	Rogue Device Classified	Classification = Rogue	NMS	10.51.1.7
<input type="checkbox"/>	Radio Down	-	NMS	10.51.1.7

Creating New Triggers

Perform the following steps to create and configure one or more new triggers. These steps define settings that are required for any type of trigger.

1. To create a new trigger, select the **Add New Trigger** button from the **System > Triggers** page. The page that appears is illustrated in [Figure 132](#).

Figure 132 Add New Trigger Page Illustration


2. Configure the **Trigger Restrictions** and **Alert Notifications**. This configuration is consistent regardless of the trigger type to be defined.
 - a. The **Trigger Restrictions** settings establishes how widely or how narrowly the trigger applies. Define the folder, subfolder, and Group covered by this trigger. [Table 106](#) describes the options for trigger restrictions.

Table 106 System > Trigger Details Fields and Default Values

Notification Option	Description
Folder	Sets the trigger to apply only to APs/Devices in the specified folder or subfolders depending on the Include Subfolders option. NOTE: If the trigger is restricted by folder and group, it only applies to the intersection of the two—it only applies to APs in the group and in the folder.
Include Subfolders	Sets the trigger to apply to all devices in the specified folder and all of the devices in folders under the specified folder.
Group	Sets the trigger to apply only to APs/Devices in the specified group. NOTE: If the trigger is restricted by folder and group, it only applies to the intersection of the two—it only applies to APs in the group and in the folder.

- b. In addition to appearing on the **System > Alerts** page, the **Alert Notifications** settings can be configured to distribute to email or to a network management system (NMS), or to both.
 - If you select **Email**, you are prompted to set the sender and recipient email addresses.
 - If you select **NMS**, you are prompted to choose one or more of the pre-defined trap destinations, which are configured on the **OV3600 Setup > NMS** page.
 - Define the **Logged Alert Visibility**, in which you can choose how this trigger is distributed. The trigger can distribute according to how is it generated (**triggering agent**), or by the **role** with which it is associated.
 - The **Suppress Until Acknowledged** setting defines whether the trigger requires manual and administrative acknowledgement to gain visibility. If **No**, a new alert will be created every time the trigger criteria are met. If **Yes**, an alert will only be received the first time the criteria is met. A new alert for the device is not created until the initial one is acknowledged.
3. In the **Trigger** section, choose the desired trigger **Type** and **Severity**. [Figure 133](#) illustrates some of the supported trigger types. Severity levels are indicated in the email alerts. The alert summary information at the top of the OV3600 screen can be configured to separately display severe alerts. Please see the **Home > User Info** section for more details.

Figure 133 *System > Triggers > Add Trigger Type Drop-down Menu*

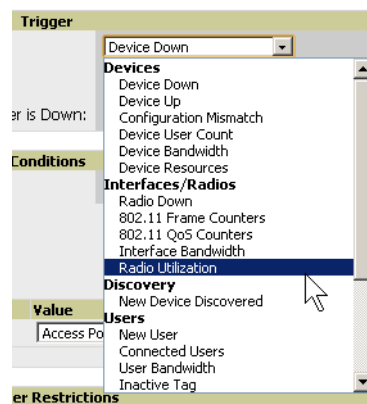

Once you have selected a trigger type, the **Add Trigger** page changes. In many cases, you must configure at least one **Condition** setting. Conditions, settings, and default values vary according to trigger type. Triggers with conditions can be configured to fire if any criteria match as well as if all criteria match.

- Some trigger types share common settings, such as **Duration** (which can be expressed in hours, minutes, seconds, or a combination of these) and **Severity** (from Normal to Critical).
- After you select **Save**, the trigger appears on your next viewing of the **System > Triggers** page with all other active triggers.
- You can edit or delete any trigger as desired from the **System > Triggers** page.
 - To edit an existing trigger, select the **pencil** icon next to the respective trigger and edit settings in the **Trigger Detail** page described in [Table 107](#).
 - To delete a trigger, check the box next to the trigger to remove, and select **Delete**.

Repeat this procedure for as many triggers and conditions as desired.

Complete the creation of your trigger type using one of the following procedures for each trigger:

- [“Setting Triggers for Devices” on page 200](#)
- [“Setting Triggers for Interfaces and Radios” on page 201](#)
- [“Setting Triggers for Discovery” on page 201](#)
- [“Setting Triggers for Users” on page 202](#)
- [“Setting Triggers for RADIUS Authentication Issues” on page 202](#)

- “Setting Triggers for IDS Events” on page 203
- “Setting Triggers for OV3600 Health” on page 203

Setting Triggers for Devices

Perform the following steps to configure device-related triggers.

- Choose a device type from the **Devices** listed in the **Type** drop-down menu. See [Figure 133. Table 107](#) itemizes and describes device trigger options and condition settings.

Table 107 *Device Trigger Types*

Option	Description
Device Down	This is the default type whenever configuring a new trigger. This type of trigger activates when an authorized, monitored AP has failed to respond to SNMP queries from OV3600. To set the conditions for this trigger type, select Add in the Conditions section. Complete the conditions with the Option , Condition , and Value drop-down menus. The conditions establish the device type. Multiple conditions can apply to this type of trigger. The Device Down trigger can be configured to send alerts for thin APs when the controller is down; this behavior is turned off by default.
Device Up	This trigger type activates when an authorized, previously down AP is now responding to SNMP queries. To set the conditions for this trigger type, select Add in the Conditions section.
Configuration Mismatch	This trigger type activates when the actual configuration on the AP does not match the defined Group configuration policy. To set the conditions for this trigger type, select Add in the Conditions section.
Device User Count	Activates when a device reaches a user-count threshold for more than a specified period (such as more than 10 users associated for more than 60 seconds).
AP Bandwidth	Activates when the total bandwidth through the device has exceeded a predefined threshold for more than a specified period (such as more than 1500kbps for more than 120 seconds). You can also select bandwidth direction and page/radio. Selecting this type displays the following new fields in the Type section. Define these settings. <ul style="list-style-type: none"> • Alert if Device Bandwidth >= (kbps)—This threshold establishes a device-specific bandwidth policy, not a bandwidth policy on the network as a whole. • Bandwidth Direction—Choose In, Out, or Combined. This bandwidth is monitored on the device itself, not on the network as a whole.
Device Resources	This type of trigger indicates that the CPU or memory utilization for a device (including router or switch) has exceeded a defined percentage for a specified period of time.
Device Event	This trigger is used for alerting based on SNMP traps and syslog messages, which are displayed in System > Syslogs & Traps , APs/Devices > Monitor for affected devices , and in Users > User Detail . The conditions supported are: <ul style="list-style-type: none"> • Event Contents (case insensitive substring matches on message content) • Event Type (syslog or trap) • Syslog Severity: Emergency, Alert, Critical, Bug, Error, Warning, Notice, or Info • Syslog Category • SNMP Trap Category: Hardware, IDS, Client Security, AP Security, AP Status, Software, or Rogue Detection <p>NOTE: During the process of upgrading or installing for non-Master Console/Failover uses, OV3600 creates two default trigger definitions for Device Events:</p> <ul style="list-style-type: none"> ■ SNMP Trap Category of Hardware or Software ■ Event Type is Syslog and Syslog Severity >= Critical

- Repeat this procedure for as many triggers and conditions as desired. Refer to the start of “[Creating New Triggers](#)” on page 197 to create a new trigger.

Setting Triggers for Interfaces and Radios

Perform the following steps to configure radio- and interface-related triggers.

- a. Choose a trigger type from the **Interfaces/Radios** category, listed in the **Type** drop-down menu. [Table 108](#) itemizes and describes the radio trigger types and condition settings.

Table 108 *Radio-Related Trigger Types*

Radio Trigger Options	Description
Radio Down	Indicates that a device's radio is down on the network. Once you choose this trigger type, select Add New Trigger Condition to create at least one condition. This type requires that a radio capability be set as a condition. The Value drop-down menu supports several condition options.
802.11 Frame Counters	Enables monitoring of traffic levels. There are multiple rate-related parameters for which you define conditions including ACK Failures, Retry Rate, and Rx Fragment Rate. See the Option drop-down menu in the Conditions section of the trigger page for a complete list of parameters. Select Add New Trigger Condition to access these settings. Define at least one condition for this trigger type.
802.11 QoS Counters	Enables monitoring of Quality of Service (QoS) parameters on the network, according to traffic type. The rate of different parameters includes ACK Failures, Duplicated Frames and Transmitted Fragments. See the drop-down field menu in the conditions section of the trigger page for a complete list of parameters. Select Add New Trigger Condition to access these settings. Define at least one condition for this trigger type.
Interface Bandwidth	Interface labels defined on the trigger page will be used to set up triggers on one or more interfaces and/or radios. Available conditions are Device Type , Interface Description , Interface Label , Interface Mode , Interface Speed In (Mbps) , Interface Speed Out (Mbps) , Interface Type , and Radio Type .
Channel Utilization	Indicates that channel utilization has crossed particular thresholds. Available conditions are Interference (%) , Radio Type , Time Busy (%) , Time Receiving (%) , and Time Transmitting (%) .

Setting Triggers for Discovery

Perform the following steps to configure triggers related to device discovery.

- a. Choose a trigger type from the **Discovery** category, listed in the **Type** drop-down menu. See [Figure 133](#). [Table 109](#) itemizes and describes the Discovery-related trigger types, and condition settings for each discovery trigger type.

Table 109 *Discovery Trigger Types and Condition Settings*

Discovery Trigger Options	Description
New Devices Discovered	This trigger type flags the discovery of a new AP, router or switch connected to the network (an device that OV3600 can monitor and configure). Once you choose this trigger type, select Add New Trigger Condition to specify a Device Type (Access Point, Controller, Remote AP, or Router/Switch)

- b. Repeat this procedure for as many triggers and conditions as desired. Refer to the start of [“Creating New Triggers”](#) on page 197 to create a new trigger.

Setting Triggers for Users

Perform the following steps to configure user-related triggers.

- a. Choose a trigger type from the **Users** category, listed in the **Type** drop-down menu. See [Figure 133](#). [Table 110](#) itemizes and describes the User-related trigger types, and condition settings for each discovery trigger type.

Table 110 *User Trigger Types and Condition Settings*

User Trigger Option	Description
New User	This trigger type indicates when a new user has associated to a device within a defined set of groups or folders. Note that the New User trigger type does not require the configuration of any condition settings, so the Condition section disappears.
Connected Users	This trigger type indicates when a device (based on an input list of MAC addresses) has associated to the wireless network. It is required to define one or more MAC addresses with the field that appears.
User Bandwidth	This trigger type indicates that the sustained rate of bandwidth used by an individual user has exceeded a predefined threshold for more than a specified period, in seconds (such as more than 1500kbps for more than 120 seconds). Once you choose this trigger type, select Add New Trigger Condition to specify the bandwidth characteristics that triggers an alert. You can apply multiple conditions to this type of trigger. The Value field requires that you input a numerical figure for kilobits per second (kbps).
Inactive Tag	This tags flags events in which an RFID tag has not been reported back to OV3600 by a controller for more than a certain number of hours. This trigger can be used to help identify inventory that might be lost or stolen. Set the time duration for this trigger type if not already completed.

- b. Repeat this procedure for as many triggers and conditions as desired. Refer to the start of “[Creating New Triggers](#)” on page 197 to create a new trigger.

Setting Triggers for RADIUS Authentication Issues

Perform the following steps to configure RADIUS-related triggers.

- a. Choose a trigger type from the **RADIUS...** list in the drop-down **Type** menu. [Table 111](#) itemizes and describes the condition settings for each **RADIUS Authentication** trigger type.

Table 111 *RADIUS Authentication Trigger Types and Condition Settings*

Option	Description
User RADIUS Authentication Issues	This trigger type sets the threshold for the maximum number of failures before an alert is issued for a user. Select Add New Trigger Condition to specify the count characteristics that trigger an alert. The Option , Condition , and Value fields allow you to define the numeric value of user issues.
Device RADIUS Authentication Issues	This trigger type sets the threshold for the maximum number of failures before an alert is issued for a device. The Option , Condition , and Value fields allow you to define the numeric value of user issues.
Total RADIUS Authentication Issues	This trigger sets the threshold for the maximum number of failures before an alert is issued for both users and devices.

- b. Repeat this procedure for as many triggers and conditions as desired. Refer to the start of “[Creating New Triggers](#)” on page 197 to create a new trigger.

Setting Triggers for IDS Events

Perform the following steps to configure Intrusion Detection System (IDS)-related triggers.

- a. Choose the **Device IDS Events** trigger type from the drop-down **Type** menu. See [Figure 133](#). [Table 112](#) describes condition settings for this trigger type.

Table 112 *Device IDS Events Authentication Trigger Types and Condition Settings*

IDS Trigger Options	Description
Device IDS Events	This trigger type is based on the number of IDS events has exceeded the threshold specified as Count in the Condition within the period of time specified in seconds in Duration. Alerts can also be generated for traps based on name, category or severity. Select Add New Trigger Condition to specify the count characteristics that trigger an IDS alert.
Rogue Device Classified	This trigger type indicates that a device has been discovered with the specified Rogue Score. Ad-hoc devices can be excluded automatically from this trigger by selecting Yes . See “ Using RAPIDS and Rogue Classification ” on page 175 for more information on score definitions and discovery methods. Once you choose this trigger type, select Add New Trigger Condition to create one or more conditions. A condition for this trigger enables you to specify the nature of the rogue device in multiple ways.

- b. Repeat this procedure for as many triggers and conditions as desired. Refer to the start of “[Creating New Triggers](#)” on page 197 to create a new trigger.

Setting Triggers for OV3600 Health

After completing steps 1-3 in “[Creating New Triggers](#)” on page 197, perform the following steps to configure IDS-related triggers.

- a. Choose the **Disk Usage** trigger type from the drop-down **Type** menu. See [Figure 133](#) for trigger types. [Table 113](#) describes the condition settings for this trigger type.

Table 113 *Disk Usage Trigger and Condition Settings*

OV3600 Health Trigger	Description
Disk Usage	This trigger type is based on the disk usage of OV3600. This type of trigger indicates that disk usage for the OV3600 server has met or surpassed a defined threshold. Select Add New Trigger Condition to specify the disk usage characteristics that trigger an alert. Alcatel-Lucent recommends setting one of these triggers at 90% , so you receive a warning before OV3600 suffers performance degradation due to lack of disk space.

- b. Repeat this procedure for as many triggers and conditions as desired. Refer to the start of “[Creating New Triggers](#)” on page 197 to create a new trigger.

Delivering Triggered Alerts

OV3600 uses Postfix to deliver alerts and reports via email because it provides a high level of security and queues email locally until delivery. If OV3600 is located behind a firewall, preventing it from sending email directly to a specified recipient, use the following procedures to forward email to a smarthost.

1. Add the following line to `/etc/postfix/main.cf`:

- ```
relayhost = [mail.example.com]
where mail.example.com is the IP address or hostname of your smarthost
```
2. Run `service postfix restart`.
  3. Send a test message to an email address:

```
Mail -v user@example.com
Subject: test mail
.
CC:
```
  4. Press **Enter**.
  5. Check the mail log to ensure mail was sent:

```
tail -f /var/log/maillog
```

## Viewing Alerts

Apart from visiting **System > Alerts**, OV3600 displays alerts and provides alert details in two additional ways:

1. The **Alert Summary** table is available on the following OV3600 pages, and is illustrated in [Figure 134](#):
  - **APs/Devices > List**
  - **Groups > Monitor**
  - **Home > Overview**
  - **Users > Connected or User Detail**

**Figure 134** *Alert Summary Table Illustration*

| Type ▲                       | Last 2 Hours | Last Day | Total | Last Event         |
|------------------------------|--------------|----------|-------|--------------------|
| AMP Alerts                   | 0            | 0        | 0     | -                  |
| IDS Events                   | 2            | 3        | 116   | 1/10/2011 12:09 PM |
| Incidents                    | 0            | 0        | 0     | -                  |
| RADIUS Authentication Issues | 0            | 0        | 11    | 1/7/2011 1:10 PM   |

This table displays alerts as follows; select the alert **Type** to display alert details:

- **OV3600 Alerts**—Displays details for all device alerts.
- **IDS Events**—Displays details of all Intrusion Detection System (IDS) events and attacks under the RAPIDS tab. You must be enabled as a RAPIDS user to see this page.
- **Incidents**—Displays recent helpdesk incidents in which the incidents are open and associated to an AP. For a complete listing of incidents, navigate to the **Helpdesk > Incidents** page.



The **Incidents** portion of this **Alert Summary** table only increments the counter for incidents that are open and associated to a Device, Group, or Folder. Unassociated incidents are not counted in this **Alert Summary**. To view all incidents, including those not associated to an AP, navigate to the **Helpdesk > Incidents** page.

- **RADIUS Authentication Issues**—Displays RADIUS-related alerts for devices in the top viewable folder available to the OV3600 user. The detailed list displays the MAC address, username, AP, radio, controller, RADIUS server, and time of each event. Alerts can be sorted by any column.
2. The **Alerts** and **Severe Alerts** top header stats in the **Status** bar at the top of all OV3600 pages, illustrated in [Figure 135](#). The Severe Alert Threshold can be configured on the **Home > User Info** page. Refer to “[Setting Severe Alert Warning Behavior](#)” on page 36.

**Figure 135** *Alerts in the OV3600 Status Bar (highlighted)*

|                  |         |           |                 |             |           |              |                   |
|------------------|---------|-----------|-----------------|-------------|-----------|--------------|-------------------|
| New Devices: 210 | Up: 278 | Down: 139 | Mismatched: 117 | Rogue: 1945 | Users: 61 | Alerts: 2710 | Severe Alerts: 87 |
|------------------|---------|-----------|-----------------|-------------|-----------|--------------|-------------------|

Select the **Alerts** or the **Severe Alerts** counter or navigate to the **System > Alerts** page. [Figure 136](#) illustrates this page.

**Figure 136 System > Alerts Page Illustration**

|                          | Trigger Type          | Trigger Summary             | Triggering Agent    | Time               | Severity |
|--------------------------|-----------------------|-----------------------------|---------------------|--------------------|----------|
| <input type="checkbox"/> | User Bandwidth        | > = 100 kbps for 30 seconds | 00:18:DE:09:B9:09   | 2/12/2007 12:54 PM | Warning  |
| <input type="checkbox"/> | Device Up             |                             | hp-530-1            | 2/12/2007 12:32 PM | Normal   |
| <input type="checkbox"/> | Device Down           |                             | hp-530-1            | 2/12/2007 12:27 PM | Critical |
| <input type="checkbox"/> | New Rogue AP Detected | > = 5 for rogue score       | Unknown Lo-72:8F:26 | 2/12/2007 11:51 AM | Minor    |
| <input type="checkbox"/> | Device Up             |                             | roamabout-4102-3    | 2/12/2007 10:24 AM | Normal   |
| <input type="checkbox"/> | Device Down           |                             | roamabout-4102-3    | 2/12/2007 10:19 AM | Critical |

For each new alert, the **System > Alerts** page displays the items listed in [Table 114](#).

**Table 114 System > Alerts Fields and Default Settings**

| Field                   | Description                                                                                                               |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Trigger Type</b>     | Displays and sorts triggers by the type of trigger.                                                                       |
| <b>Trigger Summary</b>  | Provides an additional summary information related to the trigger.                                                        |
| <b>Triggering Agent</b> | Lists the name of the AP that generated the trigger. Select the name to display its <b>APs/ Devices &gt; Manage</b> page. |
| <b>Time</b>             | Displays the date and time the trigger was generated.                                                                     |
| <b>Severity</b>         | Displays the severity code associated with that trigger.                                                                  |

## Responding to Alerts

Once you have viewed an alert, you may take one of the following courses of action:

- Leave it in active status if it is unresolved. The alert remains on the **New Alerts** list until you acknowledge or delete it. If an alert already exists, the trigger for that AP or user does not create another alert until the existing alert has been acknowledged or deleted.
- Move the alert to the Alert Log by selecting it and selecting **Acknowledge**.
- You may see all logged alerts by selecting the **View logged alerts** link at the top of the **System > Alerts** page. Select the **New Alerts** link to return to the list of new alerts.
- Delete the alert by selecting it from the list and selecting **Delete**.

## Monitoring and Supporting WLAN Users

The OV3600 **Users** pages support WLAN users in OV3600. This section describes the **Users** pages as follows:

- [Overview of the Users Pages](#)
- [Monitoring WLAN Users with the Users > Connected and Users > All Pages](#)
- [Supporting Guest WLAN Users With the Users > Guest Users Page](#)
- [Supporting RFID Tags With the Users > Tags Page](#)
- See also [Evaluating and Diagnosing User Status and Issues](#).

For information about creating OV3600 users and OV3600 user roles, refer to:

- [Creating OV3600 Users](#)
- [Creating OV3600 User Roles](#)

If you need to create an OV3600 user account for frontline personnel who are to support Guest WLAN users, refer to “[Supporting Guest WLAN Users With the Users > Guest Users Page](#)” on page 209.

## Overview of the Users Pages

The **Users** pages display multiple types of user data for existing WLAN users. The data comes from a number of locations, including data tables on the access points, information from RADIUS accounting servers, and OV3600-generated data. OV3600 supports the following **Users** pages:

- **Users > Connected**—Displays active users that are currently connected to the WLAN. Refer to “[Monitoring WLAN Users with the Users > Connected and Users > All Pages](#)” on page 206.
- **Users > All**—Displays all users of which OV3600 is aware, with related information. Non-active users are listed in gray text. For a description of the information supported on this page, refer to “[Monitoring WLAN Users with the Users > Connected and Users > All Pages](#)” on page 206.
- **Users > Guest Users**—Displays all guest users in OV3600 and allows you to create, edit, or delete guest users. See “[Supporting Guest WLAN Users With the Users > Guest Users Page](#)” on page 209.
- **Users > User Detail**—Displays client device information, alerts, signal quality, bandwidth, and association history. This page appears when you select a user’s MAC address link from these list tables:
  - **Users > Connected**
  - **Users > All**
  - **Home > Search** page results or **Search** field results that display the user MAC addressSee “[Evaluating User Status with the Users > User Detail Page](#)” on page 213.
- **Users > Diagnostics**—Displays possible client device issues, diagnostic summary data, user counts, AP information, 802.11 counters summary, and additional information. This page appears when you select a user’s MAC address from one of the following pages:
  - **Users > Connected**
  - **Users > All**
  - **Home > Search** page results or **Search** field results that display the user MAC addressSee “[Evaluating and Diagnosing User Status and Issues](#)” on page 212.
- **Users > Tags**—Displays a list of wireless tags, such as Aeroscout, PanGo and Newbury, that are heard by thin APs, and reported back to a controller that is monitored by OV3600. “[Supporting RFID Tags With the Users > Tags Page](#)” on page 211.

## Monitoring WLAN Users with the Users > Connected and Users > All Pages

The **Users > Connected** page displays all users currently connected in OV3600, and is illustrated in [Figure 137](#) and described in [Table 115](#). This page contains the following information at a glance:

- The Folder field shows the current folder of Connected Users you are viewing. You can view users under a particular folder from the Go to folder dropdown menu.
- Links under the Folder fields showing the **Total Devices**, **Mismatched**, **Users**, and **Bandwidth** (a static, unlinked statistic) summarize the device information for this folder. Select these links to be taken to detail pages for each: **Total Devices** redirects to the **APs/Devices > List** for that folder, **Mismatched** redirects to the list in **APs/Devices > Mismatched** for that folder, and selecting **Users** refreshes the page but expands to include users in the subfolders.
- Interactive graphs display average and max **Users** over time, and **Bandwidth** in and out for the selected folder over time.
- Below the Users and Bandwidth graphs is the list of connected Users


The information on this page can be adjusted in the following ways:

- Drag the slider to pick the time range on the interactive graphs, and select **Show All** to select other options to display.

- The **Alert Summary** section displays custom configured alerts that were defined in the **System > Alerts** page.
- Use the **Filter** icon (🔍) next to certain columns (**AP/Device**, **Role**, **VLAN**, **Connection Mode**, and others) to filter the results by one of the values under that column. You can filter the list by substring match under the **Username** column.

The **Users > Connected** page includes SSID information for users, and can display wired users using remote Access Point (RAP) devices in tunnel and split-tunnel mode.

**Figure 137 Users > Connected Page Illustration (Partial View)**

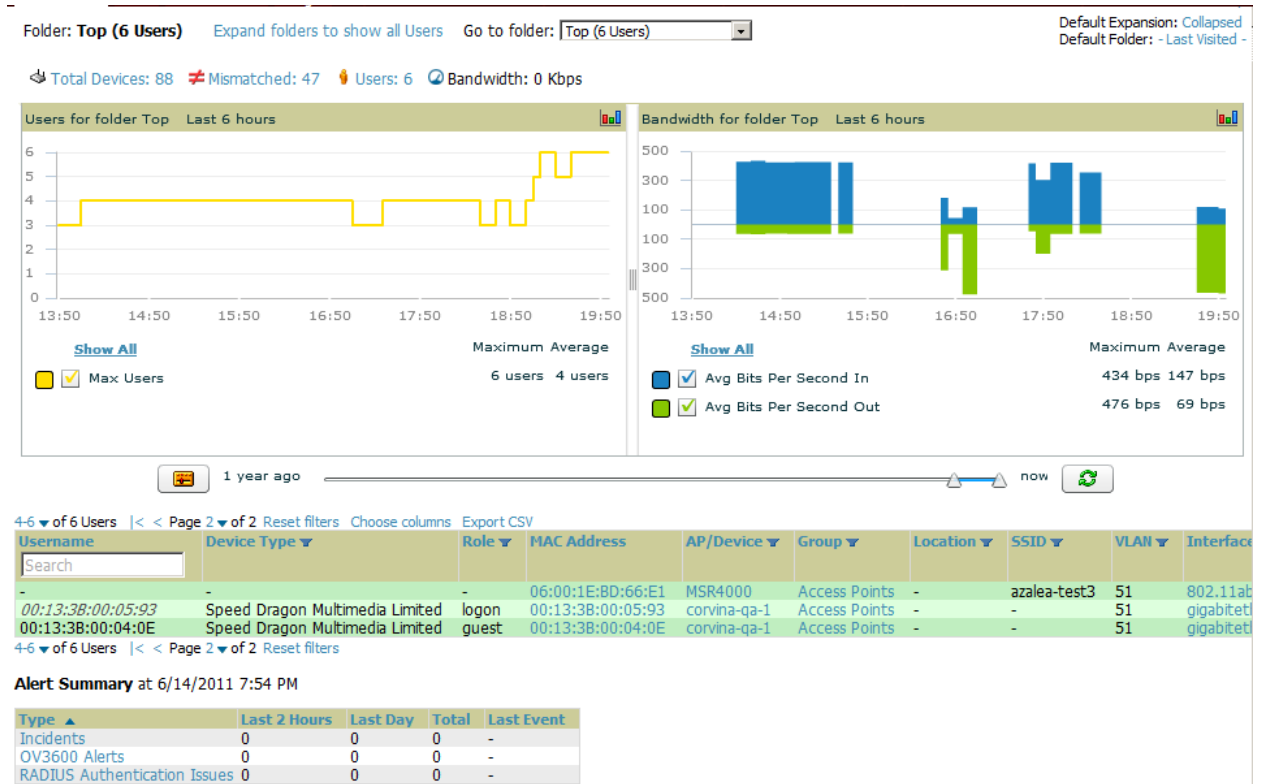

**Table 115 Users > Connected Table Columns and Links (A lphabetical)**

| Field                   | Description                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AP Radio</b>         | The radio type of the radio that the user is associated with.                                                                                                                              |
| <b>AOS Device Type</b>  | The type of device determined by the Alcatel-Lucent controller -- a fallback in case the rules set in <b>OV3600 Setup &gt; Device Type Setup</b> were unable to determine the device type. |
| <b>AP/Device</b>        | Displays the name of the AP to which the MAC address is associated as a link to this <b>AP's APs/ Devices &gt; Monitor</b> page.                                                           |
| <b>Association Time</b> | The first time OV3600 recorded the user for this association.                                                                                                                              |
| <b>Auth. Time</b>       | The how long ago the user authenticated.<br>NOTE: This value displays as a negative number for unauthenticated users.                                                                      |

**Table 115 Users > Connected Table Columns and Links (Continued)(A lphabetical)**

| Field                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Auth. Type</b>      | The type of authentication employed by the user: <ul style="list-style-type: none"> <li>• WPA2 (EOAW-APPEAP) is the standard setting.</li> <li>• EAP is reported by Alcatel-Lucent devices and Cisco VxWorks via SNMP traps.</li> <li>• RADIUS accounting servers integrated with OV3600 will provide the RADIUS Accounting Auth type.</li> <li>• Web (PAP) - Captive Portal.</li> <li>• All others are considered to be not authenticated.</li> </ul> |
| <b>BW</b>              | The average bandwidth consumed by the MAC address.                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Ch BW</b>           | The channel bandwidth that currently supports 802.11n users.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Cipher</b>          | Displays WEP with keys. This data is also displayed in the <b>User Session</b> report in the <b>Session Data By User</b> section.                                                                                                                                                                                                                                                                                                                      |
| <b>Connection Mode</b> | The Radio mode used by the user to associate to the AP for 802.11n clients.                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Device Type</b>     | The type of device determined by <b>OV3600 Setup &gt; Device Type Setup</b> rules.                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Duration</b>        | The length of time the MAC address has been associated.                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>EAP Supplicant</b>  | The party being authenticated in the Extensible Authentication Protocol.                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Forward Mode</b>    | Forwarding mode for the port: Bridge, Tunnel, or Split Tunnel.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Group</b>           | The group containing the AP that the user is associated with.                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Guest User</b>      | Specifies whether the user is a guest.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Interface</b>       | The interface on the device to which the user is connected.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>LAN Hostname</b>    | The LAN hostname of the user MAC.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>LAN IP Address</b>  | The IP assigned to the user MAC. OV3600 gathers it from the association table of APs.                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Location</b>        | If a value appears here, the location of this user's client has been mapped on VisualRF. Select the location to open a new VisualRF Floor Plan Location window.                                                                                                                                                                                                                                                                                        |
| <b>MAC Address</b>     | The radio MAC address of the user associated to APs as a link to the <b>Users &gt; Detail</b> page for this user.                                                                                                                                                                                                                                                                                                                                      |
| <b>Manufacturer</b>    | The manufacturer of the user's device.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Model</b>           | The model of the user's device.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Name</b>            | The product of the user's device.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Network Chipset</b> | The chipset indicates the functions the device was designed to perform.                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Network Driver</b>  | Driver name or other information.                                                                                                                                                                                                                                                                                                                                                                                                                      |



**Table 115 Users > Connected Table Columns and Links (Continued)(A lphabetical)**

| Field                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Notes</b>               | Free notes about the user.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>OS</b>                  | The device's operating system type.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>OS Detail</b>           | Additional information on the operating system such as version numbers.                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Phone Number</b>        | Contact number for the user.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Role</b>                | Specifies the role that an Alcatel-Lucent controller assigned to the connected user, such as "employee".                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Serial Number</b>       | Serial number of the device.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Service End</b>         | Ending timestamp of the device usage.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Service Start</b>       | Beginning timestamp of the device usage.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Sig. Qual.</b>          | The average signal quality the user experienced.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>SSID</b>                | The SSID with which the user is associated.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Tunneled Controller</b> | If a user is connected to an Alcatel-Lucent Mobility Switch, indicates which controller the user is authenticated to.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Username</b>            | Displays the name of the user associated to the AP. OV3600 gathers this data from device traps, SNMP polling, or RADIUS accounting. Usernames appear in italics when a username for that MAC address has been stored in the database from a previous association, but OV3600 is not getting a username for the current association. This may indicate that the user has not yet been authenticated for this session or OV3600 may not be getting a username from an external source. |
| <b>VLAN</b>                | Displays the VLAN assigned to the user, if available.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>VPN Hostname</b>        | Displays the VPN hostname of the user MAC.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>VPN IP Address</b>      | Displays the VPN IP of the user MAC. This information can be obtained from VPN servers that send RADIUS accounting packets to OV3600.                                                                                                                                                                                                                                                                                                                                                |

## Supporting Guest WLAN Users With the Users > Guest Users Page

OV3600 supports guest user provisioning for Dell PowerConnect W, Alcatel-Lucent, Inc., Alcatel-Lucent and Cisco WLC devices. This allows frontline staff such as receptionists or help desk technicians to grant wireless access to WLAN visitors or other temporary personnel.

Perform the following steps in the pages described to configure these settings.

1. Navigate to the **OV3600 Setup > Roles** page and select the **Read-Only Monitoring & Auditing** role type. Under **Guest User Preferences**, enable **Allow creation of Guest Users**.
2. Next, navigate to the **OV3600 Setup > Users** page and create a new user with the role that was just created. [Figure 138](#) illustrates this page.

**Figure 138** OV3600 Setup > Users Page Illustration

3. The newly created login information should be provided to the person or people who will be responsible for creating guest access users.
4. The next step in creating a guest access user is to navigate to the **Users > Guest Users** tab. From this tab, you can add new guest users, you can edit existing users, and you can repair guest user errors.

This page displays a list of guest users and data, to include the expiration date, the SSID (for Cisco WLC) and other information. [Figure 139](#) illustrates this page and [Table 116](#) describes the information.

**Figure 139** Users > Guest Users Page Illustration

**Guest Users:**

New Guest User

1-4 ▼ of 4 Guest Users Page 1 ▼ of 1

|                          | Username | Enabled | Email             | Company Name  | Sponsor Name | Expiration         | Profile ▼ | Status                      |
|--------------------------|----------|---------|-------------------|---------------|--------------|--------------------|-----------|-----------------------------|
| <input type="checkbox"/> | rzajnnqw | Yes     | vfranc@airess.com | Airess        | vfranc       | Never              | -         | Error - Failed to Configure |
| <input type="checkbox"/> | zserkxmm | Yes     | -                 | -             | bob          | Never              | -         | Error - Failed to Configure |
| <input type="checkbox"/> | bobo     | No      | bobo@nowhere.com  | arus networks | arus         | 5/27/2009 12:00 AM | -         | User Expired                |
| <input type="checkbox"/> | jestwrqg | Yes     | -                 | -             | Oriol        | 6/5/2009 12:00 PM  | -         | User Expired                |

Select All - Unselect All

**Table 116** Users > Guest Users Fields

| Field                           | Description                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Repair Guest User Errors</b> | Sets OV3600 to attempt to push the guest user again in an attempt to repair any errors in the <b>Status</b> column. |
| <b>Add New Guest User</b>       | Adds a new guest user to a controller via OV3600.                                                                   |
| <b>Username</b>                 | Randomly generates a user name for privacy protection. This name appears on the <b>Guest User</b> detail page.      |
| <b>Enabled</b>                  | Enables or disables the user status. Set the status of the guest user as active (enabled) or expired (disabled).    |
| <b>Email</b>                    | Displays the optional email address of the user.                                                                    |
| <b>Company Name</b>             | Displays the optional company name for the user.                                                                    |

**Table 116 Users > Guest Users Fields (Continued)**

| Field               | Description                                                                                                                                                                          |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Sponsor Name</b> | Displays the name of the sponsor for the guest user. This setting is optional.                                                                                                       |
| <b>Expiration</b>   | Displays the date the guest user's access is to expire.                                                                                                                              |
| <b>WLAN Profile</b> | Sets the SSID that the guest user can access. This setting applies to Cisco WLC only.                                                                                                |
| <b>Status</b>       | Reports current status by the controller. If error messages appear in this column, select the user with the checkbox at left, and select the <b>Repair guest user errors</b> button. |

Guest users associated to the wireless network appear on the same list as other wireless users, but are identified as guest users in the **Guest User** column. The **User Detail** page for a guest user also contains a box with the same guest information that appears for each user on the **Users > Guest Users** list.



The **Enabled**, **Sponsor Name**, **WLAN Profile**, and **Status** columns can be filtered using the funnel icon (🔍).

- To add a new guest user, select **Add**, and complete the fields illustrated in [Figure 140](#). [Table 116](#) above describes most fields. The first three fields are required, and the remaining fields are optional.

**Figure 140 Users > Guest Users > Add New Guest User Page Illustration**

To make the **Username** or **Password** anonymous and to increase security, complete these fields then select **Generate**. The anonymous and secure **Username** and **Password** appear in the respective fields.

- Select **Add** to complete the new guest user, or select **Cancel** to back out of new user creation. The **Users > Guest Users** page appears and displays results, as applicable.

## Supporting RFID Tags With the Users > Tags Page

Radio Frequency Identification (RFID) supports identifying and tracking wireless devices with radio waves. RFID uses radio wave tags for these and additional functions. Active tags have a battery and transmit signals autonomously, and passive tags have no battery. RFID tags often support additional and proprietary improvements to network integration, battery life, and other functions.

The **Users > Tags** page displays a list of wireless tags, such as Aeroscout, PanGo and Newbury, that are heard by thin APs, and reported back to a controller that OV3600 monitors. OV3600 displays the information

it receives from the controller in a table on this page. [Figure 141](#) illustrates this page, and [Table 117](#) describes fields and information displayed.



The **Vendor**, **Battery Level**, and **Chirp Interval** columns can be filtered using the funnel icon ( ).

**Figure 141** *Users > Tags Page Illustration*

Tags

1-5 of 5 Tags Page 1 of 1

| Name         | MAC Address       | Vendor               | Battery Level | Chirp Interval | Last Seen         | Closest AP     |
|--------------|-------------------|----------------------|---------------|----------------|-------------------|----------------|
| CD-Burner    | 00:14:7E:00:14:7E | PanGo Networks, Inc. | Normal        | 2 mins         | 1/23/2009 1:19 PM | HQ-Engineering |
| -            | 00:14:7E:00:14:7E | InnerWireless        | Normal        | 4 mins         | 1/23/2009 6:44 AM | -              |
| Water-Cooler | 00:14:7E:00:14:7E | Aeroscout Ltd.       | -             | 12 secs        | 1/22/2009 5:35 AM | -              |
| -            | 00:14:7E:00:14:7E | InnerWireless        | Normal        | 1 min          | 1/20/2009 4:13 PM | -              |

**Table 117** *Users > Tags Fields*

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>           | Displays the user-editable name associated with the tag.                                                                                                                                                                                                                                                                                                                |
| <b>MAC Address</b>    | Displays the MAC address of the AP that reported the tag.                                                                                                                                                                                                                                                                                                               |
| <b>Vendor</b>         | Displays the vendor of the tag (Aeroscout, PanGo and Newbury)—display all or filter by type.                                                                                                                                                                                                                                                                            |
| <b>Battery Level</b>  | Displays battery information—filterable in drop-down menu at the top of the column; is not displayed for Aeroscout tags.                                                                                                                                                                                                                                                |
| <b>Chirp Interval</b> | Displays the tag chirp frequency or interval, filterable from the drop-down menu at the top of the column. Note that the chirp interval from the RFID tag influences the battery life of active tags as well as search times. If a tag chirps with very long chirp interval, it may take longer time for the location engine to accurately measure x and y coordinates. |
| <b>Last Seen</b>      | Date and time the tag was last reported to OV3600.                                                                                                                                                                                                                                                                                                                      |
| <b>Closest AP</b>     | The AP that last reported the tag to the controller (linked to the AP monitoring page in OV3600).                                                                                                                                                                                                                                                                       |

- To edit the name of the tag, or to add notes to the tag's record, select the **pencil** icon next to the entry in the list. You can then add or change the name and add notes like "maternity ward inventory" or "Chicago warehouse," as two examples.
- There is also a **Tag Not Heard** trigger, which can be used to generate an alert if a tag is not reported to OV3600 after a certain interval. This can help to identify lost or stolen inventory. For more information about enabling this trigger, refer to the section [“Monitoring and Supporting OV3600 with the System Pages”](#) on page 193.

## Evaluating and Diagnosing User Status and Issues

If a WLAN user reports difficulty with the wireless network, the administration or Helpdesk personnel can view and process related user information from the **User Detail** and **Diagnostic** pages. This section describes these two pages as follows:

- [Evaluating User Status with the Users > User Detail Page](#)
- [Evaluating User Status with the Users > Diagnostics Page](#)

## Evaluating User Status with the Users > User Detail Page

The **Users > User Detail** page is a focused subtab that becomes visible when you select a specific user. Access the **Users > User Detail** page by selecting the **MAC Address** link for a specific user from one of the following pages:

- **Users > Connected**
- **Users > All**
- **Home > Search** page results or **Search** field results that display the user MAC address

This page provides information for the wireless device, signal quality, and bandwidth consumption. This page also provides an AP association history and current association status. Finally, if VisualRF is enabled in **OV3600 Setup > General**, this page provides a graphical map of the user location and facility information.

Figure 142 illustrates the contents of **Users > User Details** page.

**Figure 142 Users > User Detail Page Illustration (partial view)**

Alcatel-Lucent New Devices: 15 Up: 75 Down: 28 Mismatched: 51 Rogue: 1259 Users: 6 Alerts: 0

Home Helpdesk Groups APs/Devices **Users** Reports System Device Setup OV3600 Setup RAPIDS VisualRF

Connected All Guest Users **User Detail** Diagnostics Tags

Detail for **06:00:17:7B:00:0B**

**Device Info**

Username: -

First Seen: 6/1/2011 6:50 PM on MSA1100 for 2 hrs 0 mins

Last Seen: 6/14/2011 8:01 PM on MSA1100 for 34 mins

Network Interface Vendor: Unknown Locally Administered Address

AOS Device Type: -

Alcatel-Lucent HTTP Fingerprint: -

Classification: Unclassified

Notes:

[Show additional properties](#)

**Current Association**

Username: -

Role: -

Signal Quality: -

Association: 6/14/2011 7:26 PM

Duration: 34 mins

Mode: 802.11bgn

Bandwidth: 336 bps

SSID: xwei-vlan15

Ch. BW: -

LAN IP 1: 10.65.14.14

Auth Type: Authenticated by device

Cipher: -

AP/Device: MSA1100

Controller: -

Group: Access Points

Folder: Top

AP/Device Location: Beijing

Radio: 802.11abgn (1)

VLAN: 1

Forward Mode: -

LAN Hostname 1:

Auth Time: 34 mins

SNMP Source: Poll

**Signal Quality for 06:00:17:7B:00:0B Last 2 hours**

100  
80  
60  
40  
20  
0

18:06 19:06 20:06

[Show All](#)

Signal Quality

Maximum Average 0 0

**Bandwidth for 06:00:17:7B:00:0B Last 2 days**

600  
400  
200  
0  
-200  
-400  
-600

6/12/11 6/13/11 6/14/11

[Show All](#)

Avg Bits Per Second In

Avg Bits Per Second Out

Maximum Average 592 bps 179 bps 488 bps 283 bps

1 year ago

**Alert Summary at 6/14/2011 8:01 PM**

| Type                         | Last 2 Hours | Last Day | Total | Last Event |
|------------------------------|--------------|----------|-------|------------|
| Incidents                    | 0            | 0        | 0     | -          |
| OV3600 Alerts                | 0            | 0        | 0     | -          |
| RADIUS Authentication Issues | 0            | 0        | 0     | -          |

**Association History**

1-5 of 172 Past Associations Page 1 of 35 >> | [Reset filters](#) | [Choose columns](#) | [Export CSV](#)

| Username | AOS Device Type | Role | AP/Device | SSID        | VLAN | Interface      | Connection Mode | Ch BW | Forward Mode | Tunneled Controller | SNMP Source |
|----------|-----------------|------|-----------|-------------|------|----------------|-----------------|-------|--------------|---------------------|-------------|
| -        | -               | -    | MSA1100   | xwei-vlan15 | 1    | 802.11abgn (1) | 802.11bgn       | -     | -            | -                   | Poll        |
| -        | -               | -    | MSA1100   | xwei-vlan15 | 1    | 802.11abgn (1) | 802.11bgn       | -     | -            | -                   | Poll        |
| -        | -               | -    | MSA1100   | xwei-vlan15 | 1    | 802.11abgn (1) | 802.11bgn       | -     | -            | -                   | Poll        |
| -        | -               | -    | MSA1100   | xwei-vlan15 | 1    | 802.11abgn (1) | 802.11bgn       | -     | -            | -                   | Poll        |
| -        | -               | -    | MSA1100   | xwei-vlan15 | 1    | 802.11abgn (1) | 802.11bgn       | -     | -            | -                   | Poll        |

1-5 of 172 Past Associations Page 1 of 35 >> | [Reset filters](#)

No Device Events

## Mobile Device Access Control in Users > User Detail and Users > Connected

Mobile Device Access Control (MDAC) secures, provisions and manages network access for Apple® iOS and other employee-owned mobile devices by enabling device fingerprinting, device registration, and increased device visibility.

Use the checkbox next to these fields to enable them in **Users > User Detail**:

- Device Type
- OS
- OS Detail
- Manufacturer

To see more options, select the **Show additional properties** link. The results are illustrated in [Figure 143](#):

**Figure 143** *Device Info* section in **Users > User Detail** after **Show additional properties** is selected

Detail for **DC:2B:61:5E:A1:13**

| Device Info               |                                               |
|---------------------------|-----------------------------------------------|
| Name:                     | <input type="checkbox"/> <input type="text"/> |
| Username:                 | jhao                                          |
| First Seen:               | 11/15/2010 4:09 PM on 1154-Q for 1 hr 1 min   |
| Last Seen:                | 5/25/2011 2:14 PM on 78C for 2 mins           |
| Device Type:              | <input type="checkbox"/> Apple iPhone         |
| OS:                       | <input type="checkbox"/> iOS                  |
| OS Detail:                | <input type="checkbox"/> 4.3.1 (4; 16GB)      |
| Manufacturer:             | <input type="checkbox"/> Apple                |
| Model:                    | <input type="checkbox"/> iPhone               |
| Serial Number:            | <input type="checkbox"/> <input type="text"/> |
| Phone Number:             | <input type="checkbox"/> <input type="text"/> |
| Network Interface Vendor: | Apple                                         |
| Network Chipset:          | <input type="checkbox"/> <input type="text"/> |
| Network Driver:           | <input type="checkbox"/> <input type="text"/> |
| EAP Supplicant:           | <input type="checkbox"/> <input type="text"/> |
| Asset ID:                 | <input type="checkbox"/> <input type="text"/> |
| Asset Group:              | <input type="checkbox"/> <input type="text"/> |
| Asset Category:           | <input type="checkbox"/> <input type="text"/> |
| Service Start:            | <input type="checkbox"/> <input type="text"/> |
| Service End:              | <input type="checkbox"/> <input type="text"/> |
| AOS Device Type:          | iPhone                                        |
| Aruba HTTP Fingerprint:   | iTunes-iPhone/4.3.1 (4; 16GB)                 |
| Classification:           | <input type="text" value="Valid"/>            |
| Notes:                    | <input type="text"/>                          |

[Hide additional properties](#)

## Classifying Alcatel-Lucent Devices in User Detail

If you have deployed Alcatel-Lucent switches and have WMS Offload enabled on the network, the **Users > User Detail** page allows you to classify the device in the **Device Information** section, and to push this configuration to the Alcatel-Lucent switches that govern the devices. The classifications are as follows:

- **Unclassified**—Devices are unclassified by default.

- **Valid**—If the **Protect Valid Stations** option is enabled, this setting designates the device as a legitimate network device. Once this **Valid** setting is pushed, this setting prevents valid stations from connecting to a non-valid AP.
- **Contained**—When this status is pushed to the device, Alcatel-Lucent switches will attempt to keep it contained from the network.


You can classify the user regardless of whether WMS Offload is enabled. If WMS Offload is enabled, the classification will get pushed up to the switch.

### Quick Links for Users on Alcatel-Lucent Devices

In **Users > User Detail**, two drop-down menus were added in OV3600 7.3 next to the **Save** button in the **Device Info** section:

- **Open controller web UI**: A drop-down menu that allows you to jump to the controller’s UI in a new window. Thin APs link to **Controller > Access Points** when not operating in mesh mode, or **Controller > Mesh Nodes** otherwise. Controllers show several more pages in this menu (**Security Dashboard**, for instance) if the controller is running AOS-W version 6.1 or greater.
- **Run a command**: A drop-down menu with a list of CLI commands you can run directly from the **APs/Devices > Monitor** page.

**Figure 144** *Open controller web UI and Run a command Menus in Users > User Detail*



### Using the Deauthenticate User Feature

Some displays of the **User > User Detail** page include the **Deauthenticate User** feature in the **Current Association** section. Specifically, those displays are for devices which support this operation, namely Alcatel-Lucent and Cisco WLC with firmware version v4.0.0.0 or later.

Select **Deauthenticate User** to use this feature, as shown in [Figure 145](#):

**Figure 145** *Deauthenticate User button in Current Association section of Users > User Detail*

| Current Association |                    |                     |                  |
|---------------------|--------------------|---------------------|------------------|
| Username:           | ARUBANETWORKS\sdas | AP/Device:          | 1154-Q           |
| Role:               | employee           | Controller:         | ethersphere-1322 |
| Signal Quality:     | 50                 | Group:              | aruba corp       |
| Association:        | 5/25/2011 12:53 PM | Folder:             | Top > cor/p      |
| Duration:           | 1 hr 34 mins       | AP/Device Location: | -                |
| Mode:               | 802.11n (5 GHz)    | Radio:              | 802.11an         |
| Bandwidth:          | 3.45 Kbps          | VLAN:               | 105              |
| SSID:               | ethersphere-wpa2   | Forward Mode:       | Tunnel Encrypted |
| Ch. BW:             | HT40               | LAN Hostname:       | -                |
| LAN IP Address:     | 10.100.105.232     | Auth Time:          | 1 hr 34 mins     |
| Auth Type:          | WPA2 (EAP-PEAP)    | SNMP Source:        | Poll             |
| Cipher:             | AES                |                     |                  |

At the bottom of the table, there is a button labeled 'Deauthenticate User' which is highlighted with a light green border.

### Viewing a User’s Association History

Past association details of a user are tracked in the Association History table, which is located under the VRF QuickView illustration (if available) and the Alert Summary in **Users > User Detail**.

The columns in this table, shown in [Figure 146](#), are the same as the fields in the **Current Association** section for this user.

**Figure 146 Association History in Users > User Detail**

Association History

1-2 of 5 Past Associations Page 1 of 2 > | Reset filters Choose columns Export CSV

| Username           | AOS Device Type | Role     | AP/Device   | SSID             | VLAN | Interface | Connection Mode | Ch BW | Forward Mode     | Tunneled Controller |
|--------------------|-----------------|----------|-------------|------------------|------|-----------|-----------------|-------|------------------|---------------------|
| ARUBANETWORKS\sdas | Windows 7       | employee | 1154-Q      | ethersphere-wpa2 | 105  | 802.11an  | 802.11n (5 GHz) | HT40  | Tunnel Encrypted | -                   |
| ARUBANETWORKS\sdas | Windows 7       | employee | sdas-rap2wg | ethersphere-wpa2 | 2360 | 802.11bg  | 802.11g         | -     | -                | -                   |

1-2 of 5 Past Associations Page 1 of 2 > | Reset filters

## Evaluating User Status with the Users > Diagnostics Page

The **Users > Diagnostics** page is accessible from the User Detail page. You can also search for a user and select the associated MAC address from the search results.

This page provides an overview of a user's general status and connectivity on the network, as illustrated in [Figure 147](#).

**Figure 147 Users > Diagnostics Page Illustration**

| Possible Issues                                        |                          |                |
|--------------------------------------------------------|--------------------------|----------------|
| Issue                                                  | Ideal                    | Actual         |
| Low signal quality:                                    | >= 20                    | <b>15</b>      |
| Excessive roaming in last two hours:                   | <= 10 roams              | 0              |
| High user bandwidth:                                   | <= 50% of radio capacity | 0 Kbps (0.00%) |
| Unauthenticated users:                                 | Authenticated            | EAP            |
| High user load on device/radio:                        | <= 15                    | 1              |
| High device/radio bandwidth:                           | <= 75% of radio capacity | 0 Kbps (0.00%) |
| 802.11b users associated to 802.11bg radio:            | None                     | -              |
| 802.11bg or 802.11a users associated to 802.11n radio: | None                     | -              |
| High FCS error rate:                                   | <= 100                   | -              |

| Diagnostic Summary |                |                |                |                  |                  |                  |            |
|--------------------|----------------|----------------|----------------|------------------|------------------|------------------|------------|
|                    | Current        | Last Hour      | Last 2 Hours   | Last 4 Hours     | Last 8 Hours     | Last Day         | Last Week  |
| User Bandwidth     | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 0 Kbps (0.00%)   | 0 Kbps (0.00%)   | 0 Kbps (0.00%)   | 213 Kbps ( |
| Radio Bandwidth    | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 548 Kbps (3.65%) | 548 Kbps (3.65%) | 548 Kbps (3.65%) | 1.26 Mbps  |
| Device User Count  | 1              | 2              | 2              | 2                | 2                | 4                | 5          |
| Radio User Count   | 1              | 2              | 2              | 2                | 2                | 4                | 5          |
| Signal Quality     | 15             | 15             | 15             | 15               | 15               | <b>15</b>        | 33         |
| Device Bandwidth   | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 0 Kbps (0.00%) | 548 Kbps (3.65%) | 548 Kbps (3.65%) | 548 Kbps (3.65%) | 1.26 Mbps  |

| Current User Counts |                      |                     |
|---------------------|----------------------|---------------------|
|                     | User Count on Device | User Count on Radio |
| 802.11g             | 1                    | 1                   |
| Total               | 1                    | 1                   |

| Device Information     |                     |
|------------------------|---------------------|
| Name:                  | kevinl-2-rap2wg     |
| Uptime:                | 1 day 2 hrs 22 mins |
| Location:              | -                   |
| Type:                  | Aruba RAP-2WG       |
| Controller IP Address: | 10.1.1.228          |

| Aruba 802.11 User Counters Summary |      |
|------------------------------------|------|
| Retry Rate:                        | 50%  |
| Low Speed Rate:                    | 100% |
| Non-Unicast Rate:                  | 0%   |
| Fragmentation Rate:                | 0%   |
| Retry Error Rate:                  | 50%  |
| Receive Error Rate:                | 0%   |

Each section of the **Users > Diagnostics** page displays information by which to evaluate possible user issues.



Refer to [Table 118](#) for explanation and illustration of page components.

**Table 118** *Users > Diagnostics Page Sections*

| Section                                                | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                   |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--|--|-------|-------|--------|---------------------|-------|---|--------------------------------------|-------------|---|----------------------|--------------------------|----------------|-----------------------|---------------|-----|-----------------------------|-------|----|--------------------------|--------------------------|-------------------|---------------------------------------------|------|---|--------------------------------------------------------|------|---|----------------------|--------|---|
| <p><b>Possible Issues</b></p>                          | <p>This section summarizes the most likely items to create issues for a user on the network. <a href="#">Figure 148</a> illustrates this section. Items in red are the values considered “out of spec.”</p> <p><b>Figure 148</b> <i>Users &gt; Diagnostics &gt; Possible Issues Illustration</i></p> <table border="1" data-bbox="467 411 1205 663"> <thead> <tr> <th colspan="3">Possible Issues</th> </tr> <tr> <th>Issue</th> <th>Ideal</th> <th>Actual</th> </tr> </thead> <tbody> <tr> <td>Low signal quality:</td> <td>&gt;= 20</td> <td>0</td> </tr> <tr> <td>Excessive roaming in last two hours:</td> <td>&lt;= 10 roams</td> <td>0</td> </tr> <tr> <td>High user bandwidth:</td> <td>&lt;= 50% of radio capacity</td> <td>0 kbps (0.00%)</td> </tr> <tr> <td>Unauthenticated user:</td> <td>Authenticated</td> <td>EAP</td> </tr> <tr> <td>High user load on AP/radio:</td> <td>&lt;= 15</td> <td>26</td> </tr> <tr> <td>High AP/radio bandwidth:</td> <td>&lt;= 75% of radio capacity</td> <td>1910 kbps (0.77%)</td> </tr> <tr> <td>802.11b users associated to 802.11bg radio:</td> <td>None</td> <td>0</td> </tr> <tr> <td>802.11bg or 802.11a users associated to 802.11n radio:</td> <td>None</td> <td>5</td> </tr> <tr> <td>High FCS error rate:</td> <td>&lt;= 100</td> <td>0</td> </tr> </tbody> </table> <ul style="list-style-type: none"> <li> <p><b>Low signal quality</b>—If signal quality falls outside of ideal range, then possible resolution might be moving the client, adjusting client antennae, installing more or better antennas on the APs, adding APs, increasing the transmit power of the APs, investigating intermittent RF interference (such as the startup schedule of a nearby air conditioning unit), or evaluating the client settings.</p> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Possible Issues   |  |  | Issue | Ideal | Actual | Low signal quality: | >= 20 | 0 | Excessive roaming in last two hours: | <= 10 roams | 0 | High user bandwidth: | <= 50% of radio capacity | 0 kbps (0.00%) | Unauthenticated user: | Authenticated | EAP | High user load on AP/radio: | <= 15 | 26 | High AP/radio bandwidth: | <= 75% of radio capacity | 1910 kbps (0.77%) | 802.11b users associated to 802.11bg radio: | None | 0 | 802.11bg or 802.11a users associated to 802.11n radio: | None | 5 | High FCS error rate: | <= 100 | 0 |
| Possible Issues                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| Issue                                                  | Ideal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Actual            |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| Low signal quality:                                    | >= 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0                 |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| Excessive roaming in last two hours:                   | <= 10 roams                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0                 |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| High user bandwidth:                                   | <= 50% of radio capacity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0 kbps (0.00%)    |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| Unauthenticated user:                                  | Authenticated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | EAP               |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| High user load on AP/radio:                            | <= 15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 26                |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| High AP/radio bandwidth:                               | <= 75% of radio capacity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1910 kbps (0.77%) |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| 802.11b users associated to 802.11bg radio:            | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0                 |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| 802.11bg or 802.11a users associated to 802.11n radio: | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 5                 |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| High FCS error rate:                                   | <= 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 0                 |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |
| <p><b>Possible Issues (Cont'd)</b></p>                 | <ul style="list-style-type: none"> <li> <p><b>Excessive roaming in last two hours</b>—Excessive roaming means that a user’s connection moves from one AP to another 10 or more roaming instances in the past two hours. If there is excessive roaming but the user has been stationary, then the user might be located where there is weak coverage from two overlapping APs. Adjusting the signal strength for one of those APs may resolve the issue.</p> </li> <li> <p><b>High User Bandwidth</b>—Network performance issues might mean excessive bandwidth consumption. Investigate user bandwidth consumption for all users on a given AP, not strictly the user who reports a problem.</p> </li> <li> <p><b>Unauthenticated User</b>—This section conveys the user’s current authentication status and the actual authentication type. If a network deploys RADIUS, then the RADIUS server could be experiencing issues even if a user attempts to log in with valid credentials but shows as <b>Unauthenticated</b> on this page.</p> </li> <li> <p><b>High user load on AP/radio</b>—This field indicates whether the number of users on a given AP has exceeded that AP’s functional capacity. Excessive users on an AP could degrade performance for all users on that AP. Consider adding another AP in that area. Refer to the <b>Current User Counts</b> section on this page for more details.</p> </li> <li> <p><b>High AP radio bandwidth</b>—This figure derives from how groups of users share radio bandwidth on a shared AP. You may not need to add an additional AP to resolve this issue, but you would need to determine why neighboring APs are not functioning properly.</p> </li> <li> <p><b>802.11 radio parameters</b>—These two sections indicate the likelihood that a user’s issues are derived from mismatched 802.11 deployment. That is, an 802.11ab or g user who is connected through an 802.11n radio might not benefit from full 802.11n functionality. These two fields indicate the likelihood of such an issue impacting a user’s experience on the network, as well as a reduction of available bandwidth for other users.</p> </li> <li> <p><b>High FCS error rates</b>—Frame Check Sequence (FCS) errors are checksum errors in the 802.11 protocol and may indicate interference and congestion. One response is to assign a different channel to the AP manually or by using Adaptive Radio Management (ARM).</p> </li> </ul> |                   |  |  |       |       |        |                     |       |   |                                      |             |   |                      |                          |                |                       |               |     |                             |       |    |                          |                          |                   |                                             |      |   |                                                        |      |   |                      |        |   |

**Table 118 Users > Diagnostics Page Sections (Continued)**

| Section                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------|---------------------|-----------------------|---------------------|--------------|---------------------|----------------|-------------------|------------------|---------------------|------------------|-----------------------|-------------------|-------------------|-------------------|---------------------|---------------------|--------------|-----------------------|-------------------|-------------------|--------------------|--------------------|------------------|----|----|----|----|----|---------------|----|----|----|----|----|----------------|---|----|----|----|----|
| <b>Diagnostic Summary</b>                     | <p>This section summarizes bandwidth, user count, and signal quality parameters for specific windows of time. This section is useful when diagnosis or troubleshooting follows issues that had been observed a few or several hours prior. <a href="#">Figure 149</a> illustrates this section.</p> <p><b>NOTE:</b> Large negative changes in value are displayed in red.</p> <p><b>Figure 149 Diagnostic Summary Illustration (Partial Display)</b></p> <p>Diagnostic Summary</p> <table border="1"> <thead> <tr> <th></th> <th>Current</th> <th>Last Hour</th> <th>Last 2 Hours</th> <th>Last 4 Hours</th> <th>Last 8 Hours</th> </tr> </thead> <tbody> <tr> <td>User Bandwidth</td> <td>0 kbps (0.00%)</td> <td>69 kbps (0.03%)</td> <td>121 kbps (0.05%)</td> <td>198 kbps (0.08%)</td> <td>198 kbps (0.08%)</td> </tr> <tr> <td>Radio Bandwidth</td> <td>1910 kbps (0.77%)</td> <td>4377 kbps (1.76%)</td> <td>4377 kbps (1.76%)</td> <td>33963 kbps (13.69%)</td> <td>33963 kbps (13.69%)</td> </tr> <tr> <td>AP Bandwidth</td> <td>1911 kbps (0.39%)</td> <td>4377 kbps (0.88%)</td> <td>4377 kbps (0.88%)</td> <td>33963 kbps (6.85%)</td> <td>33963 kbps (6.85%)</td> </tr> <tr> <td>Radio User Count</td> <td>19</td> <td>20</td> <td>20</td> <td>20</td> <td>20</td> </tr> <tr> <td>AP User Count</td> <td>26</td> <td>27</td> <td>27</td> <td>27</td> <td>27</td> </tr> <tr> <td>Signal Quality</td> <td>0</td> <td>50</td> <td>50</td> <td>49</td> <td>49</td> </tr> </tbody> </table> <p>The following categories link to additional details pages:</p> <ul style="list-style-type: none"> <li>• <b>User Bandwidth</b>—select this link to display flash graphs for user bandwidth metrics.</li> <li>• <b>Radio Bandwidth</b>—select this link to display flash graphs for radio bandwidth consumption.</li> <li>• <b>AP Bandwidth</b>—select this link to display flash graphs for AP bandwidth consumption.</li> <li>• <b>Radio User Count</b>—select this link to display flash graphs for user count metrics.</li> <li>• <b>AP User Count</b>—select this link to display flash graphs for user count metrics.</li> <li>• <b>Signal Quality</b>—select this link to display flash graphs for signal quality.</li> </ul> |                     | Current              | Last Hour           | Last 2 Hours          | Last 4 Hours        | Last 8 Hours | User Bandwidth      | 0 kbps (0.00%) | 69 kbps (0.03%)   | 121 kbps (0.05%) | 198 kbps (0.08%)    | 198 kbps (0.08%) | Radio Bandwidth       | 1910 kbps (0.77%) | 4377 kbps (1.76%) | 4377 kbps (1.76%) | 33963 kbps (13.69%) | 33963 kbps (13.69%) | AP Bandwidth | 1911 kbps (0.39%)     | 4377 kbps (0.88%) | 4377 kbps (0.88%) | 33963 kbps (6.85%) | 33963 kbps (6.85%) | Radio User Count | 19 | 20 | 20 | 20 | 20 | AP User Count | 26 | 27 | 27 | 27 | 27 | Signal Quality | 0 | 50 | 50 | 49 | 49 |
|                                               | Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Last Hour           | Last 2 Hours         | Last 4 Hours        | Last 8 Hours          |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| User Bandwidth                                | 0 kbps (0.00%)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 69 kbps (0.03%)     | 121 kbps (0.05%)     | 198 kbps (0.08%)    | 198 kbps (0.08%)      |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Radio Bandwidth                               | 1910 kbps (0.77%)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4377 kbps (1.76%)   | 4377 kbps (1.76%)    | 33963 kbps (13.69%) | 33963 kbps (13.69%)   |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| AP Bandwidth                                  | 1911 kbps (0.39%)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4377 kbps (0.88%)   | 4377 kbps (0.88%)    | 33963 kbps (6.85%)  | 33963 kbps (6.85%)    |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Radio User Count                              | 19                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 20                  | 20                   | 20                  | 20                    |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| AP User Count                                 | 26                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 27                  | 27                   | 27                  | 27                    |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Signal Quality                                | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 50                  | 50                   | 49                  | 49                    |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| <b>Current User Counts</b>                    | <p>The <b>Current User Counts</b> section displays user counts for APs and radios, and includes additional summary information for APs. <a href="#">Figure 150</a> illustrates this section:</p> <p><b>Figure 150 Users &gt; Diagnostics &gt; Current User Counts Illustration</b></p> <p>Current User Counts</p> <table border="1"> <thead> <tr> <th></th> <th>User Count on Device</th> <th>User Count on Radio</th> </tr> </thead> <tbody> <tr> <td>802.11g</td> <td>1</td> <td>1</td> </tr> <tr> <td>Total</td> <td>1</td> <td>1</td> </tr> </tbody> </table> <p>Use this section in combination with the <b>Possible Issues</b> section.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                     | User Count on Device | User Count on Radio | 802.11g               | 1                   | 1            | Total               | 1              | 1                 |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
|                                               | User Count on Device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | User Count on Radio |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| 802.11g                                       | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1                   |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Total                                         | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1                   |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| <b>Alcatel-Lucent 802.11 Counters Summary</b> | <p>The <b>Alcatel-Lucent 802.11 Counters Summary</b> section conveys the same information that is available from the Radio Statistics page. <a href="#">Figure 151</a> illustrates this section.</p> <p><b>Figure 151 Users &gt; Diagnostics &gt; Alcatel-Lucent 802.11 Counters Summary Illustration</b></p> <p><b>Aruba 802.11 User Counters Summary</b></p> <table border="1"> <tbody> <tr> <td>Retry Rate:</td> <td>0%</td> </tr> <tr> <td>Low Speed Rate:</td> <td>50%</td> </tr> <tr> <td>Non-Unicast Rate:</td> <td>50%</td> </tr> <tr> <td>Fragmentation Rate:</td> <td>0%</td> </tr> <tr> <td>Retry Error Rate:</td> <td>0%</td> </tr> <tr> <td>Receive Error Rate:</td> <td>0%</td> </tr> </tbody> </table> <p><b>NOTE:</b> This section is supported for Cisco and Alcatel-Lucent devices.</p> <p>For additional information, select the link to the device on this page.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Retry Rate:         | 0%                   | Low Speed Rate:     | 50%                   | Non-Unicast Rate:   | 50%          | Fragmentation Rate: | 0%             | Retry Error Rate: | 0%               | Receive Error Rate: | 0%               |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Retry Rate:                                   | 0%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Low Speed Rate:                               | 50%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Non-Unicast Rate:                             | 50%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Fragmentation Rate:                           | 0%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Retry Error Rate:                             | 0%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| Receive Error Rate:                           | 0%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |                      |                     |                       |                     |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| <b>Radios That Can Hear This User</b>         | <p>The <b>Radios That Can Hear This User</b> section shows the radios that reported the signal from this client, and displays statistics. <a href="#">Figure 152</a> illustrates this section.</p> <p><b>Figure 152 Users &gt; Diagnostics &gt; Radios That Can Hear This User Illustration</b></p> <p>Radios That Can Hear This User</p> <table border="1"> <thead> <tr> <th>AP</th> <th>Radio</th> <th>SNR</th> <th>User Count</th> <th>Bandwidth (kbps)</th> <th>Uptime</th> <th>Recently Associated</th> </tr> </thead> <tbody> <tr> <td>AL39</td> <td>802.11an</td> <td>25</td> <td>2</td> <td>0.93712090369561</td> <td>8 days 16 hrs 12 mins</td> <td>No</td> </tr> <tr> <td>00:1a:1e:c0:55:46</td> <td>802.11an</td> <td>26</td> <td>0</td> <td>0</td> <td>32 days 12 hrs 5 mins</td> <td>No</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | AP                  | Radio                | SNR                 | User Count            | Bandwidth (kbps)    | Uptime       | Recently Associated | AL39           | 802.11an          | 25               | 2                   | 0.93712090369561 | 8 days 16 hrs 12 mins | No                | 00:1a:1e:c0:55:46 | 802.11an          | 26                  | 0                   | 0            | 32 days 12 hrs 5 mins | No                |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| AP                                            | Radio                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SNR                 | User Count           | Bandwidth (kbps)    | Uptime                | Recently Associated |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| AL39                                          | 802.11an                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 25                  | 2                    | 0.93712090369561    | 8 days 16 hrs 12 mins | No                  |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |
| 00:1a:1e:c0:55:46                             | 802.11an                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 26                  | 0                    | 0                   | 32 days 12 hrs 5 mins | No                  |              |                     |                |                   |                  |                     |                  |                       |                   |                   |                   |                     |                     |              |                       |                   |                   |                    |                    |                  |    |    |    |    |    |               |    |    |    |    |    |                |   |    |    |    |    |

# Managing Mobile Devices with SOTI MobiControl and OV3600

## Overview of SOTI MobiControl

SOTI MobiControl, the mobile device management platform for Windows Mobile, Apple, and Android devices, has been integrated into OV3600 to provide direct access to the MobiControl Web Console.

MobiControl runs on your Mobile Device Manager (MDM) server. This server provisions mobile devices to configure connectivity settings, enforce security policies, restore lost data, and other administrative services. Information gathered from mobile devices can include policy breaches, data consumption, and existing configuration settings.

## Prerequisites for Using MobiControl with OV3600

In order to use the MobiControl integration in OV3600, the following is required:

- An OV3600 running version 7.2.3 or later
- An MDM server with SOTI MobiControl Console 8.0x
- A client device that is:
  - associated with WLAN infrastructure managed by the OV3600 server running 7.2.3 or later
  - being actively managed by the SOTI MobiControl server

For more information about setting up MobiControl, please see <http://www.soti.net/mc/help/>.

In order to use SOTI MobiControl from within OV3600, you must first add your MDM server and designate it as a MobiControl.

## Adding a Mobile Device Management Server for MobiControl

1. To add an MDM server to OV3600, navigate to **OV3600 Setup > MDM Server** and select **Add**. Complete the fields on this page. [Table 119](#) describes the settings and default values:

**Table 119** *OV3600 Setup > MDM Server > Add Fields and Descriptions*

| Field                      | Description                                                                                                                                                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hostname/IP Address</b> | The address or DNS hostname configured for your MobiControl Web Console.                                                                                                                                                                                  |
| <b>Protocol</b>            | Whether HTTP or HTTPS is to be used when polling the MDM server. The port on which to connect to the MDM server is inferred from the protocol: with HTTP, OV3600 will connect to port 80 of the SOTI server; with HTTPS, OV3600 will connect to port 443. |
| <b>URL Context</b>         | The URL context appended to the server URL to build the URL when connecting with the SOTI server. For MobiControl v8.0x the default URL Context is "MobiControlWeb". For MobiControl v8.5x the default URL Context is "MobiControl".                      |
| <b>Enabled</b>             | Whether this server can be polled by OV3600. Make sure it is set to <b>Yes</b> .                                                                                                                                                                          |
| <b>Username/Password</b>   | The login credentials for accessing the web console of the MobiControl system.                                                                                                                                                                            |
| <b>Polling Period</b>      | The frequency in which OV3600 polls the MDM server. The default is 5 minutes.                                                                                                                                                                             |

2. When finished, select **Add**.

The list page for the MDM server also displays:

- **Last Contacted** – The last time OV3600 was able to contact the MDM server.
- **Errors** – Issues, if any, encountered during the last contact.

During each polling period, OV3600 will obtain a list of all device IDs and their WLAN MAC addresses. The information about device OS, device OS Detail, Manufacturer, Model, Name are retrieved from MobiControl and populated to the **Users > User Detail** page for supported mobile devices. A **View device in SOTI MobiControl** link provides direct access to the MobiControl Web Console for additional details about the device. MobiControl information overrides data obtained from AOS-W 6.0 switches.

## Accessing MobiControl from the Users > User Detail Page

In order to access the MobiControl web console for a SOTI-managed mobile device from within OV3600, follow these steps:

1. Navigate to a page that lists clients. This can include:
  - **Users > Connected** or **Users > All**
  - Search results that display user MAC address
2. Select the MAC address in the **Users** list table. The **Users > User Detail** page displays.
3. Under the Classification field, select the **View device in SOTI MobiControl** link. A new window will display the MobiControl Web Console for this device.

## Monitoring and Supporting OV3600 with the Home Pages


The **Home** tab of OV3600 provides the most frequent starting point for monitoring network status and establishing primary OV3600 functions once OV3600 configuration is complete. From the Home tab, you can access the following pages :

- The **Home > Overview** page condenses a large amount of information about your OV3600. You can view the health and usage of your network and use shortcuts to view system information. Refer to [Monitoring OV3600 with the Home > Overview Page](#) below.
- The **Home > Search** page provides a simple way to find users, managed devices, groups, and rogues. Refer to [“Searching OV3600 with the Home > Search Page”](#) on page 224.
- The page contains all relevant OV3600 documentation. See [“Accessing OV3600 Documentation”](#) on page 225.
- The **Home > License** page provides product licensing information. See [“The Customize link on the upper-right side of the page allows you to customize the widgets on the Home > Overview page. See “Customizing the Dashboard” on page 34.”](#) on page 222.
- The **Home > User Info** page is where logged-in users can configure their name, contact information, rogue count filter level, customized header columns, severe alert threshold, personalized search preferences, record display preferences, and the refresh rate of the console. See [“Configuring Your Own User Information with the Home > User Info Page”](#) on page 225.

## Monitoring OV3600 with the Home > Overview Page

To view your overall network health, navigate to **Home > Overview** page. [Figure 153](#) illustrates this page, and [Table 120](#) describes the contents. The information that displays varies depending on your role.

**Figure 153** *Home > Overview Page Illustration*

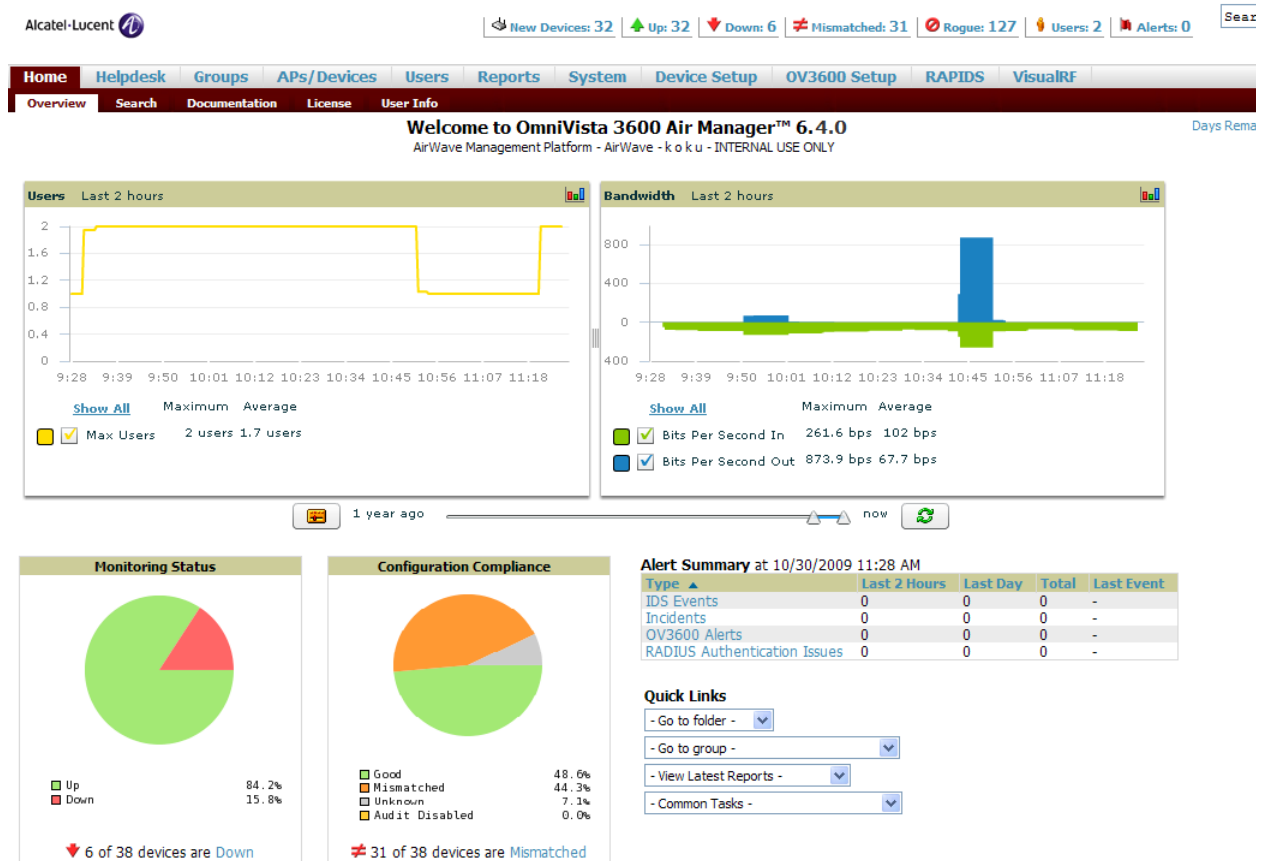

© 2009 Alcatel-Lucent. All rights reserved. - <http://www.alcatel-lucent.com/enterprise>

**Table 120** *Home > Overview Sections and Charts*

| Section                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Users</b>             | <p>This chart is a graphical summary of the number of users on the network during a period of time. The time can be adjusted. Select <b>Show All</b> to display a list of data series that this graph can display, such as the user count by SSID.</p> <p>Clear the <b>Max Users</b> or <b>Avg Users</b> checkbox to change the display of the graph. The graph displays the maximum number of users by default. To view historical graphs in a new window, select the three-bar icon on the upper right of the chart.</p> |
| <b>Bandwidth</b>         | <p>This adjustable chart displays bandwidth data over time. To remove bandwidth in or out from the graphical display, clear the check box for <b>Avg Bits Per Second In</b> or <b>Out</b>.</p> <p>To display details for specific devices, select <b>Show All</b> and select the devices to be included in the graphical bandwidth summary chart. To view historical graphs in a new window, select the three-bar icon on the upper right of the chart.</p>                                                                |
| <b>Monitoring Status</b> | <p>This pie chart shows the percentage of all devices that are up and down on the network. To review devices that are down, select <b>Down</b> in the legend or the chart, and the <b>APs/Devices &gt; Down</b> page displays.</p>                                                                                                                                                                                                                                                                                         |

**Table 120** *Home > Overview Sections and Charts (Continued)*

| Section                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Configuration Compliance</b> | The pie chart displays all known device configuration status on the network. Devices are classified as <b>Good</b> , <b>Unknown</b> , <b>Mismatched</b> , or <b>Audit Disabled</b> . Select the <b>Mismatched</b> link to see the <b>APs/Devices &gt; Mismatched</b> page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Alert Summary</b>            | <p>This section displays all known and current alerts configured and enabled in the <b>System &gt; Alerts</b> page (refer to “<a href="#">Viewing, Delivering and Responding to Triggers and Alerts</a>” on page 197). Alerts can be sorted using the column headers (<b>Type</b>, <b>Last 2 Hours</b>, <b>Last Day</b>, <b>Total</b>, or <b>Last Event</b>). The <b>Alert Summary</b> field displays four types of alerts, as follows:</p> <ul style="list-style-type: none"> <li>● <b>OV3600 Alerts</b></li> <li>● <b>IDS Events</b></li> <li>● <b>Incidents</b></li> <li>● <b>RADIUS Authentication Issues</b></li> </ul> <p>Select any alert type for more information.</p> <p><b>NOTE:</b> The <b>Incidents</b> section only increments the counter for incidents that are open and associated to an AP. This is also the case if you select <b>Incidents</b> and view incident details. To view all incidents including those not associated to an AP, go to <b>Helpdesk &gt; Incidents</b>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Quick Links</b>              | <p>The <b>Quick Links</b> section provides drop-down menus that enable you to move to the most common and frequently used pages in OV3600, as follows:</p> <ul style="list-style-type: none"> <li>● <b>Go to folder</b>—This menu lists all folders defined in OV3600 from the <b>APs/Devices List</b> page. See “<a href="#">Using Device Folders (Optional)</a>” on page 141.</li> <li>● <b>Go to group</b>—This menu lists all groups defined in OV3600, and enables you to display information for any or all of them. Use the <b>Groups</b> pages to edit, add, or delete groups that appear in this section. See “<a href="#">Configuring and Using Device Groups in OV3600</a>” on page 75.</li> <li>● <b>View Latest Reports</b>—OV3600 supports creating custom reports or viewing the latest daily version of any report. Select any report type to display the daily version. See “<a href="#">Creating, Running, and Emailing Reports</a>” on page 241.</li> <li>● <b>Common Tasks</b>—This menu lists quick links to the most heavily used task-oriented pages in OV3600, to include the following: <ul style="list-style-type: none"> <li>■ <b>Configure Alert Thresholds</b>—This link takes you to the <b>System &gt; Triggers</b> page. See “<a href="#">System &gt; Performance—Displays basic OV3600 hardware information as well as resource usage over time. Refer to “Using the System &gt; Firmware Upgrade Jobs Page” on page 228.</a>” on page 193.</li> <li>■ <b>Configure Default Credentials</b>—This link takes you to the <b>Device Setup &gt; Communication</b> page. See “<a href="#">Configuring Communication Settings for Discovered Devices</a>” on page 56.</li> <li>■ <b>Discover New Devices on Your Network</b>—This link takes you to the <b>Device Setup &gt; Discover</b> page. See “<a href="#">Discovering, Adding, and Managing Devices</a>” on page 113.</li> <li>■ <b>Supported Devices and Features</b>—This link displays a PDF that summarizes all supported devices and features in chart format for OV3600.</li> <li>■ <b>Upload Device Firmware</b>—This link displays the <b>Device Setup &gt; Firmware &amp; Files Upload</b> page. See “<a href="#">Overview of the Device Setup &gt; Upload Firmware &amp; Files Page</a>” on page 58.</li> <li>■ <b>View Event Log</b>—This link displays the <b>System &gt; Event Log</b> page. See “<a href="#">Using the System &gt; Event Log Page</a>” on page 196.</li> </ul> </li> </ul> |

The **Customize** link on the upper-right side of the page allows you to customize the widgets on the **Home > Overview** page. See “[Customizing the Dashboard](#)” on page 34.

## Viewing and Updating License Information

Navigate to the **Home > License** page using the standard OV3600 menu. [Figure 154](#) illustrates this page, and [Table 121](#) describes the contents.

Please be aware that you cannot enter multiple licenses. To combine multiple license entitlements into one new license, contact Alcatel support.

**Figure 154 Home > License Page Illustration**

| System Overview |               |          |                      |
|-----------------|---------------|----------|----------------------|
| System Name:    | aire.com      | Time:    | 9/23/2009 7:25 PM    |
| Organization:   | Aire Networks | Uptime:  | 1 day 12 hrs 50 mins |
| Hostname:       | aire.com      | Version: | 6.4                  |
| IP Address:     | 10.19.19.19   | OS:      | CentOS release 5     |

This is a licensed version of AirWave Wireless Management Suite.

Refer to your license agreement for complete information about the terms of this license. Contact AirWave Technical Support at [support@airwave.com](mailto:support@airwave.com) or 1-866-943-4267 (866-WIFI-AMP) for more information.

Enter New License:

```

--- Begin AMP License Key ---
Product: AWMS Professional
Organization: Aruba Networks
Hardware_ID: 00:21:9B:8B:B2:C4
APs: 1000
RAPIDS: Yes
VisualRF: Yes
Generated: Wed Mar 4 22:48:19 2009 UTC by VPKasf4K/eXQisetIOc+Aw
--- Signature ---
iD8DBQFJrwUzvN8PdJTKS2ERÅuzmÅJ9EwÅYfhciÅI7C3oPCOYjoÅipUZxgCfaw9q
UmDiGqRmGOH7s3S2F37HZd0=
=6V+l
--- End AMP License Key ---

```

Save

**Table 121 Home > License Fields**

| Field               | Description                                                                                                                         |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>System Name</b>  | Displays a user-definable name for OV3600. The System Name can be configured from the <b>OV3600 Setup &gt; General</b> page.        |
| <b>Organization</b> | Displays the organization listed on your license key.                                                                               |
| <b>Hostname</b>     | Displays the DNS name assigned to OV3600.                                                                                           |
| <b>IP Address</b>   | Displays the static IP address assigned to OV3600. The IP Address can be configured from the <b>OV3600 Setup &gt; Network</b> page. |
| <b>Time</b>         | Displays the current date and time set on OV3600.                                                                                   |
| <b>Uptime</b>       | Displays the amount of time since the operating system was last booted.                                                             |
| <b>Version</b>      | Displays the version number of OV3600 code currently running.                                                                       |
| <b>OS</b>           | Displays the version of Linux installed on the server.                                                                              |

## Searching OV3600 with the Home > Search Page

The **Home > Search** page provides a simple way to find connected and historical users, managed devices, rogue devices, groups, folders, and more.

Search performs partial string searches on a large number of fields including the notes, version, secondary version, radio serial number, device serial number, LAN MAC, radio MAC and apparent IP address of all the APs, as well as the client MAC, VPN user, User, LAN IP and VPN IP fields. [Figure 155](#) illustrates this page.

**Figure 155 Home > Search Page Illustration with Sample Hits on “00:”**

Search for managed devices and wireless users. A single substring match is used. To search by MAC address, include colons (e.g., 00:40:86).

00:

**APs/Devices:**  
 Modify Devices  
 1-45 of 45 APs/Devices Page 1 of 1

| Device            | Status | Users | BW (kbps) | Uptime                 | Configuration | Group         | Folder     | Controller       | Master Controller |
|-------------------|--------|-------|-----------|------------------------|---------------|---------------|------------|------------------|-------------------|
| 00:0b:86:c0:03:4a | Down   | 0     | 0         | 0                      | Unknown       | Access Points | .airespace | -                | -                 |
| 00:0b:86:c1:a0:52 | Up     | 0     | 0         | 16 hrs 59 mins         | Mismatched    | Access Points | .airespace | -                | -                 |
| 1250-91:14:1a     | Up     | 0     | 0         | 8 days 19 hrs 3 mins   | Mismatched    | lwk thin aps  | .airespace | airespace-4400-1 | -                 |
| 1250-91:14:42     | Up     | 0     | 0         | 12 days 20 hrs 18 mins | Mismatched    | lwk thin aps  | .airespace | airespace-4400-1 | -                 |
| Airespace-4012-2  | Up     | 0     | 0         | 54 days 22 hrs 46 mins | Mismatched    | Access Points | .airespace | -                | -                 |
| airespace-4400-1  | Up     | 0     | 0         | 12 days 21 hrs 28 mins | Mismatched    | 4400          | .airespace | -                | -                 |

**Users:**  
 1-50 of 325 Users Page 1 of 7 >> |

| Username | Role       | MAC Address       | AP/Device         | SSID           | VLAN | AP Radio | Connection Mode | Ch BW | Association Time   | Duration |
|----------|------------|-------------------|-------------------|----------------|------|----------|-----------------|-------|--------------------|----------|
| -        | logon      | 00:04:23:4C:C1:33 | ap2c              | ws5100_102     | 51   | 802.11b  | 802.11b         | 0     | 2/13/2009 12:50 PM | -        |
| -        | -          | 00:05:4E:4B:14:2E | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:05:4E:4D:9D:6A | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:05:4E:4F:86:81 | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | GuestLogon | 00:06:25:2C:A5:AD | 00:0b:86:c1:a0:52 | guest          | 51   | 802.11bg | 802.11b         | 0     | 1/23/2009 9:07 AM  | -        |
| -        | -          | 00:09:EF:95:1E:82 | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:09:EF:95:20:CF | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | logon      | 00:0A:88:7F:0B:01 | 00:0b:86:c1:a0:52 | -              | 51   | 802.11bg | 802.11b         | 0     | 1/29/2009 2:25 PM  | -        |
| -        | GuestLogon | 00:0A:88:7F:0B:11 | ap-Not set        | dpb_test_guest | 51   | 802.11bg | 802.11b         | 0     | 1/29/2009 2:19 PM  | -        |
| -        | -          | 00:0A:88:7F:0B:1E | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:0CF1:38:0F:A6  | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:0E:38:49:08:31 | RADIO1            | 101            | 1    | 802.11b  | 802.11b         | 0     | 3/5/2009 3:18 PM   | -        |
| -        | -          | 00:0E:38:49:08:3E | ap-Not set        | guest          | 51   | 802.11a  | 802.11a         | 0     | 2/24/2009 1:08 PM  | -        |
| -        | -          | 00:0E:98:CC:CE:F3 | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:0E:98:D7:35:BA | ap                | open-ops       | 0    | 802.11a  | 802.11a         | -     | 1/29/2009 8:59 AM  | -        |
| -        | -          | 00:0F:86:81:15:3F | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:0F:C8:82:33:A4 | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:11:24:C6:2B:52 | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:11:F5:53:AE:0F | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:13:02:1E:67:15 | RADIO1            | 101            | 1    | 802.11b  | 802.11b         | -     | 2/5/2009 5:30 PM   | -        |
| -        | -          | 00:13:02:84:39:8D | ap                | open-ops       | 0    | 802.11bg | 802.11bg        | -     | 1/28/2009 7:41 PM  | -        |
| -        | -          | 00:13:02:AD:7C:3E | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:13:02:C2:39:2B | -                 | -              | -    | -        | -               | -     | -                  | -        |
| -        | -          | 00:13:02:CD:F3:D5 | 00:0b:86:c1:a0:52 | quest          | 51   | 802.11a  | 802.11a         | 0     | 2/20/2009 7:59 AM  | -        |
| -        | -          | 00:13:CE:45:91:A0 | ap-Not set        | quest          | 51   | 802.11bg | 802.11g         | 0     | 1/29/2009 4:00 PM  | -        |

No Folders found  
 No Groups found.

**Rogues:**  
 Modify Devices  
 1-50 of 187 Rogue Devices Page 1 of 4 >> |

| Ack | RAPIDS Classification | Threat Level | Name                | Classifying Rule                         | Device Classification | Wired | #APs hearing | SSID                            |
|-----|-----------------------|--------------|---------------------|------------------------------------------|-----------------------|-------|--------------|---------------------------------|
| No  | Valid                 | -            | Enteravys-68:FA:C3  | <user set>                               | Unclassified          | -     | 6            | test012                         |
| No  | Suspected Neighbor    | 5            | Tropos Net-04:0F:BB | Suspected Neighbor - detected wirelessly | Unclassified          | -     | 5            | TroposNetworks                  |
| No  | Suspected Neighbor    | 5            | Cisco Syst-A7:B9:ED | Suspected Neighbor - detected wirelessly | Valid                 | -     | 3            | dbishop-airespace-open          |
| No  | Valid                 | -            | Aniba Netw-80:08:32 | <user set>                               | Unclassified          | -     | 5            | ethersphere-voip                |
| No  | Valid                 | -            | Enteravys-27:F6:48  | <user set>                               | Unclassified          | -     | 6            | RoamAbout Default: Network Name |
| No  | Suspected Neighbor    | 5            | SYMBOL TEC-D7:64:A6 | Suspected Neighbor - detected wirelessly | Valid                 | -     | 6            | ws5100_102                      |
| No  | Valid                 | -            | NOMADIX IN-45:02:D0 | <user set>                               | Unclassified          | -     | 6            | Nomadix                         |
| No  | Valid                 | -            | Meru Netw-89:CC:05  | <user set>                               | Unclassified          | -     | 6            | BetsyFromPike                   |

**Tags**  
 1-5 of 5 Tags Page 1 of 1

| Name | MAC Address       | Vendor         | Battery Level | Chirp Interval | Last Seen          | Closest AP          |
|------|-------------------|----------------|---------------|----------------|--------------------|---------------------|
| -    | 00:0C:CC:5E:7F:9E | Aeroscout Ltd. | Normal        | 45 secs        | 3/12/2009 10:25 AM | 1250-91:14:42       |
| -    | 00:14:7E:00:4C:DC | InnerWireless  | Normal        | 1 mn           | 3/12/2009 10:24 AM | 1250-91:14:42       |
| -    | 00:0C:CC:7A:3B:8A | Aeroscout Ltd. | Normal        | 50 secs        | 3/12/2009 10:24 AM | lwapp-1250-13:21:1e |
| -    | 00:14:7E:00:4C:B9 | InnerWireless  | Normal        | 2 mns          | 3/12/2009 10:23 AM | lwapp-1250-13:21:1e |
| -    | 00:14:7E:00:4C:F2 | InnerWireless  | Normal        | 0 mns          | 3/10/2009 10:00 AM | -                   |

1. Enter the keyword or text with which to search. If searching for a MAC address, enter it in colon-delimited format.



The OV3600 Search utility is case-insensitive when single or double quotes are not used. For exact case-sensitive matches, use quotes around the search phrase.

2. Select **Search**, and the results display after a short moment. Results support several hypertext links to additional pages, and the **Filter** icon over some columns allow for additional filtering of search returns. Search results are categorized in the following sequence. Categories of search results can be customized on the **Home > User Info** page to limit the scope of information returned. Not all categories below may offer returns for a given search:
  - **Devices**
  - **Users**
  - **Rogues**
  - **Tags**
  - **Folders and Groups**



## Accessing OV3600 Documentation

The page provides easy access to all relevant OV3600 documentation. All of the documents on this page are hosted locally by your OV3600 server and can be viewed by any PDF viewer.

**Figure 156** *Page Illustration*

### OmniVista 3600 Air Manager

- [Quickstart Guide](#)
- [User Guide](#)
- [Alcatel-Lucent Configuration Guide](#)
- [Supported Wireless Devices](#)
- [Supported Wireless Firmware Versions](#)
- [Supported Wired Devices](#)

If you have any questions that are not answered by the documentation, please contact Alcatel support.

## Configuring Your Own User Information with the Home > User Info Page

The **Home > User Info** page displays information about the user that is logged into OV3600. This page includes the authentication type (local user, RADIUS, or TACACS+) and access level. This page enables customization some of the information displayed in OV3600, and is the place to change your password.

The logged-in users can customize the information displayed in the OV3600 header. [Figure 157](#) illustrates the **Home > User Info** page, and [Table 122](#) lists the fields.

**Figure 157 Home > User Info Page Illustration**

admin is logged in as a local user with role AMP Administration and Read/Write access to RAPIDS.

**User Information**

Name:

New Password:

Confirm New Password:

Email Address:

Phone:

Notes:

---

**Top Header Stats**

Filter Level For Rogue Count:

Customize Header Columns:  Yes  No

Stats:

- New Devices
- Up (Wired & Wireless)
- Up (Wired)
- Up (Wireless)
- Down (Wired & Wireless)
- Down (Wired)
- Down (Wireless)
- Mismatched
- Rogues
- Users
- Alerts
- Severe Alerts

[Select All - Unselect All](#)

Severe Alert Threshold:

Include Device Types:

- Fat APs
- Thin APs
- Controllers
- Switches
- Others

[Select All - Unselect All](#)

---

**Search Preferences**

Customize Search:  Yes  No

Search Preferences:

- APs/Devices
- Users (Connected)
- Users (Historical)
- Folders
- Groups
- Tags
- Rogues

[Select All - Unselect All](#)

---

**Display Preferences**

Default Number of Records per List:

Reset List Preferences:

Customize Columns for Other Roles:  Yes  No

Console Refresh Rate:

**Table 122 Home > User Info Fields and Descriptions**

| Field                               | Description                                                                                                                                          |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Filter Level For Rogue Count</b> | Specifies the minimum classification that will cause a device to be included in the rogue count header information.                                  |
| <b>Customize Header Columns</b>     | Enables/disables the ability to control which statistics hyperlinks are displayed at the top of every OV3600 screen.                                 |
| <b>Stats</b>                        | Select the specific data you would like to see in the header. <b>Note:</b> This field only appears if you selected <b>Yes</b> in the previous field. |

**Table 122 Home > User Info Fields and Descriptions (Continued)**

| Field                                      | Description                                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Severe Alert Threshold</b>              | Configures the minimum severity of an alert to be included in the Severe Alerts count. Note: The severe alerts count header info will only be displayed if 'Severe Alerts' is selected in the Stats section above. <b>Note:</b> This field only appears if you selected <b>Yes</b> in the <b>Customize Header Columns</b> field.        |
| <b>Include Device Types</b>                | Configures the types of devices that should be included in the header stats. If a device type is not selected then it will not be included in the header stats. This field only appears if you selected <b>Yes</b> in <b>Customize Header Columns</b> .                                                                                 |
| <b>Customize Search/Search Preferences</b> | Set to <b>No</b> by default; when set to <b>Yes</b> , you can select which search categories to display when search results are returned.                                                                                                                                                                                               |
| <b>Default Number of Records per List</b>  | Defines the number of rows to appear in any list by default. If a row count is manually set, it will override the default setting.                                                                                                                                                                                                      |
| <b>Reset List Preferences</b>              | Reset all list preferences including number of records per list, column order and hidden column information.                                                                                                                                                                                                                            |
| <b>Customize Columns for Other Roles</b>   | Allows admin users to determine the columns that should be displayed and the order they should be displayed for specific user roles. To customize lists for other users, navigate to that list and select <b>Choose Columns for roles</b> above the list. Make the desired column changes; select the roles to update and <b>Save</b> . |
| <b>Console Refresh Rate</b>                | The frequency in which lists and charts automatically refresh on a page.                                                                                                                                                                                                                                                                |

Perform the following steps to configure your own user account with the **Home > User Info** page:

1. In the **User Information** section, enter the following information:

- **Name**—Enter the ID by which you log into and operate in OV3600.
- **Email Address**—Enter the email address to be used for alerts, triggers, and additional OV3600 functions that support an email address.
- **Phone**—Enter the area code and phone number, if desired.
- **Notes**—Enter any additional text-based information that helps other OV3600 users or administrators to understand the functions, roles, or other rights of the user being created.

## Using the System > Configuration Change Jobs Page

Schedule configuration change jobs are summarized on the **System > Configuration Change Jobs** page. Perform the following steps to use this page, illustrated in [Figure 158](#).

**Figure 158 System > Configuration Change Jobs Page Illustration**

The screenshot shows a configuration change job interface. At the top, there is a table with columns: Subject, Description, Scheduled Time, User, Folder, and Group. The job details are as follows:

| Subject | Description                                                     | Scheduled Time                 | User  | Folder                              | Group  |
|---------|-----------------------------------------------------------------|--------------------------------|-------|-------------------------------------|--------|
| AP02    | Change Radio Status on AP "AP02" 802.11bg and AP "AP02" 802.11a | September 9th 2007 at 12:00 am | admin | Top > controller/11th ap > trapsize | Access |

Below the table, the job is titled "To run at: September 9th 2007 at 12:00 am". It lists two APs:

- AP "AP02" 802.11bg: Radio: (none) [dropdown arrow] Enabled
- AP "AP02" 802.11a: Radio: (none) [dropdown arrow] Enabled

Buttons for "Apply Changes Now", "Delete", and "Cancel" are visible. Below this is a "Schedule" section with instructions: "Specify numeric dates with optional 24-hour times (like 7/4/2003 or 2003-07-04 for July 4th, 2003, or 7/4/2003 13:00 for July 4th, 2003 at 1:00 PM.), or specify relative times (like at noon, tomorrow at midnight, or next tuesday at 4am). Other input formats may be accepted." The "Start Date/Time" field is set to "September 9th 2007 at 12:00". A "Schedule" button is at the bottom.

1. To edit an existing configuration change job select on the linked description name. On the subsequent edit page you can choose to run the job immediately by selecting **Apply Changes Now**, reschedule the job by selecting **Schedule**, **Delete** the job, or **Cancel** the job edit.
2. Select the linked AP or group name under the **Subject** column to go to its monitoring page.
3. Select the linked group and folder names under **Folder** or **Group** to go to the AP's folder or group page.
4. Scheduled configuration change jobs will also appear on the **Manage** page for an AP or the **Monitoring** page for a group.

## Using the System > Firmware Upgrade Jobs Page

The **System > Firmware Upgrade Jobs** page displays a list of recent firmware upgrade jobs that have been initiated in the **APs/Devices > Manage** page or **Modify Devices** page for a controller or autonomous AP that supports firmware upgrades in OV3600.

Successful upgrade jobs are not archived on this page – generally you visit this page to review failed or pending firmware upgrade jobs.

Users with the **AP/Device Manager** role and higher can view this page. Audit-only users cannot view this page or tab.

**Figure 159 System > Firmware Upgrade Jobs Page Illustration**

**Firmware upgrade jobs:**

Add new firmware files on the [Firmware & File Upload](#) page. Initiate a firmware upgrade job from the APs/Device Manage page of a device or from the Modify Devices actions on a list of devices.

[Firmware Server Log](#)

|                          | Name ▲                                              | Role               | Username | Created          | Status | Scheduled Start Time | Total Devices | Pending | In Progress | Completed | Failed |
|--------------------------|-----------------------------------------------------|--------------------|----------|------------------|--------|----------------------|---------------|---------|-------------|-----------|--------|
| <input type="checkbox"/> | <a href="#">Firmware upgrade for 5500-6.0.196.0</a> | AMP Administration | admin    | 4/7/2011 2:57 PM | Failed | -                    | 1             | 0       | 0           | 1         | 0      |
| <input type="checkbox"/> | <a href="#">Firmware upgrade for Cisco4400</a>      | AMP Administration | admin    | 4/6/2011 3:07 PM | Failed | -                    | 1             | 0       | 0           | 0         | 1      |
| <input type="checkbox"/> | <a href="#">Firmware upgrade for Cisco4400</a>      | AMP Administration | admin    | 4/6/2011 3:12 PM | Failed | -                    | 1             | 0       | 0           | 0         | 1      |
| <input type="checkbox"/> | <a href="#">Firmware upgrade for Cisco4400</a>      | AMP Administration | admin    | 4/6/2011 3:22 PM | Failed | -                    | 1             | 0       | 0           | 0         | 1      |

4 Firmware Upgrade Jobs

[Select All - Unselect All](#)

You can perform the following operations on this page:

- To restart failed firmware upgrade jobs, select the checkboxes next to the rows you want to restart and select the **Restart Failed Jobs** button.
- To stop a pending upgrade job and remove it from the list, select the **Cancel and Delete Jobs** button.
- Use additional links on the page as shortcuts to the **Device Setup > Upload Firmware & Files** page, or the complete raw text of the Firmware Server Log
- To view additional details about an individual upgrade job including the devices being upgraded, select the name of an upgrade job from the Name column to go to the **System > Firmware Upgrade Job Detail** page, illustrated in [Figure 160](#).

From here you can click the device name to go to its **APs/Devices > Monitor** page, or the link under **Firmware File** column to go to the **Device Setup > Upload Firmware & Files** page.

**Figure 160 System > Firmware Upgrade Job Detail Page Illustration**

[Firmware Server Log](#)

Details for firmware upgrade job **Firmware upgrade for 5500-6.0.196.0**

Firmware upgrade job is stopped because too many upgrades have failed. [Restart the upgrade job](#)

**Job Information:**

| Role                               | Username | Created          | Status | Scheduled Start Time | Total Devices | Pending | In Progress | Completed | Failed |
|------------------------------------|----------|------------------|--------|----------------------|---------------|---------|-------------|-----------|--------|
| <a href="#">AMP Administration</a> | admin    | 4/7/2011 2:57 PM | Failed | -                    | 1             | 0       | 0           | 1         | 0      |

**Devices being upgraded:**

There are 3 APs that you cannot see. 0 of those APs are currently being upgraded.

|                          |                          | Order in Queue ▲ | Current Version | Desired Version | Current Secondary Version | Desired Secondary Version | Firmware File                 |
|--------------------------|--------------------------|------------------|-----------------|-----------------|---------------------------|---------------------------|-------------------------------|
| <input type="checkbox"/> | <a href="#">wlc 5500</a> | 1                | 7.0.116.0       | 6.0.199.4       | 1.0.1                     |                           | 0_AIR-CT5500-K9-6-0-199-4.aes |

[Select All - Unselect All](#)

[Cancel and Delete Upgrades](#)

## Using the System > Performance Page

The **System > Performance** page displays basic OV3600 hardware information as well as resource usage over time. OV3600 logs performance statistics such as load average, memory and swap data every minute.


The historical logging is useful to determine the best usable polling period and track the health of OV3600 over time.

The page is divided into four sections:

- System Information
- Performance Graphs
- Database Statistics
- Disk Usage

[Figure 161](#) illustrates this page and [Table 123](#) describes fields and information displayed.

Figure 161 System > Performance Page Illustration (Partial Screen)

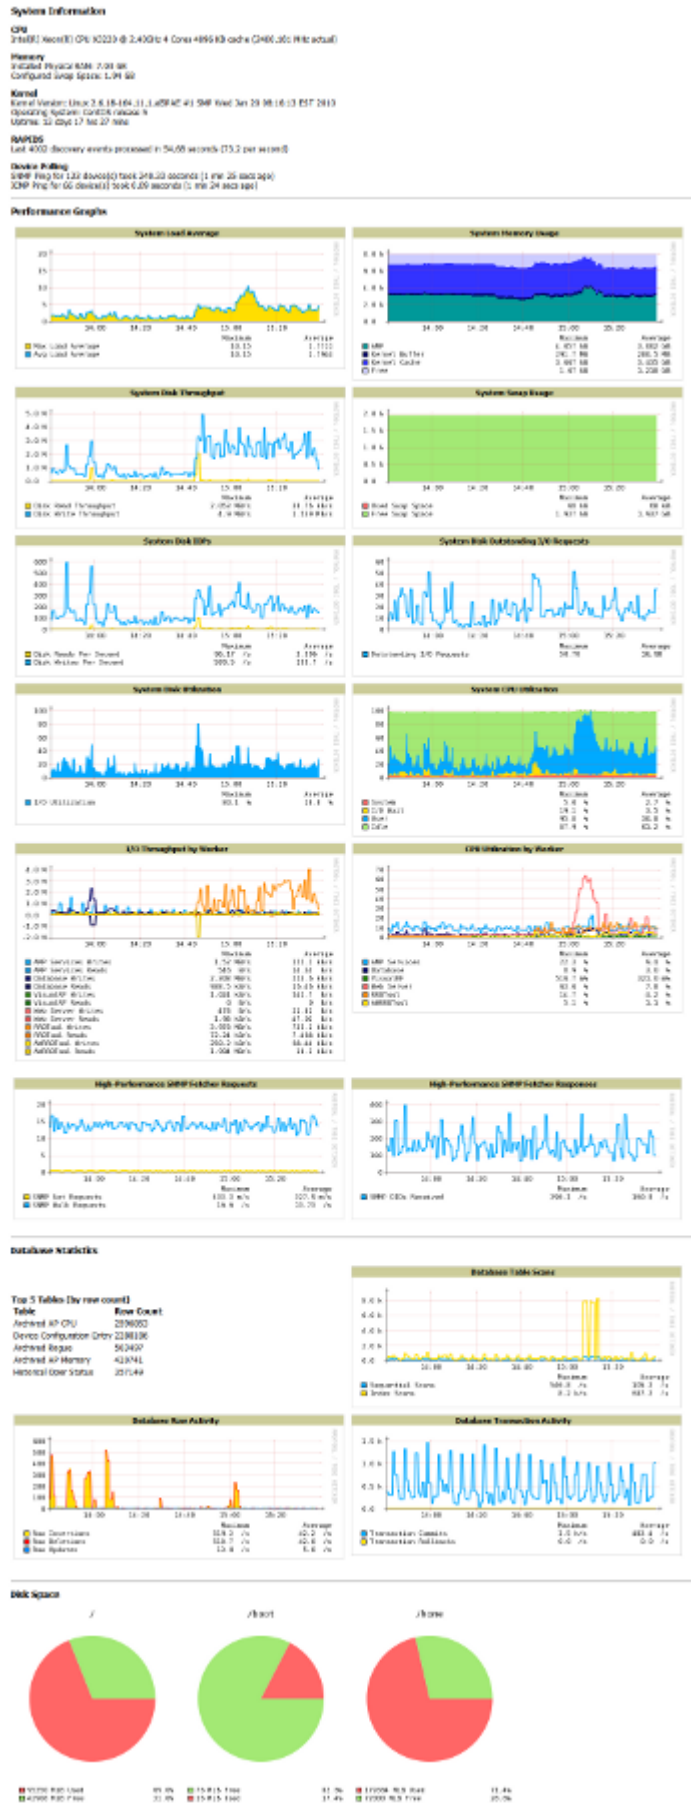

**Table 123 System > Performance Page Fields and Graphs**

| Field                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>System Information</b>                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>CPU(s)</b>                               | Basic CPU information as reported by the operating system.                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Memory</b>                               | The amount of physical RAM and Swap space seen by the operating system. Refer to the <i>OV3600 Server Hardware Guide</i> for hardware requirements.                                                                                                                                                                                                                                                                                                               |
| <b>Kernel</b>                               | The version of the Linux kernel running on the box.                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Device Polling</b>                       | Displays some AP/Device polling statistics.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Performance Graphs</b>                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>System Load Average</b>                  | The number of jobs currently waiting to be processed. Load is a rough metric that will tell you how busy a server is. A typical OV3600 load is around 2-3 times the number of CPU cores you have in your system. A constant load of 4x to 5x is cause for concern. A load above 6x is a serious issue and will probably result in OV3600 becoming unusable. To lower the load average, try increasing a few polling periods in the <b>Groups &gt; Basic</b> page. |
| <b>System Memory Usage</b>                  | The amount of RAM that is currently used broken down by usage. It is normal for OV3600 to have very little free RAM. Linux automatically allocates all free RAM as cache and buffer. If the kernel needs additional RAM for process it will dynamically take it from the cache and buffer.                                                                                                                                                                        |
| <b>System Disk Utilization</b>              | The amount of data read from the disk and written to the disk.                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>System Disk IOPs</b>                     | The number of disk reads and writes per second.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>System Disk Throughput</b>               | The rate of reading and writing from and to the disk in bytes per second.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>System Disk Outstanding I/O Requests</b> | The average number of outstanding I/O requests (queue depth). If it's high, it means that I/O requests (disk reads/writes) aren't being serviced as fast as they're being asked for.                                                                                                                                                                                                                                                                              |
| <b>System Swap Usage</b>                    | The amount of Swap memory used by OV3600. Swap is used when there is no more free physical RAM. A large performance penalty is paid when swap is used. If an OV3600 consistently uses swap, you should consider installing additional RAM.                                                                                                                                                                                                                        |
| <b>System CPU Utilization</b>               | The percentage of CPU that has been used by the user and the system as well as the amount that was idle.                                                                                                                                                                                                                                                                                                                                                          |
| <b>I/O Throughput by Worker/by Service</b>  | Displays reads and writes for workers (OV3600 services, database, VisualRF, web server, RRD tool and AWRRD tool) and for services (OV3600, VisualRF and web server).                                                                                                                                                                                                                                                                                              |
| <b>CPU Utilization by Worker/by Service</b> | Displays reads and writes for workers (OV3600 services, database, VisualRF, web server, RRD tool and AWRRD tool) and for services (OV3600, VisualRF and web server).                                                                                                                                                                                                                                                                                              |
| <b>System Network Bandwidth</b>             | All traffic in and out measured in bits per second of your primary network interface (Eth0 being the most common).                                                                                                                                                                                                                                                                                                                                                |
| <b>Bandwidth by Protocol</b>                | Displays the amount of traffic used by Telnet, HTTPS and SNMP used by your primary network interface (Eth0 being the most common).                                                                                                                                                                                                                                                                                                                                |

**Table 123 System > Performance Page Fields and Graphs (Continued)**

| Field                                          | Description                                                                                                                                                                                                                                                                     |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Legacy SNMP Fetcher Requests</b>            | The number of SNMP get and walk requests per second performed by the legacy (v1 and v3) SNMP fetcher.                                                                                                                                                                           |
| <b>Legacy SNMP Fetcher Responses</b>           | The number of SNMP OIDs received per second performed by the legacy (v1 and v3) SNMP fetcher.                                                                                                                                                                                   |
| <b>High Performance SNMP Fetcher Requests</b>  | The number of SNMP get and walk requests per second performed by the high performance SNMP (v2c) fetcher.                                                                                                                                                                       |
| <b>High Performance SNMP Fetcher Responses</b> | The number of SNMP OIDs received per second performed by the high performance SNMP (v2c) fetcher.                                                                                                                                                                               |
| <b>Database Statistics</b>                     |                                                                                                                                                                                                                                                                                 |
| <b>Top 5 Tables (by row count)</b>             | The five largest tables in OV3600. Degraded performance has been noticed for in some cases for tables over 200,000 rows. Alcatel-Lucent recommends decreasing the length of time client data is stored on the OV3600 page if a user/client table exceeds 250,000 rows.          |
| <b>Database Table Scans</b>                    | The number of database table scans performed by the database.                                                                                                                                                                                                                   |
| <b>Database Row Activity</b>                   | The number of insertions, deletions and updates performed to the database.                                                                                                                                                                                                      |
| <b>Database Transaction Activity</b>           | The number of commits and rollbacks performed by the database.                                                                                                                                                                                                                  |
| <b>Disk Space</b>                              |                                                                                                                                                                                                                                                                                 |
| <b>Disk Space</b>                              | Pie charts that display the amount of used and free hard drive space for each partition. If a drive reaches over 80% full, you may want to lower the <b>Historical Data Retention</b> settings on the <b>OV3600 Setup &gt; General</b> page or consider additional drive space. |

There are several initial steps that you can take to troubleshoot OV3600 performance problems, including slow page loads and timeout errors. Initial troubleshooting steps would include the following:

- Increasing the polling period settings on the **Groups > Basic** page.
- Increasing the polling period time for groups with routers and switches.
- Adding additional memory to the server. Please consult the sizing information in the latest edition of the *OV3600 Server Sizing Guide* or contact Alcatel support for the latest recommendations.




## Supporting OV3600 Servers with the Master Console

The **Master Console** (MC) is used to monitor multiple OV3600 stations from one central location. The **Master Console** is designed for customers running multiple OV3600 servers. Once an OV3600 station has been added to the MC, it will be polled for basic OV3600 information.

Much like the normal **Home > Overview** page, the **Master Console Home > Overview** page provides summary statistics for the entire network at a glance. [Figure 162](#) illustrates the Overview page:

**Figure 162** Master Console Home > Overview Page Illustration

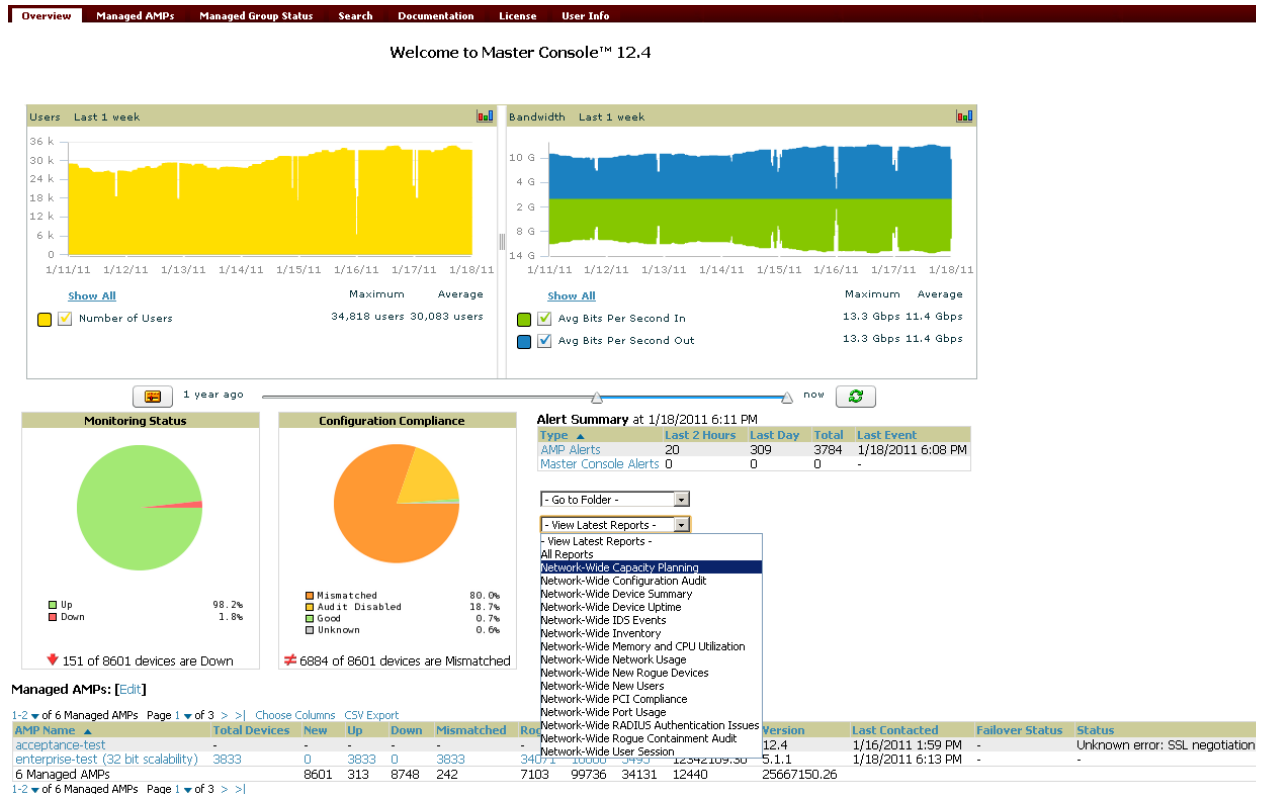

- Reports can be run from the **Master Console** to display information from multiple OV3600 stations; because such reports can be extremely large, reports can also be run as **summary only** so that they generate more quickly and finish as a manageable file size.
- The **Master Console** can also be used to populate group-level configuration on managed OV3600 installations using the **Global Groups** feature.
- The **Master Console** offers a display of devices that are in a **Down** or **Error** state anywhere on the network. This information is supported on **Master Console** pages that display device lists such as **Home > Overview** and **APs Devices > List**.
- The **Master Console** and **Failover** servers can be configured with a **Managed OV3600 Down** trigger that generates an alert if communication is lost to a managed or watched OV3600 station. The **Master Console** or **Failover** server can also send email or NMS notifications about the event. See “[Supporting OV3600 Servers with the Master Console](#)” on page 233.




The license key determines if the server will behave as a **Master Console** or as a standard OV3600 server.

### Using the Public Portal on Master Console

The **Master Console** also contains an optional Public Portal which allows any user to view basic group-level data for each managed OV3600. This feature is disabled by default for security reasons; no OV3600 or **Master Console** login is required to view the public portal. The Public Portal can be enabled in **OV3600**

**Setup > General** in the **Master Console** section. Once enabled, a new **Portal** tab will appear to the right of the **Groups** tab (refer to the navigation section in [Figure 162](#) in the previous page). The URL of the public portal will be <https://your.OV3600.name/public>. When you upgrade to the latest version of OV3600, the public portal is disabled by default, regardless of the type of license.

**Figure 163** *Public Portal Page Illustration*

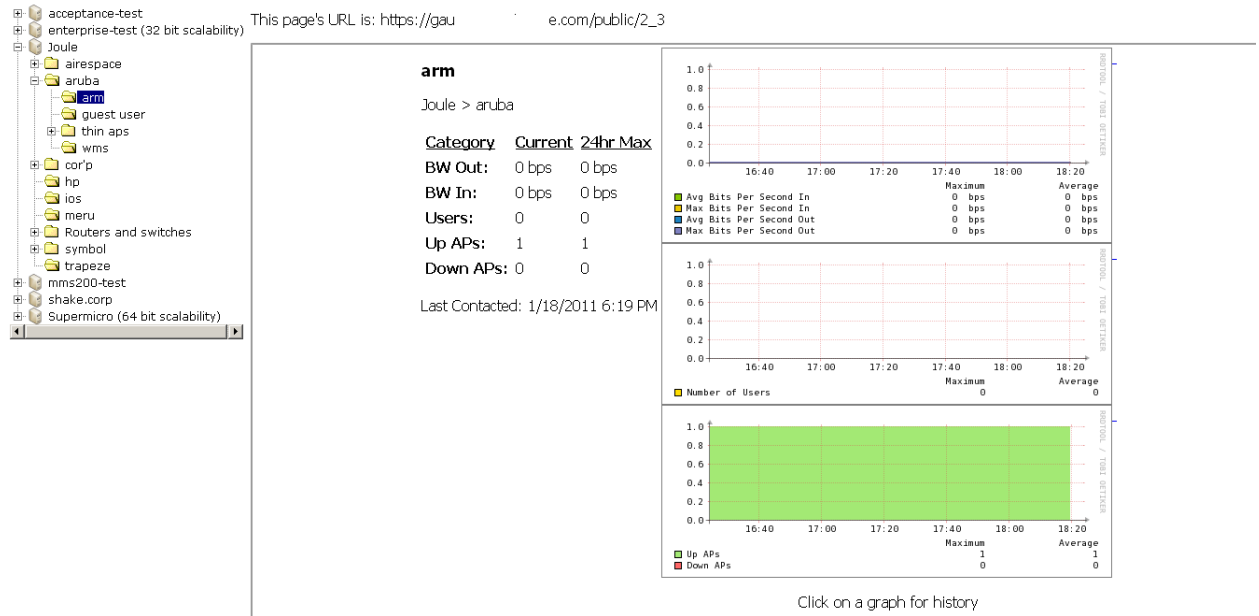

The **Public Portal** supports configuration of the iPhone interface. This can be configured using the **Master Console OV3600** page. See “[Defining General OV3600 Server Settings](#)” on page 37.

### Adding a Managed OV3600 with the Master Console

Perform the following steps to add a managed OV3600 console.

1. Navigate to the **Home > Managed OV3600s** page.
2. Select the **pencil icon** to edit or reconfigure an existing OV3600 console, or select **Add New Managed OV3600** to create a new OV3600 console. The **Managed OV3600** page appears. Complete the settings on this page as described in [Table 124](#).

**Table 124** *Managed OV3600 Fields and Default Values*

| Field                              | Default   | Description                                                                                                                                       |
|------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hostname / IP Address</b>       | N/A       | Enter the IP address or Hostname of the OV3600 server to be managed.                                                                              |
| <b>Polling Enabled</b>             | Yes       | Enables or disables the Master Console polling of managed OV3600 server.                                                                          |
| <b>Polling Period</b>              | 5 minutes | Determines how frequently the Master Console polls the managed OV3600 server.                                                                     |
| <b>Username</b>                    | N/A       | The username used by the Master Console to login to the managed OV3600 server. The user needs to be an AP/Device Manager or OV3600 Administrator. |
| <b>Password (Confirm Password)</b> | N/A       | The password used by the Master Console to login to the managed OV3600.                                                                           |
| <b>HTTP Timeout (5-1000 sec)</b>   | 60        | Defines the timeout period used when polling the managed OV3600 server.                                                                           |

**Table 124 Managed OV3600 Fields and Default Values (Continued)**

| Field                             | Default | Description                                                                               |
|-----------------------------------|---------|-------------------------------------------------------------------------------------------|
| <b>Manage Group Configuration</b> | No      | Defines whether the Master Console can manage device groups on the managed OV3600 server. |

3. When finished, select **Add** to return to the **Managed OV3600s** list page.

## Using Global Groups with Master Console

To push configurations to managed groups using the OV3600 Global Groups feature, follow these steps:

1. Navigate to the Master Console's **Groups > List** page.
2. Select **Add** to add a new group, or select the name of the group to edit settings for an existing group.
3. Select the **Duplicate** icon to create a new group with identical configuration to an existing group. Groups created on the Master Console will act as Global Groups, or groups with master configurations that can be pushed out to subscriber groups on managed OV3600s. Global groups are visible to all users, so they cannot contain APs (which can be restricted based on user role).
4. Selecting the name of an existing group on the **Master Console** loads the subtabs for **Basic**, **Security**, **SSIDs**, **AAA Servers**, **Templates**, **Radio**, **Cisco WLC Config**, **Proxim Mesh**, and **MAC ACL** pages, if such pages and configurations are active for the devices in that group.

These subtabs contain the same fields as the group subtabs on a monitored OV3600, but each field also has a checkbox. The Master Console can also configure global templates that can be used in subscriber groups. The process is the same as described in the [Chapter 6, “Creating and Using Templates”](#), except that there is no process by which templates can be fetched from devices in the subscriber group on managed OV3600s. Instead, the template must be copied and pasted into the Master Console Global Group.

When a Global Group is pushed from the **Master Console** to subscriber groups on managed OV3600s, all settings will be static except for settings with the checkbox selected; for fields with checkboxes selected, the value or setting can be changed on the corresponding tab for each managed group. For list pages, override options are available only on the **Add** page for each list. It will take several minutes for changes to Global Groups on the **Master Console** to be pushed to the managed OV3600s; make sure that the **Manage Group Configuration** option is enabled for each managed OV3600.

Once Global Groups have been configured on the **Master Console**, groups must be created or configured on the managed OV3600s to subscribe to a particular Global Group. To configure subscriber groups, enable **Use Global Groups** on the **Group > Basic** page of a group on a managed OV3600. Select the name of the Global Group from the drop-down menu, and then select **Save and Apply**. Note that the MC doesn't push anything when you create new subscriber groups; the copy of the Global Group already on the managed OV3600 provides the information.

Once the configuration is pushed, the non-overridden fields from the Global Group will appear on the subscriber group as static values and settings. Only fields that had the override checkbox selected in the Global Group will appear as fields that can be set at the level of the subscriber group. Any changes to a static field must be made on the Global Group.

The Global Groups feature can also be used without the Master Console. For more information about how this feature works, refer to [“Configuring and Using Device Groups in OV3600” on page 75](#).

## Backing Up OV3600

OV3600 creates nightly archives of all relational data, statistical data, and log files. This occurs by default at 4:15 AM, but is configurable on the **OV3600 Setup > General** page under **Nightly Maintenance Time**.

Although OV3600 only keeps the last four sets of archives, the archives can be downloaded manually or automatically off-site for more extensive backup strategies. OV3600 creates one data backup file each night. The data backup file contains all of the device and group information as well as historical data and system files, including IP address, NTP information, mail relay hosts, and other OV3600 settings.

## Viewing and Downloading Backups

To view current OV3600 backup files, go to the **System > Backups** page. [Figure 164](#) illustrates this page.

### Figure 164 System > Backups Page Illustration

Backups are run nightly.

[nightly\\_data001.tar.gz](#) Backup of 1071445503 bytes made 15 hrs 15 mins ago.  
[nightly\\_data002.tar.gz](#) Backup of 1045819243 bytes made 1 day 15 hrs 15 mins ago.  
[nightly\\_data003.tar.gz](#) Backup of 987593884 bytes made 2 days 15 hrs 15 mins ago.  
[nightly\\_data004.tar.gz](#) Backup of 1054778324 bytes made 3 days 15 hrs 15 mins ago.

To download a backup file, select the filename URL and the **File Download** popup page appears.

Regularly save the data backup file to another machine or media. This process can be automated easily with a nightly script.



---

Nightly maintenance and `amp_backup` scripts back up the full OV3600 data and save the file as `nightly_data00[1-4].tar.gz`. In previous OV3600 versions, the scripts created both config backup and data backup files. In order to restore the OV3600 data, it is only necessary to have most recent data backup file, and OV3600 no longer uses or supports the config backup file, effective as of OV3600 6.3.2 and later OV3600 versions.

---

## Running Backup on Demand

To create an immediate backup:

1. Log into the OV3600 system as **root**.
2. Run the backup script by typing `amp_backup`.

This creates a backup of the system located in `/alternative/databackup.tar.gz`.

## Restoring from a Backup

To restore a backup file on a new machine:

1. Use your OV3600 Installation CD to build a new machine. The new machine must be running the same version as the OV3600 that created the backup file.
2. Copy the `nightly_data00[1-4].tar.gz` file to the `/tmp` directory in the new OV3600.

A file transfer client that supports SFTP/SCP for Windows is WinSCP: <http://winscp.sourceforge.net/eng/>. WinSCP allows you to transfer the `nightly00[1-4].tar.gz` file from your local PC to the new OV3600 using the secure copy protocol (SCP).

3. Log onto the new server as **root**.
4. Change to the **scripts** directory by typing `scripts`.
5. Run the restore script by typing `./amp_restore -d /tmp/nightly_data00[1-4].tar.gz`.



---

Network administrators can now use the nightly backup from a 32-bit OV3600 to restore OV3600 on a 64-bit installation, rather than having to create a special backup file or use the special restore script.

---

## Upgrading OV3600

The OV3600 upgrade process may change. Please consult support of the latest OV3600 release announcement for detailed instructions. The following is sample instructions from the 6.4 announcement email:

### Upgrade Instructions

To upgrade your OV3600:

1. Login to the OV3600 server as the root user.
2. Run the following command

```
start_ov3600_upgrade -v 6.4.0
```

### Upgrading Without Internet Access

If your OV3600 cannot get to the Internet:

1. Download OV3600 6.4.0 from our download page: <http://service.esd.alcatel-lucent.com>
2. Copy the file to OV3600 /root directory using WinSCP.
3. On the OV3600, run the following command:

```
start_ov3600_upgrade -v 6.4.0
```

The `start_ov3600_upgrade` script will check the /root directory for the latest update. If the update is not found, the script will attempt to download it from the Alcatel-Lucent support page. The script will then extract the version specific upgrade script. The version specific script will deploy all needed files, update the database, perform any data migrations and restart the OV3600 services.

## Backing Up OV3600

### Overview of Backups


OV3600 creates nightly archives of all relational data, statistical data, and log files. This occurs by default at 4:15 AM, but is configurable on the **OV3600 Setup > General** page under the **Nightly Maintenance Time** setting.

Although OV3600 only keeps the last four sets of archives, the archives can be downloaded manually or automatically off-site for more extensive backup strategies. OV3600 creates one data backup file each night. The data backup file contains all of the device and group information as well as historical data and system files, including IP address, NTP information, mail relay hosts, and other OV3600 settings.

### Viewing and Downloading Backups

To view current OV3600 backup files, go to the **System > Backups** page. [Figure 164](#) illustrates this page.

**Figure 165** *System > Backups Page Illustration*

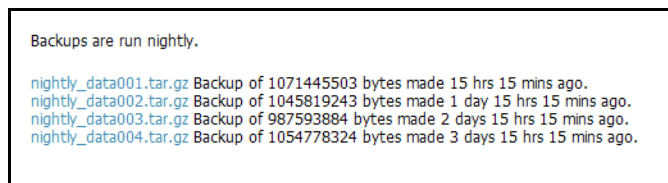

To download a backup file, click the filename URL and the **File Download** popup page appears. Proceed as prompted.

Alcatel-Lucent recommends regularly saving the data backup file to another machine or media. This process can be automated easily with a nightly script.



---

Nightly maintenance and `ov3600_backup` scripts back up the full OV3600 data and save the file as `nightly_data001.tar.gz`. In previous OV3600 versions, the scripts created both config backup and data backup files. In order to restore the OV3600 data, it is only necessary to have most recent data backup file, and OV3600 no longer uses or supports the config backup file, effective with OV3600 6.3.2 and later OV3600 versions.

---

## Running Backup on Demand

To create an immediate backup, use the following procedure:

1. Log into the OV3600 system as root.
2. Run the backup script by typing **`ov3600_backup`**

This creates a backup of the system located in `/alternative/databackup.tar.gz`.

## Restoring from a Backup

To restore a backup file on a new machine use the following procedure:

1. Use your OV3600 Installation CD to build a new machine. The new machine must be running the same version as the OV3600 that created the backup file.
2. Copy the `nightly_data00[1-4].tar.gz` file to the new OV3600. The `/tmp` directory is an appropriate destination.

A good open source Windows file transfer client that supports SFTP and SCP for is WinSCP which is available from <http://winscp.sourceforge.net/eng/>.

WINSXP allows you to transfer the `nightly00[1-4].tar.gz` file from your local PC to the new OV3600 using the secure copy protocol (SCP).

3. Log onto the new server as **root**.
4. Run the restore script by typing **`ov3600_restore -d /tmp/nightly_data00[1-4].tar.gz`**.

## Using OV3600 Failover for Backup

The failover version of OV3600 provides a “many to one” hot backup server. The Failover OV3600 polls the watched OV3600s to verify that each is up and running. If the watched OV3600 is unreachable for the specified number of polls, the Failover OV3600 automatically restores the most recent saved backup from the watched OV3600 and begins polling its APs.

## Navigation Section of OV3600 Failover

The **Navigation** section displays tabs to all main GUI pages within OV3600 Failover. The top bar is a static navigation bar containing tabs for the main components of OV3600, while the lower bar is context-sensitive and displays the subtabs for the highlighted tab. [Table 125](#) describes the contents of this page.

**Table 125** Contents of the Navigation Section of Failover

| Main Tab            | Description                                                                                                                                                                                | Subtabs                                                                                                                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Home</b>         | The <b>Home</b> page provides basic OV3600 Failover information including system name, hostname, IP address, current time, running time, software version, and watched OV3600 information. | <ul style="list-style-type: none"><li>● <b>Overview</b></li><li>● <b>User Info</b></li><li>● <b>Watched OV3600s</b></li><li>● <b>License</b></li></ul>                                             |
| <b>System</b>       | The <b>System</b> page provides information related to OV3600 operation and administration including overall system status, performance monitoring, and backups.                           | <ul style="list-style-type: none"><li>● <b>Status</b></li><li>● <b>Triggers</b></li><li>● <b>Alerts</b></li><li>● <b>Event Log</b></li><li>● <b>Backups</b></li><li>● <b>Performance</b></li></ul> |
| <b>OV3600 Setup</b> | The <b>Setup</b> page provides all information relating to the configuration of OV3600 itself and its connection to your network.                                                          | <ul style="list-style-type: none"><li>● <b>General</b></li><li>● <b>Network</b></li><li>● <b>Users</b></li><li>● <b>TACACS+</b></li></ul>                                                          |

## Adding Watched OV3600 Stations

Navigate to the **Home > Watched OV3600s** page to begin backing up and monitoring OV3600 stations. Once an OV3600 installation has been added to the Watched OV3600 list, the Failover OV3600 will download the most recent backup and begin polling. The Failover OV3600 and the Watched OV3600 must be on the same version or else the watched OV3600 will be unable to restore properly. If any of the watched OV3600s are not on the same version of OV3600, you will need to upgrade. The Failover OV3600 will need HTTPS access (port 443) to the watched OV3600 to verify that the web page is active and to fetch downloads.

Once the Failover OV3600 determines that the Watched OV3600 is not up (based on the user-defined missed poll threshold) it will restore the data backup of the Watched OV3600 and begin monitoring the watched **OV3600 APs and devices**. There are many variables that affect how long this will take including how long client historical data is being retained, but for an OV3600 with 1,000 APs it might take up to 10 minutes. For an **OV3600** with 2,500 APs, it might take as long as 20 minutes. The Failover OV3600 will retain its original IP address.

In summary, the Failover OV3600 could take over for the Watched OV3600 in as little as five minutes; it might take up to an additional 10-20 minutes to unpack the watched OV3600 data and begin monitoring APs. The most important factors are the missed poll threshold, which is defined by the user, and the size of the watched OV3600 backup, which is affected by the total number of APs and by the amount of data being saved, especially client historical data.

To restore the Watched OV3600, run the backup script from the command line and copy the current data file and the old Watched OV3600 configuration file to the Watched OV3600. Then run the restore script. More

information about backups and restores can be found in “[Backing Up OV3600](#)” on page 237 “[Backing Up OV3600](#)” on page 235.

**Table 126** *Home > Watched Page Fields and Default Values*

| Setting                          | Default   | Description                                                                                                                                                                                                 |
|----------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IP/Hostname</b>               | None      | The IP address or Hostname of the watched OV3600.<br>The Failover OV3600 needs HTTPS access to the watched OV3600s.                                                                                         |
| <b>Username</b>                  | None      | A username with management rights on the watched OV3600.                                                                                                                                                    |
| <b>Password</b>                  | None      | The password for the username with management rights specified above.                                                                                                                                       |
| <b>HTTP Timeout (5-1000 Sec)</b> | 60        | The amount of time before OV3600 considers a polling attempt failed.                                                                                                                                        |
| <b>Polling Enabled</b>           | Yes       | Enables or disables polling of the Watched OV3600.<br><b>NOTE:</b> You do not need to disable polling of the watched OV3600 system if it is set to be down during nightly maintenance or is being upgraded. |
| <b>Polling Period</b>            | 5 minutes | The amount of time between polls of the Watched OV3600.                                                                                                                                                     |
| <b>Missed Poll Threshold</b>     | None      | The number of polls that can be missed before the failover OV3600 will begin actively monitoring the Watched OV3600 APs.                                                                                    |

## Logging out of OV3600

To log out of OV3600, select the **Logout** link on the upper right hand corner of every OV3600 page.

You will be logged off automatically based on the number of minutes set in the **OV3600 User Idle Timeout** setting of **OV3600 Setup > Authentication**. Refer to “[Configuring Timeout, Login Message, TACACS+ and RADIUS Authentication](#)” on page 51.



This chapter describes OV3600 reports, including access, creation, scheduling, and distribution.

This chapter includes the following sections:

- “Overview of OV3600 Reports” on page 241
- “Using Daily Reports” on page 244
- “Defining Reports” on page 265
- “Emailing and Exporting Reports” on page 268

OV3600 ships with several reports enabled by default. Default reports may run nightly or weekly, depending on the OV3600 release. Review the list of defined and scheduled reports with the **Reports > Generated** and **Reports > Definition** pages to determine if default reports are desired. If not, you can delete, disable, or reschedule any of them.

OV3600 supports additional specialized reports as follows:

- **System > Status** page supports the diagnostic report file for sending to customer support: `diagnostics.tar.gz`.
- **System > Status** page supports the VisualRF diagnostics report file: `VisualRFdiag.tar.gz`.
- **VisualRF > Network View** supports the Bill of Materials (BOM) report. Refer to [Chapter 11, “Using VisualRF”](#) on page 277.

## Overview of OV3600 Reports

Reports are powerful tools in network analysis, user configuration, device optimization, and network monitoring on multiple levels. Among their benefits, reports provide an interface for multiple configurations.

OV3600 reports have the following general parameters:

- OV3600 runs daily versions of all reports during predefined windows of time. All reports can be scheduled to run in the background.
- The daily version of any report is available instantly in the **Reports > Generated** page.
- The **Inventory** and the **Configuration Audit** reports are the only reports that don’t span a period of time. Instead, these two reports provide a snapshot of the current state of the network.
- Users can create all other reports over a custom time period on the **Reports > Definitions** page. All reports can be emailed or exported to XML format for easy data manipulation using a spreadsheet.

## Reports > Definitions Page Overview

The **Reports > Definitions** page allows you to define new reports and see the reports already defined.

The **Definitions** page includes these sections:

- **Report definitions** section—The **Add** button allows you to define a custom report using the **Custom Options** drag and drop interface, or from any of the report types in the dropdown menu. The **Report Definitions** table has a complete list of all saved report definitions with an option to return to each definition’s table to further customize your report.
  - **Add and Run** allows you to create a report definition and run that report immediately.

- **Run Now** (visible from the expanded **Report Definitions** menu) allows immediate running of a custom report as soon as you set the parameters. You must save its definition separately, if you want to remember the parameters.
- **Report definitions for other roles** section—This section, supported for **admin** users, displays additional reports that have been scheduled for other roles. This section of the page adds the **Role** column, and other columns are the same.

Each pane includes a **Latest Report** column with the most recently run reports for each definition and role created. **Run** and **Delete** buttons allow you to select a report from the definitions table to run or delete. Once you define a report from the **Definition** page, it appears on the **Generated** page. The **Reports > Definition** page is shown in [Figure 166](#), and [Table 127](#) describes the fields available when you select a specific report definition.

**Table 127 Reports > Definition Page Fields and Descriptions**

| Field                      | Description                                                                                                                                                                                                         |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Definition</b>   | Displays a field for entering report title and dropdown menu, shown in <a href="#">Figure 167</a> , displaying all possible report types.                                                                           |
| <b>Report Restrictions</b> | Displays dynamic fields that include spaces for selecting attributes and entering data relevant to your selected report type scope such as groups, folders, SSID, Device Search filter, report start and end times. |
| <b>Scheduling Options</b>  | Reveals options for one time or regularly scheduled reporting by selecting <b>Yes</b> . Options include report frequency, start time, and current system time.                                                      |
| <b>Report Visibility</b>   | Allows you to determine a report's visibility according to user role.                                                                                                                                               |
| <b>Email Options</b>       | Reveals email address preferences for sending reports by selecting <b>Yes</b> .                                                                                                                                     |
| <b>Add and Run</b>         | Allows you to create a report definition and run that report right then.                                                                                                                                            |
| <b>Run Now</b>             | Allows you to run any report that has been defined on the spot without saving settings or creating a new report definition.                                                                                         |
| <b>Add</b>                 | Saves report definition you just created.                                                                                                                                                                           |

**Figure 166 Reports > Definitions Page Illustration (Split View)**

Report definitions:

New Report Definition

Reports are available on the [Generated Reports](#) page after they have been run.

1-20 ▼ of 45 Report Definitions Page 1 ▼ of 3 > |

| <input type="checkbox"/> | Title ▲                      | Type              | Subject                       |
|--------------------------|------------------------------|-------------------|-------------------------------|
| <input type="checkbox"/> | VoWLAN Devices               | Device Summary    | SSID intranet-voip            |
| <input type="checkbox"/> | VoWLAN Usage                 | Network Usage     | SSID intranet-voip            |
| <input type="checkbox"/> | VoWLAN User Sessions         | User Session      | SSID intranet-voip            |
| <input type="checkbox"/> | Avir-uptime                  | Device Uptime     | Group HQ                      |
| <input type="checkbox"/> | Capacity Planning Max Values | Capacity Planning | All Groups, Folders and SSIDs |
| <input type="checkbox"/> | Custom Device Summary Report | Device Summary    | Group HQ                      |
| <input type="checkbox"/> | Custom IDS Events Report     | IDS Events        | All Groups and Folders        |

| Latest Report                | Report Start  | Report End       | Last Run Time      | Scheduled                   |
|------------------------------|---------------|------------------|--------------------|-----------------------------|
| VoWLAN Devices               | 2 weeks ago   | now              | 5/15/2009 3:00 PM  | Every Friday at 3:00 pm PDT |
| VoWLAN Usage                 | 1 week ago    | now              | 5/15/2009 3:00 PM  | Every Friday at 3:00 pm PDT |
| VoWLAN User Sessions         | 2 weeks ago   | now              | 5/15/2009 3:00 PM  | Every Friday at 3:00 pm PDT |
| Avir-uptime                  | last week     | today            | 5/19/2009 12:19 AM | -                           |
| Capacity Planning Max Values | 3/1/2009      | 12:00 a.m. today | 5/21/2009 12:15 AM | Daily at 12:15 am PDT       |
| Custom Device Summary Report | 2 weeks ago   | now              | 5/14/2009 6:36 AM  | -                           |
| Custom IDS Events Report     | 5/14/09 22:00 | 5/14/09 23:00    | 5/15/2009 7:13 AM  | -                           |

Select All - Unselect All


---

Report definitions for other roles:

1-4 ▼ of 4 Report Definitions Page 1 ▼ of 1

| <input type="checkbox"/> | Role ▲                | Title                           | Type                         | Subject                                                                                                                               |
|--------------------------|-----------------------|---------------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> | corp-users-via-radius | Radius Auth Problems            | RADIUS Authentication Issues | All Groups, Folders and SSIDs                                                                                                         |
| <input type="checkbox"/> | Partner               | Device Summary Report           | Device Summary               | All Groups, Folders and SSIDs                                                                                                         |
| <input type="checkbox"/> | Partner               | RADIUSReport                    | RADIUS Authentication Issues | Group <a href="#">Research Lab</a> and Folder <a href="#">Top &gt; Sunnyvale HQ &gt; HQ Cisco LWAPP</a> and SSID <a href="#">wpa2</a> |
| <input type="checkbox"/> | Partner               | PCCompliance-Detailed-3wks-Acme | PCI Compliance               | Group <a href="#">HQ</a>                                                                                                              |

**Figure 167 Report Type Drop-down Menu in Reports > Definitions Illustration**

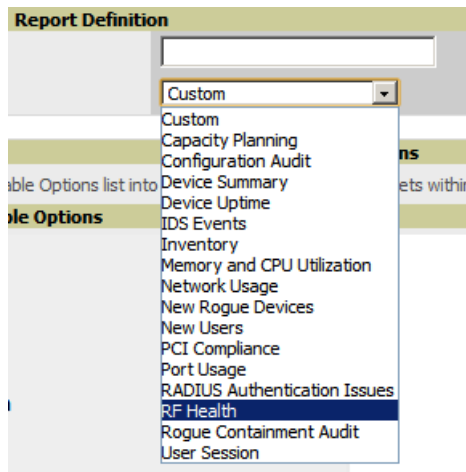

Only **admin** users have complete access to all report information. The OV3600 reports and online displays of information can vary with configuration, User Roles, and Folders.

## Reports > Generated Page Overview

The **Reports > Generated** page displays reports that have been run, as well as the most recent daily version of any report. An **Admin** user can see and edit all report definitions in OV3600. Users with **Monitor Only** roles can see reports and definitions only if they have access to all devices in the reports.

The **Reports > Generated** page contains three primary sections, as follows:

- Generated reports configured for the current role and for additional roles
- Generated reports for other roles
- The latest daily reports for immediate online viewing

**Figure 168 Reports > Generated Page Example**

**Generated reports:**  
 Visit the [Report Definitions](#) page to run new reports.  
 1-20 of 959 Reports Page 1 of 48 > > |

| <input type="checkbox"/> | Generation Time   | Title                                   | Type                         | Subject                       | Report Start       | Report End        |
|--------------------------|-------------------|-----------------------------------------|------------------------------|-------------------------------|--------------------|-------------------|
| <input type="checkbox"/> | 5/21/2009 3:24 AM | test                                    | Network Usage                | All Groups, Folders and SSIDs | 11/21/2008 2:51 AM | 5/21/2009 2:51 AM |
| <input type="checkbox"/> | 5/21/2009 3:05 AM | yourdomain.user session                 | User Session                 | All Groups, Folders and SSIDs | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 3:05 AM | yourdomain.radius authentication issues | RADIUS Authentication Issues | All Groups, Folders and SSIDs | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 2:48 AM | yourdomain.new users                    | New Users                    | All Groups, Folders and SSIDs | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 2:48 AM | yourdomain.new rogue devices            | New Rogue Devices            | All Groups and Folders        | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 2:48 AM | yourdomain.network usage                | Network Usage                | All Groups, Folders and SSIDs | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 2:24 AM | yourdomain.memory and cpu utilization   | Memory and CPU Utilization   | All Groups and Folders        | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |
| <input type="checkbox"/> | 5/21/2009 2:23 AM | yourdomain.inventory                    | Inventory                    | All Groups and Folders        | -                  | -                 |
| <input type="checkbox"/> | 5/21/2009 2:23 AM | yourdomain.ids-event                    | IDS Events                   | All Groups and Folders        | 5/20/2009 2:00 AM  | 5/21/2009 2:00 AM |

Select All - Unselect All

---

**Generated reports for other roles:**  
 1-5 of 5 Reports Page 1 of 1

| <input type="checkbox"/> | Role       | Generation Time   | Title                             | Type              | Subject                       | Report Start       | Report End         |
|--------------------------|------------|-------------------|-----------------------------------|-------------------|-------------------------------|--------------------|--------------------|
| <input type="checkbox"/> | Admin Team | 4/24/2009 9:19 AM | Capacity Report From Cron         | Capacity Planning | All Groups, Folders and SSIDs | 4/23/2009 12:00 AM | 4/24/2009 12:00 AM |
| <input type="checkbox"/> | Admin Team | Failed            | Capacity Report From Cron         | Capacity Planning | All Groups, Folders and SSIDs | 4/23/2009 12:00 AM | 4/24/2009 12:00 AM |
| <input type="checkbox"/> | Partner    | 4/28/2009 7:15 AM | PCISCompliance-Detailed-3wks-Acme | PCI Compliance    | Group Acme HQ                 | 4/7/2009 7:12 AM   | 4/28/2009 7:12 AM  |

Select All - Unselect All

**Figure 169** *Reports > Generated Page with Single-click Report Viewing Options*

Latest Capacity Planning Report  
Latest Configuration Audit Report  
Latest Custom Report  
Latest Device Summary Report  
Latest Device Uptime Report  
Latest IDS Events Report  
Latest Inventory Report  
Latest Memory and CPU Utilization Report  
Latest Network Usage Report  
Latest New Rogue Devices Report  
Latest New Users Report  
Latest PCI Compliance Report  
Latest Port Usage Report  
Latest RADIUS Authentication Issues Report  
Latest RF Health Report  
Latest User Session Report

## Using Daily Reports

This section describes the default and custom-scheduled reports supported in OV3600. These reports can be accessed from the **Reports > Generated** page.

### Viewing Generated Reports

The **Reports > Generated** page supports the following general viewing options:

- By default, the reports on the **Reports > Generated** page are sorted by **Generation Time**. You can sort reports by any other column header in sequential or reverse sequential order. You can also choose columns, export the Generated Reports list in CSV, and modify the pagination of this list.
- The **Reports > Detail** page launches when you select any report title from this page.

The **Generated Reports** page contains fewer columns and information than the **Definitions** page. [Table 128](#) describes each column for the **Reports > Generated** page.

**Table 128** *Reports > Generated Page Fields and Descriptions*

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Generated Time</b> | Displays the date and time of the last time the report was run, or when the latest report is available. Selecting the link in this field displays the latest version of a given report. When the latest version of a given report is not available, this field is blank. In this case, a report can be run by selecting the report title and selecting <b>Run</b> . |
| <b>Title</b>          | Displays title of the report. This is a user-configured field when creating the report.                                                                                                                                                                                                                                                                             |
| <b>Type</b>           | Displays the type of the report.                                                                                                                                                                                                                                                                                                                                    |
| <b>Subject</b>        | Displays the scope of the report, to include groups, folders, SSIDs, or any combination of these that are included in the report.                                                                                                                                                                                                                                   |
| <b>Report Start</b>   | Displays the beginning of the time period covered in the report.                                                                                                                                                                                                                                                                                                    |
| <b>Report End</b>     | Displays the end of the time period covered in the report.                                                                                                                                                                                                                                                                                                          |
| <b>Role</b>           | In the <b>Reports definitions for other roles</b> section, this column indicates the roles for which additional reports are defined.                                                                                                                                                                                                                                |

## Using Custom Reports


Custom reports allow users to specify the data that should be included in a report.

Perform these steps to create a Custom Report.

1. Navigate to the **Reports > Definitions** page.
2. Select **Add**.

3. By default, the Custom option will be selected in the Type drop-down menu, and the **Custom Options** section appears below as shown in [Figure 170](#).

**Figure 170** *OV3600 Custom Options Page Illustration*

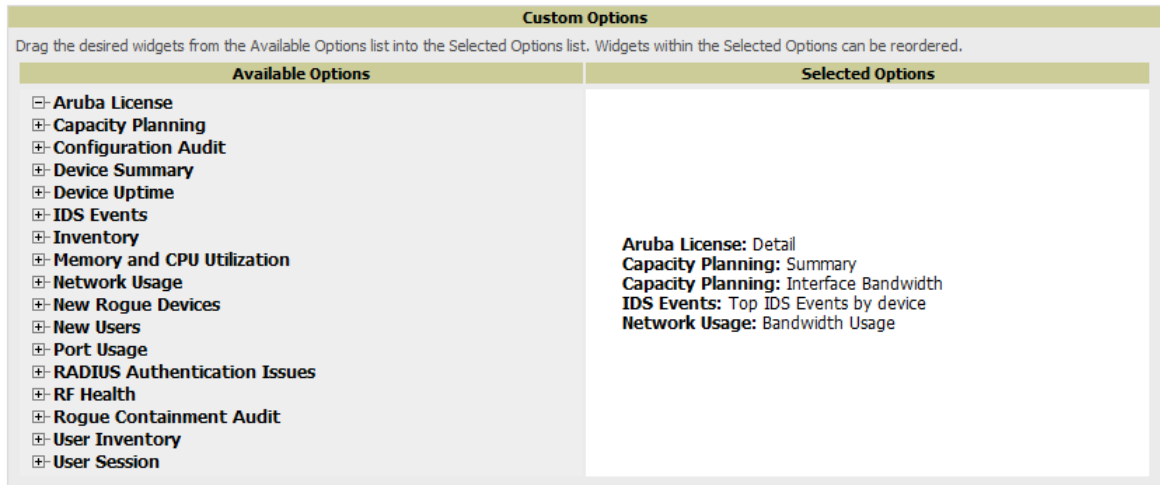

The left pane of the **Custom Options** section lists all available data that can be included in the report. For example, if the data you want to include is in the RF Health report, select **RF Health** to view a list of all available radio frequency information. Then, simply drag the desired data from the **Available Options** list on the left to the **Selected Options** pane on the right.

The order of the data in the **Selected Options** section is the order that it will appear in the report. The data can be reordered by dragging an item up or down the list.

4. Below the Custom Options panes are the **Report Restrictions**, **Scheduling Options**, **Report Visibility**, and **Email Options** sections. Choose the parameters as needed for your report, especially a **Report Start** and **Report End**.
5. When finished, select **Add and Run** to add the report to your list and run it immediately, **Run Now** to run without being added to the list, **Add** to add but not run the report, or **Cancel** to exit this page.

## Using the Alcatel-Lucent License Report

A new Alcatel-Lucent License Report has been added in the Reports tab to track licenses on Alcatel-Lucent devices in your network. This report includes information on the type, quantity, percent used, installation date, expiration date, and the license keys.

**Figure 171 Alcatel-Lucent License Report Detail Page**

**Alcatel-Lucent License Report for Device Types Access Points, Controllers, Switches & Routers, Universal & Custom Devices**  
**Group Access Points**  
[Folder Top](#)

Generated on 6/21/2011 7:24 PM

**Details for Aruba800 in Group aruba gui no wms and Folder Top > aruba with Max #of APs 16**

1-8 ▼ of 8 Aruba800 Page 1 ▼ of 1 [Export CSV](#)

| License Type                  | License Qty | License Used (%) | Install Date        | Expires | Flag | Key                                              |
|-------------------------------|-------------|------------------|---------------------|---------|------|--------------------------------------------------|
| AP Developers Module          | -           | -                | 2009-08-25 02:14:37 | Never   | E    | bmo7joNC-2j0sUjxC-/rT8j2tm-Wwojppa-8W001hkq-2zc  |
| Voice Services Module         | -           | -                | 2009-08-25 02:14:23 | Never   | E    | nFFoa6E5-pg6qxISM-/VtaNIp9-8wu4hM0u-Ohtnj1yP-XV\ |
| External Services Interface   | -           | -                | 2009-08-26 03:00:14 | Never   | E    | rw15Lw/A-EmZZHsj-7IivmPeY-kBzU8Pkq-ZmiYaSMZ-Hv   |
| MMC AP                        | -           | -                | 2009-08-26 03:00:12 | Never   | E    | c+8HJ9lp-cuHr79mk-8ytsOHO/-5TuLvZ9/-E5sTP/Un-A2k |
| xSec Module                   | -           | -                | 2009-08-26 03:00:12 | Never   | E    | dYh7cFQv-RsUH5jCA-+WUaGwyW-CTrYyhYl-QjFk7Gti-ge  |
| Client Integrity Module       | -           | -                | 2009-08-26 03:00:13 | Never   | E    | Oh5fstC-Xm/E763-2dSXW9Z-ATrbAjtV-IrQrsGQ-sew     |
| Wireless Intrusion Protection | -           | -                | 2009-08-26 03:00:13 | Never   | E    | P4hkbzw-pZ4UroSZ-OJ38dnL9-IOtLD/fX-Ku92sldt-opw  |
| VPN Server                    | -           | -                | 2009-08-26 03:00:13 | Never   | E    | HbnXkYdF-MOaoUls5-d6eweXq2-ZIVc8QK0-nHR4Fz/H-FV  |

1-8 ▼ of 8 Aruba800 Page 1 ▼ of 1

**Details for 10.15.76.8 in Group 10.15.76.8 and Folder Top > 10.15.76.8 with Max #of APs 32**

1-1 ▼ of 1 10.15.76.8 Page 1 ▼ of 1 [Export CSV](#)

| License Type                              | License Qty | License Used (%) | Install Date        | Expires | Flag | Key                                   |
|-------------------------------------------|-------------|------------------|---------------------|---------|------|---------------------------------------|
| Policy Enforcement Firewall for VPN users | -           | -                | 2011-01-18 15:26:31 | Never   | E    | dTjudtrN-908tVTT2-+JKsZhr1-K+n3r0XS-J |

1-1 ▼ of 1 10.15.76.8 Page 1 ▼ of 1

**Details for Aruba3600-Master in Group aruba gui no wms and Folder Top > aruba > guest user with Max #of APs 16**

1-1 ▼ of 1 Aruba3600-Master Page 1 ▼ of 1 [Export CSV](#)

| License Type                              | License Qty | License Used (%) | Install Date        | Expires | Flag | Key                                     |
|-------------------------------------------|-------------|------------------|---------------------|---------|------|-----------------------------------------|
| Policy Enforcement Firewall for VPN users | -           | -                | 2011-02-28 13:37:04 | Never   | E    | kh+aiHT9-u8oKILF1-M+fEjnjH-aIeOfTSU-BzZ |

1-1 ▼ of 1 Aruba3600-Master Page 1 ▼ of 1

## Using the Capacity Planning Report

The **Capacity Planning Report** tracks device bandwidth capacity and throughput in device groups, folders, and SSIDs. This report assists in analyzing device capacity and performance on the network, and such analysis can help to achieve network efficiency and improved experience for users.

This report is based on interface-level activity. The information in this report can be sorted by any column header in sequential or reverse-sequential order by selecting the column heading.

Refer also to the “Using the Network Usage Report” on page 255 for additional bandwidth information.

The following figures and [Table 129](#) illustrate and describe the contents of the **Capacity Planning Report**.

# Figure 172 Capacity Planning Report Detail Page

## Daily Capacity Planning Report for All Groups, Folders and SSIDs

8% of Capacity for 1-100% of the time  
 1/10/2011 12:00 AM to 1/11/2011 12:00 AM  
 Generated on 1/11/2011 8:22 PM

- XML (XHTML) export
- CSV export
- Email this report
- Print report

### Interfaces

1-5 of 35 Interfaces Page 1 of 7 > > | CSV Export

| Device            | Interface | Group            | Folder                 | Controller       | Time Above 8% of Capacity | Capacity Combined (b/s) | Usage While > Threshold (Combined) |
|-------------------|-----------|------------------|------------------------|------------------|---------------------------|-------------------------|------------------------------------|
| 00:1a:1e:c0:1a:64 | 802.11bgn | aruba gui no wms | Top > aruba > thin aps | Aruba3200        | 15 hrs 50 mins (65.97%)   | 5000000                 | 18.31%                             |
| 1372              | 802.11an  | aruba corp       | Top > cor/p            | ethersphere-1322 | 9 hrs 15 mins (38.54%)    | 5000000                 | 21.80%                             |
| 1249              | 802.11an  | aruba corp       | Top > cor/p            | ethersphere-1322 | 6 hrs 40 mins (27.78%)    | 5000000                 | 32.54%                             |
| AL27              | 802.11an  | aruba corp       | Top > cor/p            | ethersphere-lms3 | 6 hrs 35 mins (27.43%)    | 5000000                 | 19.12%                             |
| 12C               | 802.11an  | aruba corp       | Top > cor/p            | ethersphere-lms3 | 6 hrs 25 mins (26.74%)    | 5000000                 | 26.17%                             |

1-5 of 35 Interfaces Page 1 of 7 > > |

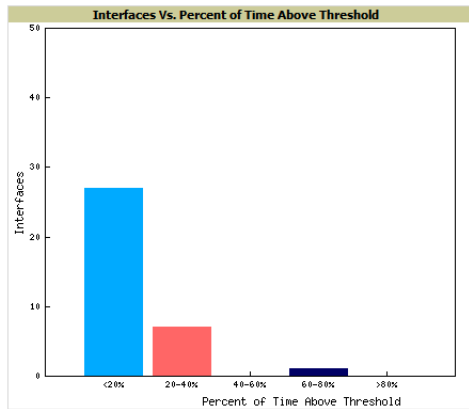


Table 129 Capacity Planning Report Fields and Contents, Top Portion

| Field      | Description                                                           |
|------------|-----------------------------------------------------------------------|
| Device     | Displays the device type or name.                                     |
| Interface  | Displays the type of 802.11 wireless service supported by the device. |
| Group      | Displays the device group with which the device is associated.        |
| Folder     | Displays the folder with which the device is associated.              |
| Controller | Displays the controller with which a device operates.                 |

**Table 129 Capacity Planning Report Fields and Contents, Top Portion (Continued)**

| Field                                        | Description                                                                                                                                                                                                                                        |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Time Above 1% of Capacity</b>             | Displays the time duration in which the device has functioned above 0% of capacity. A low percentage of use in this field may indicate that a device is under-used or poorly configured in relation to its capacity, or in relation to user needs. |
| <b>Capacity Combined (b/s)</b>               | Displays the combined capacity in and out of the device, in bits-per-second.                                                                                                                                                                       |
| <b>Usage While &gt; Threshold (Combined)</b> | Displays the time in which a device has functioned above defined threshold capacity, both in and out.                                                                                                                                              |
| <b>Overall Usage (Combined)</b>              | Displays the overall usage of the device, both combined in and out traffic.                                                                                                                                                                        |
| <b>Usage While &gt; Threshold (in)</b>       | Displays device usage that exceeds the defined and incoming threshold capacity.                                                                                                                                                                    |
| <b>Overall Usage (In)</b>                    | Displays overall device usage for incoming data.                                                                                                                                                                                                   |
| <b>Usage While &gt; Threshold (Out)</b>      | Displays device usage for outgoing data that exceeds defined thresholds.                                                                                                                                                                           |
| <b>Overall Usage (Out)</b>                   | Displays device usage for outgoing data.                                                                                                                                                                                                           |

## Using the Configuration Audit Report

The **Configuration Audit Report** provides an inventory of device configurations on the network, enabling you to display information one device at a time, one folder at a time, or one device group at a time. This report links to additional configuration pages.

Perform these steps to view the most recent version of the report, then to configure a given device using this report.

1. Navigate to the **Reports > Generated** page.
2. Scroll to the bottom, and select **Latest Configuration Audit Report** to display **Detail** device configuration information for all devices. The ensuing **Detail** report can be very large in size, and provides multiple links to additional device configuration or information display pages.
3. You can display device-specific configuration to reduce report size and to focus on a specific device. When viewing configured devices on the **Detail** page, select a device in the **Name** column. The device-specific configuration appears.
4. You can create or assign a template for a given device from the **Detail** page. Select **Add a Template** when viewing device-specific configuration information.
5. You can audit the current device configuration from the **Detail** page. Select **Audit** when viewing device-specific information.
6. You can display archived configuration about a given device from the **Detail** page. Select **Show Archived Device Configuration**.

Figure 173 and Table 130 illustrate and describe the general **Configuration Audit** report and related contents.



**Figure 173 Reports > Generated > Daily Configuration Audit Report Page, abbreviated example**

**Daily Configuration Audit Report for All Groups, Folders and SSIDs**

Generated on 5/21/2009 2:21 AM

[export](#)  
[CSV export](#)  
[Email this report](#)  
[Print report](#)

1-20 of 360 Items Page 1 of 18 > |

| Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Folder                       | Group                        | Mismatches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------|------------------------------|-----------------------------------|-------------------|---------------|------------------------------|------|---------|-------------------------|----------|---------|-------------------------|----------|---------|-------------------------|----------|---------|----------------------|---------|----------|--------------------------------------|------|------|
| 11.1.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Top > Sunnyvale HQ           | Corp HQ                      | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>Location</td> <td>(failed to fetch)</td> <td>Not Available</td> </tr> <tr> <td>Mesh Role</td> <td>None</td> <td>Mesh AP</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | Current Device Configuration | Desired Device Configuration | Location                          | (failed to fetch) | Not Available | Mesh Role                    | None | Mesh AP |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (failed to fetch)            | Not Available                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Mesh Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | None                         | Mesh AP                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 11.1.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Top > HQ                     | Corp HQ                      | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>Location</td> <td>(failed to fetch)</td> <td>Not Available</td> </tr> <tr> <td>Mesh Role</td> <td>None</td> <td>Mesh AP</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | Current Device Configuration | Desired Device Configuration | Location                          | (failed to fetch) | Not Available | Mesh Role                    | None | Mesh AP |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (failed to fetch)            | Not Available                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Mesh Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | None                         | Mesh AP                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 11.1.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Top > HQ                     | Corp HQ                      | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>Location</td> <td>(failed to fetch)</td> <td>Not Available</td> </tr> <tr> <td>Mesh Role</td> <td>None</td> <td>Mesh AP</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | Current Device Configuration | Desired Device Configuration | Location                          | (failed to fetch) | Not Available | Mesh Role                    | None | Mesh AP |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (failed to fetch)            | Not Available                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Mesh Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | None                         | Mesh AP                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 11.1.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Top > HQ                     | Corp HQ                      | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>Location</td> <td>(failed to fetch)</td> <td>Not Available</td> </tr> <tr> <td>Mesh Role</td> <td>None</td> <td>Mesh AP</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | Current Device Configuration | Desired Device Configuration | Location                          | (failed to fetch) | Not Available | Mesh Role                    | None | Mesh AP |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (failed to fetch)            | Not Available                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Mesh Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | None                         | Mesh AP                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 1210-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Top > HQ > Lab               | Corp HQ                      | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>Location</td> <td>(failed to fetch)</td> <td>Not Available</td> </tr> <tr> <td>Mesh Role</td> <td>None</td> <td>Mesh AP</td> </tr> </tbody> </table>                                                                                                                                                                                                                                                                                                                                                                                                                                       |  | Current Device Configuration | Desired Device Configuration | Location                          | (failed to fetch) | Not Available | Mesh Role                    | None | Mesh AP |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (failed to fetch)            | Not Available                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Mesh Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | None                         | Mesh AP                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| <pre> Template: Actual aaa accounting network acct_methods start-stop group rad_acct Actual aaa authentication login eap_methods group rad_eap Actual aaa authentication login eap_methods4 group rad_eap4 Actual aaa authentication login mac_methods local Actual aaa authorization exec default local Actual aaa cache profile admin_cache Actual all Actual aaa group server radius dummy Actual aaa group server radius rad_acct Actual aaa group server radius rad_admin Actual cache authentication profile admin_cache Actual cache authorization profile admin_cache Actual cache expiry 1 Actual aaa group server radius rad_eap Actual aaa group server radius rad_eap4 Actual server 10.2.25.180 auth-port 1645 acct-port 1646 Actual server 10.2.25.180 auth-port 1812 acct-port 1813                 </pre> |                              |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| Airwave_Cisco_LWAPP Top > Sunnyvale HQ > HQ Cisco LWAPP Research Lab                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                              |                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                              |                              | <table border="1"> <thead> <tr> <th></th> <th>Current Device Configuration</th> <th>Desired Device Configuration</th> </tr> </thead> <tbody> <tr> <td>802.11a Channel Assignment Method</td> <td>Automatic</td> <td>Static</td> </tr> <tr> <td>802.11a Coverage Measurement</td> <td>180</td> <td>300</td> </tr> <tr> <td>802.11a DCA Channel 165</td> <td>Disabled</td> <td>Enabled</td> </tr> <tr> <td>802.11a DCA Channel 190</td> <td>Disabled</td> <td>Enabled</td> </tr> <tr> <td>802.11a DCA Channel 196</td> <td>Disabled</td> <td>Enabled</td> </tr> <tr> <td>802.11a DTPC Support</td> <td>Enabled</td> <td>Disabled</td> </tr> <tr> <td>802.11a Data Fragmentation Threshold</td> <td>2346</td> <td>2337</td> </tr> </tbody> </table> |  | Current Device Configuration | Desired Device Configuration | 802.11a Channel Assignment Method | Automatic         | Static        | 802.11a Coverage Measurement | 180  | 300     | 802.11a DCA Channel 165 | Disabled | Enabled | 802.11a DCA Channel 190 | Disabled | Enabled | 802.11a DCA Channel 196 | Disabled | Enabled | 802.11a DTPC Support | Enabled | Disabled | 802.11a Data Fragmentation Threshold | 2346 | 2337 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Current Device Configuration | Desired Device Configuration |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a Channel Assignment Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Automatic                    | Static                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a Coverage Measurement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 180                          | 300                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a DCA Channel 165                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Disabled                     | Enabled                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a DCA Channel 190                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Disabled                     | Enabled                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a DCA Channel 196                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Disabled                     | Enabled                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a DTPC Support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Enabled                      | Disabled                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |
| 802.11a Data Fragmentation Threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2346                         | 2337                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                              |                              |                                   |                   |               |                              |      |         |                         |          |         |                         |          |         |                         |          |         |                      |         |          |                                      |      |      |

**Table 130 Daily Configuration Audit Report**

| Field             | Description                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>       | Displays the device name for every device on the network. Selecting a given device name in this column allows you to display device-specific configuration.                                                                                                                               |
| <b>Folder</b>     | Displays the folder in which the device is configured in OV3600. Selecting the folder name in this report displays the <b>APs/Devices &gt; List</b> page for additional device, folder and configuration options.                                                                         |
| <b>Group</b>      | Displays the group with which any given device associates. Selecting the group for a given device takes you to the <b>Groups &gt; Monitor</b> page for that specific group, to display graphical group information, modification options, alerts, and an audit log for the related group. |
| <b>Mismatches</b> | This field displays configuration mismatch information. When a device configuration does not match ideal configuration, this field displays the ideal device settings compared to current settings.                                                                                       |

## Using the Device Summary Report

The **Device Summary Report** identifies devices that are the most or least used devices, and a comprehensive list of all devices. One potential use of this report is to establish more equal bandwidth distribution across multiple devices. This report contains the following five lists of devices.

- **Most Utilized by Maximum Number of Simultaneous Users**—By default, this list displays the 10 devices that support the highest numbers of users. This list provides links to additional information or configuration pages for each device to make adjustments, as desired.

- **Most Utilized by Bandwidth**—By default, this list displays the 10 devices that consistently have the highest bandwidth consumption during the time period defined for the report. This list provides links to additional information or configuration pages for each device.
- **Least Utilized by Maximum Number of Simultaneous Users**—By default, this list displays the 10 devices that are the least used, according to the number of users.
- **Least Utilized by Bandwidth**—By default, this list displays the 10 devices that are the least used, according to the bandwidth throughput.
- **Devices**—This list displays all devices in OV3600. By default it is sorted alphabetically by device name.



---

You can specify the number of devices that appear in each of the first four categories in the **Reports > Definitions > Add** page.

---

Any section of this report can be sorted by any of the columns. For example, you can specify a location and then sort the **Devices** list by the **Location** column to see details by location, or you can see all of the APs associated with a particular controller by sorting on the **Controller** column. If the AP name contains information about the location of the AP, you can sort by AP name.

If sorting the **Devices** list does not provide you with sufficient detail, you can specify a **Group** or **Folder** in the report **Definition** of a custom report. If you create a separate Group or Folder for each set of master and local controllers, you can generate a separate report for each Group or Folder. With this method, the summary sections of each report contain only devices from that Group or Folder.

and [Table 131](#) illustrate and describe the **Reports > Generated > Device Summary Detail** page.

Figure 174 Reports > Generated > Daily Device Summary Report Illustration (partial view)

**Daily Device Summary Report for All Groups, Folders and SSIDs**

1/11/2011 12:00 AM to 1/12/2011 12:00 AM  
Generated on 1/12/2011 12:40 AM

[XML \(XHTML\) export](#)  
[CSV export](#)  
[Email this report](#)  
[Print report](#)

**Most Utilized by Maximum Number of Simultaneous Users**

| Rank | AP/Device        | Number of Users | Max Simultaneous Users | Total Bandwidth (MB) | Average Bandwidth (kbps) | Location         | Controller     |
|------|------------------|-----------------|------------------------|----------------------|--------------------------|------------------|----------------|
| 2    | ethersphere-lms3 | 205             | 116                    | 19610.24             | 1815.76                  | Aruba Networks   | -              |
| 4    | RAP-Local        | 99              | 45                     | 6476.88              | 599.71                   | 1344 Server Room | -              |
| 1    | ethersphere-1322 | 231             | 126                    | 26165.29             | 2422.71                  | 1322             | -              |
| 3    | RAP-OPS-02       | 250             | 71                     | 18975.59             | 1757.00                  | -                | -              |
| 5    | 1310             | 41              | 23                     | 5849.25              | 541.60                   | -                | ethersphere-1: |
| 6    | AL27             | 42              | 23                     | 3368.82              | 311.93                   | -                | ethersphere-lr |
| 7    | 1153             | 46              | 23                     | 6290.70              | 582.47                   | -                | ethersphere-1: |
| 8    | 1242-H           | 50              | 19                     | 1418.28              | 131.32                   | -                | ethersphere-1: |
| 9    | 12C              | 41              | 19                     | 4206.01              | 389.44                   | -                | ethersphere-lr |
| 10   | 1263             | 56              | 19                     | 3181.33              | 294.57                   | -                | ethersphere-1: |

**Most Utilized by Bandwidth**

| Rank | AP/Device                    | Number of Users | Max Simultaneous Users | Total Bandwidth (MB) | Average Bandwidth (kbps) | Location               |
|------|------------------------------|-----------------|------------------------|----------------------|--------------------------|------------------------|
| 1    | Switch15.dev.airwave.com     | 0               | 0                      | 2154332.01           | 199475.19                | "Server Room top of    |
| 2    | 10.51.3.110                  | 0               | 0                      | 1555354.77           | 144014.33                | Sunnyvale              |
| 3    | lab-distro-switch            | 0               | 0                      | 753047.39            | 69726.61                 | AirWave AP Lab         |
| 4    | sales-24poe.corp.airwave.com | 0               | 0                      | 611772.61            | 56645.61                 | server room: CORP r    |
| 5    | switch7.dev.airwave.com      | 0               | 0                      | 609536.36            | 56438.55                 | server room: rack on   |
| 6    | 10.51.0.11                   | 0               | 0                      | 507892.66            | 47027.10                 | Dev Lab                |
| 7    | hp-zl-sw                     | 0               | 0                      | 394324.25            | 36511.50                 | -                      |
| 8    | cisco3560-poe                | 0               | 0                      | 218693.02            | 20249.35                 | server room: CORP r    |
| 9    | hp-poe-switch                | 0               | 0                      | 216460.70            | 20042.66                 | server room: left side |
| 10   | xlwesm make me mismatch      | 0               | 0                      | 87071.39             | 8062.17                  | -                      |

**Least Utilized by Maximum Number of Simultaneous Users**

| Rank | AP/Device                               | Number of Users | Max Simultaneous Users | Total Bandwidth (MB) | Average Bandwidth (kbps) | Location |
|------|-----------------------------------------|-----------------|------------------------|----------------------|--------------------------|----------|
| 1    | Aruba200-Master-really                  | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 2    | Aironet Wireless Communication-38:FB:BF | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 3    | blyman-rap5wn                           | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 4    | (id: 60293)                             | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 5    | tforman-rap2wg                          | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 6    | clukaszewski-rap5wn                     | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 7    | bzeno-RAP-2WG                           | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 8    | 10.51.0.9                               | 0               | 0                      | 0.00                 | 0.00                     | yy       |
| 9    | joeb-rap2wg                             | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 10   | ap125                                   | 0               | 0                      | 0.00                 | 0.00                     | -        |

**Least Utilized by Bandwidth**

| Rank | AP/Device                               | Number of Users | Max Simultaneous Users | Total Bandwidth (MB) | Average Bandwidth (kbps) | Location |
|------|-----------------------------------------|-----------------|------------------------|----------------------|--------------------------|----------|
| 1    | Aruba200-Master-really                  | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 2    | khamilton-rap5wn                        | 1               | 1                      | 0.00                 | 0.00                     | -        |
| 3    | (id: 60293)                             | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 4    | blyman-rap5wn                           | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 5    | tforman-rap2wg                          | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 6    | clukaszewski-rap5wn                     | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 7    | bzeno-RAP-2WG                           | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 8    | 10.51.0.9                               | 0               | 0                      | 0.00                 | 0.00                     | yy       |
| 9    | joeb-rap2wg                             | 0               | 0                      | 0.00                 | 0.00                     | -        |
| 10   | Aironet Wireless Communication-38:FB:BF | 0               | 0                      | 0.00                 | 0.00                     | -        |

Table 131 Reports > Generated > Daily Device Summary Report Unique Fields and Descriptions

| Field                           | Description                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Max Simultaneous Users</b>   | Displays the maximum number of users that were active on the associated device during the period of time that the report covers. |
| <b>Total Bandwidth (MB)</b>     | Displays the bandwidth in megabytes that the device supported during the period of time covered by the report.                   |
| <b>Average Bandwidth (kbps)</b> | Displays the average bandwidth throughput for the device during the period of time covered by the report.                        |

## Using the Device Uptime Report


The **Device Uptime Report** monitors device performance and availability on the network, tracking uptime by multiple criteria to include the following:

- Total average uptime by SNMP and ICMP
- Average uptime by device group
- Average uptime by device folder

You can use this report as the central starting point to improve uptime by multiple criteria. This report covers protocol-oriented, device-oriented, or SSID-oriented information. This report can help to monitor and optimize the network in multiple ways. This report can demonstrate service parameters, can establish locations that have superior or problematic uptime availability, and can help with additional analysis in multiple ways. Locations, device groups, or other groupings within a network can be identified as needing attention or can be proven to have superior performance when using this report.

Figure 175 and Table 131 illustrate and describe the **Reports > Generated > Device Uptime Detail** report.

**Figure 175 Device Uptime Report Illustration**

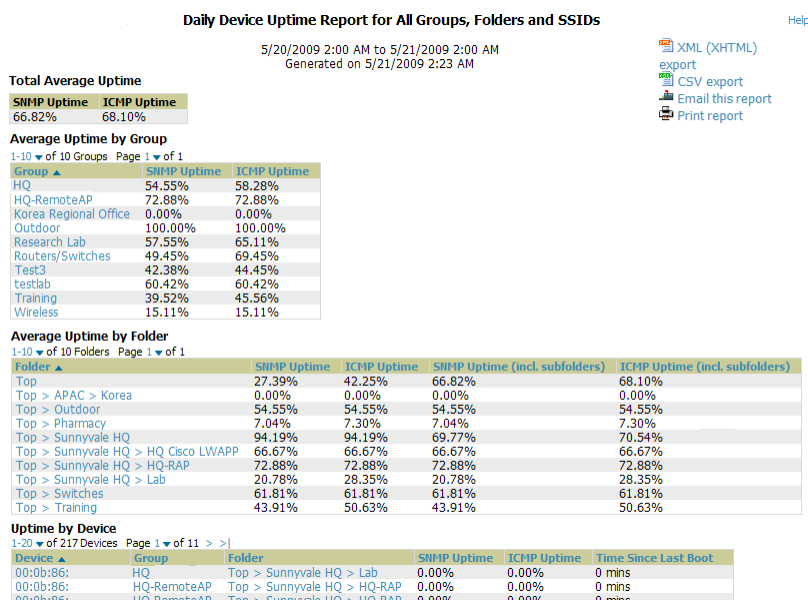

**Table 132 Reports > Generated > Device Uptime Report Unique Fields and Descriptions**

| Field                       | Description                                                                                                                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SNMP Uptime</b>          | Displays the percentage of time the device was reachable via ICMP. OV3600 polls the device via SNMP at the rate specified on the <b>Groups &gt; Basic</b> page.                                                                                |
| <b>ICMP Uptime</b>          | Displays the percentage of time the device was reachable via ICMP. If the device is reachable via SNMP it is assumed to be reachable via ICMP. OV3600 only pings the device if SNMP fails and then it pings at the SNMP polling interval rate. |
| <b>Time Since Last Boot</b> | The uptime as reported by the device at the end of the time period covered by the report.                                                                                                                                                      |

## Using the IDS Events Report

The **IDS Events Report** lists and tracks IDS events on the network involving APs or controller devices. This report cites the number of IDS events for devices that have experienced the most instances in the prior 24 hours, and provides links to support additional analysis or configuration in response.



Your role must be enabled to view RAPIDS to see this report.

The **Home > Overview** page also cites IDS events, and triggers can be configured for IDS events. Refer to “[Setting Triggers for IDS Events](#)” on page 203 for additional information.

Selecting the AP device or controller name takes you to the **APs/Devices > List** page.

[Figure 176](#) and [Table 133](#) illustrate and describe the **Reports > Generated > IDS Events Detail** page.

**Figure 176 Reports > Generated > IDS Events Report Illustration**

**IDS event yesterday for All Groups and Folders**

5/20/2009 2:00 AM to 5/21/2009 2:00 AM  
Generated on 5/21/2009 2:23 AM

XML (XHTML) export

CSV export

Email this report

Print report

**Top IDS Events by AP**

| AP              | Total Events ▲ | First Event        | Most Recent Event  |
|-----------------|----------------|--------------------|--------------------|
| idhasoft-ap70-2 | 2              | 5/20/2009 11:06 PM | 5/20/2009 11:06 PM |

**Top IDS Events by Controller**

| Controller | Total Events ▲ | First Event        | Most Recent Event  |
|------------|----------------|--------------------|--------------------|
| RAP-Local  | 2              | 5/20/2009 11:06 PM | 5/20/2009 11:06 PM |

1-2 ▼ of 2 Items Page 1 ▼ of 1

| Attack              | Attacker          | AP              | Controller | Radio    | Channel | SNR | Precedence | Time ▼             |
|---------------------|-------------------|-----------------|------------|----------|---------|-----|------------|--------------------|
| Null-Probe-Response | 00:1A:70:77:9C:CF | idhasoft-ap70-2 | RAP-Local  | 802.11bg | -       | 4   | -          | 5/20/2009 11:06 PM |
| Null-Probe-Response | 00:1A:70:77:9C:CF | idhasoft-ap70-2 | RAP-Local  | 802.11bg | -       | 4   | -          | 5/20/2009 11:06 PM |

**Table 133 Reports > Generated > IDS Events Detail Unique Fields and Descriptions**

| Field              | Description                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Attack</b>      | Displays the name or label for the IDS event.                                                                                                                         |
| <b>Controllers</b> | This column lists the controllers for which IDS events have occurred in the prior 24 hours, and provides a link to the <b>APs/Devices &gt; Monitor</b> page for each. |
| <b>Attacker</b>    | Displays the MAC address of the device that generated the IDS event.                                                                                                  |
| <b>Radio</b>       | Displays the 802.11 radio type associated with the IDS event.                                                                                                         |
| <b>Channel</b>     | Displays the 802.11 radio channel associated with the IDS event, when known.                                                                                          |
| <b>SNR</b>         | Displays the signal-to-noise (SNR) radio associated with the IDS event.                                                                                               |
| <b>Precedence</b>  | Displays precedence information associated with the IDS event, when known.                                                                                            |
| <b>Time</b>        | Displays the time of the IDS event.                                                                                                                                   |


## Using the Inventory Report

The **Inventory Report** itemizes all devices and firmware versions on the network, to include vendor information and graphical pie-chart summaries. The primary sections of this report are as follows:

- Vendor Summary—Lists the vendors for all devices or firmware on the network.
- Firmware Version Summary—Lists the firmware version for all firmware used on the network.
- Model Summary—Lists the model numbers for all devices or firmware on the network.

See [Figure 177](#) for an illustration of a sample report.

**Figure 177** Reports > Generated > Inventory Report Illustration (Edited View)

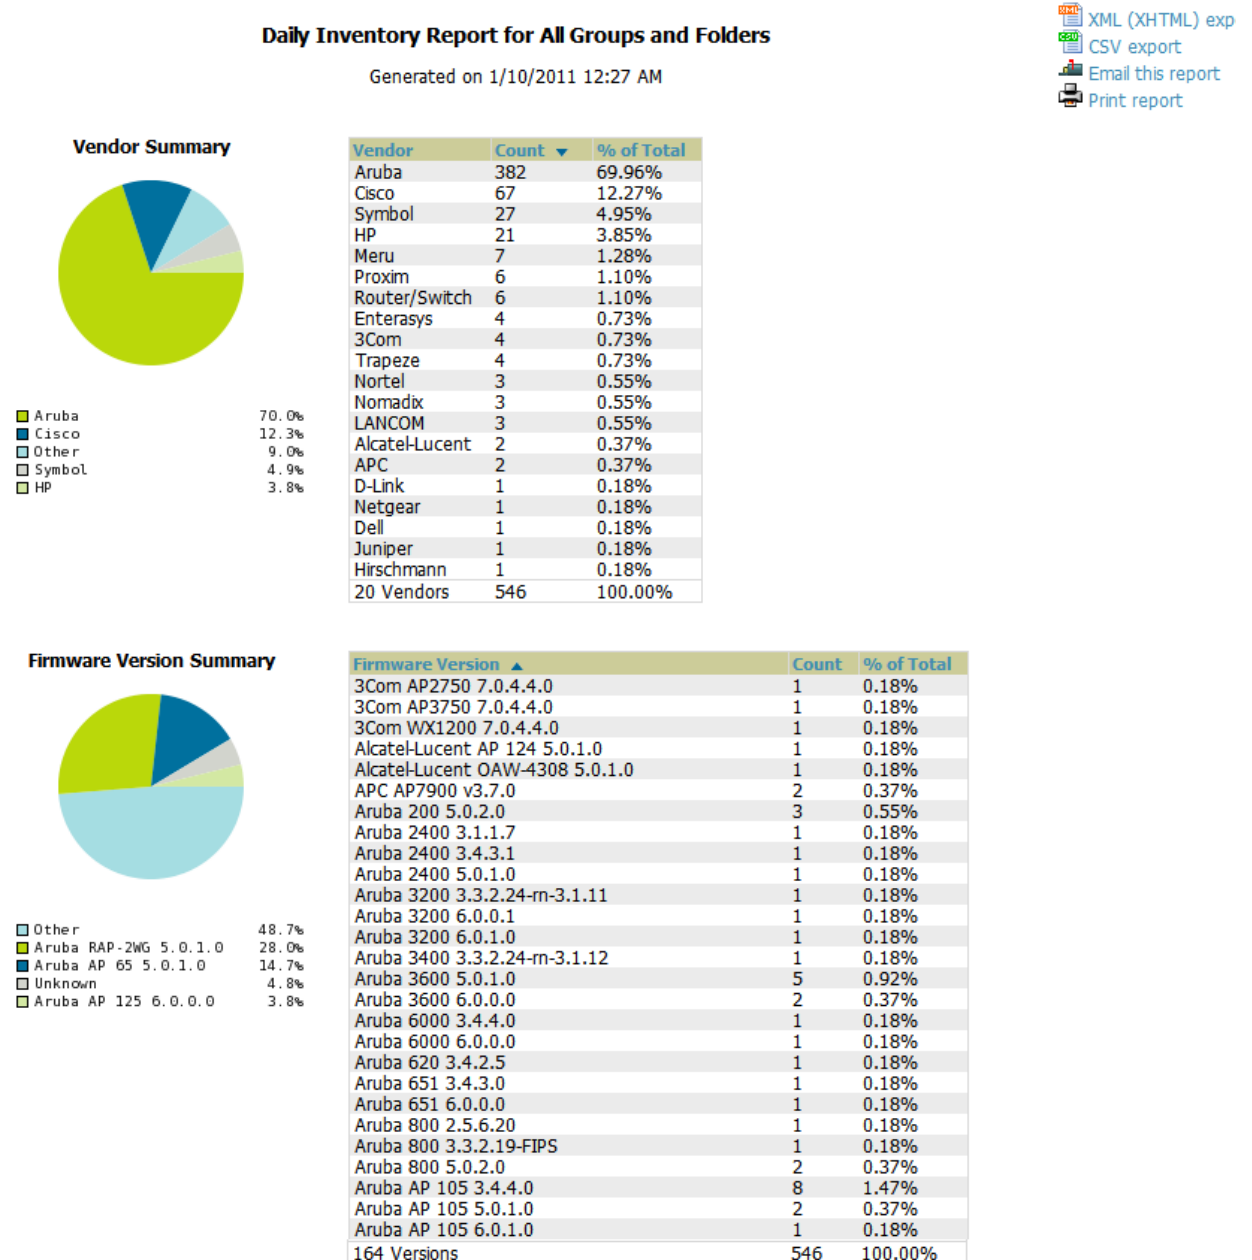


## Using the Memory and CPU Utilization Report

The **Memory and CPU Utilization Report** displays the top memory usage by device, and CPU usage on the network by device. Both are by percentage.

To create a scheduled and generated report of this type, refer to “Using Daily Reports” on page 244.

Figure 178 illustrates the **Reports > Detail** page for this report.

**Figure 178 Reports > Generated > Daily Memory and CPU Usage Report Illustration (Contents Rearranged for Space)**

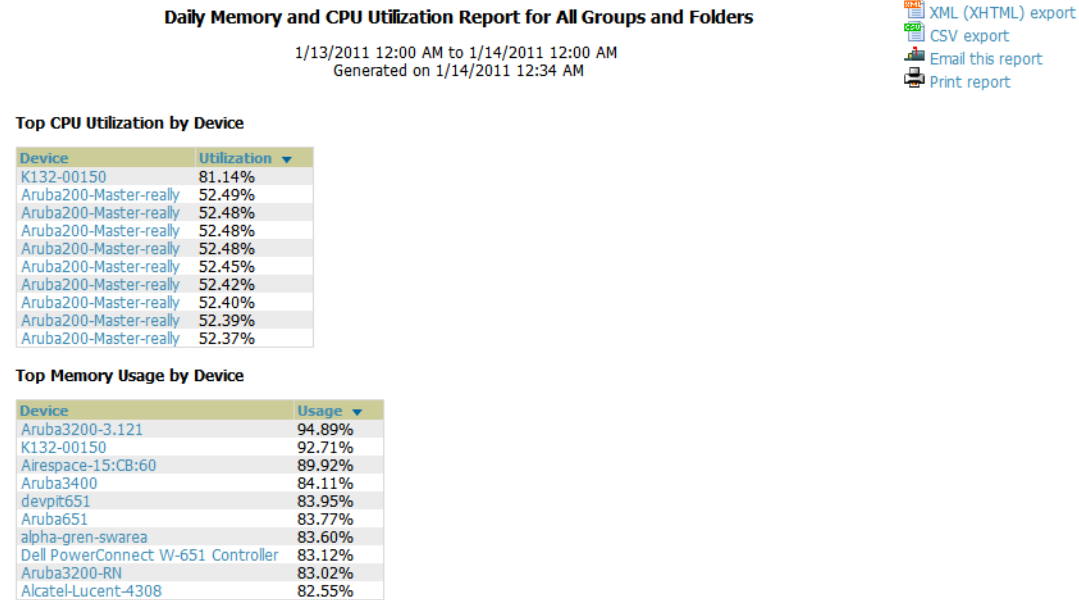


## Using the Network Usage Report

The **Network Usage Report** contains network-wide information in two categories:

- **Bandwidth usage by device**—maximum and average bandwidth in kbps
- **Number of users by time period**—average bandwidth in and out

Figure 179 illustrates the **Reports > Detail** page for the Daily Network Usage.

**Figure 179 Reports > Generated > Network Usage Report Illustration**

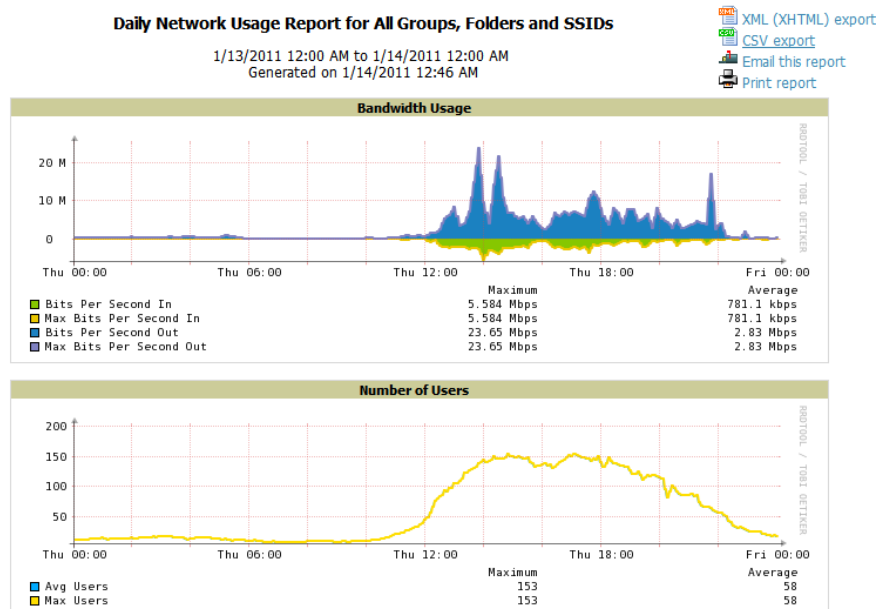

## Using the New Rogue Devices Report

The **New Rogue Devices Report** summarizes rogue device information including the following categories of information:

- Rogue devices by RAPIDS classification—described in [“Using RAPIDS and Rogue Classification” on page 175](#)
- Top rogue devices by number of discovering APs
- Top rogue devices by signal strength
- Graphical summary of rogue devices by LAN MAC address vendor
- Graphical summary of rogue devices by radio MAC address vendor
- Text-based table summary of rogue device counts
- Detailed and text-based table of rogue devices discovered only wirelessly with extensive device parameters and hyperlink interoperability to additional OV3600 pages
- Detailed and text-based table of all rogue devices supporting all discovery methods with extensive device parameters and hyperlink interoperability to additional OV3600 pages
- Detailed and text-based table of discovery events pertaining to the discovery of rogue devices with extensive parameters and hyperlink interoperability to additional OV3600 pages

This report is not run by default, but is available after you define it.





Refer to [Figure 180](#) for a sample illustration of this report.



Figure 180 Reports > Generated > New Rogue Devices Report Illustration

New Rogue Devices Report for All Groups and Folders

Rogues with classifications between Suspected Valid and Contained Rogue  
 12/11/2010 9:18 PM to 1/11/2011 9:18 PM  
 Generated on 1/11/2011 9:24 PM

-  XML (XHTML) export
-  CSV export
-  Email this report
-  Print report

Devices by RAPIDS Classification



|                    |       |
|--------------------|-------|
| Suspected Rogue    | 81.4% |
| Suspected Neighbor | 18.3% |
| Suspected Valid    | 0.3%  |

| RAPIDS Classification | Total |
|-----------------------|-------|
| Suspected Rogue       | 1512  |
| Suspected Neighbor    | 340   |
| Suspected Valid       | 6     |

Devices by Controller Classification



|                    |       |
|--------------------|-------|
| Suspected Neighbor | 60.2% |
| Suspected Rogue    | 32.7% |
| Valid              | 4.3%  |
| <unknown>          | 1.3%  |
| Rogue              | 0.9%  |
| Unclassified       | 0.6%  |


| Controller Classification | Total |
|---------------------------|-------|
| Suspected Neighbor        | 1119  |
| Suspected Rogue           | 607   |
| Valid                     | 79    |
| <unknown>                 | 24    |
| Rogue                     | 17    |
| Unclassified              | 12    |

Devices by Controller Classification



| Controller Classification | Total |
|---------------------------|-------|
| Suspected Neighbor        | 1119  |
| Suspected Rogue           | 607   |
| Valid                     | 79    |
| <unknown>                 | 24    |
| Rogue                     | 17    |
| Unclassified              | 12    |

Devices by LAN MAC Address Vendor



|                   |       |
|-------------------|-------|
| unknown           | 98.8% |
| Aruba             | 0.5%  |
| Other             | 0.4%  |
| Meru Networks Inc | 0.2%  |
| Cisco             | 0.2%  |

1-4 of 11 LAN MAC Address Vendors Page 1 of 3 > > | CSV Export

| LAN MAC Address Vendor | Total |
|------------------------|-------|
| -                      | 1835  |
| Aruba                  | 10    |
| Cisco                  | 3     |
| Meru Networks Inc      | 3     |

1-4 of 11 LAN MAC Address Vendors Page 1 of 3 > > |

Devices by Radio MAC Address Vendor



|                           |       |
|---------------------------|-------|
| Aruba                     | 94.1% |
| Unknown Locally Admini... | 2.3%  |
| Other                     | 1.3%  |
| unknown                   | 1.2%  |
| Unknown                   | 1.0%  |

1-3 of 14 Radio MAC Address Vendors Page 1 of 5 > > | CSV Export

| Radio MAC Address Vendor             | Total |
|--------------------------------------|-------|
| Aruba                                | 1749  |
| Unknown Locally Administered Address | 43    |
| -                                    | 23    |

1-3 of 14 Radio MAC Address Vendors Page 1 of 5 > > |

| Rogues Summary                                |        |
|-----------------------------------------------|--------|
| Total number of rogues:                       | 1858   |
| Total number of discovery events:             | 31002  |
| Average number of discovery events per rogue: | 16.69  |
| Average signal quality:                       | -62.17 |

Rogue Devices

1-5 of 1858 Rogue Devices Page 1 of 372 > > | CSV Export

| Name           | RAPIDS Classification | Threat Level | Controller Classification | Ack | First Discovered   | First Discovery Method | First Discove |
|----------------|-----------------------|--------------|---------------------------|-----|--------------------|------------------------|---------------|
| Aruba-C8:1E:70 | Suspected Rogue       | 5            | Suspected Rogue           | No  | 12/14/2010 4:18 PM | Wireless AP scan       | ap65-c2:2e:4  |
| Aruba-68:E1:40 | Suspected Rogue       | 5            | Suspected Rogue           | No  | 12/28/2010 6:22 PM | Wireless AP scan       | 00:1a:1e:c1:  |
| Aruba-C0:1F:30 | Suspected Neighbor    | 5            | Suspected Neighbor        | No  | 12/28/2010 9:56 AM | Wireless AP scan       | Fish-bowl     |

The rogue device inventories that comprise this report contain many fields, described in Table 134.

**Table 134 New Rogue Devices Report Fields**

| Field                         | Description                                                                                                                                                                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>                   | Displays the device name, as able to be determined.                                                                                                                                                                                                  |
| <b>RAPIDS Classification</b>  | Displays the RAPIDS classification for the rogue device, as classified by rules defined on the <b>RAPIDS &gt; Rules</b> page. Refer to <a href="#">“Using RAPIDS and Rogue Classification” on page 175</a> for additional information.               |
| <b>Threat Level</b>           | Displays the numeric threat level by which the device has been classified, according to rules defined on the <b>RAPIDS &gt; Rules</b> page. Refer to <a href="#">“Using RAPIDS and Rogue Classification” on page 175</a> for additional information. |
| <b>Ack</b>                    | Displays whether the device has been acknowledged with the network.                                                                                                                                                                                  |
| <b>First Discovered</b>       | Displays the date and time that the rogue device was first discovered on the network.                                                                                                                                                                |
| <b>First Discovery Method</b> | Displays the method by which the rogue device was discovered.                                                                                                                                                                                        |
| <b>First Discovery Agent</b>  | Displays the network device that first discovered the rogue device.                                                                                                                                                                                  |
| <b>Last Discovering AP</b>    | Displays the network device that most recently discovered the rogue device.                                                                                                                                                                          |
| <b>Model</b>                  | Displays the rogue device type when known.                                                                                                                                                                                                           |
| <b>Operating System</b>       | Displays the operating system for the device type, when known.                                                                                                                                                                                       |
| <b>IP Address</b>             | Displays the IP address of the rogue device when known.                                                                                                                                                                                              |
| <b>SSID</b>                   | Displays the SSID for the rogue device when known.                                                                                                                                                                                                   |
| <b>Network Type</b>           | Displays the network type on which the rogue was detected, when known.                                                                                                                                                                               |
| <b>Channel</b>                | Displays the wireless RF channel on which the rogue device was detected.                                                                                                                                                                             |
| <b>WEP</b>                    | Displays WEP encryption usage when known.                                                                                                                                                                                                            |
| <b>RSSI</b>                   | Displays Received Signal Strength (RSSI) information for radio signal strength when known.                                                                                                                                                           |
| <b>Signal</b>                 | Displays signal strength when known.                                                                                                                                                                                                                 |
| <b>LAN MAC Address</b>        | Displays the MAC address for the associated LAN when known.                                                                                                                                                                                          |
| <b>LAN Vendor</b>             | Displays LAN vendor information associated with the rogue device, when known.                                                                                                                                                                        |
| <b>Radio MAC Address</b>      | Displays the MAC address for the radio device, when known.                                                                                                                                                                                           |
| <b>Radio Vendor</b>           | Displays the vendor information for the radio device when known.                                                                                                                                                                                     |
| <b>Port</b>                   | Displays the router or switch port associated with the rogue device when known.                                                                                                                                                                      |
| <b>Last Seen</b>              | Displays the last time in which the rogue device was seen on the network.                                                                                                                                                                            |
| <b>Total Discovering APs</b>  | Displays the total number of APs that detected the rogue device.                                                                                                                                                                                     |
| <b>Total Discovery Events</b> | Displays the total number of instances in which the rogue device was discovered.                                                                                                                                                                     |

## Using the New Users Report


The **New Users Report** lists all new users that have appeared on the network during the time duration defined for the report. This report covers the user identifier, the associated role when known, device information and more. The report definition can filter on connection mode (wired, wireless or both).

Figure 181 illustrates the fields and information in the **New Users Report**.

Figure 181 **Reports > Generated > New Users Report Illustration**

**Daily New Users Report for All Groups, Folders, SSIDs and Roles**

2/6/2010 12:00 AM to 2/7/2010 12:00 AM  
Generated on 2/7/2010 12:16 AM

 XML (XHTML)  
 export  
 CSV export  
 Email this report  
 Print report

**New Users**

1-9 of 9 New Users Page 1 of 1

| Username              | Role     | MAC Address       | Vendor                              | AP/Device           | Association Time   | Duration    |
|-----------------------|----------|-------------------|-------------------------------------|---------------------|--------------------|-------------|
| -                     | VoFi     | 00:03:2A:00:03:2A | UniData Communication Systems, Inc. | Operations-AL25     | 1/20/2009 6:25 PM  | 38 mins     |
| NETWORKS\abc          | employee | 00:16:CF:00:16:CF | Hon Hai Precision Ind. Co., Ltd.    | ExecutiveSuite-AL16 | 1/20/2009 5:17 PM  | 17 mins     |
| -                     | -        | 00:03:2A:00:03:2A | Cisco-Linksys LLC                   | HQ-Engineering      | 1/20/2009 2:46 PM  | 5 mins      |
| wifiphone             | employee | 00:16:CF:00:16:CF | UniData Communication Systems, Inc. | Haystack-AL29       | 1/20/2009 1:44 PM  | 10 hrs 31 r |
| employee@networks.com | employee | 00:03:2A:00:03:2A | Nokia Danmark AS                    | Area51-AL33         | 1/20/2009 11:17 AM | 6 mins      |
| 58224                 | visitor  | 00:16:CF:00:16:CF | Intel                               | Facilities-AL37     | 1/20/2009 11:11 AM | 2 hrs 33 m  |

## Using the PCI Compliance Report

OV3600 supports PCI requirements in accordance with the Payment Card Industry (PCI) Data Security Standard (DSS). The **PCI Compliance Report** displays current PCI configurations and status as enabled on the network. Verify that OV3600 is enabled to monitor compliance with PCI requirements, as described in the “[Enabling or Disabling PCI Auditing](#)” on page 71.






In addition to citing simple pass or fail status with regard to each PCI requirement, OV3600 introduces very detailed diagnostic information to recommend the specific action or actions required to achieve Pass status, when sufficient information is available. Refer to the “[Auditing PCI Compliance on the Network](#)” on page 69 for information about enabling PCI on the network. The configurations in that section enable or disable the contents of the PCI Compliance Report that is viewable on the **Reports > Generated** page.

Figure 182 illustrates the fields and information in a **PCI Compliance Report**.

Figure 182 **Reports > Generated > PCI Compliance Report Illustration Example**

**Daily PCI Compliance Report for All Groups, Folders and PCI Requirements**

1/20/2009 12:00 AM to 1/21/2009 12:00 AM  
Generated on 1/21/2009 12:23 AM

 XML (XHTML)  
 export  
 CSV export  
 Email this report  
 Print report

This report covers sections of the Payment Card Industry (PCI) Data Security Standard (DSS) Version 1.2 requirements that are relevant to security in your network. PCI DSS standard requirements are available at <https://www.pcisecuritystandards.org>.

Disclaimer: The PCI Compliance Report must be completed by an authorized QSA. The sole purpose of this report is to provide IT administrators with an on-demand internal audit of components which are visible to AirWave Wireless Management Suite.

**Summary**

| PCI Requirement | Description                                                                                                                                                                                                                                         | Status |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 1.1             | Configuration standards for router.<br>A device fails if it is in read-write management mode and there are mismatches between the desired configuration and the configuration on the device.                                                        | Pass   |
| 1.2.3           | Install firewalls between any wireless networks and the cardholder data environment.<br>A device passes if it can function as a stateful firewall.                                                                                                  | Pass   |
| 2.1             | Always change vendor-supplied defaults.<br>A device fails if the usernames, passwords or SNMP credentials being used by AWMS to communicate with the device are on a list of forbidden credentials. The list includes common manufacturer defaults. | Pass   |
| 2.1.1           | Change vendor-supplied defaults for wireless environments.<br>A device fails if the passphrases, SSIDs or other security-related settings are on a list of forbidden values. The list includes common manufacturer defaults.                        | Pass   |
| 4.1.1           | Use strong encryption in wireless networks.<br>A device fails if the desired or actual configuration reflect that WEP is enabled or if associated users can connect with WEP.                                                                       | Pass   |


## Using the Port Usage Report

You can generate a wide array of port usage statistics from the **Port Usage Report** including each of the following:

- List of all the switches and ports in your network by folder
- List of unused ports
- List of access and distribution ports
- Histogram displaying unused ports vs. unused switches by type (access or distribution)
- List of most used switches
- List of most used ports

A sample of the types of information used to generate in a **Port Usage Report** appears in [Figure 183](#).

**Figure 183** Reports > Generated > Port Usage Report Detail Page (partial view)

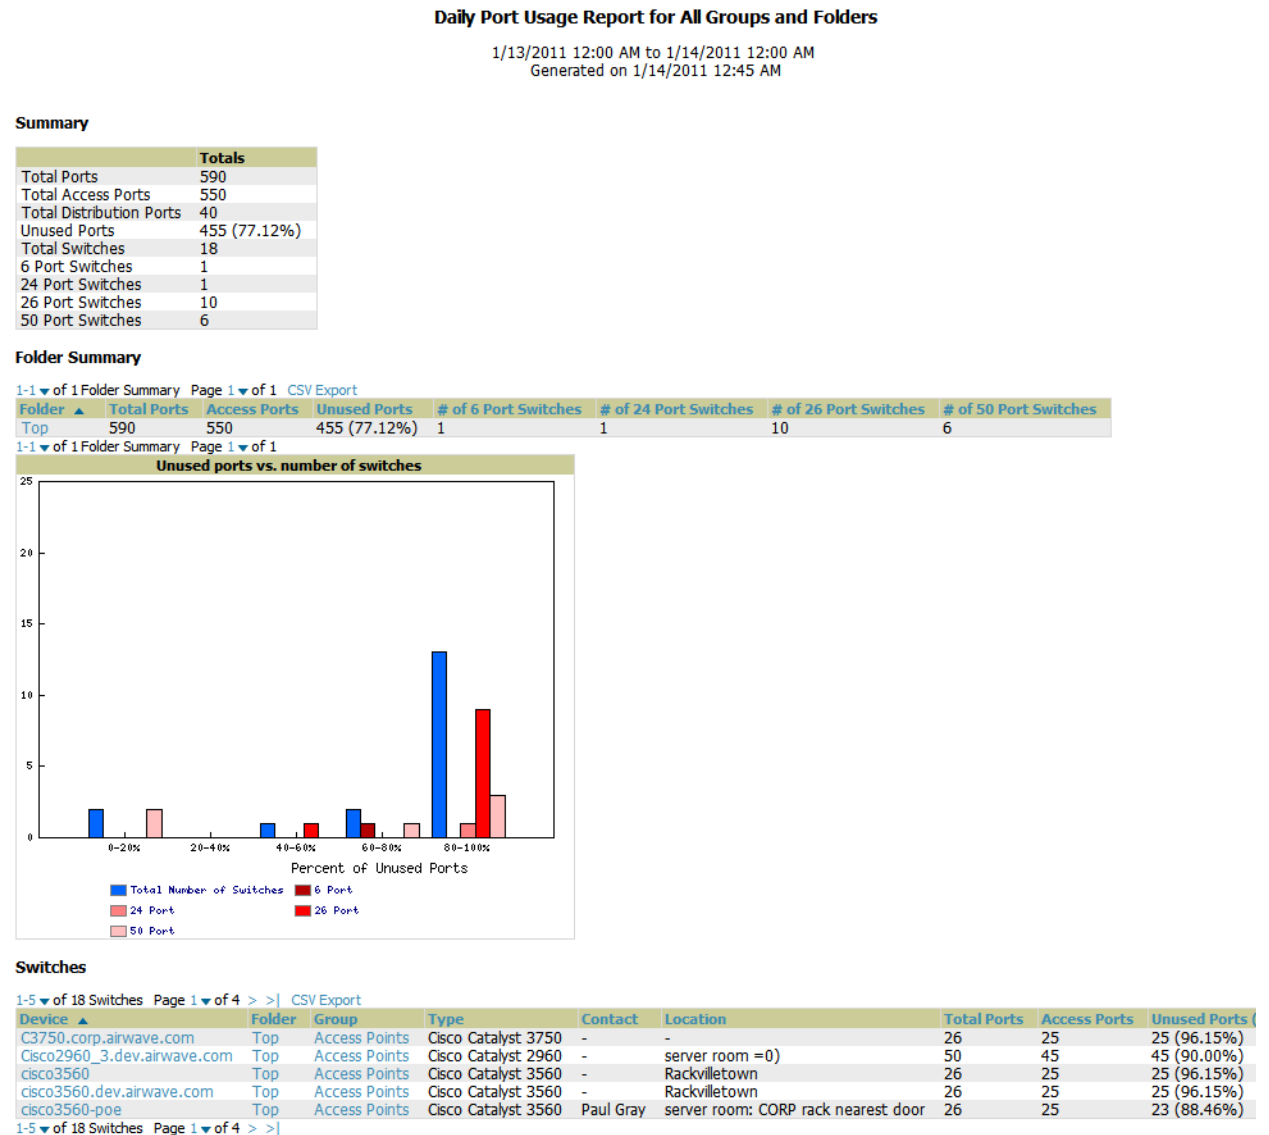

## Using the RADIUS Authentication Issues Report

The **RADIUS Authentication Issues Report** contains issues that may appear with controllers, RADIUS servers, and users. [Figure 184](#) illustrates the fields and information in the **RADIUS Authentication Issues Report**.

**Figure 184** Reports > Generated > RADIUS Authentication Issues Detail Page Illustration

**Daily RADIUS Authentication Issues Report for All Groups, Folders and SSIDs**

1/20/2009 12:00 AM to 1/21/2009 12:00 AM  
Generated on 1/21/2009 12:21 AM

[XML \(XHTML\)](#)  
[export](#)  
[CSV export](#)  
[Email this report](#)  
[Print report](#)

**Top 10 RADIUS Authentication Issues by Controller**

| Device      | Total Failures | First Event        | Most Recent Event  |
|-------------|----------------|--------------------|--------------------|
| airespace-1 | 1776           | 1/20/2009 12:00 AM | 1/20/2009 11:59 PM |

**Top 10 RADIUS Authentication Issues by RADIUS Server**

| RADIUS Server | Total Failures | First Event        | Most Recent Event  |
|---------------|----------------|--------------------|--------------------|
| vortex        | 2              | 1/20/2009 10:41 AM | 1/20/2009 10:41 AM |

**Top 10 RADIUS Authentication Issues by User**

| User              | Total Failures | First Event        | Most Recent Event  |
|-------------------|----------------|--------------------|--------------------|
| 00:21:5C:00:21:5C | 1732           | 1/20/2009 12:00 AM | 1/20/2009 11:59 PM |
| 00:1D:D9:00:1D:D9 | 15             | 1/20/2009 1:51 PM  | 1/20/2009 2:08 PM  |
| 00:16:CF:00:16:CF | 6              | 1/20/2009 3:05 PM  | 1/20/2009 3:13 PM  |
| 00:21:5C:00:21:5C | 5              | 1/20/2009 7:05 AM  | 1/20/2009 5:33 PM  |
| 00:1C:BF:00:1C:BF | 3              | 1/20/2009 4:12 PM  | 1/20/2009 4:13 PM  |
| 00:16:CF:00:16:CF | 2              | 1/20/2009 8:33 AM  | 1/20/2009 5:42 PM  |
| 00:14:A4:00:14:A4 | 2              | 1/20/2009 5:27 PM  | 1/20/2009 5:28 PM  |
| 00:1F:3B:00:16:CF | 1              | 1/20/2009 8:52 AM  | 1/20/2009 8:52 AM  |
| 00:19:7D:00:14:A4 | 1              | 1/20/2009 3:04 PM  | 1/20/2009 3:04 PM  |
| 00:21:FE:00:16:CF | 1              | 1/20/2009 11:23 AM | 1/20/2009 11:23 AM |

1-20 of 1776 RADIUS Authentication Issues Page 1 of 89 > >|

| Event                                              | User MAC Address  | Username | RADIUS Server | Event Time         | Device      | AP | Radio |
|----------------------------------------------------|-------------------|----------|---------------|--------------------|-------------|----|-------|
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:59 PM | airespace-1 | -  | -     |
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:59 PM | airespace-1 | -  | -     |
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:58 PM | airespace-1 | -  | -     |
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:58 PM | airespace-1 | -  | -     |
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:57 PM | airespace-1 | -  | -     |
| Client authentication failed for 00:21:5C:85:BD:0B | 00:21:5C:00:21:5C | -        | -             | 1/20/2009 11:57 PM | airespace-1 | -  | -     |

## Using the RF Health Report

The RF Health Report tracks the top AP radio issues by noise, MAC/Phy errors, channel changes, transmit power changes, mode changes, and interfering devices (the last two apply only if there are ARM events). This report assists in pinpointing the most problematic devices on your network, and lists the top 10 devices by problem type.


Problematic APs are displayed in two separate lists Problem Radios lists, grouped by radio frequency. A device will make it into the list if it violates two or more thresholds. (For more on the thresholds that indicate problems, refer to “[Evaluating Radio Statistics for an AP](#)” on page 131.)

Other lists grouped by radio frequency include Most Noise, Most/Least Utilized by Channel Usage, Most MAC/Phy Errors, Most Channel Changes, Most Transmit Power Changes.

If an RF Health Report has not been generated before, you can create it by following the instructions on the [Defining Reports](#) section of this chapter.

[Figure 185](#) illustrates a sample RF Health Report.

# Figure 185 Reports > Detail > Daily RF Health Report Page Illustration



## Daily RF Health Report for All Groups and Folders

1/4/2011 12:00 AM to 1/5/2011 12:00 AM  
Generated on 1/5/2011 12:36 AM

### Problem 5 GHz Radios

| Device | Channel Changes | Transmit Power Changes | Mode Changes | Average Noise | Average Channel Utilization | MAC/Phy Errors | Interfering Devices | Number of Users | Bandwidth (bps) | Location | Controller       | Folder | Group         |
|--------|-----------------|------------------------|--------------|---------------|-----------------------------|----------------|---------------------|-----------------|-----------------|----------|------------------|--------|---------------|
| 1394   | 1               | 1                      | 0            | -74.50        | -                           | 22636800       | -                   | 1               | 10138.00        | -        | ethersphere-1322 | Top    | Access Points |
| 2198   | 4               | 1                      | 0            | -79.00        | -                           | 58752000       | -                   | 2               | 44596.00        | -        | ethersphere-1322 | Top    | Access Points |

### Problem 2.4 GHz Radios

| Device           | Channel Changes | Transmit Power Changes | Mode Changes | Average Noise | Average Channel Utilization | MAC/Phy Errors | Interfering Devices | Number of Users | Bandwidth (bps) | Location | Controller       | Folder | Group         |
|------------------|-----------------|------------------------|--------------|---------------|-----------------------------|----------------|---------------------|-----------------|-----------------|----------|------------------|--------|---------------|
| 00:1a:1e:c0:6c46 | 16              | 7                      | 0            | -77.00        | -                           | 4579200        | -                   | 0               | 0.00            | -        | Aruba3600-US     | Top    | Access Points |
| 1154-Q           | 9               | 1                      | 0            | -71.50        | -                           | 123984000      | -                   | 1               | 419.00          | -        | ethersphere-1322 | Top    | Access Points |
| 1350             | 1               | 5                      | 0            | -53.00        | -                           | 345600         | -                   | 0               | 0.00            | -        | ethersphere-1322 | Top    | Access Points |
| 2103             | 3               | 1                      | 0            | -61.50        | -                           | 99100800       | -                   | 0               | 0.00            | -        | ethersphere-1322 | Top    | Access Points |
| 2188             | 6               | 3                      | 0            | -73.50        | -                           | 60652800       | -                   | 1               | 308.00          | -        | ethersphere-1322 | Top    | Access Points |

### Most Noise (5 GHz)

| Rank | Device            | Average Noise | Channel Changes | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location | Controller       | Folder | Group         |
|------|-------------------|---------------|-----------------|-----------------------------|-----------------|-----------------|----------|------------------|--------|---------------|
| 1    | 1394              | -74.50        | 1               | -                           | 1               | 10138.00        | -        | ethersphere-1322 | Top    | Access Points |
| 2    | 2198              | -79.00        | 4               | 0.00                        | 2               | 44596.00        | -        | ethersphere-1322 | Top    | Access Points |
| 3    | 1310              | -86.00        | 1               | -                           | 15              | 2439711.00      | -        | ethersphere-1322 | Top    | Access Points |
| 4    | 1350              | -87.00        | 1               | -                           | 6               | 383120.00       | -        | ethersphere-1322 | Top    | Access Points |
| 5    | ap105-A1          | -87.00        | 18              | -                           | 0               | 0.00            | pt       | Aruba-3400       | Top    | Access Points |
| 6    | 00:24:6c:c4:c6    | -87.50        | 1               | -                           | 0               | 0.00            | -        | Aruba3200-3.121  | Top    | Access Points |
| 7    | 00:1a:1e:c0:1a:dc | -87.50        | 1               | -                           | 0               | 0.00            | -        | Aruba3200-3.121  | Top    | Access Points |
| 8    | 1260              | -88.00        | 5               | -                           | 2               | 73432.00        | -        | ethersphere-1322 | Top    | Access Points |
| 9    | 1242-H            | -88.00        | 1               | -                           | 8               | 2098072.00      | -        | ethersphere-1322 | Top    | Access Points |
| 10   | 1248              | -88.00        | 13              | -                           | 1               | 6185.00         | -        | ethersphere-1322 | Top    | Access Points |

### Most Noise (2.4 GHz)

| Rank | Device            | Average Noise | Channel Changes | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location         | Controller       | Folder | Group         |
|------|-------------------|---------------|-----------------|-----------------------------|-----------------|-----------------|------------------|------------------|--------|---------------|
| 1    | 1350              | -53.00        | 1               | -                           | 0               | 0.00            | -                | ethersphere-1322 | Top    | Access Points |
| 2    | 2103              | -61.50        | 3               | -                           | 0               | 0.00            | -                | ethersphere-1322 | Top    | Access Points |
| 3    | 1154-Q            | -71.50        | 9               | -                           | 1               | 419.00          | -                | ethersphere-1322 | Top    | Access Points |
| 4    | 2188              | -73.50        | 6               | -                           | 1               | 308.00          | -                | ethersphere-1322 | Top    | Access Points |
| 5    | R00105            | -73.50        | 1               | -                           | 0               | 0.00            | -                | r6700(primary)   | Top    | Access Points |
| 6    | 00:1a:1e:c0:6c46  | -77.00        | 16              | -                           | 0               | 0.00            | -                | Aruba3600-US     | Top    | Access Points |
| 7    | AP001d.a1fc.ca7a  | -77.50        | 7               | 25.20                       | 0               | 0.00            | default location | 5500-6.0.196.0   | Top    | Access Points |
| 8    | 1372              | -81.50        | 5               | -                           | 0               | 0.00            | -                | ethersphere-1322 | Top    | Access Points |
| 9    | 00:1a:1e:c1:52:0e | -81.50        | 1               | -                           | 0               | 0.00            | -                | Aruba3200-3.121  | Top    | Access Points |
| 10   | 00:1a:1e:c1:52:0e | -82.00        | 1               | -                           | 1               | 2064.00         | -                | Aruba51          | Top    | Access Points |

### Most Utilized by Channel Usage (5 GHz)

| Rank | Device           | Channel Busy | Interference | Number of Users | Bandwidth (bps) | Location           | Controller | Folder | Group         |
|------|------------------|--------------|--------------|-----------------|-----------------|--------------------|------------|--------|---------------|
| 1    | AP10             | 3.15         | 3.15         | 0               | 0.00            | ap lab             | Cisco400   | Top    | Access Points |
| 2    | AP0018.19bd.b1d0 | 1.57         | 1.57         | 0               | 0.00            | Sales Office-hello | Cisco400   | Top    | Access Points |

### Most Utilized by Channel Usage (2.4 GHz)

| Rank | Device           | Channel Busy | Interference | Number of Users | Bandwidth (bps) | Location           | Controller     | Folder | Group         |
|------|------------------|--------------|--------------|-----------------|-----------------|--------------------|----------------|--------|---------------|
| 1    | AP0018.19bd.b1d0 | 71.65        | 68.90        | 0               | 0.00            | ap lab             | Cisco400       | Top    | Access Points |
| 2    | AP10             | 64.96        | 62.60        | 0               | 1.00            | Sales Office-hello | Cisco400       | Top    | Access Points |
| 3    | AP001d.a1fc.ca7a | 22.83        | 20.47        | 0               | 0.00            | default location   | 5500-6.0.196.0 | Top    | Access Points |

### Most MAC/Phy Errors (5 GHz)

| Rank | Device    | MAC/Phy Errors | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location   | Controller       | Folder           | Group         |               |
|------|-----------|----------------|-----------------|---------------|-----------------------------|-----------------|-----------------|------------|------------------|------------------|---------------|---------------|
| 1    | 2103      | 186865200      | 14              | -88.00        | -                           | 0               | 672.00          | -          | ethersphere-1322 | Top              | Access Points |               |
| 2    | Fish-bowl | 534816000      | 6               | -90.00        | -                           | 0               | 4               | 767319.00  | -                | ethersphere-1322 | Top           | Access Points |
| 3    | ap105-A1  | 471571200      | 18              | -87.00        | -                           | 0               | 0.00            | pt         | Aruba-3400       | Top              | Access Points |               |
| 4    | 1154      | 308016000      | 1               | -92.00        | -                           | 8               | 646989.00       | -          | ethersphere-1322 | Top              | Access Points |               |
| 5    | 1154-Q    | 300326400      | 1               | -89.50        | -                           | 0               | 0.00            | -          | ethersphere-1322 | Top              | Access Points |               |
| 6    | 1260      | 261792000      | 5               | -88.00        | -                           | 2               | 73432.00        | -          | ethersphere-1322 | Top              | Access Points |               |
| 7    | 2188      | 242697600      | 1               | -91.00        | -                           | 4               | 110898.00       | -          | ethersphere-1322 | Top              | Access Points |               |
| 8    | 1263      | 242524800      | 6               | -91.00        | -                           | 0               | 3               | 1493316.00 | -                | ethersphere-1322 | Top           | Access Points |
| 9    | 1372      | 233798400      | 2               | -90.00        | -                           | 3               | 233005.00       | -          | ethersphere-1322 | Top              | Access Points |               |
| 10   | 1350      | 226275200      | 1               | -87.00        | -                           | 6               | 383120.00       | -          | ethersphere-1322 | Top              | Access Points |               |

### Most MAC/Phy Errors (2.4 GHz)

| Rank | Device            | MAC/Phy Errors | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location | Controller       | Folder | Group         |
|------|-------------------|----------------|-----------------|---------------|-----------------------------|-----------------|-----------------|----------|------------------|--------|---------------|
| 1    | ap105-A1          | 240264800      | 6               | -86.50        | -                           | 0               | 0.00            | pt       | Aruba-3400       | Top    | Access Points |
| 2    | 1154-Q            | 123984000      | 9               | -71.50        | -                           | 0               | 419.00          | -        | ethersphere-1322 | Top    | Access Points |
| 3    | 2103              | 99100800       | 3               | -61.50        | -                           | 0               | 0.00            | -        | ethersphere-1322 | Top    | Access Points |
| 4    | 2188              | 60652800       | 6               | -73.50        | -                           | 1               | 308.00          | -        | ethersphere-1322 | Top    | Access Points |
| 5    | 1260              | 56505600       | 6               | -86.50        | -                           | 2               | 676.00          | -        | ethersphere-1322 | Top    | Access Points |
| 6    | 00:24:6c:c4:c6    | 50889600       | 20              | -82.00        | -                           | 0               | 0.00            | -        | Aruba51          | Top    | Access Points |
| 7    | Fish-bowl         | 43632000       | 2               | -86.00        | -                           | 1               | 83.00           | -        | ethersphere-1322 | Top    | Access Points |
| 8    | 2198              | 34819200       | 4               | -86.50        | -                           | 1               | 4616.00         | -        | ethersphere-1322 | Top    | Access Points |
| 9    | 1242-H            | 32572800       | 2               | -88.00        | -                           | 1               | 188.00          | -        | ethersphere-1322 | Top    | Access Points |
| 10   | 00:08:86:C3:65:7A | 30758400       | 1               | -102.50       | -                           | 0               | 0.00            | -        | Aruba3400        | Top    | Access Points |

### Most Channel Changes (5 GHz)

| Rank | Device         | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location        | Controller       | Folder | Group         |
|------|----------------|-----------------|---------------|-----------------------------|-----------------|-----------------|-----------------|------------------|--------|---------------|
| 1    | 00:24:6c:c4:c6 | 20              | -90.00        | -                           | 0               | 337.00          | -               | Aruba51          | Top    | Access Points |
| 2    | ap105-A1       | 18              | -87.00        | -                           | 0               | 0.00            | pt              | Aruba-3400       | Top    | Access Points |
| 3    | 2103           | 14              | -88.00        | -                           | 0               | 672.00          | -               | ethersphere-1322 | Top    | Access Points |
| 4    | 1248           | 13              | -88.00        | -                           | 1               | 308.00          | -               | ethersphere-1322 | Top    | Access Points |
| 5    | 1263           | 6               | -91.00        | -                           | 3               | 1493316.00      | -               | ethersphere-1322 | Top    | Access Points |
| 6    | Fish-bowl      | 6               | -90.00        | -                           | 4               | 767319.00       | -               | ethersphere-1322 | Top    | Access Points |
| 7    | 1260           | 6               | -88.00        | -                           | 2               | 73432.00        | -               | ethersphere-1322 | Top    | Access Points |
| 8    | 2198           | 4               | -79.00        | -                           | 2               | 44596.00        | -               | ethersphere-1322 | Top    | Access Points |
| 9    | ap65-c2:2e:4a  | 2               | -104.50       | -                           | 0               | 0.00            | chicken fingers | Aruba2400        | Top    | Access Points |
| 10   | 1372           | 2               | -90.00        | -                           | 3               | 233005.00       | -               | ethersphere-1322 | Top    | Access Points |

### Most Channel Changes (2.4 GHz)

| Rank | Device           | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location         | Controller       | Folder | Group         |
|------|------------------|-----------------|---------------|-----------------------------|-----------------|-----------------|------------------|------------------|--------|---------------|
| 1    | 00:24:6c:c4:c6   | 20              | -82.00        | -                           | 0               | 0.00            | -                | Aruba51          | Top    | Access Points |
| 2    | 00:1a:1e:c0:6c46 | 16              | -77.00        | -                           | 0               | 0.00            | -                | Aruba3600-US     | Top    | Access Points |
| 3    | 1154-Q           | 9               | -82.00        | -                           | 1               | 419.00          | -                | ethersphere-1322 | Top    | Access Points |
| 4    | 1248             | 8               | -88.00        | -                           | 1               | 56.00           | -                | ethersphere-1322 | Top    | Access Points |
| 5    | AP001d.a1fc.ca7a | 7               | -77.50        | 25.20                       | 0               | 0.00            | default location | 5500-6.0.196.0   | Top    | Access Points |
| 6    | 1260             | 6               | -86.50        | -                           | 2               | 676.00          | -                | ethersphere-1322 | Top    | Access Points |
| 7    | 2188             | 5               | -83.50        | -                           | 1               | 308.00          | -                | ethersphere-1322 | Top    | Access Points |
| 8    | ap105-A1         | 5               | -86.50        | -                           | 0               | 0.00            | pt               | Aruba-3400       | Top    | Access Points |
| 9    | 1372             | 5               | -81.50        | -                           | 0               | 0.00            | -                | ethersphere-1322 | Top    | Access Points |
| 10   | 1153             | 5               | -85.00        | -                           | 2               | 1200.00         | -                | ethersphere-1322 | Top    | Access Points |

### Most Transmit Power Changes (5 GHz)

| Rank | Device            | Transmit Power Changes | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location        | Controller       | Folder | Group         |
|------|-------------------|------------------------|-----------------|---------------|-----------------------------|-----------------|-----------------|-----------------|------------------|--------|---------------|
| 1    | ap105-A1          | 31                     | 18              | -87.00        | -                           | 0               | 0.00            | pt              | Aruba-3400       | Top    | Access Points |
| 2    | 00:24:6c:c4:c6    | 17                     | 20              | -90.00        | -                           | 0               | 337.00          | -               | Aruba51          | Top    | Access Points |
| 3    | 2103              | 13                     | 14              | -88.00        | -                           | 7               | 672.00          | -               | ethersphere-1322 | Top    | Access Points |
| 4    | 00:1a:1e:c0:2b:34 | 6                      | 6               | -88.00        | -                           | 0               | 0.00            | -               | Aruba3200-3.121  | Top    | Access Points |
| 5    | 00:1a:1e:c0:6c46  | 5                      | 1               | -89.50        | -                           | 0               | 0.00            | -               | Aruba3600-US     | Top    | Access Points |
| 6    | 1248              | 5                      | 6               | -88.00        | -                           | 1               | 6185.00         | -               | ethersphere-1322 | Top    | Access Points |
| 7    | 1263              | 6                      | 6               | -91.00        | -                           | 3               | 1493316.00      | -               | ethersphere-1322 | Top    | Access Points |
| 8    | Fish-bowl         | 3                      | 6               | -90.00        | -                           | 4               | 767319.00       | -               | ethersphere-1322 | Top    | Access Points |
| 9    | ap65-c2:2e:4a     | 2                      | 2               | -104.50       | -                           | 0               | 0.00            | chicken fingers | Aruba2400        | Top    | Access Points |
| 10   | 1242-H            | 1                      | 1               | -88.00        | -                           | 8               | 2098072.00      | -               | ethersphere-1322 | Top    | Access Points |

### Most Transmit Power Changes (2.4 GHz)

| Rank | Device            | Transmit Power Changes | Channel Changes | Average Noise | Average Channel Utilization | Number of Users | Bandwidth (bps) | Location | Controller       | Folder | Group         |
|------|-------------------|------------------------|-----------------|---------------|-----------------------------|-----------------|-----------------|----------|------------------|--------|---------------|
| 1    | 00:24:6c:c4:c6    | 29                     | 20              | -82.00        | -                           | 0               | 0.00            | -        | Aruba51          | Top    | Access Points |
| 2    | 00:1a:1e:c1:52:0e | 13                     | 1               | -82.00        | -                           | 1               | 2064.00         | -        | Aruba51          | Top    | Access Points |
| 3    | 1248              | 10                     | 8               | -90.50        | -                           | 0               | 56.00           | -        | ethersphere-1322 | Top    | Access Points |
| 4    | 1248              | 8                      | 4               | -90.50        | -                           | 0               | 65.00           | -        | ethersphere-1322 | Top    | Access Points |
| 5    | 00:1a:1e:c0:6c46  | 7                      | 16              | -77.00        | -                           | 0               | 0.00            | -        | Aruba3600-US     | Top    | Access Points |
| 6    | 1394              | 5                      | 1               | -63.50        | -                           | 0               | 0.00            | -        | ethersphere-1322 | Top    | Access Points |
| 7    | 1350              | 5                      | 5               | -53.00        | -                           | 0               | 0.00            | -        | ethersphere-1322 | Top    | Access Points |
| 8    | ap105-A1          | 5                      | 6               | -86.50        | -                           | 0               | 0.00            | pt       | Aruba-3400       | Top    | Access Points |
| 9    | 1260              | 3                      | 6               | -86.50        | -                           | 2               | 676.00          | -        | ethersphere-1322 | Top    | Access Points |
| 10   | 2188              | 3                      | 6               | -73.50        | -                           | 1               | 308.00          | -        | ethersphere-1322 | Top    | Access Points |

### Least Utilized by Channel Usage (5 GHz)

| Rank | Device           | Channel Busy | Interference | Number of Users | Bandwidth (bps) | Location           | Controller | Folder | Group         |
|------|------------------|--------------|--------------|-----------------|-----------------|--------------------|------------|--------|---------------|
| 1    | AP0018.19bd.b1d0 | 1.57         | 1.57         | 0               | 0.00            | ap lab             | Cisco400   | Top    | Access Points |
| 2    | AP10             | 3.15         | 3.15         | 0               | 0.00            | Sales Office-hello | Cisco400   | Top    | Access Points |

### Least Utilized by Channel Usage (2.4 GHz)

| Rank | Device | Channel Busy | Interference | Number of Users | Bandwidth (bps) | Location | Controller | Folder | Group</ |
|------|--------|--------------|--------------|-----------------|-----------------|----------|------------|--------|---------|
|------|--------|--------------|--------------|-----------------|-----------------|----------|------------|--------|---------|

folder, and group, and all are sorted according to rank. Selecting a value under the **Device** column in any table will take you to the **APs/Devices > Monitor > Radio Statistics** page for the band indicated in the table title (5 GHz or 2.4 GHz).

- Every list contains Rank, Device (name, not type), Channel Changes, Average Noise, Average Channel Utilization, Users, Bandwidth, Location, Controller name, Folder, and Group.
- The third column in the list (after Device) will be the column the list is sorted by.
- If that column would otherwise be in the list (Channel Changes), it does not show up in the list where it would otherwise.
- Note that sometimes the sorted column is not one of those common ones, such as the Interfering Devices section.

OV3600 limits data storage to 183 days (approximately six months) per radio. If you create an RF Health Report with a date range longer than 183 days, it will only include Channel Changes, Transmit Power Changes, Average Utilization, Mac/Phy Errors and Average Noise based on whatever part of the report intersects the last 183 days. This differs from most reports because other data (like bandwidth and users) maxes out at 425 days, and OV3600 validates reports so you can only run them over a 366-day duration.

## Using the Rogue Containment Audit Report

The rogue containment audit report that lets you know if any containment is failing. [Figure 186](#) illustrates the fields and information in this report type.

**Figure 186** Reports > Detail > Rogue Containment Audit Report Page Illustration

**Rogue Containment Audit Report for All Groups and Folders**

Generated on 12/1/2009 4:33 PM

[XML \(XHTML\) export](#)  
[CSV export](#)  
[Email this report](#)  
[Print report](#)

1-8 ▼ of 8 Rogues Contained Page 1 ▼ of 1 Export to CSV

| Controller     | Rogue               | BSSID             | Containment State | Desired Containment State | Classifying Rule               | Location |
|----------------|---------------------|-------------------|-------------------|---------------------------|--------------------------------|----------|
| - All -        | - All -             | - All -           | - All -           | - All -                   | - All -                        | - All -  |
| Airespace-5500 | Apple-ED:38:17      | 00:03:93:ED:38:17 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |
| Airespace-5500 | Senao Inte-43:7B:81 | 00:02:6F:43:7B:81 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |
| Airespace-5500 | Cisco-9F:75:90      | 00:1D:45:9F:75:90 | Not Contained     | Contained                 | Manual Classification Override | -        |
| Aruba2400      | Enterasys-36:5C:18  | 00:01:F4:36:5C:18 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |
| Aruba2400      | Enterasys-37:4A:C3  | 00:01:F4:37:4A:C3 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |
| Aruba2400      | Cisco-9F:75:90      | 00:1D:45:9F:75:90 | Not Contained     | Contained                 | Manual Classification Override | -        |
| Aruba2400      | Locally Ad-71:BA:90 | 02:20:A6:71:BA:90 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |
| Aruba2400      | Locally Ad-71:BA:90 | 02:20:A6:71:BA:91 | Contained         | Not Contained             | Signal strength > -75 dBm      | -        |

1-8 ▼ of 8 Rogues Contained Page 1 ▼ of 1


## Using the User Session Report

The **User Session Report** extensively itemizes user-level activity by session- any instance in which a user connects to the network. In list and chart form, this report tracks and display session information that can include any or all of the following:

- Session Data by OS (List or Chart)
- Session Data by OS Detail (List or Chart)
- Session Data by Model (List or Chart)
- Session Data by Manufacturer (List or Chart)
- Session Data by Device Type (List or Chart)
- Session Data by AOS Device Type (List or Chart)
- Session Data by Network Interface Vendor (List or Chart)
- Session Data by Network Chipset (List or Chart)
- Session Data by Network Driver (List or Chart)
- Session Data by EAP Supplicant (List or Chart)
- Session Data by Asset Group (List or Chart)
- Session Data by Asset Category (List or Chart)
- Session Data by Connection Mode (List or Chart)

- Session Data by SSID (List or Chart)
- Session Data by Role (List or Chart)
- Session Data by VLAN (List or Chart)
- Session Data by Cipher (List or Chart)
- Summary
- Sessions
- Session Data by User

**Figure 187 User Session Detail, Partial View**

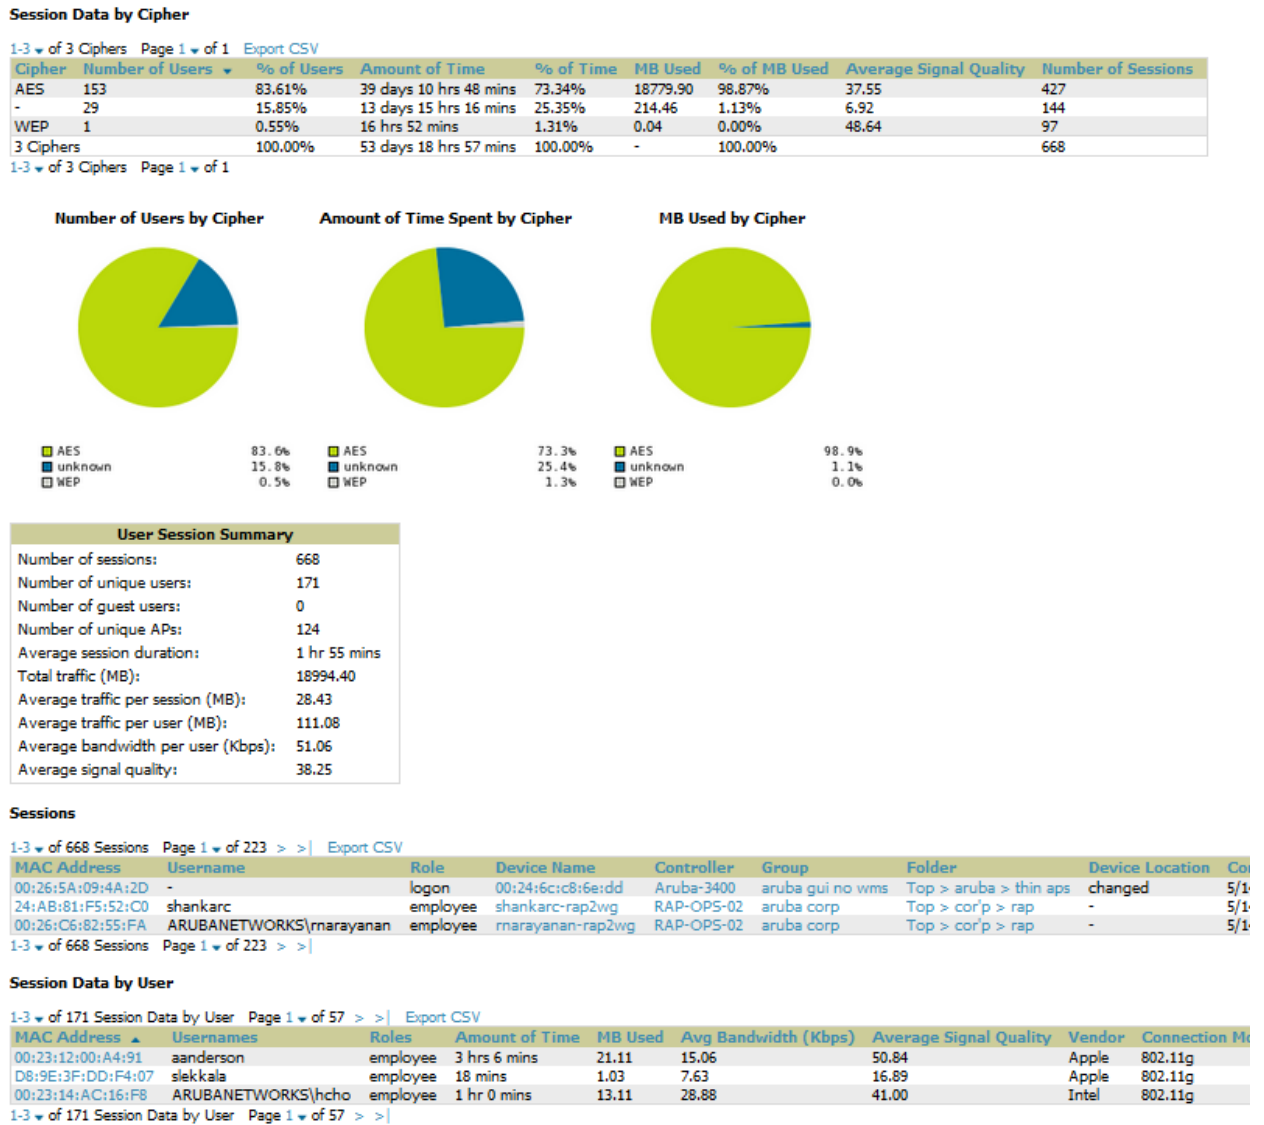



## Defining Reports

You can create reports in OV3600 for any time period you wish, to be run when you wish, and distributed to recipients that you define. Perform these steps to create and run custom reports. Reports created with the **Reports > Definition** page appear on this and on the **Reports > Generated** page once defined.

1. To create or edit a report, browse to the **Reports > Definition** page and select the **Add** button, or select the pencil icon to edit an existing report definition. [Figure 188](#) illustrates one view of the **Reports > Definition** page.

**Figure 188** *Defining a Report with Reports > Definitions > Add Button*

**Report Restrictions**

Group: -- All Groups --

Folder: -- All Folders --

Device Search Filter:  
This report will be run against Devices that match this search.

**Report Restrictions** section varies according to report type.

Report Start:

Report End:

**Scheduling Options**

Schedule:  Yes  No

**Report Visibility**

Generated Report Visibility: By Role

**Email Options**

Email Report:  Yes  No

2. Complete the fields described in [Table 135](#) and any additional **Report Restrictions**. The **Report Restrictions** section changes according to the report type you choose. Additional information about each report type is described in “Using Daily Reports” on page 244.

**Table 135** *Reports > Definitions > Add Page Fields*


| Field                        | Default          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Title</b>                 | Empty            | Enter a <b>Report Title</b> . Alcatel-Lucent recommends using a title that is a meaningful and descriptive, so it may be found easily on the lists of reports that appear on either <b>Generated</b> or <b>Definitions</b> pages.                                                                                                                                                                                                                                       |
| <b>Type</b>                  | Capacity         | Choose the type of report you wish to create in the Report Type drop-down menu.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Group</b>                 | All Groups       | Specify the groups and folders to be covered in the report by choosing <b>All Groups</b> (or <b>All Folders</b> ) or specifying <b>Use selected groups</b> (or <b>Use selected folders</b> ) in the drop-down menu.                                                                                                                                                                                                                                                     |
| <b>Folder</b>                | All Folders      | If <b>Use selected groups</b> is chosen, a menu with checkboxes appears, allowing you to choose the groups to include in the report.                                                                                                                                                                                                                                                                                                                                    |
| <b>Device Search Filter</b>  | Blank            | Add a specific alpha numeric string for finding devices that match that which you entered. Note that once you enter a search string, new or deleted devices that match the search string will automatically be included or excluded in all future reports generated until you delete or change the search string.<br>For certain reports, such as <b>New User</b> and <b>User Session</b> , will allow you to search devices associated with a specific user or device. |
| <b>Filter by device type</b> | All Device Types | Filter this report by device type. By selecting the second option - <b>Use selected device types</b> - you can select the checkboxes next to the specific device types you want to filter on: Access Points (such as campus APs remote APs, and different types of Mesh APs), Controllers (Master, Local, Standby, and Virtual), Switches & Routers (Alcatel-Lucent and non-Alcatel-Lucent), and Universal & Custom Devices.                                            |

**Table 135 Reports > Definitions > Add Page Fields (Continued)**

| Field                              | Default   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SSID</b>                        | All SSIDs | This field displays for most report types. When this field appears, and when you select <b>Use Selected IDs</b> , a new list of SSIDs displays. Check (select) the specific SSIDs to be included in the report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Report Start Report End</b>     | Blank     | These fields establish the time period to be covered by the report. These fields are supported for most report types. When these fields do not appear, the report provides a snapshot of current status rather than information covering a period of time<br>Times can be entered in relative or absolute form. A start date of 6 months 3 weeks 5 days 9 hours ago and an end time of 4 months 2 weeks 1 day ago is valid, as is a start date of 5/5/2008 13:00 and an end date of 6/6/2008 9:00. Absolute times must be entered in a 24-hour format. Other reports, like the Inventory Report, give a snapshot picture of the OV3600 at the present time.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Schedule</b>                    | No        | When you select <b>Yes</b> , new fields display that allow you to define a specific time for report creation. The report schedule setting is distinct from the <b>Report Start</b> and <b>Report End</b> fields, as these define the period of time to be covered by the report.<br>These <b>Schedule</b> fields establish the time that a report runs, independent of report scope: <ul style="list-style-type: none"> <li>• <b>Current Local Time</b>—Displays for reference the time of the OV3600 system.</li> <li>• <b>Desired Start Date/Time</b>—Sets the time the report runs, which may often be separate from the time period covered by the report. This allows you to run a report during less busy hours.</li> <li>• <b>Occurs</b>—Select whether the report is to be run one time, daily, weekly, monthly, or annually. Depending on the recurrence pattern selected, you get an additional drop-down menu. For example, if you select a recurrence of monthly, you get an additional drop-down menu that allows you to pick which day of the month (day 1, day 2, and so forth) the report should run.</li> </ul> |
| <b>Generated Report Visibility</b> | By Role   | This field allows you to display the report either by user role, with the report appearing in User Role lists on the <b>Reports &gt; Generated</b> page.<br>Alternatively, this field allows you to display reports by <b>Subject</b> on the <b>Reports &gt; Generated</b> page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Email Report</b>                | No        | Select <b>Yes</b> to display sender and recipient fields. Enter the Sender Address where marked <b>Yes</b> to indicate the address that appears in the <b>From</b> field of the emailed report. Enter recipient email addresses separated by commas when using multiple email addresses.<br><b>NOTE:</b> OV3600 will not attempt to email a report with an excessively large number of rows in the detail section.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

In the report restrictions section you can customize any detailed information contained in a chosen report. [Figure 189](#) shows a sample **Report Restrictions** page.

**Figure 189 Report Restrictions Illustration**

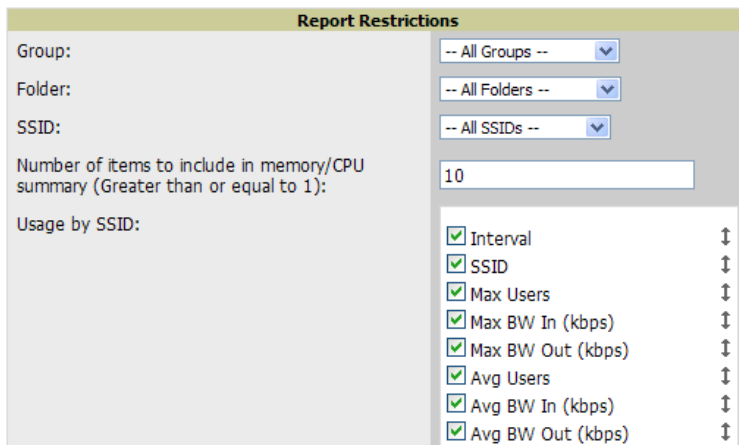

By default all data will be included. Deselect the checkbox to hide specific information. The list can also be reordered by dragging and dropping the separate lines. The order displayed here will match the column order in the report.

3. Do one of the following:

- Select **Add and Run** to generate the report immediately, in addition to saving report settings.
- Select **Run Now** to generate the report immediately without creating a new report definition or saving the report settings.
- Select **Add (only)** to complete the report creation, to be run at the time scheduled.
- Select **Cancel** to exit from the **Add** page.

Table 136 describes the configurable settings for the custom report to be created. Select any of the report names to view additional information on that report type.

**Table 136** Report Types and Scheduling Options Supported for Custom Reports

| Report Type                                                 | Can be Run by Time Period | Can be Run by Group/Folder | Description                                                                                                                                                                            |
|-------------------------------------------------------------|---------------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#">Using Custom Reports</a>                        | Yes                       | Yes                        | Summarizes devices based on which have exceeded a defined percentage of their maximum bandwidth capacity. Pulls data for AP radios or interfaces of universal devices (ifSpeed value). |
| <a href="#">Using the Capacity Planning Report</a>          | Yes                       | Yes                        | Tracks bandwidth capacity and consumption according to thresholds for data throughput. This is a device-oriented report.                                                               |
| <a href="#">Using the Configuration Audit Report</a>        | <b>No</b>                 | Yes                        | Provides a snapshot of the configuration of all specified access points in OV3600, at report run time.                                                                                 |
| <a href="#">Using the Device Summary Report</a>             | Yes                       | Yes                        | Summarizes user and bandwidth statistics and lists devices in OV3600.                                                                                                                  |
| <a href="#">Using the Device Uptime Report</a>              | Yes                       | Yes                        | Summarizes device uptime within defined groups or folders.                                                                                                                             |
| <a href="#">Using the IDS Events Report</a>                 | Yes                       | Yes                        | Summarizes IDS events; can be limited to a summary of a certain number of events.                                                                                                      |
| <a href="#">Using the Inventory Report</a>                  | <b>No</b>                 | Yes                        | Provides an audit of vendors, models and firmware versions of devices in OV3600.                                                                                                       |
| <a href="#">Using the Memory and CPU Utilization Report</a> | Yes                       | Yes                        | Summarizes usage for controllers for defined top number of devices; can be run with or without per-CPU details and details about device memory usage.                                  |
| <a href="#">Using the Network Usage Report</a>              | Yes                       | Yes                        | Summarizes bandwidth data and number of users.                                                                                                                                         |
| <a href="#">Using the New Rogue Devices Report</a>          | Yes                       | <b>No</b>                  | Shows new rogue devices by score, discovering AP, and MAC address vendor.                                                                                                              |
| <a href="#">Using the New Users Report</a>                  | Yes                       | <b>No</b>                  | Provides a summary list of new users, including username, role, MAC address, discovering AP, and association time.                                                                     |

**Table 136** Report Types and Scheduling Options Supported for Custom Reports (Continued)

| Report Type                                                   | Can be Run by Time Period | Can be Run by Group/ Folder | Description                                                                                                                                                                        |
|---------------------------------------------------------------|---------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#">Using the PCI Compliance Report</a>               | Yes                       | Yes                         | Provides a summary of network compliance with PCI requirements, according to the PCI requirements enabled in OV3600 using the <b>OV3600 Setup &gt; PCI Compliance</b> page.        |
| <a href="#">Using the Port Usage Report</a>                   | Yes                       | Yes                         | Summarizes switch and port information across the network. Generates information on the unused ports. Provides a detailed list of all available switches and ports in the network. |
| <a href="#">Using the RADIUS Authentication Issues Report</a> | Yes                       | Yes                         | Summarizes RADIUS authentication issues by controller and by user, as well as a list of all issues.                                                                                |
| <a href="#">Using the RF Health Report</a>                    | Yes                       | Yes                         | Tracks problematic radios, changes, errors, and interfering devices.                                                                                                               |
| <a href="#">Using the RF Health Report</a>                    | <b>No</b>                 | Yes                         | Identifies discrepancies between access point containment status specified in OV3600 compared to containment status identified by the controller at report run time.               |
| <a href="#">Using the User Session Report</a>                 | Yes                       | Yes                         | Summarizes user data by radio mode, SSID and VLAN, as well as lists all sessions.                                                                                                  |

## Emailing and Exporting Reports

This section describes three ways in which distribute reports from OV3600:

- [Emailing Reports in General Email Applications](#)
- [Emailing Reports to Smarthost](#)
- [Exporting Reports to XML or CSV](#)

### Emailing Reports in General Email Applications

Perform these steps to set up email distribution of reports in OV3600:

- All reports contain a link to export the report to an XML file and a text box where you may specify email addresses, separated by commas, to which reports are sent.
- Select **Email This Report** to email the report to the address specified in the text box above the button.

Additional information about email-based report generation is described in [“Defining Reports” on page 265](#), and in [“Emailing Reports to Smarthost” on page 268](#).

### Emailing Reports to Smarthost

OV3600 uses Postfix to deliver alerts and reports via email, because it provides a high level of security and locally queues email until delivery. If OV3600 sits behind a firewall, which prevents it from sending email directly to the specified recipient, use the following procedure to forward email to a smarthost.

1. Add the following line to `/etc/postfix/main.cf`:

```
relayhost = [mail.example.com]
```

Where: `mail.example.com` is the IP address or hostname of your smarthost.

2. Run `service postfix restart`
3. Send a test message to an email address.

```
Mail -v xxx@xxx.com
Subject: test mail
.
CC:
```

4. Press **Enter**.
5. Check the mail log to ensure mail was sent by running this command:

```
tail -f /var/log/maillog
```

## Exporting Reports to XML or CSV

OV3600 allows you to export individual reports in XML (xhtml) or CSV. You can also export all reports at once and a zip file will be generated with all of the files in CSV format included. These files may be read by an HTML browser or opened in Excel. The CSV files can be opened in any text editor.



---

This method of exporting files supports graphics and links, and prevents **Missing File C:\filename.css** error messages.

---

## Transferring Reports Using FTP

Once reports are generated, you can also copy them to any ftp accessible destination using a sample script. Contact Alcatel support for more information.



This chapter presents the functions, configuration, and use of the OV3600 **Helpdesk** and includes the following sections:

- “Helpdesk Overview” on page 271
- “Enabling Helpdesk” on page 271
- “Monitoring Incidents with Helpdesk” on page 271
- “Creating a New Incident with Helpdesk” on page 273
- “Creating New Snapshots or Incident Relationships” on page 274
- “Using the Helpdesk Tab with an Existing Remedy Server” on page 274

## Helpdesk Overview

The Helpdesk module of the OV3600 allows front-line technical support staff to take full advantage of the data available in OV3600. The OV3600 Helpdesk includes the following features and functions, with additional features described in this chapter:

- The **Helpdesk** tab appears to the right of the **Home** tab.
- Users with an **Admin** role have the **Helpdesk** option enabled by default.
- **Admin** users can make the Helpdesk available to users of any role by selecting the **enabled** radio button on the **role detail** page. To edit existing roles, select the **pencil** icon next to a role on the **OV3600 Setup > Roles** page.
- The OV3600 Helpdesk allows you to document incidents associated with users on the network.
- Installing Remedy allows you to disable Helpdesk, and use OV3600 as an interface for creating, viewing, and editing incidents on the existing Remedy server. You can also associate snapshots with Remedy incidents and store them on your OV3600.

The option to use an external Remedy server is disabled by default. Navigate to the **Helpdesk > Setup** page to enable Remedy. See “Using the Helpdesk Tab with an Existing Remedy Server” on page 274 for more information on how to integrate OV3600 with a Remedy server.

## Enabling Helpdesk

To make Helpdesk tabs visible in OV3600, navigate to **OV3600 Setup > General**, and set the **Enable Helpdesk** field to **Yes** in the **OV3600 Features** section of the page.

## Monitoring Incidents with Helpdesk

For a complete list of incidents, or to open a new incident, navigate to the **Helpdesk > Incidents** page. [Figure 190](#) illustrates the components of the OV3600 **Helpdesk Incidents** page.

**Figure 190 Helpdesk > Incidents Page Illustration**

| State  | Last 2 Hours | Last Day | Total |
|--------|--------------|----------|-------|
| Open   | 0            | 0        | 18    |
| Closed | 0            | 0        | 0     |
| Total  | 0            | 0        | 18    |

Add

1-5 of 18 Incidents Page 1 of 4 > > | [Reset filters](#) [Choose columns](#)

|                          | Summary           | State | Opened By | Related | Created            | Updated            |
|--------------------------|-------------------|-------|-----------|---------|--------------------|--------------------|
| <input type="checkbox"/> | CANT_AUTHENTICATE | Open  | admin     | 1       | 4/4/2011 11:01 AM  | 4/4/2011 11:01 AM  |
| <input type="checkbox"/> | NO_CONNECTION     | Open  | admin     | 1       | 4/4/2011 11:01 AM  | 4/4/2011 11:01 AM  |
| <input type="checkbox"/> | POOR_VOICE        | Open  | admin     | 2       | 3/25/2011 11:31 AM | 3/25/2011 11:31 AM |
| <input type="checkbox"/> | SLOW_CONNECTION   | Open  | admin     | 2       | 3/25/2011 11:31 AM | 3/25/2011 11:31 AM |
| <input type="checkbox"/> | NO_IP             | Open  | admin     | 1       | 3/25/2011 11:31 AM | 3/25/2011 11:31 AM |

1-5 of 18 Incidents Page 1 of 4 > > | [Reset filters](#)

Select All - Unselect All

The table in **Helpdesk > Incidents** displays the count of incidents by state and by time. You can sort incidents from within any category of information, whether in sequential or reverse-sequential order. You can display all incidents, or strictly open or closed incidents, and you can display incidents according to the person who created them. Finally, the **Helpdesk > Incidents** page allows you to add or delete incidents.

**Table 137 Helpdesk > Incidents Top Table**

| Column                          | Description                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>State</b>                    | Displays three states as they apply, as follows: <ul style="list-style-type: none"> <li>Open (currently under investigation)</li> <li>Closed (resolved)</li> <li>The total incident count</li> </ul> |
| <b>Period of time and Total</b> | Shows the count of incidents in the last two hours, the last day, and the total count.                                                                                                               |

The table at the bottom of the page, as described in [Table 138](#) below, summarizes the incidents that have been reported thus far, and which OV3600 has not yet purged.

Using the **Closed Helpdesk Incidents** field in **OV3600 Setup > General**, set the number of days that OV3600 is to retain records of closed Helpdesk incidents. Setting this value to **0** disables this function.

Selecting the **pencil** icon next to any incident opens an edit page where you can modify and update the incident. An incident can be deleted by selecting the checkbox next to it and selecting **Delete**.

**Table 138 OV3600 Helpdesk > Incidents Bottom Table**

| Column           | Description                                                                                                                                                                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>ID</b>        | Displays the ID number of the incident, which is assigned automatically when the incident is logged.                                                                                                                                                                 |
| <b>Summary</b>   | Presents a summary statement of the issue or problem—entered by the OV3600 user when the incident is created.                                                                                                                                                        |
| <b>State</b>     | The current state of the incident - this can be either open or closed. The drop-down menu at the top can be used to show only open or closed incidents. The default is to show both states.                                                                          |
| <b>Opened By</b> | Displays the username of the OV3600 user who opened the incident. Helpdesk can be made available to users of any role. To do this, go to <b>OV3600 Setup &gt; Roles</b> , select the pencil icon next to a role, and select <b>Yes</b> in the <b>Helpdesk</b> field. |
| <b>Related</b>   | Displays the number of items that have been associated to the incident. These link different groups, APs or clients to the incident report.                                                                                                                          |
| <b>Created</b>   | Displays the time and date the incident was created.                                                                                                                                                                                                                 |
| <b>Updated</b>   | Displays the time and date the incident was last modified by an OV3600 user.                                                                                                                                                                                         |



## Creating a New Incident with Helpdesk

To create a new Helpdesk incident, select **Add New Incident** underneath the top table. This launches and displays an incident edit page, as illustrated in [Figure 191](#). The page contents are described in [Table 139](#).

**Figure 191** *Add Incident Page Illustration*

**Table 139** *Helpdesk Incident Edit Page Fields*

| Field              | Description                                                                          |
|--------------------|--------------------------------------------------------------------------------------|
| <b>Summary</b>     | Displays user-entered text that describes a short summary of the incident            |
| <b>State</b>       | Provides a drop-down menu with the options "Open" or "Closed"                        |
| <b>Description</b> | Provides a longer user-entered text area for a thorough description of the incident. |



The **Incidents** portion of the **Alert Summary** table on other OV3600 pages only increments the counter for incidents that are open and associated to an AP. This field displays incidents based on the Top folder on this page and on the **Home > Overview** page. Incidents not related to devices in that folder are not counted in the **Alert Summary** table on other pages. To view all incidents including those not associated to an AP, use the **Helpdesk > Incidents** page.

**Helpdesk** icons appear at the top of other OV3600 pages, allowing graphical snapshots and other records to be associated to existing incidents. These appear next to the **Help** link. Refer to [Figure 192](#).

**Figure 192** *Helpdesk Icons on Additional Pages*



12: Greg can't connect to the network - | Help

[Table 140](#) describes the Helpdesk icon components.

**Table 140** *Helpdesk Icon Components*

| Icon | Description                                                                                                                                                                                                                               |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | (ID number and description) Identifies the current incident of focus in the Helpdesk header. Selecting the link brings up the <b>Incident Edit</b> page (see above). Mousing over the incident brings up a summary popup of the incident. |
|      | Relates the device, group or client to the incident (see below for more details).                                                                                                                                                         |
|      | Attaches a snapshot of the page to the incident. This feature can be used to record a screenshot of information and preserve it for future troubleshooting purposes.                                                                      |
|      | Creates a new incident report.                                                                                                                                                                                                            |
|      | Choose a new incident from the list of created incidents to be the <b>Current Incident</b> (see description of icon above).                                                                                                               |

## Creating New Snapshots or Incident Relationships

Snapshots or relationships can be created by selecting the Helpdesk header icon (see [Table 140](#)) on the screen that needs to be documented. Snapshots or relationships can then be related to the current incident in the popup window. To attach them to another incident, select **Choose a New Incident**.

Relationships and snapshots appear on the **Incident Edit** page after they have been created. When a relationship is created the user can enter a brief note, and in the **Relationships** table the name of the relationship links to the appropriate page in OV3600. Selecting the snapshot description opens a popup window to display the screenshot. [Figure 193](#) illustrates these GUI tools.

**Figure 193** Relationships and Snapshots on the **Incident Edit** Page

The screenshot shows the 'Incident Edit' page. At the top, there is a form for the incident details. The 'Summary' field contains 'Matt is seeing Mismatches.' The 'State' dropdown is set to 'Open'. The 'Description' field contains 'On an Access 247 controller.' Below the form are 'Save' and 'Cancel' buttons.

Below the form is a 'Relationships' section with a table:

| Name                                            | Notes                        |
|-------------------------------------------------|------------------------------|
| <input type="checkbox"/> Controller "Access247" | -                            |
| <input type="checkbox"/> Folder "Top"           | This is the Top folder.      |
| <input type="checkbox"/> Group "Access Points"  | The controller belongs here. |

Below the Relationships table are 'Select All - Unselect All' and 'Delete' buttons.

Below that is a 'Snapshots' section with a table:

| Description                          | Created          |
|--------------------------------------|------------------|
| <input type="checkbox"/> Snapshot 11 | 3/3/2010 3:32 PM |

Below the Snapshots table are 'Select All - Unselect All' and 'Delete' buttons.

## Using the Helpdesk Tab with an Existing Remedy Server

If an external Remedy server exists, you can use the OV3600 **Helpdesk** tab to create, view and edit incidents on the Remedy server. OV3600 can only support integration with a Remedy server if it is a default installation of Remedy 7.0 with no changes to the web service definitions.

To use the Helpdesk tab with a Remedy server, first navigate to the **Helpdesk > Setup** page. In the **BMC Remedy Setup** area, select **Yes** to enable Remedy. This launches a set of fields for information about the Remedy server. Once enabled to use Remedy, the Helpdesk header icons work in the same way for a Remedy-configured Helpdesk as they do for the default OV3600 **Helpdesk**. [Figure 194](#) illustrates this appearance, and [Table 141](#) describes the components. For more details, see “[Creating New Snapshots or Incident Relationships](#)” on page 274.

**Figure 194 Helpdesk > Setup with Remedy Enabled**

**Table 141 Components of Helpdesk > Setup with Remedy Enabled**

| Field                                | Description                                                                                                                                                                                                                                                                                       |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Remedy Enabled</b>                | If <b>no</b> (default) is selected, the existing OV3600 Helpdesk functionality is available. If <b>yes</b> is selected, the Helpdesk functionality is disabled and the <b>Helpdesk</b> tab can be used with an existing Remedy server. Fields for server data appear only when Remedy is enabled. |
| <b>Middle Tier Host</b>              | The location of the Remedy installation's web server.                                                                                                                                                                                                                                             |
| <b>Port</b>                          | The port for the HTTP interface with the web server (this is likely 8080, but there is no default value in OV3600).                                                                                                                                                                               |
| <b>SOAP URL</b>                      | Gateway for web services on Remedy's middle tier host. This is usually arsys/services/ARService, but there is no default value in OV3600.                                                                                                                                                         |
| <b>Server</b>                        | The location of the backend server where Remedy data is stored.                                                                                                                                                                                                                                   |
| <b>Timeout</b>                       | The timeout for HTTP requests (60 seconds by default).                                                                                                                                                                                                                                            |
| <b>Username</b>                      | Username for an existing Remedy account; the role of this user defines the visibility OV3600 will have into the Remedy server.                                                                                                                                                                    |
| <b>Password and Confirm Password</b> | The password for the Remedy user account.                                                                                                                                                                                                                                                         |

Once the server settings have been saved and applied, **Helpdesk** features become disabled. OV3600 then displays incident data pulled from the **Remedy** server and push changes back. With the exception of snapshots, OV3600 does not store any Remedy data locally.

To view **Remedy** incidents in OV3600, navigate to the **Helpdesk > Incidents** tab. [Figure 195](#) illustrates the appearance and [Table 142](#) describes the components of this page.

**Figure 195 Helpdesk > Incidents with Remedy Enabled**

**Table 142 Helpdesk > Incidents Components with Remedy Enabled**

| Field                  | Description                                                                          |
|------------------------|--------------------------------------------------------------------------------------|
| <b>Incident Number</b> | Displays a unique identifier for each incident; assigned by the Remedy installation. |
| <b>Summary</b>         | Contains a brief incident summary as entered by OV3600 or Remedy user.               |

**Table 142 Helpdesk > Incidents Components with Remedy Enabled (Continued)**

| Field           | Description                                                                                                                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Status</b>   | Displays the status as chosen by OV3600 or the Remedy user: <ul style="list-style-type: none"> <li>• New</li> <li>• Assigned</li> <li>• In Progress</li> <li>• Pending</li> <li>• Resolved</li> <li>• Closed</li> <li>• Cancelled</li> </ul> |
| <b>Assignee</b> | Assigned by Remedy installation; cannot be changed in OV3600.                                                                                                                                                                                |
| <b>Urgency</b>  | Displays the urgency level, as chosen by the OV3600 or Remedy User: <ul style="list-style-type: none"> <li>• 1 - Critical</li> <li>• 2 - High</li> <li>• 3 - Medium</li> <li>• 4 - Low</li> </ul>                                            |

To change the current incident in the **Helpdesk** header, select **Unselect Current Incident**. To add a new Remedy incident, select **Add**. To edit an existing Remedy incident, select the pencil icon next to the incident you wish to edit. Refer to [Figure 196](#) and [Table 143](#) for additional illustration and explanation.

**Figure 196 Helpdesk > Incidents > Add a New Remedy Incident Page Illustration**

**Table 143 Helpdesk > Incidents > Add a New Remedy Incident Fields**

| Field                               | Description                                                                                                                                                                            |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Customer First and Last Name</b> | These must match exactly a customer that already exists on the Remedy server. There is no way to create a new customer from OV3600 or to search Remedy customers remotely.             |
| <b>Impact</b>                       | <ul style="list-style-type: none"> <li>• 1 - Extensive/Widespread (default)</li> <li>• 2 - Significant/Large</li> <li>• 3 - Moderate/Limited</li> <li>• 4 - Minor/Localized</li> </ul> |
| <b>Urgency</b>                      | <ul style="list-style-type: none"> <li>• 1 - Critical (default)</li> <li>• 2 - High</li> <li>• 3 - Medium</li> <li>• 4 - Low</li> </ul>                                                |
| <b>Summary</b>                      | Free-form text field.                                                                                                                                                                  |



A new incident is not created if the customer First and Last name do not exist on the Remedy server. However, in this scenario, there is no failure message or warning that the incident was not created.

Once an incident has been created, select the pencil icon in the incident list to edit the information. The status or urgency can be changed as the case progresses, and more detailed information about the incident can be added. Snapshots can also be related to Remedy incidents as described above. However, snapshots are only stored locally on the OV3600 server—they are not pushed to the Remedy server.


This chapter contains information about VisualRF, and includes the following topics:

- “Features” on page 278
- “Useful Terms” on page 278
- “Starting VisualRF” on page 279
- “Basic QuickView Navigation” on page 279
- “Using the Settings in the VisualRF > Setup Page” on page 283
- “Configuring QuickView Personal Preferences” on page 287
- “Increasing Location Accuracy” on page 288
- “Using QuickView to Assess RF Environments” on page 295
- “Planning and Provisioning” on page 300
- “Importing and Exporting in VisualRF” on page 310
- “VisualRF Location APIs” on page 312

The VisualRF module provides a real-time picture of the actual radio environment of your wireless network and the ability to plan the wireless coverage of new sites. To understand what is happening on your wireless network, you need to know where your users and devices are located, and you need to monitor the RF environment in those areas. VisualRF puts this information at your fingertips through integrated mapping and location data.

VisualRF uses RF fingerprinting to accurately display coverage patterns and calculate the location of every wireless device in range. Moreover, VisualRF does not require dedicated RF sensors or a costly additional location appliance - all the necessary information is gathered from existing wireless access points and controllers.

**Figure 197** Example VisualRF Page Showing all networks

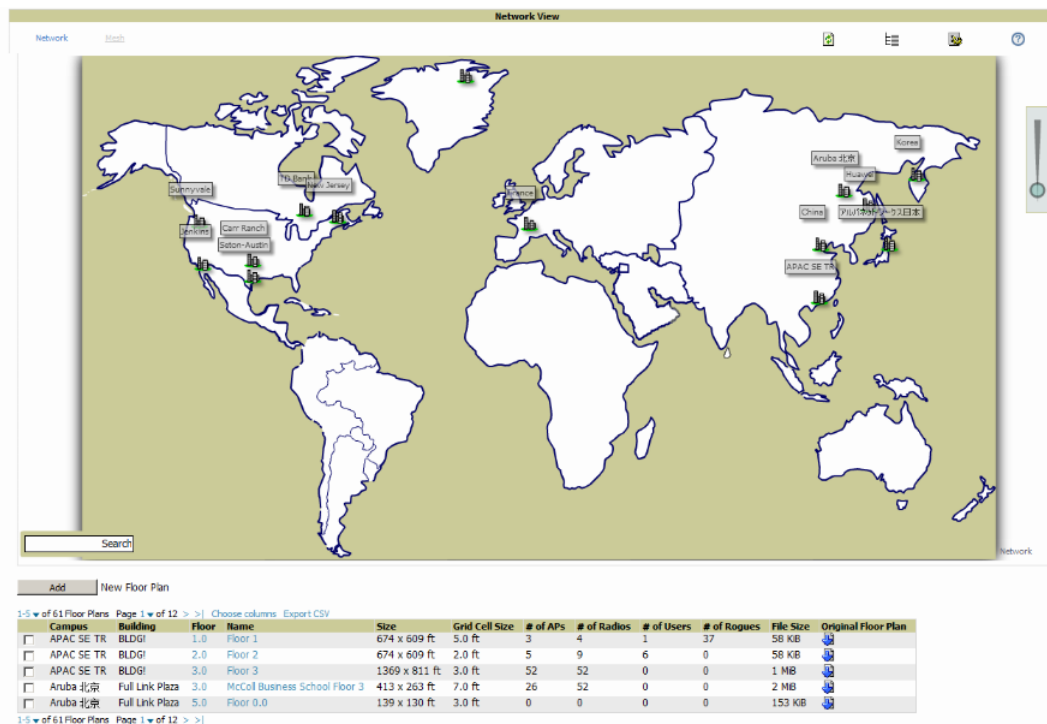

## Features

- Floor plan upload wizard enables direct importation of JPEG, GIF, PNG, PDF and CAD files for floor plans.
- Batch upload wizard enables batch uploads of multiple CAD files with corresponding walls, and access points.
- Accurate calculation of the location of all client devices (laptops, RFID Tags, PDAs, Phones) using RF data from your existing APs and controllers. Further improvements in accuracy can be achieved with site surveys.
- Graphical navigation allows your Help Desk to view floor plans simply by clicking on the appropriate campus, building, or floor.
- Tree view allows you to navigate to a specific campus, building, or floor via a tree navigation.
- Heatmaps depict the strength of RF coverage in each location.
- Data rate view which depicts the highest possible data rate at every location on a floor plan.
- Location playback viewer which allows visual tracking of up to 24 hours of location history.
- Dynamically recalculates path loss and device locations based on real-time data from your wireless LAN, for increased location accuracy.
- Calibrates RF data from multiple vendors' APs (and across different product lines from the same vendor) for accurate display even in multi-vendor and multi-architecture environments.
- Full planning capabilities based on data rate or signal requirements.

## Useful Terms

- **VisualRF** - The OV3600 service that calculates location, calculates path loss, and provides floor plan editing capabilities.
- **VisualRF Plan** - Makes the planning portions of VisualRF available in an offline software package that does not require a server.
- **QuickView** - Flash front-end for VisualRF which displays information generated by the backend service.
- **mW** - 1/1000 of a Watt. It is a linear measurement (always positive) generally used to represent transmission.
- **dB (Decibels)** - difference/ratio between two signal levels.
- **dBm** - dB as compared to 1 mW. It is a logarithmic measurement (integer) which is typically used in place of mW to represent receive-power level. OV3600 normalizes all signals to dBm, so it is easy to evaluate performance between various vendors.
- **RSSI (Received Signal Strength Indicator)** - IEEE defines RSSI is a mechanism by which RF energy is to be measured by the circuitry on a wireless NIC (0-255). RSSI is not standard across vendors. Each vendor determines their own RSSI scale/values.
- **AP-to-AP Signal (Neighbor)** - Some APs/Controllers have the ability to report the signal strength of APs that they hear. OV3600 uses these signal strength readings to dynamically attenuate floor plans to increase the accuracy of client locations and heat maps.
- **Unassociated Client Information** - Some APs/Controllers have the ability to report the signal strength clients they hear, but that are associated to a radio on a neighboring AP. OV3600 also uses these signal strength readings to more accurately place clients.
- **Client Surveys** - Client surveys within VisualRF use access points to understand which clients they hear and at what signal strength.
- **Rogue Surveys** - Rogue surveys are facilitated by AMC, VisualRF and the client's radio to understand which access points they hear and what signal strength.

## Starting VisualRF

In order to launch VisualRF, it must be enabled within **OV3600 Setup** to display the VisualRF tab, and the VisualRF engine must be switched on in **VisualRF > Setup**. Both of these pages are visible to logged-in administrators only. By default, VisualRF is disabled in new OV3600 installations.

To enable VisualRF, follow these instructions while logged in as an administrator:


1. Go to **OV3600 Setup > General**.
2. Scroll down to the **OV3600 Features** section as shown in [Figure 198](#). In the field **Display VisualRF**, select **Yes**. Then select **Save**.

**Figure 198** *OV3600 Setup > General > OV3600 Features Page Illustration*



3. After the VisualRF tab is visible, navigate to **VisualRF > Setup**.
4. In the **Server Settings** section, select **Yes** in the **Enable VisualRF Engine** field. Then select **Save**.


**Figure 199** *VisualRF > Setup > Server Settings Section*




## Basic QuickView Navigation

The top-level menus of VisualRF are split into two major categories: Network and Mesh, as shown in [Figure 200](#) and [Figure 201](#). Selecting these menus will cause relevant submenus and sections to display below:

**Figure 200** *Default VisualRF Top Level Menu - Network View*

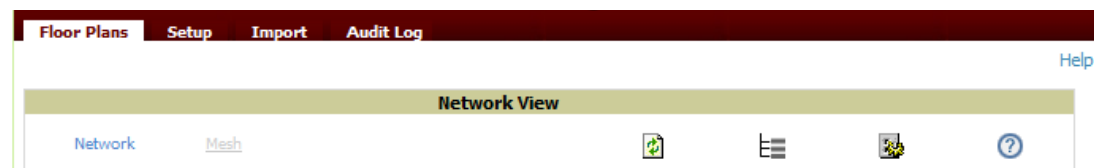

**Figure 201** *Default VisualRF Top Level Menu - Mesh View*

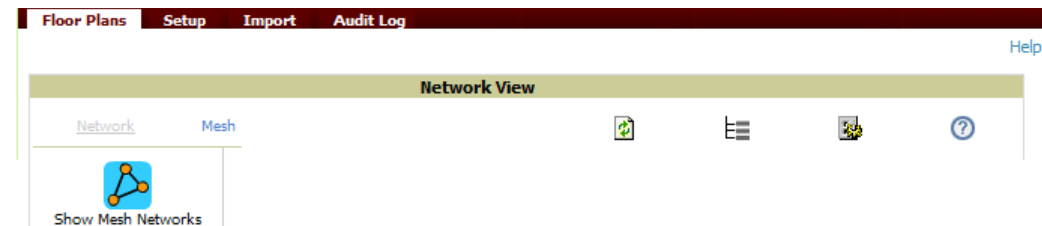



[Table 144](#) describes the top level icons and their functions on VisualRF.

**Table 144** *Top Level Icons and Descriptions*

| Operation      | Icon | Description                                                    |
|----------------|------|----------------------------------------------------------------|
| Refresh        |      | Refresh the floor plan to see changes.                         |
| Open Site Tree |      | Display the Network Tree View Window on top of the floor plan. |

**Table 144** Top Level Icons and Descriptions


| Operation   | Icon                                                                              | Description                                                                                                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Preferences |  | Configure personal viewing preferences. The Preferences menu allows you to configure user preferences (overlay types, grid lines, alerts, icon sizes). See <a href="#">“Configuring QuickView Personal Preferences”</a> on page 287 for more details. |
| Help        |  | Launch the online help.<br><b>NOTE:</b> This User Guide currently contains the most up-to-date help information for the VisualRF interface.                                                                                                           |

## Network View Navigation

When viewing a floor plan in Network View, the top-level menu changes to **Overlays**, **Display**, and **Edit** toggles.

### Overlays

**Figure 202** Overlays Menu - Data Rate selected

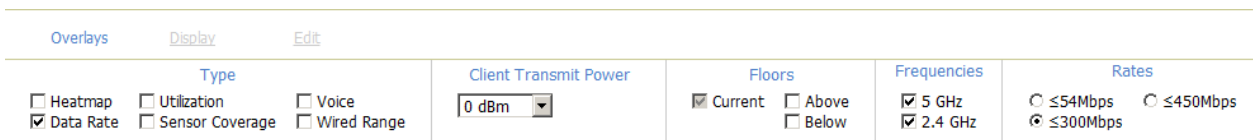

The **Overlays** menu contains three common sections: **Type**, **Floors**, and **Frequencies**. Selecting options in these sections can display additional menu sections that affect the data overlays on the floorplan you are viewing.

#### Type section

- **Heatmap** - Evaluate coverage based on signal levels by providing the highest dBm (energy level) for all areas of a floor plan. When this option is selected, the **Signal Cutoff** drop-down menu displays.
- **Data Rate** - Evaluate coverage based on xmit power of client by providing the highest data rate a user will receive for all areas of a floor plan. When this option is selected, the **Client Transmit Power** drop-down menu displays. Also, a **Rates** interface appears with 54Mbps, 300Mbps, and 450Mbps.
- **Utilization** - View how much airtime is used in the environment. Airtime usage is a good measure of how busy an area is. When you select this option, a new **Data Set** menu appears where you can select the Current or Maximum Total, Receive, Transmit or Interference information to display on the Floor Plan.
- **Sensor Coverage** - provides the farthest area which a sensor can hear. When this option is selected, the **Client Transmit Power** drop-down menu displays.
- **Voice** - provides color-coded overlay based on number of radios covering each grid cell based on the selected signal cutoff. When this option is selected, the **Signal Cutoff** drop-down menu displays.
- **Wired Range** - Displays the distance an Ethernet cable can be pulled from an IDF. The max range is equal to 300 feet minus 5 percent minus 1.1x the floor height.

#### Floors section

The Floors section shows the overlay information for adjacent floors to determine how the bleed through from adjacent floors affects the viewed floor. Select all options to see all floors, or one or more of the following options:

- Above - show the data from APs located on the floor above
- Current (default)
- Below - show the data from APs located on the floor below




## Frequencies section

Select the desired frequency from the following options:

- 5 GHz (lines are always green)
- 2.4 GHz (lines are always blue)
- 2.4 + 5 GHz (lines are yellow)

## Display Menu

Figure 203 *Display Menu*

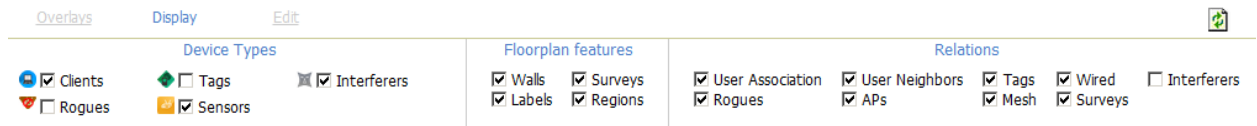

## Device Types section

- **Clients** - Turns the display of wireless users on or off. Clients on the floor plan are indicated by the icon.
- **Rogues** - Toggle rogue devices on or off. Rogues on the floor plan are indicated by the icon.
- **Tags** - Toggle WiFi Tags on or off. Tags on the floor plan are indicated by the icon.
- **Sensors** - Toggle sensors on or off. Sensors on the floor plan are indicated by the icon.
- **Interferers** - Toggle interferers on or off. Interferers on the floor plan are indicated by the icon.



Interferer indicators works for AOS customers running 6.1 or newer that have run the mgmt-server type OV3600 command, and have APs performing Spectrum analysis through hybrid scanning or dedicated spectrum monitors.

## Floorplan Features section


- **Regions** - Toggle regions on or off.
- **Surveys** - Toggle surveys on or off.
- **Walls** - Toggle walls on or off.
- **Labels** - Toggle labels on or off.

## Relations section

- **User Association** - Toggle line between the wireless user and AP of association.
- **Rogues** - Toggle lines between rogue APs and radios which hear the AP.
- **User Neighbors** - Toggle lines between client and radios which hear the client excluding the radio of association.
- **APs** - Toggle lines between APs which heard each other.
- **Tags** - Toggle lines between WiFi Tags and radios which hear the Tags. For Tags there is no radio of association.
- **Wired** - Toggle lines between APs/sensors and their IDF.
- **Mesh** - Toggle lines between Mesh portals and nodes.
- **Surveys** - Toggle lines between client (x,y) to APs by client during survey.
- **Interferers** - Toggle lines between interferers and the radios that have discovered them. For interferers, there is no radio of association.

## Edit Menu

Figure 204 Edit Menu Options

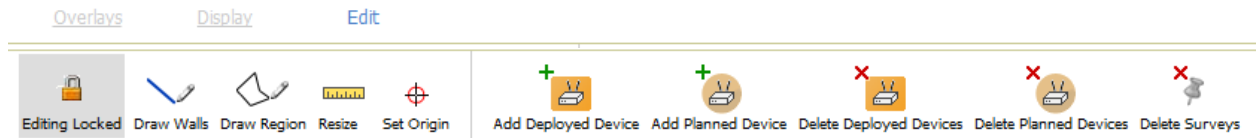


Options in the Edit menu allow you to add information to the floor plan. Table 145 explains the options in the Edit menu:

Table 145 Edit Icons and Descriptions

| Operation                                             | Description                                                                                                                 |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Edit Locked/Unlocked</b>                           | Lock a floor plan for editing.                                                                                              |
| <b>Draw Walls</b>                                     | Add walls onto a floor plan. Refer to “Adding Exterior Walls” on page 289.                                                  |
| <b>Draw Region</b>                                    | Add region onto a floor plan. Region types include Planning, IDF, Location Probability, Location Testing and Informational. |
| <b>Resize</b>                                         | Update the scale of the floor plan to properly reflect the accurate dimensions of the floor plan.                           |
| <b>Set Origin</b>                                     | Set Orientation for proper vertical floor plan alignment.                                                                   |
| <b>Add Deployed Device</b>                            | Provision APs onto a floor plan (APs monitored by OV3600).                                                                  |
| <b>Add Planned Device</b>                             | Manually plan APs onto a floor plan (APs not monitored by OV3600).                                                          |
| <b>Delete Planned Devices/Delete Deployeds Device</b> | Remove all specified devices on a floor plan.                                                                               |
| <b>Delete Surveys</b>                                 | Remove all surveys (rogue and client) on floor plan.                                                                        |

Figure 205 shows additional navigation controls when viewing floor plans. In the bottom left corner of the window is the **Search** box. In the top right corner is the zoom control. You can also zoom by using Ctrl + your mouse wheel as well as the + and - keys. In the bottom right corner are navigation tools related to network, campus, and building.

Figure 205 On-Screen Navigation Options

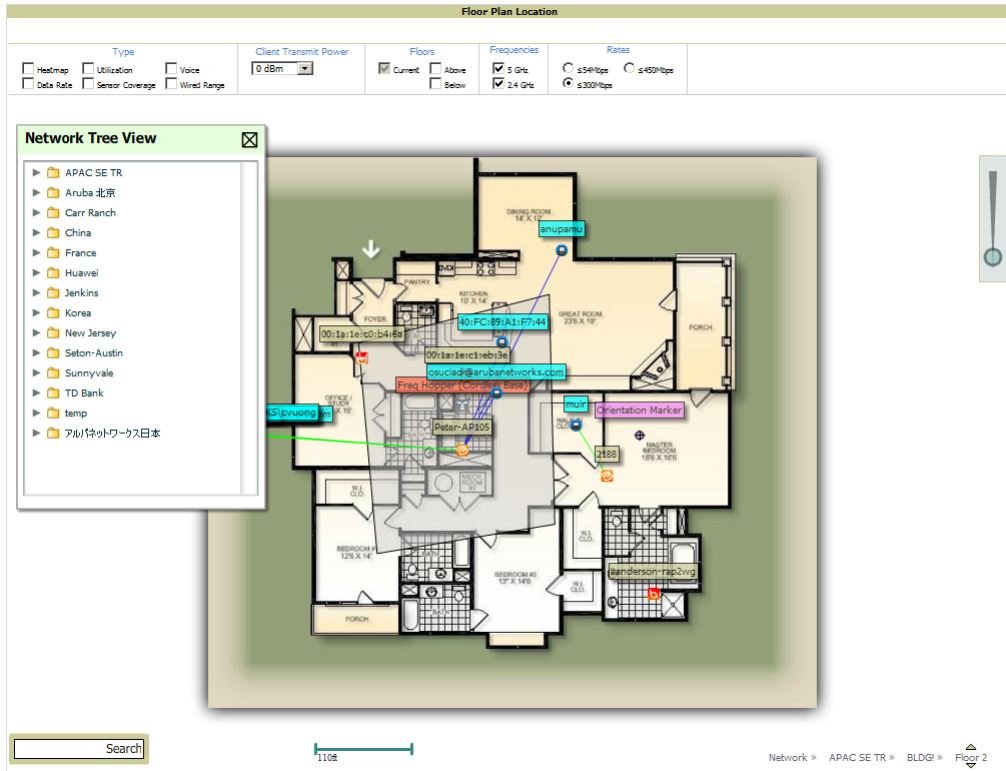

The following are general navigation tips for these other options:

- **Search** - Use the search box to quickly find a wireless client, AP, or rogue device displayed on the floor plan. Search will do substring matches on username, MAC address and model.
- **Left-Click** - Clicking on an object will display monitoring statistics about that object.
- **CTRL+ Click** - select multiple objects for deleting or simulating failure.
- **Click + Hold** - enables panning on the floor plan or background image.
- **Right-Click** - left clicking on an object will allow you to edit that object.
- **CTRL+ALT+Shift+X+M+L** - displays the XML behind Flash output which is useful for debugging.
- **CTRL + Mouse Wheel** - zooms in or out of a floor plan, campus, or building view.

## Using the Settings in the VisualRF > Setup Page

The **VisualRF > Setup** page, illustrated in Figure 206, configures advanced settings for VisualRF. Please reconfigure these settings very carefully because these settings can impact your server's performance as well as your location accuracy.



---

Selecting **Save** will cause VisualRF to restart, disrupting or delaying the usability for up to 5 minutes.

---

**Figure 206** *The VisualRF > Setup Page*

The screenshot displays the 'VisualRF > Setup Page' with four main configuration sections:

- Server Settings:** Includes options for 'Enable VisualRF Engine', 'Enable Multi-floor Bleed Through', 'Dynamic Attenuation', and 'Use Metric Units', each with radio buttons for Yes/No. It also features dropdown menus for 'Memory Allocation' (1 GB), 'Core Threads' (8), 'Location Caching Threads' (8), 'UI Threads' (8), and 'Synchronization Timer' (15 minutes). A checkbox at the bottom restricts visibility of empty floor plans.
- Location Settings:** Includes 'Allowed deviation for client placement' (2 dB) and 'Maximum Rogue APs per Floor Plan (approx.)' (50), both with dropdown menus.
- Location Calculation Timer Settings:** A list of 15 items, each with a dropdown menu for Min/Max (sec) and a dropdown for Number of Samples. Items include Legacy Laptop, Laptop, Phone, RFID, Scale, Printer, and Rogue, each with its own specific default values.
- Wall Attenuation Settings:** Features an 'Add' button and a table of wall materials. The table has columns for Material, Attenuation, and Color. Below the table is a '10 Wall Attenuations' label and 'Save' and 'Revert' buttons.

To enable VisualRF and tune memory and performance, navigate to the **Server Settings** section on this page. The settings in this section are detailed in [Table 146](#):

**Table 146** *Server Settings Section of the VisualRF > Setup Page*

| Setting                                 | Default | Description                                                                                                                                                                                               |
|-----------------------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Enable VisualRF Engine</b>           | No      | Enables or disables the VisualRF engine. This setting must be enabled to use VisualRF. If you do not have a license for VisualRF, this page will not appear.                                              |
| <b>Enable Multi-floor Bleed-Through</b> | Yes     | Enables or disables calculating the impact APs on floors above and below the currently viewed floor in the Quick View.                                                                                    |
| <b>Dynamic Attenuation</b>              | Yes     | Incorporate AP to AP readings as well as site survey information and dynamically recalculate the path loss of each radio to every grid cell on the floor plan, increasing coverage and location accuracy. |
| <b>Use Metric Units</b>                 | No      | Instructs the VisualRF engine to display all units of measurements in metric                                                                                                                              |

**Table 146** *Server Settings* Section of the **VisualRF > Setup** Page (Continued)

| Setting                                                                                  | Default            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Memory Allocation</b>                                                                 | 512 MB             | <p>The amount of memory dedicate to VisualRF. It is not dynamically allocated and all the memory is consumed upon starting the service. Be sure to check the memory and swap utilization in the <b>Systems &gt; Performance</b> page before making any changes. The exact amount of memory used per floor plan will vary heavily based on the size, number of devices and number of grid cells on the floor plan.</p> <ul style="list-style-type: none"> <li>• 25 floors or less 512 MB</li> <li>• 50 to 75 floors 1 GB</li> <li>• 75 to 100 floors 1.5 GB</li> <li>• 100 to 200 floors 3GB</li> <li>• 200 to 300 floors 5 GB (64-bit only)</li> <li>• Above 300 8 GB (64-bit only)</li> </ul> <p><b>NOTE:</b> If you see Out of Memory errors in the SSL error log on the <b>System &gt; Status</b> page, you should increase memory allocation.</p> |
| <b>Core Threads</b>                                                                      | 1x number of cores | Number of threads that calculate path loss for each floor. These threads also regenerate a floor's RF properties when new APs, walls, or regions are added to a floor plan.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Location Caching Threads</b>                                                          | 1x number of cores | Number of threads that calculate the location of all clients associated with access points on this floor plan.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>UI Threads</b>                                                                        | 1x number of cores | <p>Number of threads that service the users accessing QuickView, as well as OV3600-to-VisualRF communication.</p> <p><b>NOTE:</b> If users experience timeout errors while using QuickView, allocate additional UI Threads.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Synchronization Timer</b>                                                             | 15 minutes         | This timer indicates how often VisualRF will synchronize security for APs within OV3600.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Restrict visibility of empty floor plans to the role of the user who created them</b> | No                 | When enabled, only the creator can view an empty floor plan.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

To tune location accuracy, go to the **Location Settings** section on this page as described in [Table 147](#):

**Table 147** *Location Settings* Section in **VisualRF > Setup**

| Setting                                       | Default | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Allowed deviation for client placement</b> | 4 dB    | <p>When VisualRF locates a client or rogue it utilizes signal metrics from all the APs that hear the client or rogue device. VisualRF builds a fingerprint location for all clients with similar transmit-power capability. All subsequent clients that fall within the deviation is placed on the same location fingerprint or x, y coordinates.</p> <p><b>Example:</b> AP #1 hears client1 at -72, and AP #2 hears client 1 at -64. VisualRF calculates the client's location to be at coordinates 100, 200. Client2 is heard by AP#1 at -71 and AP#2 at -65. VisualRF will use the average of the difference in signals (AP#1 -72 and -71) to see if the client matches a pre-calculated location fingerprint. <math>1 + 1</math> (differences in signals) / 2 (# of APs) = 1 which falls within the deviation of 2, hence the client would be located at 100,200.</p> |
| <b>Maximum Rogue APs per Floor Plan</b>       | 20      | <p>Sets the maximum number of rogues OV3600 will place on a Floor. Use this filter in combination with the <b>RAPIDS Export Threshold</b> configured on the <b>RAPIDS &gt; Setup</b> page to intelligently control the number of rogue devices displayed per floor.</p> <p><b>NOTE:</b> Increasing this value could increase the load on the server and the clutter on the screen.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

To tune the frequency for calculating device locations within the VisualRF UI, navigate to the **Location Calculation Timer Settings** section as described in [Table 149](#):

**Table 148 Location Calculation Timer Settings Section of VisualRF > Setup**

| Setting                                | Default | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Legacy Laptop Min/Max (sec)</b>     | 90/360  | This timer determines how often to calculate location for legacy laptop devices. Taken with the data samples the calculation would follow:<br><br>After minimum timer (90 seconds) check to see if the number of data samples received from all APs that hear this client are greater than or equal to the number of samples setting for legacy laptop devices (default of 3 data samples).<br><br>If so ( <b>Yes</b> to question above) then recalculate the client device's location based on the samples received.<br><br>If not ( <b>No</b> to the question above) then wait until the number of sample setting is met and recalculate. If the number of samples is never met, wait until the maximum timer (360 seconds) and recalculate. |
| <b>Legacy Laptop Number of Samples</b> | 3       | See definition above.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

All of the other device types (phone, printer, scale, and so on) use the same methodology as detailed above.

To edit the wall settings and select a color for wall types within the VisualRF UI, navigate to the **Wall Attenuation Settings** section and select the pencil icon next to each of these settings as described in [Table 149](#):

**Table 149 Wall Attenuation Settings in VisualRF > Setup**

| Setting                          | Default | Description                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Glass Attenuation (dB)</b>    | 2       | Specifies the attenuation for any glass walls that are drawn in VisualRF.<br><br><b>NOTE:</b> All of these values are global variables that cannot be overridden for individual floor plans. VisualRF uses these values to calculate path loss and client locations. Walls within VisualRF are interpreted as pure dB loss without adjusting for wall thickness. |
| <b>Cubicle Attenuation (dB)</b>  | 4       | Specifies the attenuation for any cubicle walls drawn in VisualRF.                                                                                                                                                                                                                                                                                               |
| <b>Drywall Attenuation (dB)</b>  | 6       | Specifies the attenuation for any drywall walls drawn in VisualRF.                                                                                                                                                                                                                                                                                               |
| <b>Concrete Attenuation (dB)</b> | 15      | Specifies the attenuation for any concrete walls drawn in VisualRF.                                                                                                                                                                                                                                                                                              |

## VisualRF Resource Utilization

When tuning the VisualRF server, Alcatel-Lucent recommends using the default settings as recommended. If you do change any of these settings above, change one at a time and see how the system performs. Each time you restart VisualRF, it will take at least 30 minutes to return to normal processing.

If you use the 'top' command to check on VisualRF resource utilization, ensure you use the 'l' and 'H' flags to show cores and threads. Remember 'top' also takes 1-2 minutes to normalize and provide accurate data.




It is normal for VisualRF to consume 20% of each core with a combination of threads. It will utilize excess CPU cycles on all cores when required.

## Configuring QuickView Personal Preferences

To configure your personal preferences in QuickView, select the **Preferences** icon and choose from the following configuration options:

- **General** - select from the **Configure Preferences** drop-down menu, as shown in [Figure 207](#):
  - Enable auto-refresh toggle
  - Refresh Interval in minutes
  - Show Scale
  - Hide neighbor lines ignored in location calculation
  - High Quality Background Image - you can disable to increase rendering speed
  - Label Transparency

**Figure 207** QuickView Preferences Page Illustration (General preferences selected)

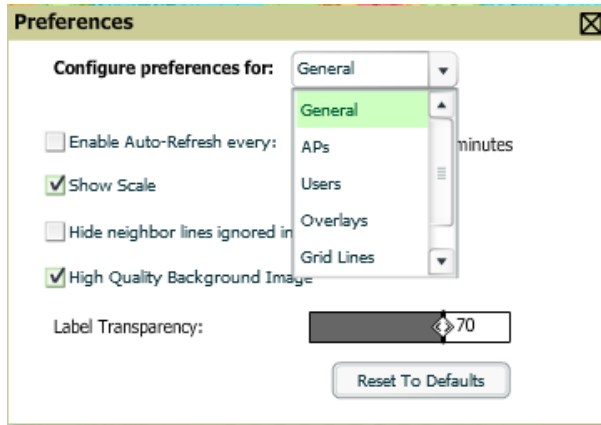

- **APs** - select from the **Configure Preferences** drop-down menu:
  - BW - select the kbps threshold for normal (green), high (yellow), and excessive (red)
  - # of Users - select the number of users threshold for normal (green), high (yellow), and excessive (red)
  - % of Uptime for the last 24 hours for normal (green) and excessive (red)
  - Radio Status - display red or green depending on the status of the radios within the AP
  - AP Status - display red or green in relation to up/down status of AP
  - Icon Size - select the size of the AP icon display on the floor plan
  - Show Channel in Label
  - Show Transmit Power in Label
- **Users** - select from the **Configure Preferences** drop-down menu:
  - BW - select the kbps threshold for normal (green), high (yellow), and excessive (red).
  - Signal Strength - select the dBm client threshold between excellent and poor
  - Icon Size - select the size of the client device icon display on the floor plan
- **Overlays** - select display type
  - Grid - non vector overlay
  - Vector - provides a more smooth overlay with mouse-over capabilities
- **Grid Lines** - Toggle grid lines on or off
  - Distance between grid lines
  - Color of grid lines
- **Navigation** - select from the **Configure Preferences** drop-down menu (campus and buildings):
  - % of APs Up for the last 24 hours for normal (green) and excessive (red)
  - Icon Size for campus, building and floor



These preferences are stored in the database, so they will be retained across browsers and machines.



The remaining sections in this chapter apply to networks, campuses, buildings, and floor plans that have already been set up in VisualRF. If you do not yet have any of this information in VisualRF for your network, refer to “Planning and Provisioning” on page 300.

## Increasing Location Accuracy

The Location Service will use all RF information available to increase location accuracy of clients, tags, and rogue devices. Understanding your infrastructure's inherent capabilities helps you learn the extra effort required to ensure location accuracy.

There are three key elements read from controllers or access points that increase location accuracy: signal strength of a client as heard by the AP of association, signal strength of a client as heard by APs other than the AP of association, and signal strength at which an AP hears other APs.

These factors are detailed further in [Table 150](#):

**Table 150** Elements Read From Controllers to Increase Location Accuracy

| MFG/Model        | Client Signal Associated AP | AP-to-AP Signals (Dynamic Attenuation) | Unassociated Client Signal | Rogue AP Signal |
|------------------|-----------------------------|----------------------------------------|----------------------------|-----------------|
| Alcatel-Lucent   | Yes                         | Yes                                    | Yes                        | Yes             |
| Cisco LWAPP      | Yes                         | Yes                                    | Yes                        | Yes             |
| Cisco IOS        | Yes                         | No                                     | No                         | With WLSE       |
| Cisco VxWorks    | Yes                         | No                                     | No                         | No              |
| Trapeze          | Yes                         | No                                     | No                         | Yes             |
| Meru             | No                          | No                                     | No                         | Yes             |
| Proxim           | Yes                         | Yes                                    | Yes                        | Yes             |
| Symbol Auton. AP | Yes                         | No                                     | No                         | Yes             |
| Symbol Thin AP   | Yes                         | No                                     | Yes                        | Yes             |
| Proxim AP-2000   | Yes                         | No                                     | Yes                        | Yes             |
| Proxim AP-4000   | Yes                         | Yes                                    | Yes                        | Yes             |
| ProCurve WeSM    | Yes                         | Yes                                    | No                         | Yes             |
| ProCurve 530     | Yes                         | Yes                                    | Yes                        | Yes             |
| ProCurve 420     | Yes                         | Yes                                    | No                         | Yes             |

OV3600 provides four main methods to increase accuracy once your access points are deployed:

- Adding Exterior Walls - increases location accuracy by reducing the statistical probability of placements outside the office confines. See “[Adding Exterior Walls](#)” on page 289.
- Client Training for Stationary Devices - ensures non-mobile clients like desktops or scales will always remain in a defined static location. Statically assigning non-mobile devices reduces the CPU load on



your server because VisualRF does not evaluate any signal metrics for this MAC address when associated with an AP on the floor plan. See “[Location Training for Stationary Devices](#)” on page 289.

- Remote Client Surveys - provides additional attenuation inputs for corners and low-coverage areas without the burden of actually carrying a laptop to the physical location. See “[Adding Client Surveys](#)” on page 290.
- Location Probability Regions - Probability regions will increase or decrease the chances of a device being located within the region. See “[Adding Location Probability Regions](#)” on page 291.

## Adding Exterior Walls

Because VisualRF utilizes much existing RF information, generally only external walls are required for accurate client locations. VisualRF's Dynamic Attenuation feature uses AP-to-AP information to calculate attenuation for interior areas, negating the need to enter interior walls. If your devices support AP-to-AP information in the table above, you should only draw exterior walls.


1. Select **Draw Walls** icon in the Edit menu.
2. The cursor changes to a crosshair. Use this to draw the wall directly over the floor plan, as shown in [Figure 208](#):

**Figure 208** Drawing a wall



3. To move or resize the wall, select the **Wall** icon in the Edit menu again. The cursor changes to a hand, and the ends of the wall is highlighted. Click and drag the endpoint handles to change the wall, as shown in [Figure 209](#):

**Figure 209** Moving and resizing an existing wall



- To change the attenuation of a wall, right-click the wall and select the appropriate building material.
  - To delete a wall, select the wall and press the Delete key.
4. Once all walls are provisioned on the floor plan, select **Save** (floppy disk icon above the zoom bar).



---

Alcatel-Lucent recommends only drawing outside walls. If you are seeing inaccurate client locations or heat maps after entering exterior walls, proceed to Client Surveys. If you still experience problems, then you can proceed to adding interior walls.


---

## Location Training for Stationary Devices

QuickView provides the ability to statically assign a permanent  $x, y$  coordinate to stationary devices like PCs, Scales, and Point-of-Sale terminals. This will reduce the calculation requirements on the VisualRF location service and increase the accuracy of the RF characteristics of individual floor plans.

1. Drag the client device to the proper location.
2. Select the device and a popup menu appears. From that menu, select **Surveys and Training**.
3. Click the **Add** button for Static Training, as shown in [Figure 210](#):

**Figure 210** Surveys and Training menu for a client device

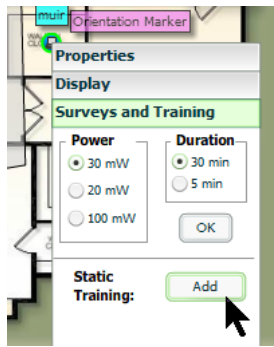

To remove a statically trained device, select client, and select the Surveys and Training option. Select **Delete** button (which will have replaced the **Add** button) for **Static Training**.



---

The static locations are automatically saved, so the **Save** icon (floppy disk) will not appear.

---

## Adding Client Surveys

Client surveys provide a method for increasing the accuracy of the attenuation grid by taking real signal samplings from client devices associated with the WLAN.


Key differentiators of OV3600's client surveys are: (1) they take readings from the access points and not the client and (2) they take numerous samples. This produces a more accurate representation because signals obtained from the client's card (the signal level at which a client hears the AP) can vary from vendor to vendor.

The signal levels at which APs can hear a client are already normalized. Using multiple samples alleviates spikes or troughs that come from using a single sample.

To start a client survey, follow these steps:

1. Drag the client to the proper location.
2. Select the client to see the **Properties** pop-up menu, as shown in [Figure 211](#):

**Figure 211** Client Surveys

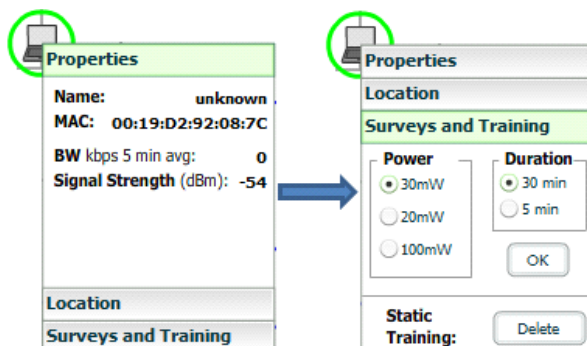

3. Select the **Surveys and Training** option.
4. Select the appropriate transmit power for the wireless client. Leave the default to **30mW** if you are unsure.
5. Select the **Duration** or the time that you want to sample the client's signal measurements. Longer durations will increase Path Loss accuracy and location accuracy.
6. Select **OK** to begin the survey.

To display survey locations, select the **Display** menu and select **Surveys**. Note the following information about this procedure:

- Ensure the client will remain in the same location for at least the duration of the survey.
- You should delete and resurvey an area or a floor plan after a remodel or significant interior movement.
- Surveys should be conducted during normal business hours to reflect normal RF activity on the floor.
- 11a clients automatically inherit the proper transmit power from the 11g configuration. Example: 30mW Pre-2006 laptops equate to 20mW for 11a clients.
- OV3600 dynamically assigns a transmit power to every client based on OUI as shown in [Table 151](#). This step increases the accuracy for surveys by allowing an override.

**Table 151** *Auto-assigned Client Type and Transmit Power*

| Client Type                                 | Transmit Power 11g |
|---------------------------------------------|--------------------|
| Pre-2006 Laptops                            | 30 mW              |
| Post -2006 Laptops                          | 100 mW             |
| SOHO WLAN Cards (D-Link, Net Gear, LINKSYS) | 30 mW              |
| RFID Tags                                   | 10 mW              |
| PDA                                         | 20 mW              |
| iPhone                                      | 20 mW              |
| Desktop                                     | 100 mW             |
| Cisco Cards                                 | 100 mW             |

## Adding Location Probability Regions

Location probability regions are optional regions that can be used to increase the accuracy of device location in VisualRF.


VisualRF calculates device locations based on probability. VisualRF determines the probability of a device being located in every grid cell and places the device where the probability is the highest.

Probability regions will add or remove up to 20% chance from the device location probability. They can be used to push users into regions where they are more likely to be located, like conference rooms and cubical farms, or they can be used to pull users out of regions where they are less likely to be like parking lots and courtyards.

To add a probability region to a floor plan, follow these steps:

1. Select the **Edit** menu and click the **Draw Region** option.
2. Outline the desired probability region. Double click to end the outline process.
3. Name the region, select a Region Type of **Location Probability** and select OK.
4. Move the location probability slider to the desired level, as shown on [Figure 212](#). **Very Low** will decrease the probability of a device being placed in that region by 20%. **Very High** will increase the probability of a device being placed in that region by 20%.

**Figure 212** Adding a New Location Probability Region

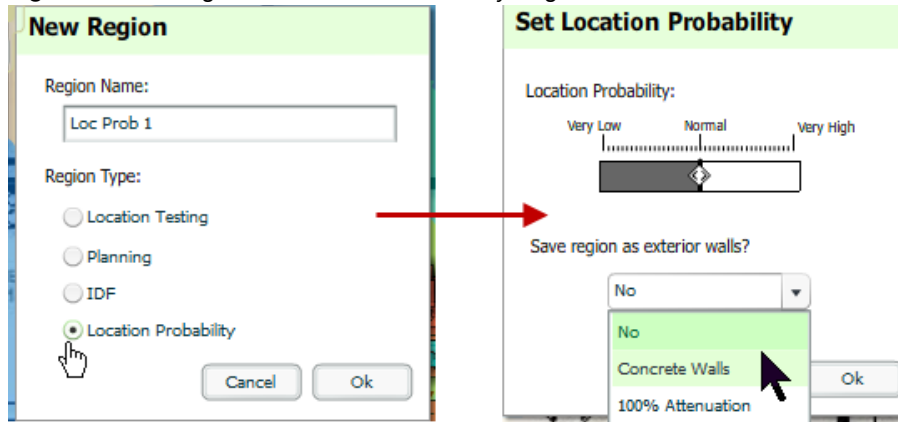


5. Optionally, you can save the location region as the exterior walls. 100% attenuation can be selected to force VisualRF to only place devices inside of the selected region. No device will ever be placed outside of the probability region when 100% attenuation is selected. 100% attenuation is only recommended for tall buildings where it is extremely unlikely that any user is located outside of the building. No heat map or attenuation grid is calculated for devices outside of the 100% attenuation region.

## Adding an IDF

To add an IDF to VisualRF, follow these steps:

1. In the **Edit** menu, select the **Draw Region** option.
2. Outline the desired IDF region. Double-click to end the outline process.
3. Name the region, select a Region Type of **IDF**, and select **OK**, as shown in [Figure 213](#).


**Figure 213** Adding a new IDF Region

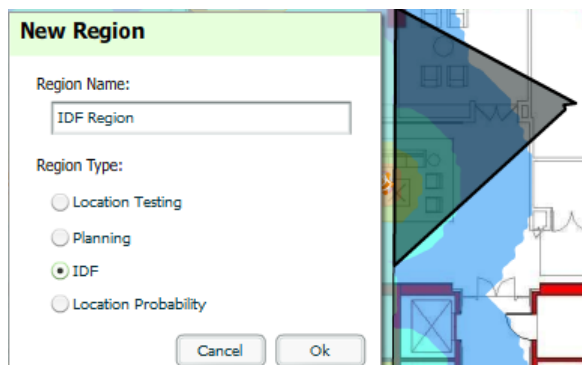

Now that the IDF is defined you will see a green IDF icon on your floor plan. Double click that icon to navigate into the IDF.

1. Add a rack to the IDF by selecting the **Add Empty Rack** icon and dragging it to the background.
2. To add a planned device, select the **Add Planned Device** icon to view the **Manually Provision Rack Gear** menu. Select the device type in the **Type** menu, and then find the device you want to add. Drag it into the rack at the appropriate location.
3. To add a wired device that is currently being monitored by OV3600, select **Add Deployed Device**.
4. Locate the device to be added.
5. Drag the device to the appropriate location in the rack, as shown in [Figure 214](#).

Figure 214 Provisioning Devices

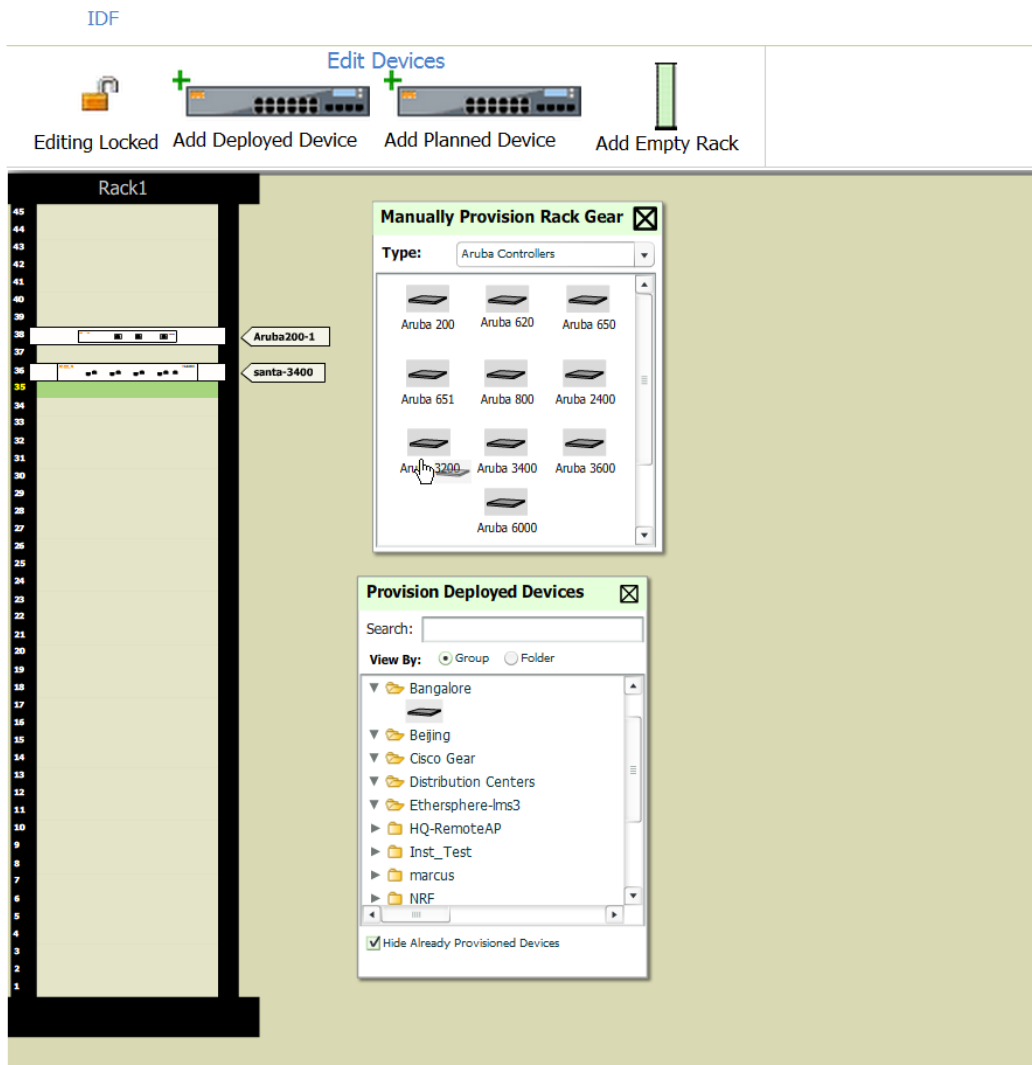


Wired devices that are added to an IDF are included in any BOM report covering that floor.

### Viewing Port Status on Deployed Switches

Deployed switches on a rack will display the port status as red (down) and green (up) interface icons, which corresponds with the operationally up devices on the **APs/Devices > Interfaces** list. Planned switches do not display these status indicators in VisualRF.

Figure 215 Deployed switch showing red and green port status icons

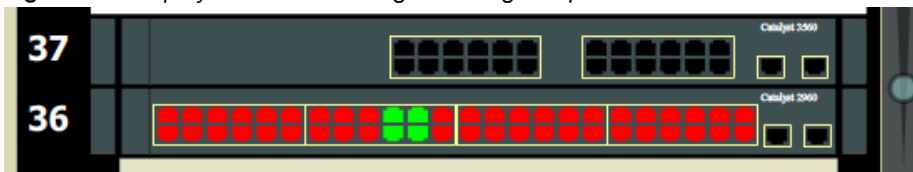

### Fine-Tuning Location Service in VisualRF > Setup

There are several options on the **VisualRF > Setup** page which increase client location accuracy. All of these items will increase the processing requirements for the location service and could negatively impact the overall performance of OV3600.


- **Grid Size** - decreasing the grid size will enable the location to place clients in a small grid which will increase accuracy. You can right-click on a floor plan within a building view and change this setting.

- **Dynamic Attenuation** - enabling dynamic attenuation (which is on by default) instructs the location service to sample the current RF environment and to dynamically adjust Path Loss.

## Configuring Infrastructure

Ensure that the hardware is configured to retrieve the RF information and that it provides this information on a timely basis. There are three unique timing mechanisms which impact location accuracy: how often the infrastructure collects and correlates RF statistics in their MIB, how often the OV3600 queries those MIB entries, and how often VisualRF service queries OV3600 for this RF information.

**Figure 216** Timing Factors Impacting Location Accuracy

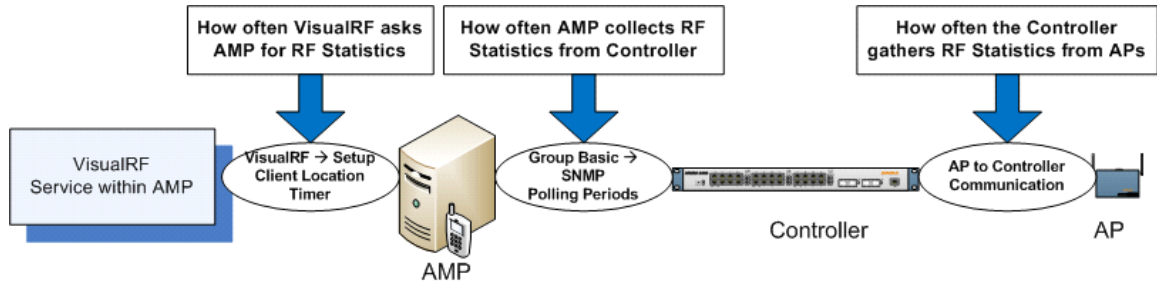

Alcatel-Lucent recommends these best practices when configuring hardware infrastructure:

- For legacy autonomous APs, ensure on the **Group > Radio** page that **Rogue Scanning** is enabled and the interval is accurate, as shown in [Figure 217](#):

**Figure 217** Group Rogue Scanning Configuration

|                                        |                                                                         |
|----------------------------------------|-------------------------------------------------------------------------|
| Rogue Scanning:                        | <input checked="" type="radio"/> Enabled <input type="radio"/> Disabled |
| Rogue Scanning Interval (15-1440 min): | 15                                                                      |

- For thin APs, ensure that the controllers are configured to gather RF information from the thin APs frequently.
- For Cisco LWAPP, navigate to **Groups > Cisco WLC Config** page in OV3600. Navigate the tree control to the **Wireless** section, and for each PHY navigate to **RRM > General** section as shown in [Figure 218](#).

**Figure 218** WLC RRM Configuration in OV3600

| Profile Thresholds for Traps                 |                  |
|----------------------------------------------|------------------|
| Interference (0-100%):                       | 10               |
| Clients (1-75):                              | 12               |
| Noise (-127 to 0 dBm):                       | -70              |
| Coverage (3-50 dBm):                         | 12               |
| Utilization (0-100%):                        | 80               |
| Data Rate (1-1000 Kbps):                     | 1000             |
| Noise/Interference/Rogue Monitoring Channels |                  |
| Monitoring Channels:                         | Country Channels |
| Monitor Intervals                            |                  |
| Signal Measurement (60-3600 sec):            | 300              |
| Noise Measurement (60-3600 sec):             | 300              |
| Load Measurement (60-3600 sec):              | 300              |
| Coverage Measurement (60-3600 sec):          | 300              |

Buttons: Save and Apply, Save, Revert, Revert All

- Review the values in the **Monitor Intervals** section. These should be configured to a recommended setting of **180** for better accuracy.


## Deploying APs for Client Location Accuracy

Deploying access points for client location accuracy can be different than deploying access points for capacity. Follow these guidelines for best results:

- Ensure that at least 3 radios can hear each client devices at -85 dBm or below
- Ensure that you deploy an access point approximately every 3,500 square feet.
- For square or rectangular floor plans ensure access points are deployed on the exterior walls of each floor with access points in the middle as well.

Refer to [Figure 219](#) for an example.

**Figure 219** Rectangular Floor Plan AP Deployment

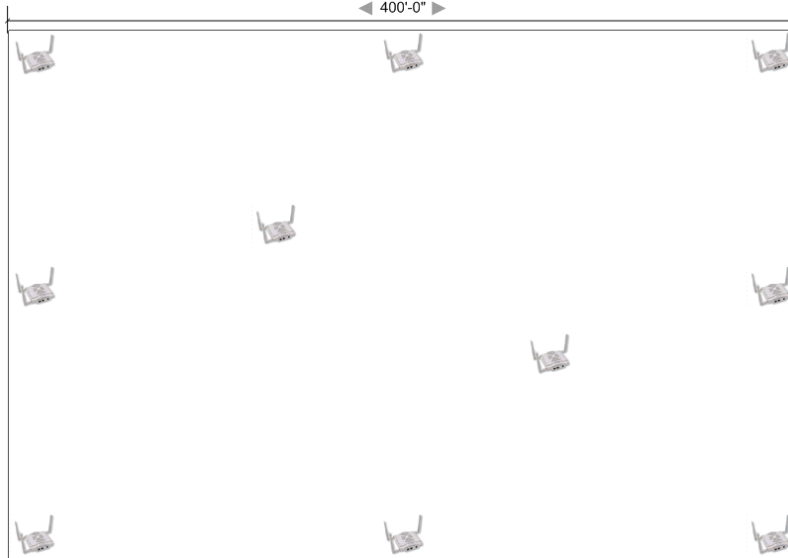

## Using QuickView to Assess RF Environments

QuickView has four distinct views or entry points: client view, access point view, floor plan view, and network, campus, and building view.

This section contains the following corresponding topics:

- “Viewing a Wireless User's RF Environment” on page 295
- “Viewing an AP's Wireless RF Environment” on page 297
- “Viewing a Floor Plan's RF Environment” on page 299
- “Viewing a Network, Campus, Building's RF Environment” on page 299


### Viewing a Wireless User's RF Environment

1. Navigate to **Users > List** in OV3600.
2. Click the link under the **Location** column for the user of interest, as shown in [Figure 220](#). A QuickView window of that location opens and indicates the client with a Username label, as shown in [Figure 221](#):

**Figure 220** Link to user's thumbnail (the Location column)

| Username              | Location                     |
|-----------------------|------------------------------|
| ARUBANETWORKS\mgalvin | APAC SE TR > BLDG! > Floor 2 |
| umahindra             | APAC SE TR > BLDG! > Floor 2 |
| dkurose               | APAC SE TR > BLDG! > Floor 1 |
| jzelnosky             | -                            |

**Figure 221** QuickView of the selected device

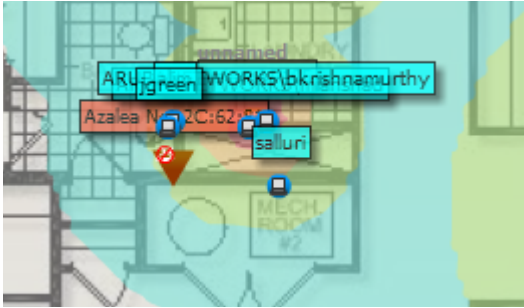

You can also access this information from the **Users > User Detail** page by selecting the QuickView thumbnail, located next to the **Current Association** section of this page as shown in [Figure 222](#):

**Figure 222** QuickView thumbnail in **Users > User Detail**

| Connected                  | All               | Guest Users        | User Detail                               | Diagnostics | Tags |
|----------------------------|-------------------|--------------------|-------------------------------------------|-------------|------|
| <b>Current Association</b> |                   |                    |                                           |             |      |
| Username:                  | dkurose           | AP/Device:         | 1394                                      |             |      |
| Role:                      | employee          | Controller:        | ethersphere-1322                          |             |      |
| Signal Quality:            | -                 | Group:             | 1322 Test Controller                      |             |      |
| Association Time:          | 3/24/2011 2:26 PM | Folder:            | Top > Sunnyvale HQ > 1322 Test controller |             |      |
| Duration:                  | 4 mins            | Device Location:   | -                                         |             |      |
| Connection Mode:           | 802.11n (2.4GHz)  | Radio:             | 802.11bgn                                 |             |      |
| Bandwidth:                 | -                 | Channel Bandwidth: | HT20                                      |             |      |
| SSID:                      | ethersphere-voip  | VLAN:              | 66                                        |             |      |
| LAN IP Address:            | 0.0.0.0           | LAN Hostname:      | -                                         |             |      |
| VPN IP Address:            | -                 | VPN Hostname:      | -                                         |             |      |
| Auth Type:                 | WPA2 (EAP-        | Auth Time:         | 4 mins                                    |             |      |

Location: APAC SE TR > BLDG! > Floor 1 (Floor 1) Enlarge |

Last Placed: 3/24/2011 2:26 PM


This view is focused on the wireless user enabling you quick resolution of a user's issues and therefore disables most RF objects by default.

- Users - only the user in focus is displayed
- APs - only the access point in which the focus client is associated with is displayed
- Radios - the heatmap represents only the radio to which the client in focus is associated
- Rogues - all rogues are off
- Client/Rogue Surveys - all surveys are off
- Walls - all walls are displayed
- Lines - client to AP of association
- Labels - all labels are disabled

### Tracking Location History

Select a client icon in the Floor Plan and select **Display** from the pop-up menu shown in [Figure 223](#):


**Figure 223** Show Location History

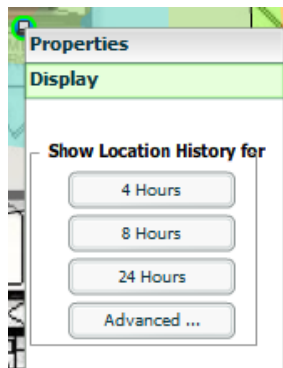



A location history player, illustrated in [Figure 224](#), appears at the bottom of the QuickView window.


**Figure 224** Location History Player



## Checking Signal Strength to Client Location

1. On a Floor Plan, locate the **Signal Cutoff** menu.
2. Select the desired signal level to display, as shown in [Figure 225](#). The heatmap updates immediately.

**Figure 225** Signal Cutoff dBm Dropdown Menu

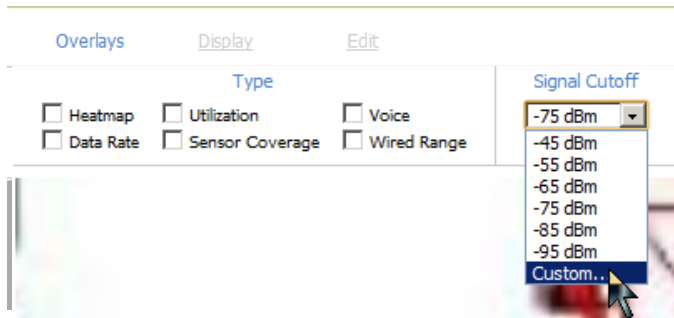


## Viewing an AP's Wireless RF Environment

To view an access point's RF environment from **APs/Devices > Monitor** page:


1. Select a device of interest from **APs/Devices > List**, or any other OV3600 page that lists your APs. The **APs/Devices > Monitor** page opens.
2. Click on the QuickView thumbnail showing the location of the AP, shown on the right side of [Figure 226](#):

**Figure 226** QuickView Thumbnail in **APs/Devices > Monitor** page for an AP

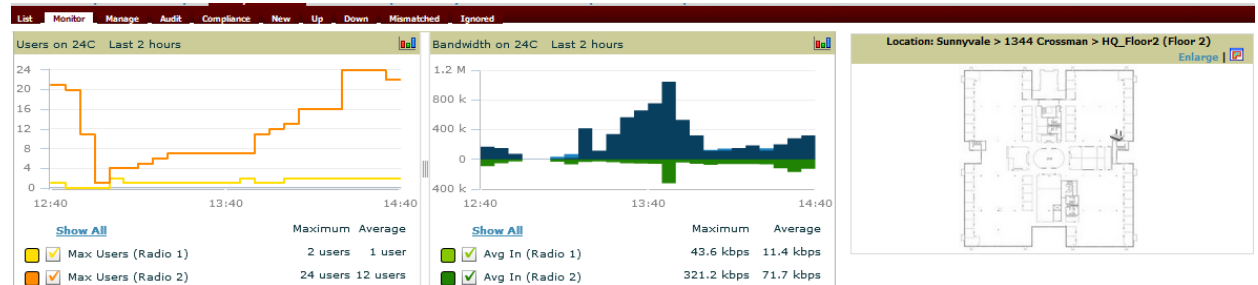

A fully interactive QuickView display opens below the thumbnail on the same page (not in a new window), as shown in [Figure 227](#):

Figure 227 Full QuickView in APs/Devices > Monitor page for an AP (partial view)

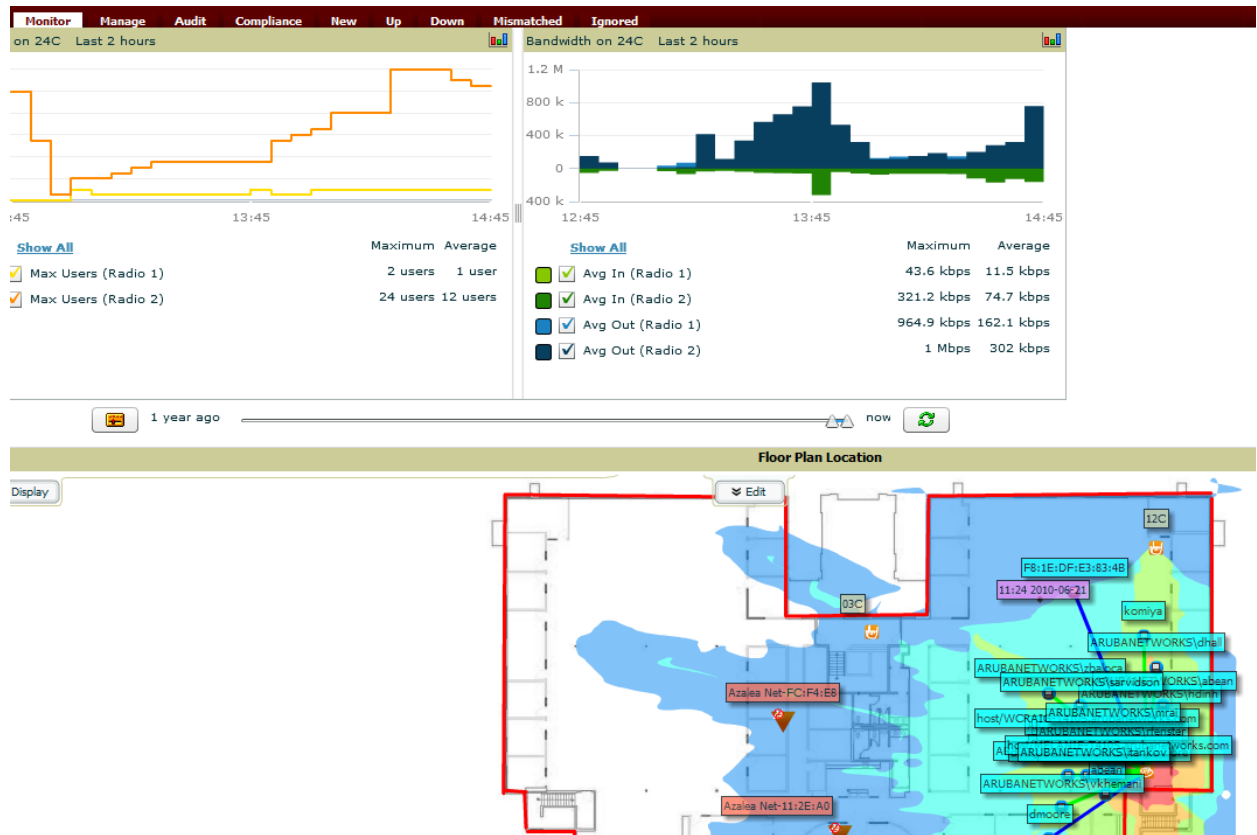

This view is focused on enabling quick resolution of AP issues and therefore disables many RF objects by default as follows:

- Users - only users associated with radios within access point of focus are displayed
- APs - only the access point in focus is displayed
- Radios - the heatmap represents all radios within the access point of focus
- Rogues - all rogues are **off**
- Client/Rogue Surveys - all surveys are **off**
- Walls - all walls on displayed
- Lines - client to AP of association are displayed
- Labels - all labels are disabled

## Viewing a Floor Plan's RF Environment

View a floor plan's RF environment from **VisualRF > Floor Plans** page. This page has a fixed sorting filter of Campus > Building > Floor number, as shown in [Figure 228](#).

**Figure 228** Floor Plans List View

| Campus         | Building         | Floor | Name      | Size         | Grid Cell Size | # of APs | # of Radios | # of Users | # of Rogues | File Size | Original Floor Plan |
|----------------|------------------|-------|-----------|--------------|----------------|----------|-------------|------------|-------------|-----------|---------------------|
| Default Campus | Default Building | 2.0   | Floor 2.0 | 277 x 123 ft | 5.0 ft         | 0        | 0           | 0          | 0           | 16 KIB    |                     |
| Default Campus | Default Building | 3.0   | Floor 3   | 288 x 192 ft | 5.0 ft         | 0        | 0           | 0          | 0           | 300 KIB   |                     |
| Default Campus | Default Building | 4.0   | Floor 4   | 526 x 381 ft | 10.0 ft        | 0        | 0           | 0          | 0           | 592 KIB   |                     |
| Default Campus | Default Building | 5.0   | Atrium    | 400 x 215 ft | 7.0 ft         | 4        | 6           | 3          | 0           | 1 MB      |                     |

This page provides a snapshot of how VisualRF is performing, as described in [Table 152](#):

**Table 152** Floor Plans list columns

| Field               | Description                                                                                                                                                                                                                                                                                                       |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Campus              | Campus associated to the floor.                                                                                                                                                                                                                                                                                   |
| Building            | Building associated to the floor.                                                                                                                                                                                                                                                                                 |
| Floor               | Floor number. The decimal place can be used for mezzanine levels.                                                                                                                                                                                                                                                 |
| Name                | Optional name of a floor. (If the name is not changed, it displays the name as Floor [Number] by default.)                                                                                                                                                                                                        |
| Size                | The height and width in feet of the floor plan, including white space.                                                                                                                                                                                                                                            |
| Grid Cell Size      | The size of the grid cells, in feet.                                                                                                                                                                                                                                                                              |
| # of APs            | The number of access points on the floor.                                                                                                                                                                                                                                                                         |
| # of Radios         | The number of radios associated with access points on the floor                                                                                                                                                                                                                                                   |
| # of Users          | The number of wireless users associated with access points on the floor.<br><br><b>NOTE:</b> Locating users consumes significant VisualRF resources. A floor with hundreds or thousands of clients can take a long time to process.                                                                               |
| # of Rogues         | The number of rogue devices heard by access points on the floor. This number reflects the filters configured on the VisualRF > Setup. This means that while APs on the floor might hear more rogue devices, they are being filtered because of weak signal, they haven't been heard recently, or they are ad-hoc. |
| File Size           | The floor plan background or image reported, in kilobytes. The larger the file, the longer it will take to render in the canvas.                                                                                                                                                                                  |
| Original Floor Plan | A link to download the original image background file.                                                                                                                                                                                                                                                            |


## Viewing a Network, Campus, Building's RF Environment

To view floors from a geographical perspective:


1. Navigate to the **VisualRF > Floor Plans** page.
2. Click on each network, campus, or building successively to drill down further until you reach the floor plan. This navigation provides information in each view as follows:
  - Network View - contains all campuses within your WLAN
  - Campus View - all buildings within a campus
  - Building View - all floors within a building
  - Floor Plan View - all devices access points, clients, and rogues within the floor

## Viewing Campuses, Buildings, or Floors from a Tree View

As an alternative to using QuickView, you can use the Tree View to view floors from a hierarchical tree, as follows:

1. Navigate to the **VisualRF > Floor Plans** page.
2. Select the **Tree** icon (  ) at the top right of any view. The **Network Tree View** window, shown in [Figure 229](#), appears on the screen.

**Figure 229** Network Tree View - Floor highlighted

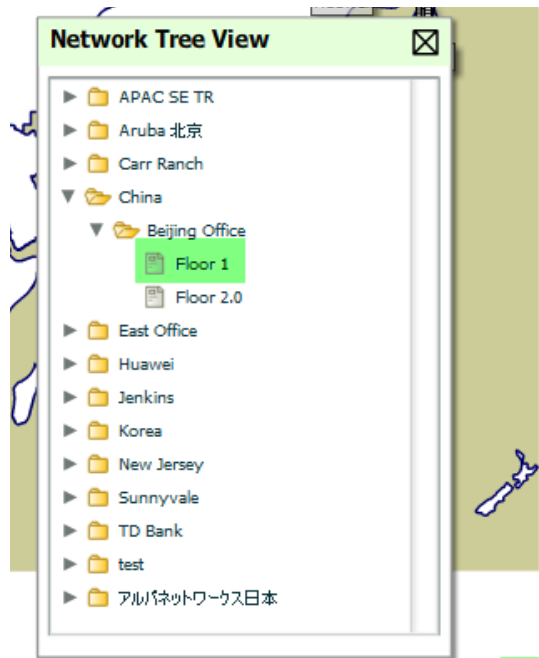

3. Use the arrows to drill down into the folders to select the Campus, Building, or Floor. Select the folder or floor plan icon to open the view you have selected. The Network Tree View window will remain on the screen until you close it.

## Planning and Provisioning

VisualRF provides the capability to plan campuses, buildings, floors, and access points prior to the actual access point deployment. The following procedure describes the workflow:

- “Creating a New Campus” on page 300
- “Building Creation” on page 301
- “Importing a Floor Plan” on page 302
- “Editing a Floor Plan Image” on page 303
- “Provisioning Existing Access Points onto the Floor Plan” on page 306
- “Automatically Provisioning APs onto a Floor Plan” on page 307
- “Tweaking a Planning Region” on page 308
- “Printing a Bill of Materials Report” on page 309

### Creating a New Campus

Floors are associated with a building and buildings are associated with a campus. In order to create a new floor, you must first create a campus and building.

To create and place your campus, follow these steps:

1. Navigate to **VisualRF > Floor Plans**.

2. Select the **Add Campus** button, located above the floor plan. The **Create New Campus** window, illustrated in [Figure 230](#), appears.
3. Enter the following campus information:
  - **Name** of the campus
  - **User Transmit Power** - used in auto placement of access points onto floors within this campus. The range is 30mW to 100mW.
  - **Desired Data Rate** - used in auto placement of access points onto floors within this campus. The range is 6 to 200 mbps.





---

Buildings and floors inherit transmit power and data rate from the campus.

---

**Figure 230** *Create New Campus window*

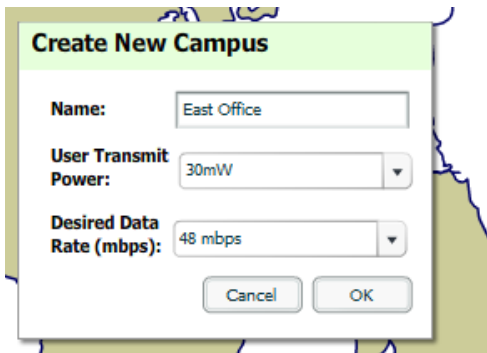

4. Select **OK** to save. You will see a new Campus icon appear on the campus canvas. (OV3600 ships with a default campus and building.)
5. Add appropriate network geographical background or upload a personalized image by right-clicking on the background.
  - Set Map - allows you to browse with the included maps.
  - Custom - launches the image upload wizard documented in [“Importing a Floor Plan”](#) on page 302.
6. Drag the new Campus icon to the appropriate location on the map background.




---

QuickView automatically saves background map images, campus locations, building locations, and building types

---

## Building Creation

1. Select the newly created Campus icon from the previous step. When the blank campus area opens, select the **Add New Building** icon.
2. When the New Building window appears, enter the following information:


**Table 153** *New Building Fields and Descriptions*

| Field                   | Description                                                                                                                                                                                                                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name                    | Name of the building; located on an existing campus.                                                                                                                                                                                                                                                            |
| Campus                  | Lists all campuses configured on your OV3600.                                                                                                                                                                                                                                                                   |
| Longitude & Latitude    | These fields are used to represent a building on Google Earth.                                                                                                                                                                                                                                                  |
| Distance between floors | The normal distance between floors in the building. This value can be overridden as each floor is created, but this is the default value for every new floor added to the system. This data element can be imported or exported to external planning tools like Ekahau. It is not currently utilized by OV3600. |

**Table 153** New Building Fields and Descriptions (Continued)

| Field                      | Description                                                                                                                                                                                                                                                                                                        |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Attenuation between Floors | Enter the attenuation loss in decibels between floors. This value can be overridden as each floor is created, but this is the default value for every new floor added to the system. This data element can be imported or exported to external planning tools like Ekahau. It is not currently utilized by OV3600. |
| User Transmit Power        | This value is used when auto-provisioning access points onto a floor plan.                                                                                                                                                                                                                                         |
| Desired Data Rate          | Data rate will determine the new access points when auto-provisioning Greenfield deployment.                                                                                                                                                                                                                       |
| Address                    | Building or Campus address (optional)                                                                                                                                                                                                                                                                              |

**Figure 231** Create New Building Window

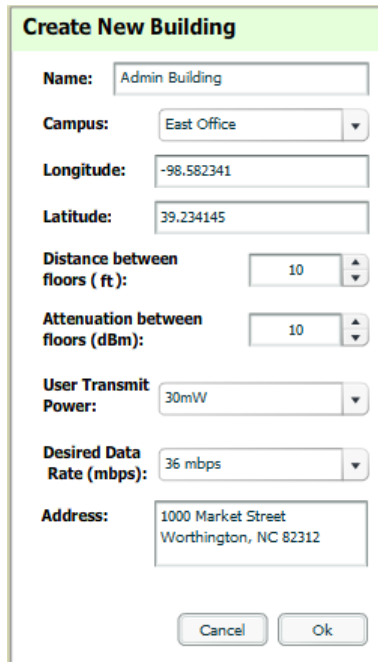

3. Select **OK** to save. A new Building icon will appear in the middle of the canvas.

4. Drag the Building icon to the appropriate location on the map background.



QuickView automatically saves background map images, campus locations, building locations, and building types.

5. Add appropriate geographical background or upload a personalized image by right-clicking on the background.
  - Set Map - allows you to browser with the included maps.
  - Custom - launches the image upload wizard documented in [“Importing a Floor Plan”](#) on page 302.
6. To change building types, right-click the Building icon.
7. Select proper building type.
8. Select the newly created Building icon from the previous step. You are redirected to a blank canvas without a background. You are now ready to import your floor plan.


## Importing a Floor Plan

The following steps show how to import a floor plan background image file.

1. In **VisualRF > Floor Plans**, click the **Add Floorplan** icon (displays when viewing a Building) or use the **Add** button above the floor plan list at the bottom of the page.

2. Select **Choose File** to locate a floor plan image file from your hard drive.
3. In VisualRF, select **Upload**. This opens the image file along with VisualRF planning tools on the left side.

**Figure 232** Floor Plan Imported into VisualRF

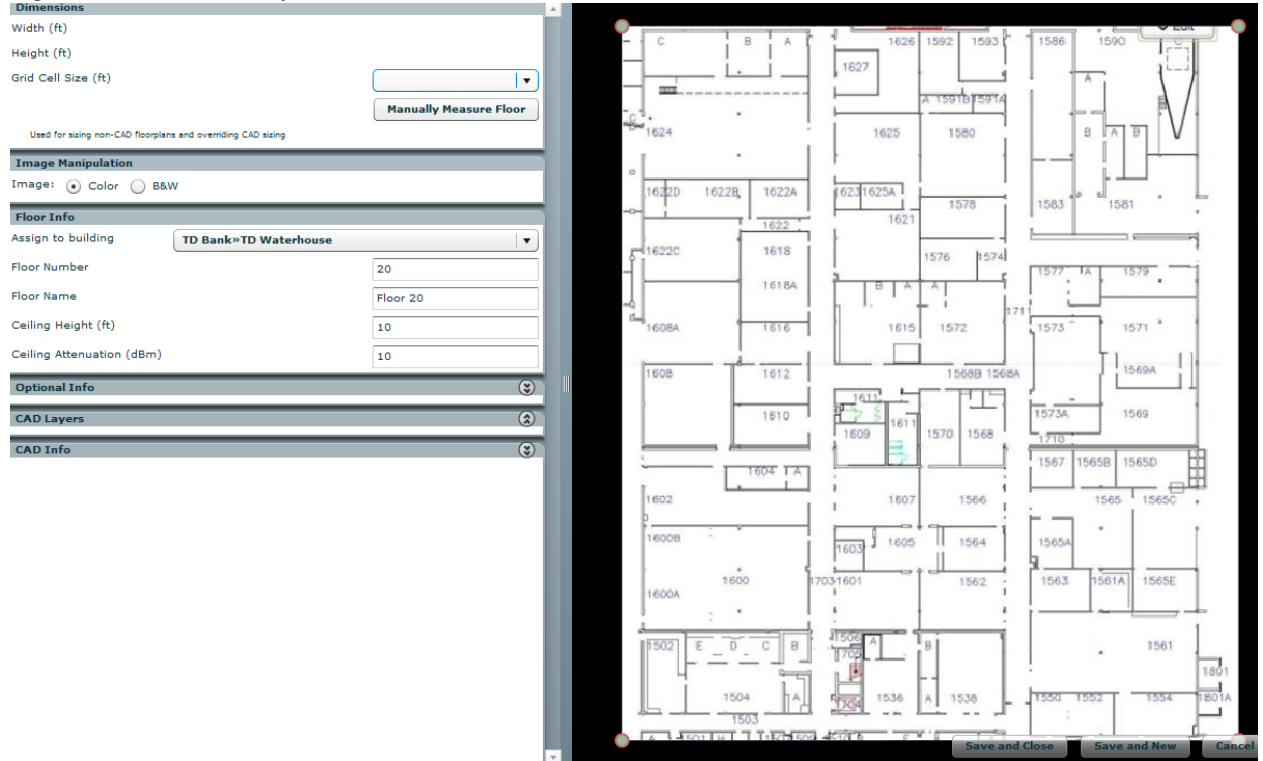

- If the floor plan does not require cropping, sizing, or layer control, then click **Save and Close** to begin provisioning APs or **Save and New** to upload a new floor plan.
- If the floor plan does require cropping, sizing, or layer control, then proceed to the next procedure.

## Editing a Floor Plan Image

There are many ways to edit a floor plan that you have uploaded, as explained in the following topics:

- “Cropping the Floor Plan Image” on page 303
- “Sizing a Non-CAD Floor Plan” on page 304
- “Removing Color from a Floor Plan Image” on page 304
- “Assigning Campus, Building and Floor Numbers” on page 305
- “Assigning Optional Planner, Owner, or Installer Information for the Floor Plan” on page 305
- “Controlling the Layers in the Uploaded Floor Plan (CAD only)” on page 305
- “Error Checking of CAD Images” on page 305

## Cropping the Floor Plan Image

Use the cropping handles (red circles) to remove extra white space around the floor plan. VisualRF will calculate an attenuation grid for the entire map including white space. Reducing the white space on a floor plan will increase location accuracy and decrease the load on the server. A good rule of thumb would be about ½ inch white space, if possible, on all sides.

VisualRF dissects each floor plan into a grid consisting of cells specified in this setting. The Core Thread service calculates the path loss for every radio to every cell on the floor plan.

By default the importation wizard allocates 2,500 grid cells to each site based on dimensions. If you have a site that is 250 ft. by 100 ft, the Floor Plan importation wizard would calculate the grid cell size at 10 feet.  $250 \text{ ft.} \times 100 \text{ ft.} = 25,000 \text{ ft.}$   $25,000 \text{ ft.} / 2,500 \text{ ft.} = 10 \text{ ft.}$



Decreasing the grid cell size will increase accuracy, but it also increase CPU consumption by the floor caching threads and the location caching threads. Check the System ' Performance page to ensure your server is functioning properly when you make a change to this setting.

Other items worth noting:


- If this is a CAD file, then the Floor Plan creation wizard will automatically inherit height and width from the drawing.
- If this is a non-CAD file, then the height and width is zero.
- CAD files are converted to a JPG with a resolution of 4096 horizontal pixels at 100% quality prior to cropping. If you crop, then you will lose clarity.
- CAD files may not exceed 10 MB.
- Metric CAD files are supported.
- Importing GIF files for floor plans will result in blank QuickView thumbnails.

### Sizing a Non-CAD Floor Plan

You should not have to resize a CAD drawing unless you see nonsensical dimensions. To resize a non-CAD image if you already know the dimensions, follow these steps:

1. Select the **Manually Measure Floor** button in the **Dimensions** section. The pointer changes to a cross-hair icon.
2. Locate two points within the floor plan that you know the distance. Most door jams (door openings) are 3 feet.
3. Select and hold to establish the first point and drag your mouse to the second point and release.
4. A distance dialogue box appears. Enter the proper length in feet, as shown in [Figure 233](#).

**Figure 233** *Manually Measuring a Floor Plan*

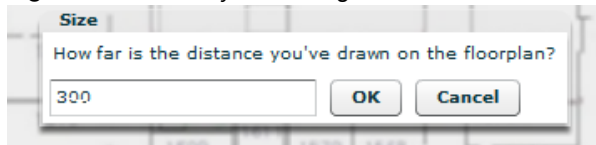

5. Select **OK**.

Floor plans can be resized in VisualRF after they have been uploaded. Within VisualRF you will also be able to zoom in on a room or doorway to increase the accuracy of your sizing.

### Removing Color from a Floor Plan Image

To remove color, locate the **Image Manipulation** section and select **B&W** in the **Image** field.



## Assigning Campus, Building and Floor Numbers

Locate the **Floor Info** Section and assign the following information, as detailed in [Table 154](#) and illustrated in [Figure 234](#):

**Table 154** Assigning numbers

| Setting             | Default        | Description                                                                                                                                                               |
|---------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Building drop-down  | N/A            | Use this drop-down to associate the floor with a building which associate it to a Campus as well.                                                                         |
| Floor Number        | 0.0            | The floor number. You can enter negative numbers for basements.<br><b>NOTE:</b> Each floor plan within a building must have a unique floor number.                        |
| Floor Name          | Floor [Number] | A descriptive name for the floor. It inherits the floor number as a name if nothing is entered.                                                                           |
| Ceiling Height      | 10             | Specifies the height from the floor to the ceiling. This will default to the ceiling height for the building, but you can override here if needed for atria or basements. |
| Ceiling Attenuation | 20             | Specifies the attenuation characteristics in dB of the ceiling or the floor above.                                                                                        |

**Figure 234** Entering Floor Info for the Uploaded Floor Plan Image

The screenshot shows a form titled "Floor Info" with the following fields and values:

- Assign to building: New Jersey»N (dropdown menu)
- Floor Number: 4 (text input)
- Floor Name: Floor 4 (text input)
- Ceiling Height (ft): 10 (text input)
- Ceiling Attenuation (dBm): 10 (text input)

## Assigning Optional Planner, Owner, or Installer Information for the Floor Plan

Locate the **Optional Information** section and enter the following information in [Table 155](#):

**Table 155** Optional Information for the Floor Plan

| Setting   | Default | Description                                                    |
|-----------|---------|----------------------------------------------------------------|
| Owner     | N/A     | The owner of the floor (used in diagnostics and alerts).       |
| Planner   | N/A     | The person in charge of planning the RF layout for the floor.  |
| Installer | N/A     | The person in charge of installing RF equipment for the floor. |

## Controlling the Layers in the Uploaded Floor Plan (CAD only)

Follow these steps for CAD images:


1. Find the CAD Layers section on the page.
2. Unselect the layers which are not required. There is slight delay because each request makes a round trip to the server.

## Error Checking of CAD Images

VisualRF will check for errors in your uploaded CAD image. You can view any issues as follows:

1. Locate the **CAD Info** section, as shown in [Figure 235](#).
2. Review the CAD version, units of measurement, and raw width and height numbers.

**Figure 235** Checking for CAD errors

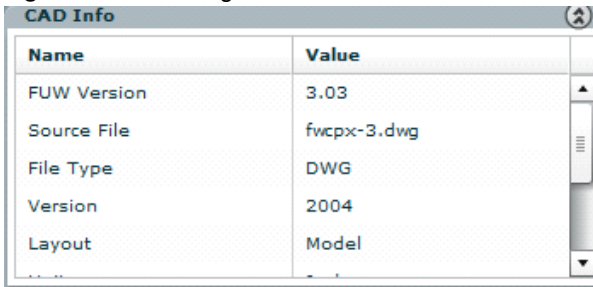

| Name        | Value       |
|-------------|-------------|
| FUW Version | 3.03        |
| Source File | fwpvx-3.dwg |
| File Type   | DWG         |
| Version     | 2004        |
| Layout      | Model       |

Click the **Save and Close** button to begin provisioning APs or **Save and New** to upload another floor plan. After clicking **Save and Close**, you are redirected back into QuickView where you can provision APs, IDF's, and wired infrastructure.

## Provisioning Existing Access Points onto the Floor Plan

To provision existing AP in your network onto the floor plan you just uploaded, follow these steps:

1. Navigate to **VisualRF > Floor Plans**.
2. Select the floor plan you have uploaded using the floor number or name links in the list.
3. Select the **Add Deployed Device** icon in the **Edit** menu. A popup window list of devices in your OV3600 appears on the screen, as shown on 4..
4. Select whether to navigate by Group or by Folder in the **View By** field.




---

Alternatively, you can use the **Search** field.

---

5. Expand the Group or Folder containing the access points which need to be provisioned on this floor plan. Note that by default, devices that have already been added to VisualRF are hidden. To show them, clear the "Hide Devices already added to VisualRF" checkbox at the bottom of the list.
6. Click and drag an AP to its proper location on the floor, as shown in [Figure 236](#):

**Figure 236** Provisioning APs onto the Floor Plan

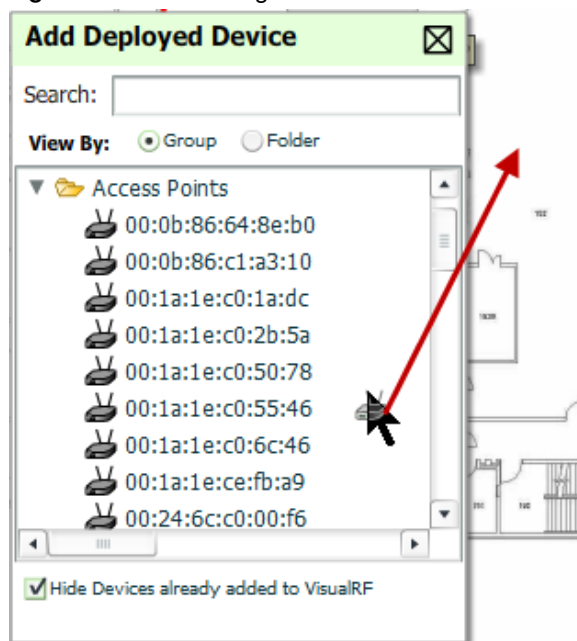

- Once all APs are provisioned on the floor plan, select **Save** (floppy disk icon) in the top right of the QuickView window.




The floor is submitted to one of the core threads to recalculate path loss and then to one of the location caching threads to recalculate client locations. All changes may not be visible on a refresh until this process complete.

## Automatically Provisioning APs onto a Floor Plan

To automatically provision your access points onto your floor plan:

- Select **Draw Region** from the **Edit** menu. A new provisioning popup appears as shown in 4. with a crosshair pointer.

**Figure 237** Planning Region Drawing and Selection Illustration

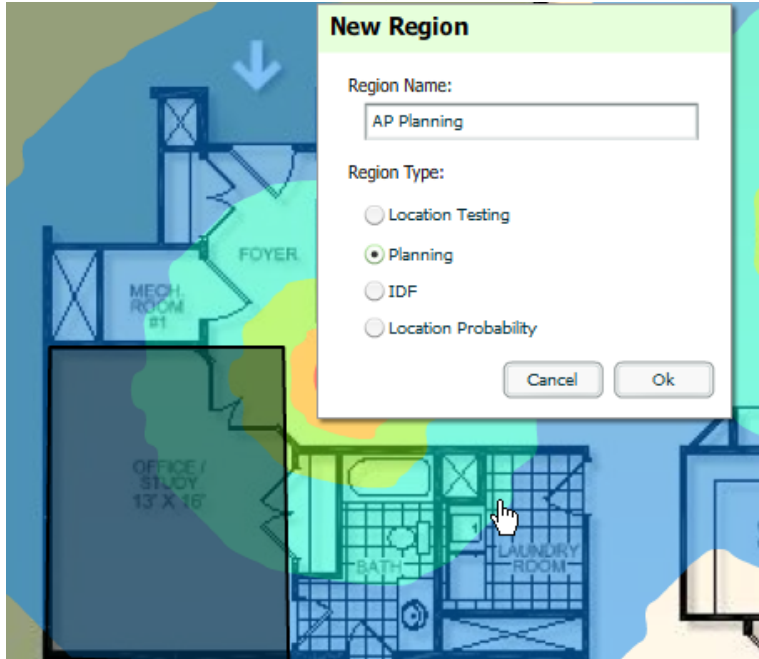

- Draw your polygon as follows:
  - Left-click to initiate the process. The tool will automatically shade in your provisioning area.
  - Complete the polygon by double-clicking.
- Once you have finished drawing the region, select a Region Type of **Planning**. Then select **OK**.
- Enter the following information into the **Autoprovision APs** window as described in [Table 156](#) and illustrated in [Figure 238](#):

**Table 156** Fields in the Autoprovision APs Window

| Field                   | Description                                  |
|-------------------------|----------------------------------------------|
| <b>Device Selection</b> |                                              |
| AP Type                 | The type of AP used in this planning region. |
| <b>Radio Section</b>    |                                              |
| Phy                     | Whether they PHY is set to 11n or no radio.  |
| Xmit                    | Transmit power of the APs.                   |
| Gain                    | Gain of the APs.                             |
| EIRP                    | EIRP of the APs.                             |

**Table 156** Fields in the Autoprovision APs Window (Continued)

| Field                            | Description                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Environment                      | A range from 1-4 that best describes whether the environment is related to an office space, cubicles, offices, or concrete.            |
| <b>Plan By Section</b>           |                                                                                                                                        |
| Coverage                         | Coverage by Data Rate or Signal.                                                                                                       |
| Location                         | Plan for location accuracy. This mode will result in additional APs placed near the edge of the region to aid in location calculation. |
| Number of APs                    | Number of APs to place in the planning region.                                                                                         |
| <b>Other Section</b>             |                                                                                                                                        |
| Plan Sensors                     | Whether to plan sensors into the region.                                                                                               |
| Save Region as Walls             | Whether to save the edges of the planning region as walls.                                                                             |
| Update Environment and Data Rate | Whether to update the environment and data rate in case of changes.                                                                    |

**Figure 238** Autoprovision APs Window Illustration

The screenshot shows the 'Autoprovision APs' window with the following sections:

- Device Selection:** AP Type is set to 'Dell AP 175P(n)'.
- Radio Section:**
  - Radio 1:** Phy: 11n 5 GHz, Xmit: 11 dBm, Gain: 5.2, EIRP: 16.2 dBm.
  - Radio 2:** Phy: 11n 2.4 GHz, Xmit: 11 dBm, Gain: 3.2, EIRP: 14.2 dBm.
- Environment:** A slider is positioned between 'Cubicles' and 'Offices', with a value of 3 displayed in a box.
- Plan By:** Number Of APs is set to 10.
- Other:**
  - Plan Sensors
  - Save Region as Walls
  - Update Environment and Data Rate

Buttons for 'Cancel' and 'Ok' are located at the bottom.

5. When you're finished selecting the desired options, select **OK**.

## Tweaking a Planning Region

If the planning layout does not meet your expectations, you can edit by right-clicking within the region to see the following options:

- **Delete Planned APs in the Region** - deletes only provisioned APs in the region
- **Reprovision APs** - remove all planned APs inside this region and prompts for new information to replan the region
- **Delete the Region** - deletes the region and all planned APs

- **Edit the region** - change the name of the region
- **Copy the Region to floors above** - will copy the region and auto plan for floors above.



The starting floor will add one to the highest floor in the building and the ending floor defaults to 10 more than the starting floor.

To replicate a floor plan, follow these steps:

1. Navigate back to the Building view by clicking on the navigation tags in the bottom-right corner of the window.
2. Right-click the floor and select **Duplicate**.
3. Enter the following information:
  - Starting and ending floors
  - Select the toggles to copy walls, regions, data rates, and AP placement



The starting floor will add one to the highest floor in the building and the ending floor defaults to 10 more than the starting floor.

4. Select **OK** to save your changes.
5. Manually refresh page and you is redirected to the **VisualRF > Floor Plan** page. The Building view will reflect the new floors.




You should see all replicate floors with matching number of access points.

## Printing a Bill of Materials Report

You can generate a Bill of Materials (BOM) Report from within VisualRF in Word format. Follow these steps:

1. Navigate back to the Network view.
2. Right select Campus icon and select **Show Bill of Materials**. A generating report popup appears.
3. Select options such as heatmap, data rate, sensor coverage, wired range, and summary.
4. Select **OK**. A BOM report appears in Microsoft Word as illustrated in [Figure 239](#):

**Figure 239** *Bill of Materials Report Illustration*

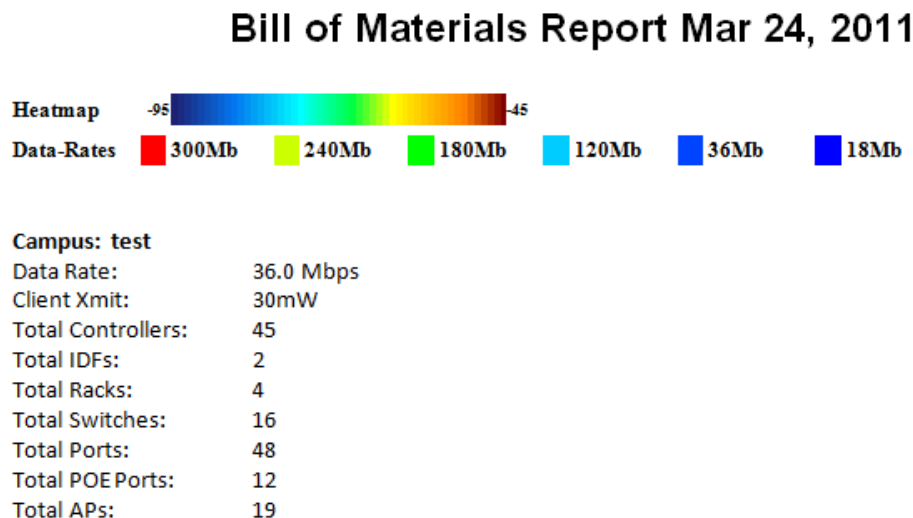

## Importing and Exporting in VisualRF

### Exporting a campus

To export a campus from VisualRF so you can import it into another OV3600, follow these steps:

1. Navigate back to the **Network** view.
2. Right-click the **Campus** icon.
3. Select **Export**. An object selection window appears.
4. Select the objects to export and select **Export**. A File Download window appears.
5. Select **Save** and save the zipped file to your local hard drive for importation to another OV3600.

At this point, you are ready to deploy a production OV3600 and manage devices by importing your exported campus and matching the access points to your plan.

### Importing from CAD

The Floor Plan Upload Wizard (FUW) should inherit all pertinent information from your CAD file if you follow this procedure:

1. Determine UNITS - all modern CAD versions (2001 and newer) support UNITS
2. Determine MEASURE - Legacy CAD versions (2000 and older) used a Imperial or Metric system.
  - If UNITS are 0 or undefined, then the standard dictates defaulting to MEASURE value
  - If MEASURE is 0 or undefined, then the standard dictates defaulting to English and inches
3. Find MODEL VIEW - If the drawing contains multiple views the FUW will default to the Model view
4. Determine Bounding Box - FUW will encompass all lines and symbols on the drawing and create a bounding box which is generally smaller than entire drawing. It is based on the UNITS or MEASUREMENT above.
5. Convert to JPG - FUW will convert the bounding box area to a JPG file with a resolution of 4096 horizontal pixels at 100% quality.
6. Start Web UI of FUW Step #1 - This is the cropping step.

This and all subsequent steps use the converted JPG file. The greater the floor plan dimensions, the less clarity the background image provides.

### Batch Importing CAD Files

This process provides the ability to automatically upload many CAD files and auto provision existing walls and access points, and contains the following topics:

- [“Requirements” on page 310](#)
- [“Pre Processing Steps” on page 311](#)
- [“Upload Processing Steps” on page 311](#)
- [“Post Processing Steps” on page 311](#)
- [“Sample Upload Instruction XML File” on page 311](#)
- [“Common Importation Problems” on page 312](#)

### Requirements

- Operating System: Client machine must be Windows XP, Windows Vista, or Windows 7
- Flash: Version 9 or later

## Pre Processing Steps

1. Increase Memory Allocation in **VisualRF > Setup** as follows:
  - 25 floors or less - 512 MB
  - 25 to 75 floors - 1 GB
  - More than 75 floors - 1.5 GB
2. Massage the output data.
3. Increase the **Location Caching Timer** to 1 hour so that VisualRF does not overload the server calculating client locations while calculating path loss and process floor plan images.

## Upload Processing Steps

1. Create CAD XML files which contain drawing filename, dimensions and optional information like device manufacture and model, device coordinates, wall coordinates and building material. This step is usually performed by your facilities or CAD department. The output of AutoCAD will not be properly formed XML, so you may need to massage the output data.
2. Copy all CAD drawings and corresponding XML files into a single directory on Windows machine. All files must be in a single directory.
3. Compress all files into a single \*.zip file.
4. Open your browser and navigate to your OV3600: [https://<HOSTNAME>/visualrf/site\\_batch](https://<HOSTNAME>/visualrf/site_batch).
5. Select **Browse** to launch the File Explorer Window.
6. Select the zip file containing the upload instructions and click the **Open** button. The File Explorer Window will disappear you will return to the Batch Floor Upload Wizard.
7. Select **Next**.
8. The application validates the following information
  - Well-formed XML
  - All drawing files are accessible
  - All APs are present
  - All Building and Campuses are present
9. If there are any errors, none of the floor plans are created.

## Post Processing Steps

1. Decrease the Location Caching Timer to previous value.
2. Review the **VisualRF > Floor Plans** page to ensure server is keeping up.

## Sample Upload Instruction XML File

```
<?xml version='1.0' encoding='ISO-8859-1'?>
<visualrf:site_batch xmlns:visualrf='http://www.example.com'
 xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
 version='1' origin='lower-left'>
 <floor name='T-0607' number='21' building-id='218'>
 <image filename='T-0607_WLS_02.dwg' />
 <access-points>
 <access-point id=29648 x=177.51 y=293.15 />
 <access-point id=29678 x=312.78 y=293.63 />
 <access-point id=29748 x=259.15 y=432.62 />
 </access-points>
 <walls>
 <wall type=4 x1=135.94 y1=159.43 x2=135.94 y2=453.16 />
 <wall type=4 x1=135.04 y1=453.16 x2=439.83 y2=453.16 />
 <wall type=4 x1=439.83 y1=453.16 x2=439.83 y2=418.16 />
 </walls>
 </floor>
 <floor name='T-0068' number='22' building-id='218'>
 <image filename='T-0068_WLS_01.dwg' />
 </floor>
</site_batch>
```

```
</floor>
<floor name='Test JPG' number='23' building-id='218' width='523.34' height='231.34'>
 <image filename='Flwst IT_dwg.jpg' />
</floor>
</visualrf:site_batch>
```

## Common Importation Problems

- Improper or undefined UNITS or MEASURE
- Text embedded into the Model view which causes an inconsistent bounding box
- Large dimensions which cause grainy resolution upon zoom
- Legacy CAD versions prior to Release 15 or AutoCAD 2000.

## Importing from an Alcatel-Lucent Controller

The instructions below will enable you to seamlessly migrate all building, campus, and floor plan information previously entered into an Alcatel-Lucent controller.

### Pre-Conversion Checklist

Prior to importing floor plans ensure you VisualRF's memory allocation is sufficient for the anticipated number of floors plans.

To change the memory allocation, navigate to the **VisualRF > Setup** page and configure the memory allocation accordingly. Memory allocation should equal .5 GB for 1-75 floor plans, 1 GB for 76-250 floor plans, 1.5 GB for 251-500 floor plans, and 2 GB for 501-1,000 floor plans.



---

Importing a large number of floor plans can impact performance of the OV3600 server. VisualRF must create a thumbnail, provision APs, create attenuation grid, and locate all clients on each imported floor plan. This can cause the **VisualRF > Floor Plans** page to be unresponsive.

---

### Process on Controller

1. On the controller's UI navigate to the **Plan > Building List** page.
2. Select the buildings to be exported and select **Export**.
3. When the dialog box appears, make sure that you have included all images and select **Save to a file**.

### Process on OV3600

1. Navigate to **VisualRF > Import**.
2. Select the **Import floor plans from an Alcatel-Lucent Controller** link.
3. Select the **Begin Importing Floor Plans** link.
4. When prompted for input file, use the file saved from the controller process.

## VisualRF Location APIs

VisualRF provides the following location APIs:

**Site Inventory:** [https://\[hostname\]/visualrf/site.xml?site\\_id=...](https://[hostname]/visualrf/site.xml?site_id=...)

- You can find the site\_id from the Floor Plan List query defined on the XML API page
- This interface provides floor details including access points, walls, regions, surveys, etc.
- The corresponding example XML and schema are attached in visualrf\_site\_inventory.\*

**Device Location:** [https://\[hostname\]/visualrf/location.xml?mac=...](https://[hostname]/visualrf/location.xml?mac=...)

- Provide the radio MAC of the client to locate.
- The corresponding site where the user was placed is provided along with the dimensions



- If a client is heard on multiple floors, it will only be placed on the floor that contains the AP it is associated with.

## Sample Device Location Response

```
<visualrf:device_location version="1" xmlns:visualrf="www.example.com">
 <device mac="00:13:02:C2:39:28" name="Peter"
 site_id="4f674301-4b47-4ac6-8417-4eba3f7df3a6"
 site_name="NewYork">
 <site-width>124.51</site-width>
 <site-height>161.14</site-height>
 <x>82.50</x>
 <y>37.50</y>
 </device>
</visualrf:device_location>
```

## Sample Site Inventory Response

```
<amp:amp_site_inventory version="1"
 xmlns:amp=http://www.example.com
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <site id="b45e7a49-23b5-4db0-891a-2e60bff90d2c" version="677">
 <name>Remax</name>
 <uom>ft</uom>
 <width>314.45</width> <height>425.88</height>
 <property name="site_owner" value="" format="" />
 <property name="name" value="Remax" format="" />
 <property name="installer" value="" format="" />
 <property name="planner" value="" format="" />
 <image type="background">
 <filename>/var/example/snapshot/b45e7a49-23-2e6d2c.677/background.jpg</filename>
 <relative-url>/snapshot/b423b5-4db0-891a2e0d2c.677/background.jpg</relative-url>
 <pixel-width>1151</pixel-width>
 <pixel-height>1557</pixel-height>
 </image>
 <image type="thumbnail">
 <filename>/var/example/snapshot/b45e7a49891af90d2c.677/thumb.jpg</filename>
 <relative-url>/snapshot/b45e7a49-23b5-4db0-891a2c.677/thumb.jpg</relative-url>
 <pixel-width>230</pixel-width>
 <pixel-height>311</pixel-height>
 </image>
 <ap id="12615" name="OAW-AP4000M-1">
 <x>118.97</x> <y>130.38</y>
 <total-bandwidth>0</total-bandwidth>
 <total-clients>0</total-clients>
 <status>down</status>
 <uptime>0.0</uptime>
 <radio index="1" phy="g" mac="00:20:A6:5A:63:66" beamwidth="0.0"
 gain="1.5" antenna="" orientation="0.0" mount="Ceiling" valid="false">
 <discovering-radio id="11276" index="1" dBm="-85" />
 <discovering-radio id="11828" index="1" dBm="-93" />
 </radio>
 </ap>
 </site>
</amp:amp_site_inventory>
```



This appendix describes the Alcatel-Lucent Instant access point and Virtual Controller system, and how to integrate this system with OV3600 7.2.2 and later. The appendix contains the following topics:

- “Overview of Alcatel-Lucent Instant” on page 315
- “Using Alcatel-Lucent Instant with OV3600” on page 315
- “Workflow of the Alcatel-Lucent Instant and OV3600 Integration Process” on page 316
- “OV3600 Pages with Instant-Specific Features” on page 319
- “Other Available Features” on page 320
- “Known Issues of Alcatel-Lucent Instant integration with OV3600” on page 320

### Overview of Alcatel-Lucent Instant

Alcatel-Lucent Instant is a system of up to 16 access points (OAW-IAP92, OAW-IAP93, or OAW-IAP105) per Layer 2 subnet. Alcatel-Lucent Instant OAW-IAPs are controlled by a single OAW-IAP that serves a dual role as a primary Virtual Controller, eliminating the need for dedicated controller hardware. This system can be deployed through a simplified setup process appropriate for smaller organizations, or for multiple geographically-dispersed locations without an on-site administrator.

Only the first OAW-IAP/Virtual Controller you add to the network must be configured; the subsequent OAW-IAPs will all inherit the necessary configuration information from the Virtual Controller. Alcatel-Lucent Instant continually monitors the network to determine which OAW-IAP should function as the Virtual Controller at any time, and the Virtual Controller will move from OAW-IAP to OAW-IAP as necessary without impacting network performance.

The Virtual Controller technology in Alcatel-Lucent Instant is capable of OAW-IAP auto discovery, 802.1X authentication, role- and device-based policy enforcement, rogue detection, and Adaptive Radio Management (ARM).

### Using Alcatel-Lucent Instant with OV3600

OV3600 has added centralized network management support for Alcatel-Lucent Instant in version 7.2.2.

With a distributed deployment where multiple locations each have an Alcatel-Lucent Instant Virtual Controller and OAW-IAPs, OV3600 serves as a centralized management console. OV3600 provides all functionality for normal WLAN deployments including long-term trend reporting, PCI compliance, configuration auditing, role-based administration, location services, RF visualization, and many other features.

Integrating Alcatel-Lucent Instant systems into OV3600 is unique from the setup of any other device class due to the following considerations:

- **Discovery:** OV3600 does not discover Alcatel-Lucent Instant devices via scanning (SNMP or HTTP) the network. Each Alcatel-Lucent Instant deployment will automatically check-in to the OV3600 configured within the OAW-IAP's user interface. The first Virtual Controller for an organization will automatically appear as a new device in OV3600. Subsequent OAW-IAPs are discovered via the Virtual Controller, just like standard controller/thin AP deployments.

- **Auto-provisioning:** The first authorized Virtual Controller requires manual authorization into OV3600 via shared secret to ensure security. Along with the shared secret, the Virtual Controller sends an Organization String which automatically initializes and organizes the OAW-IAPs in OV3600. Unlike the traditional infrastructure of a physical controller and thin APs, Alcatel-Lucent Instant automates many tedious steps of developing a complex hierarchical structure of folders, config groups, templates, admin users, and admin roles for Alcatel-Lucent Instant.
- **Communication via HTTPS:** Because Alcatel-Lucent Instant devices may be deployed behind NAT-enabled firewalls, Virtual Controllers "push" data to OV3600 via HTTPS. OV3600 initiates no connections to Alcatel-Lucent Instant devices via SNMP, TFTP, SSH, and the like. This enables quick remote setup without having to modify firewall rules.
- **Virtual controller listed as separate device:** The Virtual Controller is listed as an additional device, even though it is part of the existing set of OAW-IAPs. If you have 10 physical OAW-IAPs, OV3600 will list 10 Alcatel-Lucent Instant OAW-IAPs and one Alcatel-Lucent Instant Virtual Controller. You can identify the OAW-IAP acting as the Virtual Controller by their identical LAN MAC addresses in **APs/Devices > List** pages, Device Inventory reports, and any other OV3600 pages that list your network devices.

Refer to the *Alcatel-Lucent Instant Data Sheet* for full operational and regulatory specifications, hardware capabilities, antenna plots, and radio details.

## Workflow of the Alcatel-Lucent Instant and OV3600 Integration Process

The following is a sample setup workflow around a common Alcatel-Lucent Instant use case.

### Setting up Alcatel-Lucent Instant Hardware

See the *Alcatel-Lucent Instant Quick Start Guide*, the *Alcatel-Lucent Instant Professional Installation Guide*, the *OAW-IAP105 Wireless Access Point Installation Guide*, and the *OAW-IAP92 and OAW-IAP93 Wireless Access Point Installation Guide* for information on setting up the hardware and configuring the network.

### Required Personnel

For each remote location, an on-site installer is required to physically mount the OAW-IAPs, connect to the Alcatel-Lucent Instant SSID, configure the WLAN, configure the names of the OAW-IAPs, and enter the information in the first OAW-IAP's user interface that will enable communication with the OV3600.

An OV3600 administrator sends an Organization String and Shared Secret key along with OV3600's IP address to the on-site installer. The OV3600 admin later validates the first Virtual Controller's Organization String and its Shared Secret when it appears in the **APs/Devices > New** list. The administrator also enables user roles to administer the Alcatel-Lucent Instant systems, makes any other changes in OV3600 as necessary.

### Creating your Organization String

The Organization String is a set of colon-separated strings created by the OV3600 administrator to accurately represent the deployment of each Alcatel-Lucent Instant system. This string is entered into the Alcatel-Lucent Instant UI by the on-site installer.

The format of the Organization String is "Org:subfolder1:subfolder2..." and so on, up to 31 characters long. "Org," the top-level string, is generally the name of your organization and is used to automatically generate the following (if not already present) in OV3600:

- OV3600 Role: "Org Admin" (initially disabled)

- OV3600 User: "Org Admin" (assigned to the role "Org Admin")
- Folder: "Org" (under the Top folder in OV3600)
- Configuration Group: "Org"

Additional strings in the Organization String are used to create a hierarchy of subfolders under the folder named "Org":

- subfolder1 would be a folder under the "Org" folder
- subfolder2 would be a folder under subfolder1

To create your Organization String, consider the plan of how your Alcatel-Lucent Instant OAW-IAPs are to be physically distributed. As a best practice, the Organization String should mirror your company's geographical or internal reporting structure. For example, if you plan to deploy Alcatel-Lucent Instant in four stores in two different cities for Acme Corporation, your Organization Strings might look like these:

- Acme:New York:Times Square Store
- Acme:New York:Queens Store
- Acme:San Francisco:Sunset Store
- Acme:San Francisco:SOMA Store

## The Shared Secret Key

The Shared Secret key is used by the administrator to manually authorize the first Virtual Controller for an organization that appears in the **APs/Devices > New** page in OV3600. Any string is acceptable.



**NOTE:** Always ensure the protection of your organization's shared secret. Knowledge of this shared secret, the organization string, and communication protocol could allow a rogue device to masquerade as an Alcatel-Lucent Instant device.

At this point, the admin in our example should send the Organization String, Shared Secret key, and OV3600 IP address to the on-site installers setting up Alcatel-Lucent Instant hardware inside the storefronts.

## Entering the Organization String and OV3600 Info into OAW-IAP

For the initial OAW-IAP/Virtual Controller set up in each location, the on-site installer logs in to the first OAW-IAP's web interface via the Alcatel-Lucent Instant configuration SSID, and navigates to **Settings > OV3600**. The installer then enters the correct Organization String, the OV3600 IP address, and the Shared Secret key, as shown in [Figure 240](#).

**Figure 240** Alcatel-Lucent Instant UI: Settings > OV3600

## Receiving the Alcatel-Lucent Instant Virtual Controller as a New Device

After the installer enters this information in the Alcatel-Lucent Instant user interface, the device will immediately attempt to contact your OV3600 server. Within a few minutes, the **New Devices** link at the top of the OV3600 UI will increase by one - that first OAW-IAP is added as an Alcatel-Lucent Instant Virtual Controller in the **APs/Devices > New** page, as shown in [Figure 241](#).

**Figure 241** New Instant Virtual Controller on **APs/Devices > New** Page Illustration

To discover more devices, visit the [Discover](#) page.

1-1 of 1 APs/Devices Page 1 of 1 Choose Columns CSV Export

Device	Type	IP Address	LAN MAC Address	Discovered
Instant Karma	Aruba Instant Virtual Controller	-	-	3/7/2011

1-1 of 1 APs/Devices Page 1 of 1

Select All - Unselect All

## Verifying the Shared Secret and Adding the Device

When an Alcatel-Lucent Instant device appears in the **APs/Devices > New** page, the admin user should mouse over the value under the **Type** column to verify the device's Shared Secret with OV3600, as shown in [Figure 242](#).

**Figure 242** Mouseover the Alcatel-Lucent Instant Type to Indicate Shared Secret

1-1 of 1 APs/Devices Page 1 of 1 Choose Columns CSV Export

Device	Type	IP Address	LAN MAC Address	Discovered
Instant Karma	Aruba Instant Virtual Controller	-	-	3/7/2011 8:55 PM

1-1 of 1 APs/Devices Page 1 of 1

Shared Secret: airwave

If the incoming Shared Secret matches the one you created, select **Add**, then **Save and Apply** in the confirmation page.



**NOTE**

**NOTE:** With an Organization specified, you do not have to select any Group or Folder from the drop-down menus on the **APs/Devices > New** page. In fact, if you do change the Group/Folder drop-down menus, all Organization-specified Virtual Controllers will ignore these values and will use the folder/group values from the Organization String instead. If you select **Add** for some non-Alcatel-Lucent-Instant devices as well as some Organization-specified Virtual Controllers, the drop-down menus will apply to the non-OAW-IAPs but not the Virtual Controllers. If you have any Virtual Controllers with no Organization specified the first time they communicate with OV3600, then they will be placed in the Folder/Group drop-box values you have selected.

OV3600 parses the information from the Organization String and auto-creates the following in its own interface:


- a new User Role (disabled by default for security reasons) named "Acme Admin"
- a new User named "Acme Admin" with a password equal to the Virtual Controller's Shared Secret
- a new configuration group called "Acme"
- a new folder just under the Top folder called "Acme"
- two subfolders: "New York" and "San Francisco" from subfolder2
- two subfolders under New York: "Times Square Store" and "Queens Store" from subfolder3
- two subfolders under San Francisco: "Sunset Store" and "SOMA Store" from subfolder3

## Remaining Manual Admin Tasks in OV3600

The Admin will then complete the following tasks in OV3600:

1. Enable the newly created Admin User Role in **OV3600 Setup > Roles**, as shown in [Figure 243](#).

**Figure 243** Enable Admin User Role in **OV3600 Setup > Roles**



2. In **Groups > Template** for the newly created Acme group, verify the first Virtual Controller's auto-created template.



**NOTE:** The auto-created template is most useful if the first Virtual Controller for the top-level Organization String is fully configured on-site *before* it is pointed at OV3600 in the Virtual Controller's UI.

3. Evaluate, approve, or ignore incoming Virtual Controllers with a different top level Organization String and/or Shared Secret in the **APs/Devices > New** list. Subsequent OAW-IAPs are auto-authorized if they have an Organization/Shared Secret key that matches the Shared Secret key of any existing authorized Virtual Controller in the top-level Organization String.
4. Set the initial Virtual Controller to **Manage Read/Write** mode and push the good configuration to the subsequent OAW-IAPs.
5. Set up OV3600 users to have access to specific folders, if desired.

## OV3600 Pages with Instant-Specific Features

The following is a summary of OV3600 pages affected by Alcatel-Lucent Instant support:

### APs/Devices > New

When an Alcatel-Lucent Instant device appears in the **APs/Devices > New** page, an admin user can mouse over the value on the **Type** column to display the device's Shared Secret with OV3600.

### APs/Devices > List

The Virtual Controller is listed as an additional device, even though it is part of the existing set of OAW-IAPs. You can identify the OAW-IAP acting as the Virtual Controller by their identical LAN MAC addresses.

### Users > User Detail

Once OAW-IAPs are serving clients, the OAW-IAPs can use user-agent strings to extract operating systems and device descriptions of its clients, and then populate the Device Description and Device OS fields in **Users > User Detail**.

### APs/Devices > Audit

Alcatel-Lucent Instant configuration fetching can be performed in **APs/Devices > Audit**. The running configuration is stored on the OAW-IAP and verified by the template.

## APs/Devices > Monitor > Radio Statistics

The Radio Statistics page for Alcatel-Lucent Instant devices displays CPU Utilization, Channel Utilization, Bandwidth, Power, and MAC/Phy Error statistics.

### RAPIDS

Since Alcatel-Lucent Instant does not support mitigation or high-level rogue reporting, it does not synchronize classification. All rogue devices are reported and stored in the OV3600 for evaluation based on high-level rule sets.

Alcatel-Lucent Instant currently does not match wireless BSSIDs to local MAC addresses within an OAW-IAP's ARP table.

Alcatel-Lucent Instant does not currently support IDS event notification.

### Reports

Alcatel-Lucent Instant Virtual Controllers appear as a separate device in the Device Inventory Report and most other reports that list devices.



---

**NOTE:** OV3600 does not provide a Device Uptime report for Alcatel-Lucent Instant devices.

---

## Other Available Features

### Firmware Image Management

OV3600 pushes firmware to the Alcatel-Lucent Instant Virtual Controller, and the Virtual Controller pushes the firmware to the rest of its OAW-IAPs. When using OV3600 to manage OAW-IAPs, you can upgrade the firmware by loading the firmware onto OV3600 and then scheduling an upgrade from OV3600.

### Intrusion Detection System

OV3600 automatically detects rogue OAW-IAPs irrespective of their location in the network. It prevents authorized OAW-IAPs from being detected as rogue OAW-IAPs, and tracks and correlates the IDS events to provide a comprehensive picture of your network's security.

## Known Issues of Alcatel-Lucent Instant integration with OV3600

If the Organization String configured on the Alcatel-Lucent Instant device is different than what is statically written in the template, OV3600 will overwrite the configured Organization String to match the template.



## Numerics

802.11 counters ..... 81, 132, 133, 206, 218

## A

AAA servers ..... 75, 86

access points  
adding with CSV file ..... 121

ACLs, see groups

ACS  
integrating ..... 66  
servers ..... 66

Active BSSIDs ..... 135

Active Interfering Devices ..... 135

Adaptive Radio Management ..... 131

admin role ..... 48

Air Monitor ..... 72

Alcatel-Lucent GUI Config ..... 147

Alcatel-Lucent Instant ..... 315–320

Alcatel-Lucent Overrides ..... 157

Alert Summary table ..... 124, 204

alerts  
viewing ..... 204  
warning behavior, setting ..... 36

AMON data collection ..... 43

Antenna Diversity ..... 146

AP Interface Polling Period ..... 132

AP/Device Manager role ..... 48

APs  
enabling automatic discovery ..... 118

ARM ..... 131, 133, 134, 154

ARM Events table ..... 134

Association History table ..... 215

audit  
configuring intervals ..... 38  
device configuration ..... 140  
PCI Compliance ..... 69

Audit (Read Only) ..... 50

Auto Detect Upstream Device setting ..... 145

Automatically monitor/manage new devices ..... 38

## B

backups ..... 235, 237  
restoring from a backup ..... 236

running on demand ..... 236  
using Failover ..... 238

browsers, supported ..... 16

## C

CDP, enabling for device discovery ..... 118

Channel Busy Threshold ..... 39

Choose Columns link ..... 32

Cipher ..... 130

Cisco  
ACS ..... 52  
Catalyst ..... 75, 159, 171  
configuring IOS templates ..... 165, 169  
Dynamic AP Management in OV3600 ..... 148  
IOS ..... 53, 64, 75, 83, 144, 159, 169  
safe flag in firmware upgrade ..... 152  
Wireless Domain Services ..... 62  
WLC ..... 61, 75, 83  
WLSE ..... 61, 288

Cisco Discovery Protocol  
see CDP ..... 118

Client Transmit Power, see VisualRF ..... 280

comparing device groups ..... 106

configuration change jobs, viewing ..... 227

configuration change jobs, viewing ..... 143

Configuration Compliance chart ..... 222

Connected Users table ..... 139

Containment, managing rogue AP ..... 179

CSV File, adding multiple devices with ..... 121

Current Association ..... 215

Current User Counts table ..... 218

## D

dashboard  
customizing display ..... 34

date and time  
configuring ..... 18

Deauthenticate User ..... 215

Detected Interfering Devices ..... 135

Device Events ..... 42

Device OUI score ..... 182

Device Troubleshooting Hint ..... 39

Device Type Setup ..... 61

devices ..... 113

adding manually .....	118
communication settings .....	56
discovering, managing, and troubleshooting.....	113
folders .....	141
importing via CSV .....	121
individual support and firmware upgrades .....	150
modifying.....	109
status .....	144
troubleshooting a newly discovered device .....	152
verifying .....	123, 140
DHCP, using .....	147
Diagnostic Summary table .....	218
discovery	
automatic AP.....	118
Discovery Events table.....	188
Disk Space charts .....	232
DNS Hostname Lifetime.....	39

## E

editing interfaces.....	138
Error fetching existing configuration .....	153
Excessive roaming .....	217
Expand folders to show all APs.....	123
external logging .....	41

## F

Failover .....	15, 233, 238
FCS error rates .....	217
Firefox.....	16
firewall,configuring .....	21
firmware	
MD5 Checksum.....	58
specifying minimum versions for APs.....	105
uploading.....	58, 60
firmware upgrade jobs,viewing .....	228
firmware upgrades in monitor-only mode.....	42
Folders.....	141
FTP Server,enabling .....	43
fully qualified domain names .....	39

## G

Global Alcatel-Lucent Configuration .....	155
Global Groups	
with Master Console .....	235
global templates.....	173
Google Chrome.....	16
Google Earth.....	27, 127, 145, 301
Groups.....	75–112
groups	
changing multiple group configurations.....	107
comparing.....	106

configuring and using .....	75
configuring basic group settings .....	78
configuring group AAA servers.....	86
configuring group SSIDs and VLANS.....	90
configuring group templates.....	159
configuring radio settings .....	93
configuring security settings.....	87
deleting .....	107
deleting a group .....	107
global groups.....	77, 111
MAC ACLs.....	105
overview .....	76
radio settings .....	93
security .....	87
viewing.....	77
Guest Access Sponsor role.....	49
Guest User Configuration .....	40
Guest Users .....	42

## H

hardware requirements.....	17
Heatmap, see VisualRF	
Helpdesk .....	271
creating a new incident .....	273
creating snapshots and incident relationships .....	274
enable for a role .....	272
monitoring incidents .....	271
using with remedy server .....	274
High user load .....	217
Historical Data Retention .....	41
host name	
assigning host name.....	20
HP ProCurve .....	84, 159
HTTP Timeout .....	57

## I

IAP, see Alcatel-Lucent Instant	
ICMP settings.....	57
IDS Events .....	204
Incidents .....	204
incidents	
creating .....	273
Interface Monitoring page.....	139
Interfering Devices .....	42
Internet Explorer .....	16
IP address	
adding and assigning.....	19
iPhone .....	234

## L

Licenses .....	127
Linux CentOS 5	
installing .....	17

Logging out of OV3600 .....	240
Login message, configuring.....	51
logs	
ARM Events .....	134
async_logger.....	195
audit.....	41
config_pusher.....	195
error_log .....	195
syslog.....	41

## M

MAC/Phy errors .....	133
Manage (Read/Write) .....	50
Managed OV3600s	
adding .....	234
Master Console.....	15, 233
Public Portal.....	233
Mesh	
device-to-device link polling .....	80
gateway .....	127
mode.....	127
monitoring.....	135
Proxim.....	103
message-of-the-day .....	51
Modify Devices link.....	140
Monitor (Read Only).....	50
monitoring	
mesh devices .....	135
wired devices .....	137
wireless devices .....	125

## N

navigation.....	22
understanding the UI.....	31
Network integration with OV3600.....	15
network settings	
defining.....	45
Nightly Maintenance Time setting .....	38
NMS .....	68, 69
non-UTF8 characters.....	40
NTP .....	82

## O

Open controller web UI link .....	215
Organization String, see Alcatel-Lucent Instant	
OUI.....	182
OV3600 Alerts.....	204
OV3600 interface	
sections .....	22
System > Backups.....	237

## P

pagination records	
setting, resetting.....	33
pagination widget, using.....	33
password	
changing default root.....	20
PCI Compliance	
Default Credential Compliance .....	72
PCI Requirements .....	70
Physical Interfaces table.....	138
Poll Now button.....	127
product overview	
additional interfaces and tools .....	193
configuring date and time.....	18
defining a scan.....	115
executing a scan .....	116
navigating.....	22
protocols and ports.....	21
Proxim 4900M.....	96
Proxim/Avaya .....	83

## Q

Quick Links .....	215, 222
-------------------	----------

## R

Radio Enabled option .....	147
Radio Role field .....	156
radio settings	
configuring for groups.....	93
radio statistics .....	131–135
Radio table.....	128
RADIUS .....	86, 217
authentication .....	51
configuring authentication and authorization .....	53
integrating .....	54
RADIUS Authentication Issues .....	204
Radius/ARM/IDS Events retention .....	42
RAPIDS.....	25, 175
audit log .....	190
enabling .....	40
overview .....	14
score override .....	189
setup.....	177
viewing ignored rogues .....	189
Recent Events table .....	131
Replace Hardware button .....	153
reports.....	241
Alcatel-Lucent License.....	246
Capacity Planning .....	246
Configuration Audit.....	248
creating, running, and emailing .....	241
custom .....	244
defining custom reports .....	265

Device Summary .....	249
Device Uptime .....	252, 320
emailing and exporting .....	268
IDS Events .....	253
Inventory .....	254
Memory and CPU Utilization .....	255
Network Usage .....	255
New Rogue Devices .....	256
New Users .....	259
RADIUS Authentication Issues .....	261
RF Health Report .....	261
Rogue Containment Audit .....	263
transferring with FTP .....	269
User Session .....	263
restoring from backup .....	236
RF Health Report .....	261
RFprotect license .....	154
Rogue AP Discovery Events .....	41
rogue classification .....	175
rogue scanning	
enabling in Groups > Radio .....	96, 294
root password,changing .....	20
routers and switches .....	137
adding with a CSV file .....	121
RTLS Collector .....	43
Run a command menu .....	215
<b>S</b>	
scan credentials .....	115
scan sets .....	115
scanning	
defining credentials .....	115
security	
auditing PCI compliance .....	69
configuring ACS servers .....	66
configuring group security settings .....	87
configuring group SSIDs and VLANs .....	90
configuring RADIUS .....	51
configuring TACACS+ .....	51
integrating NMS .....	68
RAPIDS and rogue classification .....	175
using triggers and alerts .....	193
servers	
specifying general settings .....	37
Severe Alert .....	36
Shared Secret key .....	317
Signal Cutoff .....	280, 297
Signal Quality .....	130, 218
Smarthost .....	268
SNMP	
Fetcher .....	232
polling period .....	80
Port .....	120
Rate Limiting for Monitored Devices .....	44
read-write .....	57

timeout setting .....	56
Trap .....	153
v3 Informs .....	56
Software updates .....	38
SOTI MobiControl .....	219
spectrum analysis .....	154
SSIDs .....	90
inactive .....	42
SSL Certificates .....	147
static IPs, assigning .....	81
Static Routes .....	46
switches	
virtual interfaces .....	148
Symbol .....	84, 96, 159
Syslog .....	41, 195
system status, viewing .....	194

## T

TACACS+ .....	52, 86
configuring authentication .....	51
integrating .....	51
Telnet/SSH Timeout .....	57
templates .....	160
adding .....	162, 173
configuring a global template .....	173
configuring Cisco IOS templates .....	169
configuring for groups .....	159
global template variables .....	174
variables .....	174
Top Header Stats .....	31
Transmit Power Level .....	146
trap types .....	134
Trapeze .....	159
triggers .....	197–204

## U

UI	
understanding the navigation bar .....	31
Unauthenticated User .....	217
Unexpected LAN MAC Address .....	153
Universal devices,adding .....	122
user account, configuring .....	227
User Association History .....	41
User Data Polling Period .....	132
User Idle Timeout .....	51
user interface	
APs/Devices > Audit38, 118, 127, 140, 141, 142, 165	
APs/Devices > Ignored .....	123
APs/Devices > Interfaces .....	138, 139, 148
APs/Devices > List .....	124
APs/Devices > New .....	118, 122, 317
buttons and icons .....	26

Configuration Change Confirmation .....	108
Device Setup > Add .....	118, 121, 122
Device Setup > Communication .....	56, 57
Device Setup > Discover .....	114, 115, 116
Device Setup > Firmware Files .....	58
flash graphs .....	34, 35, 36
Group SNMP Polling Period .....	80
Groups > Alcatel-Lucent Config .....	75
Groups > Basic .....	79, 80, 81, 83, 84, 111
Groups > Cisco WLC Config .....	97
Groups > Firmware .....	106
Groups > List .....	77
Groups > MAC ACL .....	105
Groups > Proxim Mesh .....	103
Groups > PTMP .....	103
Groups > Radio .....	94
Groups > Security .....	87
Groups > SSIDs .....	90
Groups > Templates .....	160, 162, 173, 174
Help .....	26
Helpdesk > Incidents .....	272, 274, 275
Helpdesk > Setup .....	275
Home .....	220
Home > License .....	222, 223
Home > Managed OV3600s .....	234
Home > Overview .....	221
Home > Search .....	224
Home > User Info .....	36, 225
Home Overview .....	34, 35, 36
Master Console .....	233
Master Console > Groups > Basic .....	235
Master Console > Groups > Basic, Managed .....	235
Master Console > Manage OV3600s, IP/Hostname .....	234
OV3600 Setup > Authentication .....	240
OV3600 Setup > Device Type Setup .....	61
OV3600 Setup > General .....	37
OV3600 Setup > MDM Server .....	219
OV3600 Setup > Network .....	45
OV3600 Setup > NMS .....	68, 69
OV3600 Setup > Roles .....	46, 48
OV3600 Setup > Users .....	47, 48
page sections .....	
Activity section .....	26
Navigation section .....	24
Status section .....	22
Radio Statistics .....	131
RAPIDS > Audit Log .....	190
RAPIDS > List .....	185
RAPIDS > Rogue APs (Detail), Score Override .....	190
RAPIDS > Score Override .....	189
RAPIDS > Setup .....	177
Reports > Definitions .....	243, 265
Reports > Generated > Port Utilization Report .....	260
System .....	193
System > Alerts .....	41, 205
System > Backups .....	236
System > Configuration Change Jobs .....	143, 227
System > Event Logs .....	196
System > Events Log .....	131
System > Firmware Upgrade Jobs .....	228
System > Performance .....	229
System > Status .....	194
System > Syslog and Traps .....	195
System > Trigger Detail .....	198
System > Triggers .....	197
Users > Connected .....	206, 207
Users > Diagnostics .....	216
Users > Guest Users .....	210
Users > Tags .....	211
Users > User Detail .....	215, 220
View AP Credentials .....	154
user roles .....	
creating .....	48
users .....	
creating .....	46
<b>V</b> .....	
vendor-specific device settings .....	39
View Device Credentials link .....	153
Virtual controller, see Alcatel-Lucent Instant .....	
VisualRF .....	14, 25
adding exterior walls .....	289
APIs .....	312
autoprovisioning .....	307
checking signal strength .....	297
client surveys .....	290
Client Transmit Power .....	280
Data Set menu .....	280
Device Types .....	281
Display Menu .....	281
Edit Menu .....	282
editing a floor plan image .....	303
Enabling .....	40, 279
Floors .....	280
Frequencies .....	281
icons .....	279
IDF .....	292
importing a floor plan .....	302
Importing and Exporting .....	310
Interferers .....	281
location history .....	296
location probability regions .....	291
Location Service .....	288
location training .....	289
Mesh .....	281
Mesh View .....	279
Navigation .....	279
Network View .....	280
New building .....	301
New Campus .....	300
Overlays .....	280
Overview .....	277
Planning and Provisioning .....	300
Preferences .....	287
printing a BOM .....	309
provisioning existing APs .....	306
QuickView .....	130, 279
Removing color .....	304
Search .....	283
Sensors .....	281
Setup page .....	283
Terminology .....	278
Tree view .....	299
View a floor plan RF environment .....	299
Viewing a wireless user .....	295

Wired Range .....	280
VLANs.....	90
Voice overlay .....	280

## **W**

Watched OV3600s .....	239
WDS Role.....	147
Web Auth bundles.....	55, 60
wired devices	
monitoring.....	137
Wired Interfaces table .....	129