

EnGenius® X-TRA RANGE



ESR600H/ESR750H

Dual Concurrent Wireless Media Router

V1.0

TABLE OF CONTENTS

| | |
|---------------------------------|--------|
| Conventions | 0-xi |
| Copyright | 0-xiii |
| Product Overview | |
| Product Overview | 1-1 |
| Features | 1-1 |
| Package Contents | 1-3 |
| Product Layout | 1-4 |
| Installation | |
| System Requirements | 2-1 |
| Wall Mounting | 2-2 |
| EnGenius Quick Start | |
| Installing the Software | 3-1 |
| Setup Notes | 3-1 |
| Installation | 3-1 |
| Connecting Network Cables | 3-3 |
| Web Configuration | |

| | |
|---|------|
| Logging In | 4-1 |
| Viewing the Dash Board | 4-2 |
| Services | 4-3 |
| Home | 4-3 |
| Setup Wizard | 4-3 |
| Network Settings | 4-3 |
| Language | 4-3 |
| Logout | 4-3 |
| Web Menus Overview | 4-4 |
| System | 4-4 |
| Internet | 4-5 |
| Wireless 2.4G | 4-6 |
| Wireless 5G | 4-7 |
| Firewall | 4-8 |
| Virtual Private Network | 4-9 |
| Advanced | 4-10 |
| Tools | 4-11 |
| | |
| Installation Setup Wizard | |
| Detecting the Internet Connection | 5-1 |
| | |
| Basic Network Settings | |
| System Setup | 6-1 |

| | |
|--------------------------------------|------|
| Viewing System Status | 6-1 |
| System | 6-1 |
| WAN Settings | 6-2 |
| LAN Settings | 6-3 |
| Wireless 2.4G Setting | 6-3 |
| Wireless 5G Setting | 6-4 |
| Configuring LAN | 6-5 |
| LAN IP | 6-5 |
| DHCP Server | 6-6 |
| DNS Server | 6-7 |
| Configuring DHCP | 6-8 |
| DHCP Client Table | 6-8 |
| Enable Static DHCP IP | 6-8 |
| Current Static DHCP Table | 6-9 |
| Configuring Logging | 6-10 |
| Log Message List | 6-10 |
| Monitoring Bandwidth Usage | 6-11 |
| Configuring Languages | 6-12 |
| Configuring WAN Settings | 6-13 |
| View WAN Status | 6-13 |
| WAN Settings | 6-13 |
| Configuring Dynamic IP | 6-14 |

| | |
|---|------|
| Dynamic IP | 6-14 |
| DNS Servers | 6-15 |
| Configuring Static IP | 6-16 |
| Static IP | 6-16 |
| Configuring PPPoE | 6-17 |
| Configuring PPTP | 6-19 |
| WAN Interface Settings | 6-19 |
| Dynamic IP Address | 6-19 |
| Static IP Address | 6-20 |
| PPTP Settings | 6-21 |
| Configuring L2TP | 6-22 |
| WAN Interface Settings | 6-22 |
| Dynamic IP Address | 6-22 |
| Static IP Address | 6-23 |
| L2TP Settings | 6-24 |
| Wireless 2.4G LAN Setup | 6-25 |
| Configuring Basic Settings | 6-25 |
| Access Point Mode | 6-26 |
| Wireless Distribution System Mode | 6-27 |
| Configuring Advanced Settings | 6-30 |
| Configuring Security | 6-32 |
| Encryption Type | 6-33 |

| | |
|---|------|
| Wired Equivalent Privacy (WEP) | 6-33 |
| Encryption: Wi-Fi Protected Access (WPA) Pre-Shared Key | 6-34 |
| Encryption: WPA RADIUS | 6-35 |
| Configuring Filter | 6-36 |
| Enable Wireless Access Control | 6-36 |
| MAC Address Filtering Table | 6-37 |
| Configuring Wi-Fi Protected Setup | 6-38 |
| Configuring Client List | 6-39 |
| Wireless LAN 5G Setup | 6-40 |
| Configuring Basic Settings. | 6-40 |
| Access Point Mode. | 6-41 |
| Wireless Distribution System Mode | 6-41 |
| Configuring Advanced Settings | 6-45 |
| Configuring Security | 6-47 |
| Encryption Type | 6-48 |
| Wired Equivalent Privacy (WEP) | 6-48 |
| Encryption: Wi-Fi Protected Access (WPA) Pre-Shared Key | 6-49 |
| Encryption: WPA RADIUS | 6-50 |
| Configuring Filters | 6-51 |
| Enable Wireless Access Control. | 6-51 |
| MAC Address Filtering Table | 6-52 |
| Configuring Wi-Fi Protected Setup | 6-53 |

| | |
|--|------|
| Configuring Client List | 6-54 |
| Firewall Setup | 6-55 |
| Configure Basic Settings | 6-55 |
| Configuring Advanced Settings | 6-56 |
| Configuring Demilitarized Zone | 6-57 |
| Configuring Denial of Service | 6-58 |
| WAN Settings | 6-58 |
| Virtual Private Network Setup | 6-59 |
| Viewing Status | 6-59 |
| Using the Virtual Private Network Wizard | 6-60 |
| L2TP | 6-62 |
| PPTP | 6-64 |
| Configuring a VPN Tunnel Profile | 6-66 |
| PPTP | 6-67 |
| L2TP | 6-69 |
| Configuring a User Profile | 6-71 |
| Creating a User Profile | 6-71 |
| Advanced Network Settings | 6-72 |
| NAT Setup | 6-72 |
| Port Mapping Setup | 6-73 |
| Port Forwarding Setup | 6-75 |

| | |
|---|------|
| Port Triggering Setup | 6-77 |
| Application Layer Gateway Setup | 6-80 |
| Universal Plug and Play Setup | 6-81 |
| Internet Group Multicast Protocol Setup | 6-82 |
| Quality of Service Setup | 6-83 |
| Priority Queue | 6-84 |
| Bandwidth Allocation | 6-85 |
| Routing Setup | 6-86 |
| NAT Disabled | 6-86 |
| NAT Enabled | 6-87 |
| Wake on LAN Setup | 6-88 |
| USB Port Setup | 6-89 |
| USB Access Mode | 6-89 |
| Tools Setup | 6-91 |
| Configuring the Administrator Account | 6-91 |
| Configuring the Router's Time | 6-92 |
| Configuring Dynamic Domain Name Service | 6-93 |
| Diagnosing a Network Connection | 6-94 |
| Upgrading Firmware | 6-95 |
| Backing Up Settings | 6-96 |
| Rebooting the Device | 6-97 |

USB Services

| | |
|---|------|
| USB Over IP | 7-2 |
| Using the USB Device Server | 7-2 |
| Introduction | 7-2 |
| Connect & Disconnect. | 7-2 |
| Subnet Issue | 7-2 |
| Installation of a USB Device Driver | 7-3 |
| Using the USB Device Server | 7-5 |
| Printer and Scanner Sharing | 7-6 |
| Auto-Connected Printers. | 7-6 |
| Viewing a List of Auto-Connected Printers | 7-10 |
| Removing a Printer from the Auto-Connect List | 7-10 |
| Printing to an Auto-Connected Printer | 7-11 |
| Configuring the Control Centre as a Windows Service | 7-12 |
| Network Scanners. | 7-14 |
| Scanning with a USB Scanning Device and NetUSB. | 7-14 |
| Storage | 7-17 |
| Request to Connect | 7-18 |
| Quitting the Control Center | 7-19 |
| Limitations. | 7-19 |
| shAir Music | 7-20 |
| Using USB Speakers with shAir | 7-20 |

Play Music from iTunes 7-22

Multiple Speakers 7-23

Streaming Music Stored from an iOS Device Directly to the shAir Music Server 7-24

Samba 7-26

 Preliminary 7-26

 Connecting USB Mass Storage to the Server. 7-27

 Supported Codepages 7-28

 What is Codepage? 7-28

 Filename Encoding of FAT File System 7-28

 When do You Need to Configure Codepage? 7-28

 Configuring the Server’s Codepages 7-28

 Using Shared Storage by USB Server Mode for Windows 7-29

Appendix A

Federal Communication Commission Interference Statement. A-1

Appendix B

Industry Canada Statement B-1

Appendix C

Link Layers C-1

 Dynamic IP Address (DHCP) C-1

 Static IP C-1

Point-to-Point Protocol over Ethernet (PPPoE) C-2
Layer 2 Tunneling Protocol (L2TP) C-2

Appendix D

WorldWide Technical Support D-1

Conventions

The following conventions are used to give the user additional information about specific procedures or content. It is important to pay attention to these conventions as they provide information to prevent damage to equipment or personal injury.

General Conventions

The following general conventions are used in this document.

**CAUTION!**

CAUTIONS APPEAR BEFORE THE TEXT IT REFERENCES. CAUTIONS APPEAR IN CAPITAL LETTERS TO EMPHASIZE THAT THE MESSAGE CONTAINS VITAL HEALTH AND SAFETY INFORMATION.

**WARNING!**

Warning information appears before the text it references to emphasize that the content may prevent damage to the device or equipment.

**Important:**

Indicates information that is important to know for the proper completion of a procedure, choice of an option, or completing a task.

**Note:**

Indicates additional information that is relevant to the current process or procedure.

**Example:**

Indicates information used to demonstrate or explain an associated concept.

N/A:

Indicates that a component or a procedure is not applicable to this model.

Prerequisite:

Indicates a requirement that must be addressed before proceeding with the current function or procedure.

Typographical Conventions

The following typographical conventions are used in this document:

Italics

Indicates book titles, directory names, file names, path names, and program/process names.

`Constant width`

Indicates computer output shown on a computer screen, including menus, prompts, responses to input, and error messages.

`Constant width bold`

Indicates commands lines as entered on the computer. Variables contained within user input are shown in angle brackets (< >).

`Bold`

Indicates keyboard keys that are pressed by the user.

Copyright

This user guide and its content is copyright of © EnGenius Networks, 2011. All rights reserved.

Any redistribution or reproduction in part or in whole in any form is prohibited.

Do not distribute, transmit, store in any form of electronic retrieval system or commercially exploit the content without the expressed written permission of EnGenius Networks.

Product Overview

1.1 Product Overview

Thank you for purchasing the ESR600H/ESR750H Dual Concurrent Wireless Router from EnGenius Networks.

The EnGenius ESR600H/ESR750H Dual Concurrent Wireless Router is a member of the X-TRA RANGE series of routers.

The ESR600H/ESR750H offers 1 WAN and 4 LAN Gigabit connections and extended signal coverage with two external high gain 5dBi antennas. The ESR600H/ESR750H also features one USB port for SAMBA, NetUSB and shAir Music (ESR750H) functionality. The added features provide USB storage, printer and speaker sharing over a trusted network.

The ESR600H/ESR750H provides advanced security features to protect your network and the devices connected to it. An SPI Firewall protects the LAN as well as data sent over the Internet. For clients that want a direct, secure connection the router supports VPN lite tunneling. Data encryption protocols, such as WEP, WPA, WPA2 and TKIP/AES, IEEE802.1x Authentication and MAC Address Filtering are some of the other features which block access from unauthorized clients and better protect the network environment.

The ESR600H/ESR750H provides energy saving technology through the wireless LAN and supports Multiple SSID and Wi-Fi scheduling. It allows users to login to different SSIDs with different access rights. Wi-Fi Scheduling allows administrators to better manage Wi-Fi accessibility.

The ESR750H provides one USB2.0 port which supports SAMBA, NetUSB and shAir Music. shAir Music allows the ESR750H to handle the playback action on any iTunes device or allows an iPhone/iPad/iPod Touch* to stream audio to USB speakers connected to the router. This feature offers wireless audio streaming from anywhere the signal is accessible.

Features


- Extended Signal Coverage
- Dual-Band Concurrent Technology
- High Performance Gigabit Connection

- QoS Wireless Multimedia
- Wireless LAN Power Saving
- Support IEEE802.1x Authentication
- SAMBA and NetUSB
- shAir Music (ESR750H only)


1.2 Package Contents

| ITEM | QUANTITY |
|---------------------------------|----------|
| Dual Concurrent Wireless Router | 1 |
| 5dBi Antennas | 2 |
| Quick Installation Guide | 1 |
| 12V/1.25A Power Adaptor | 1 |
| Ethernet Cable | 1 |
| User CD (with user manual) | 1 |
| Technical Support Card | 1 |

1.3 Product Layout

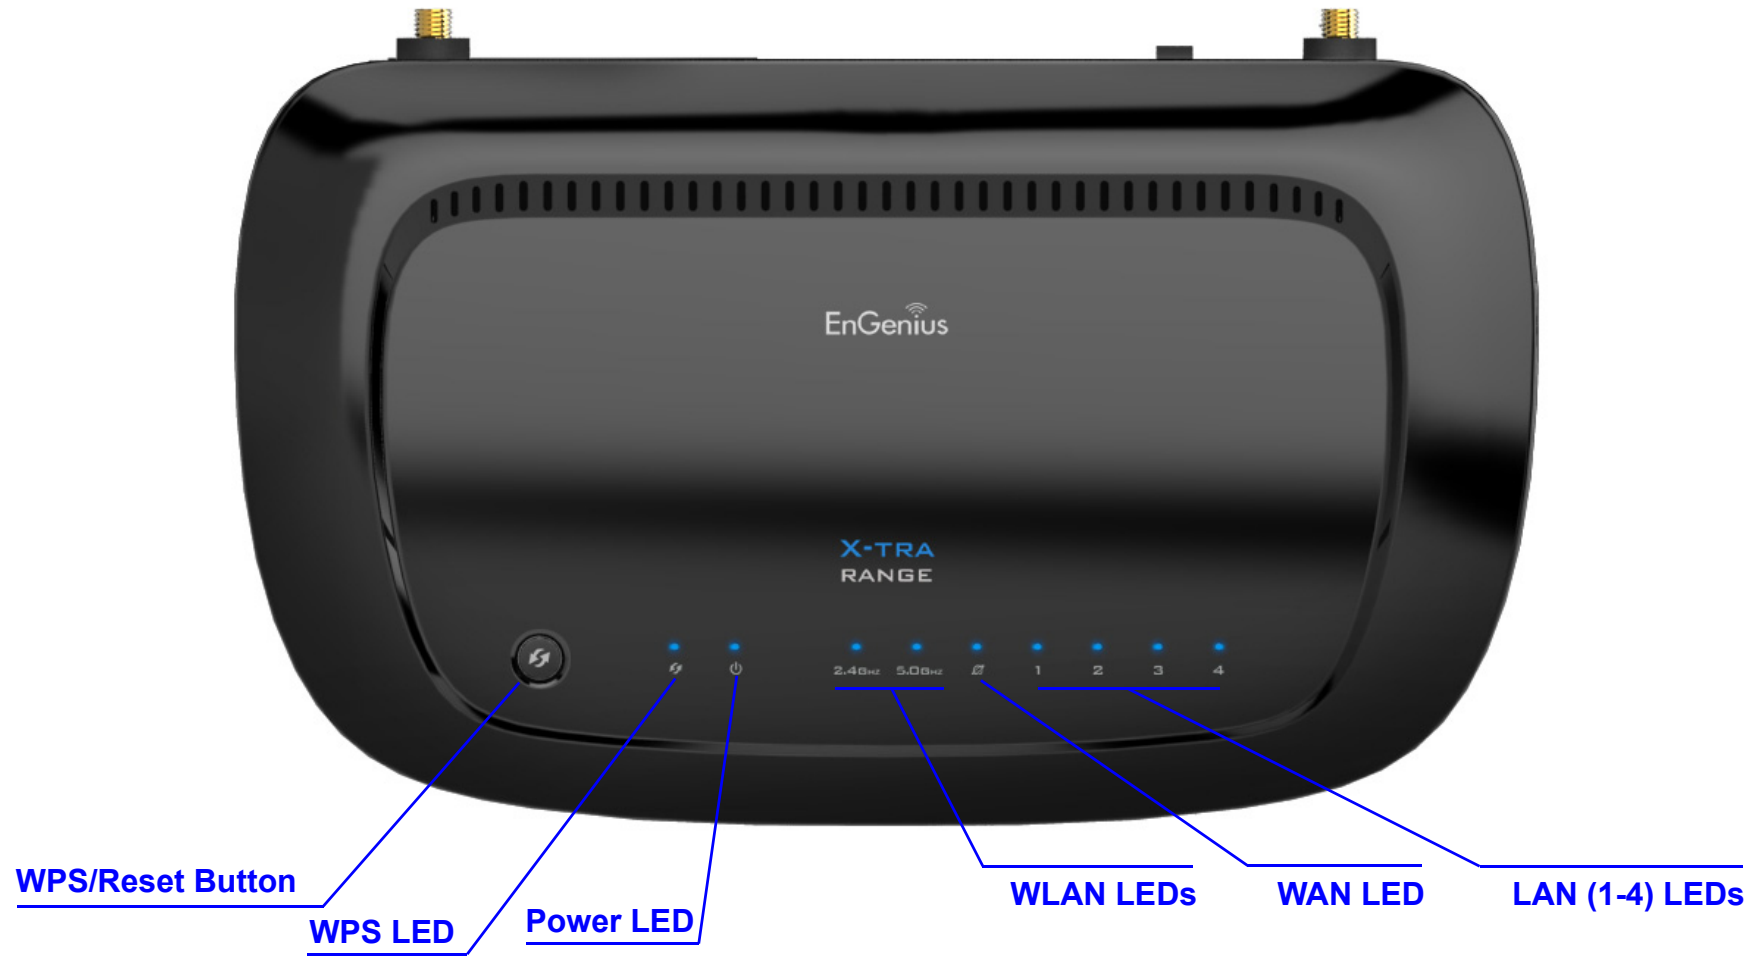

| FRONT PANEL COMPONENTS | DESCRIPTION |
|------------------------|---|
| WPS/Reset Button | Wi-Fi Protected Setup button. To activate 2.4G WPS, press button for 0~5 seconds. To activate 5G WPS, press button for 5~10 seconds. N/A 10~15 seconds To reset to factory settings, press button for > 15 seconds. |
| Power LED | Power status LED. |
| WLAN LED | Wireless LAN (WLAN) status LED. |
| WAN LED | Network status LED. |
| LAN (1 – 4) LEDs | LAN port status LED(s). |

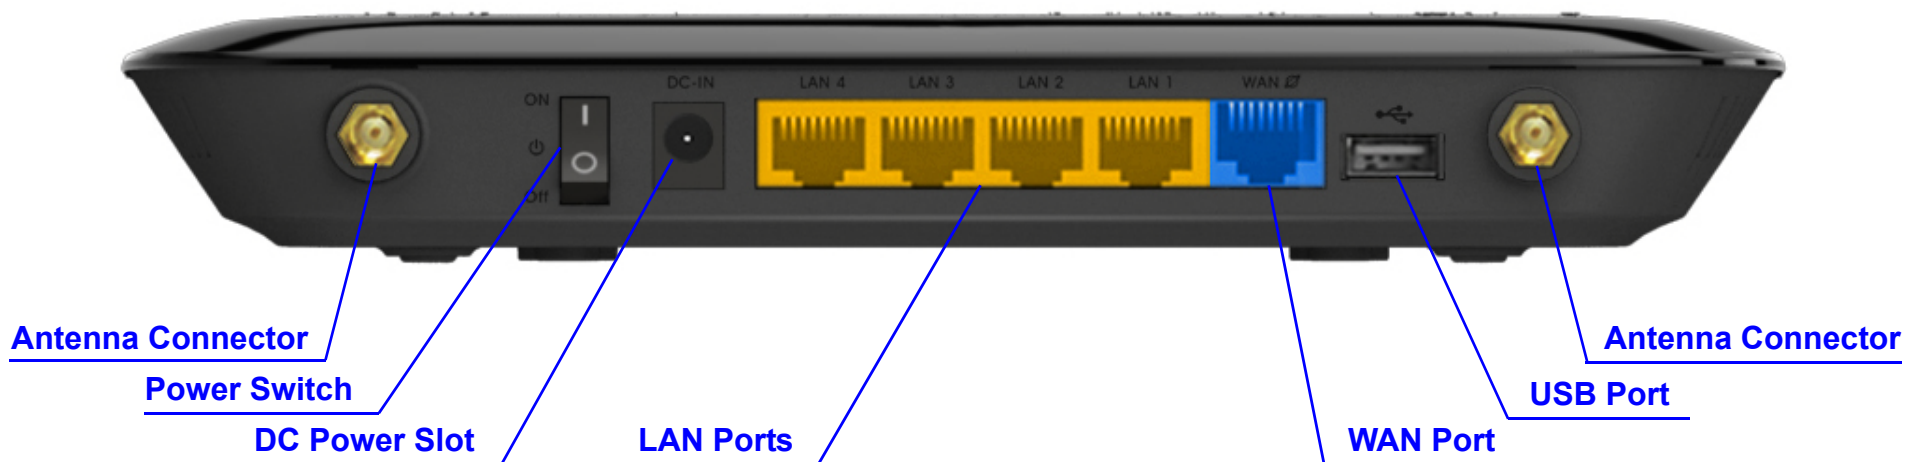

| BACK PANEL COMPONENTS | DESCRIPTION |
|-----------------------------|---|
| External Antenna Connectors | External interface for the antennas. |
| Power Switch | Turns the router on or off. |
| DC Power Slot | Connects the router to a DC power adapter source. |
| LAN Ports (1 – 4) | Connects up to four computers (4) to a local area network (LAN) using Ethernet cable. |
| WAN Port | Connects the router to a cable or DSL modem using an Ethernet cable. |
| USB Port | Provides Samba, NetUSB and shAir connectivity to devices on the LAN. |

Installation

2.1 System Requirements

To install the ESR600H/ESR750H, you need the following:

- Computer (Windows, Linux and MAC OS X Operating Systems)
- CD-ROM*
- Web Browser (Internet Explorer, FireFox, Chrome, Safari)
- Network Interface Card with an open RJ-45 Ethernet Port
- Wi-Fi Card or USB Wi-Fi Dongle (802.11 B/G/N)**
- External xDSL (ADSL) or Cable Modem with an open RJ-45 Ethernet Port
- RJ45 Ethernet Cables



Note:

*Using ESR600H/ESR750H Setup CD

**Optional

2.2 Wall Mounting

Mounting the ESR600H/ESR750H on a wall optimizes the wireless access range.

**Note:**

Choose a location that is within reach of an electrical outlet for the AC adapter and the DSL or Cable modem.

To mount the device on the wall do the following:

1. Measure the distance from the middle of each mounting screw hole.
2. Mark the locations of the screw holes on the wall.
3. Drill a hole for each marked location and insert a screw in each.

**Note:**

Make sure to leave enough of the screw head above the wall surface to secure the router.

4. Install and secure the mounts onto the ESR600H/ESR750H.
5. Install the ESR600H/ESR750H on the wall.

EnGenius Quick Start

3.1 Installing the Software

**Note:**

Before getting started, please power off the cable or DSL modem.

Setup Notes

When considering the placement of the ESR600H/ESR750H remember the following:


- It must be located close to a DSL or Cable modem.
- It must be close to an electrical outlet.
- Upon first setup, it must be close to the computer that is used to set up and configure the router.
- For optimal wireless access place the router in the center of the room, at a high altitude and with an unobstructed view of the other wireless devices.
- Other electronic devices can interfere with the wireless frequency of the router and reduce the wireless access range.

Installation


**Note:**

If the instructions do not automatically start, open a file manager and browse the root folder of the CD-ROM. Look for the file named *index.html* and open it.

1. Insert the ESR600H/ESR750H installation CD into the CD-ROM drive.

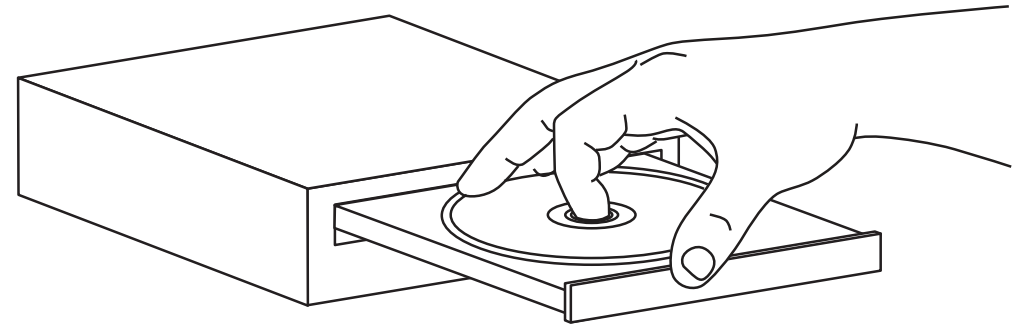

2. Click **Quick Start**. The wizard will guide you through setting up your ESR600H/ESR750H.

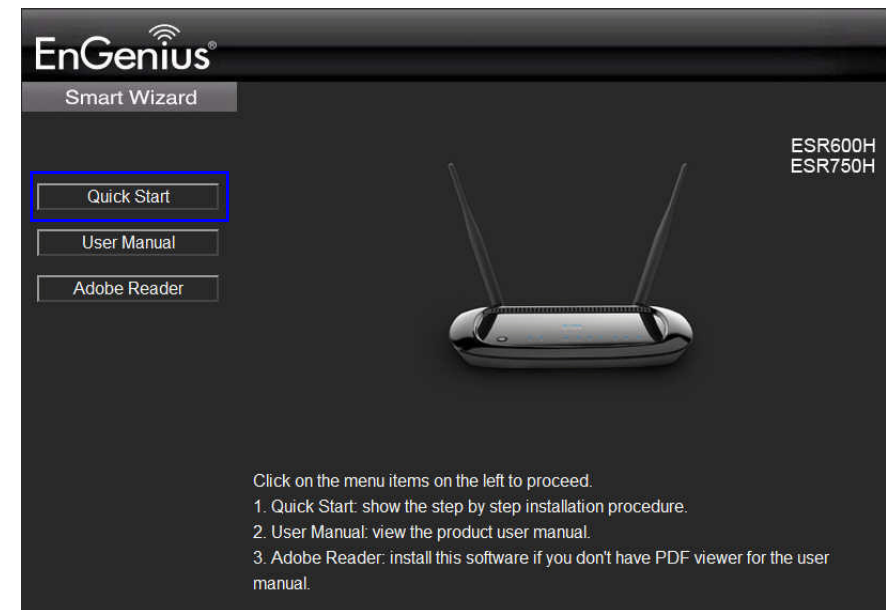

3.2 Connecting Network Cables



CAUTION!



Unplug all peripherals and the router's adapter before starting with this procedure.

1. Connect the adapter cable to an electrical outlet.


Note:

The Power LED lights up to show the device is active.

2. Plug one end of the Ethernet cable (1) into the WAN port on the back panel of the router. Plug the other end of the cable into the cable or DSL modem.

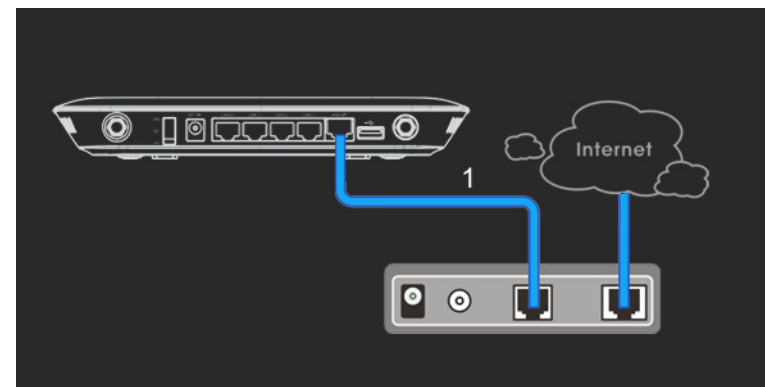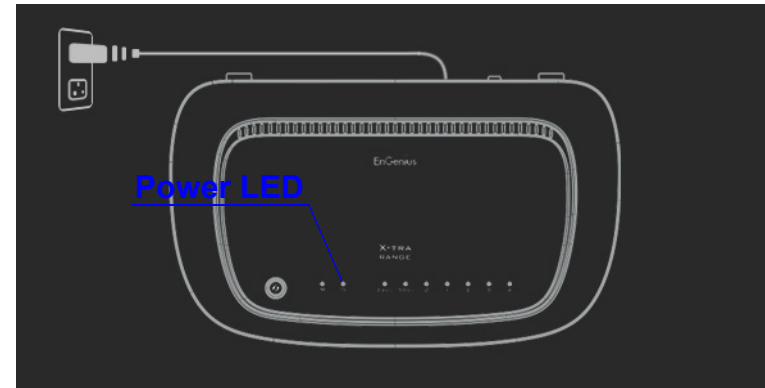

3. Plug one end of an Ethernet cable (2) into the LAN port on the back panel of the router. Plug the other end of the cable into the Ethernet port of the computer.
4. Click **Next** to display the login screen.

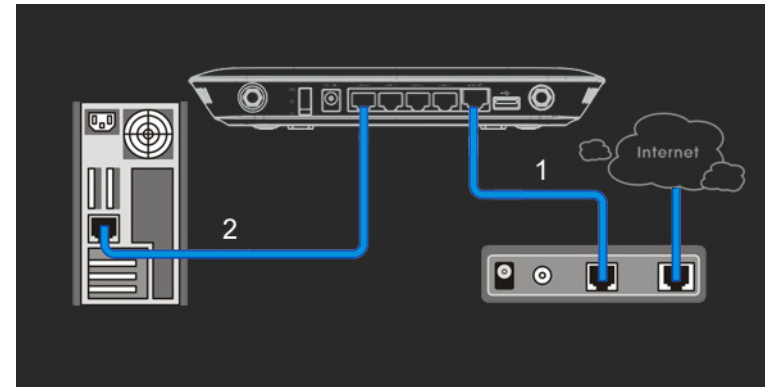**Note:**

If the browser does not show the login screen, enter the default router IP address, `192.168.0.1`.

**Note:**

Make sure the network cable and power adapter are firmly connected.

Web Configuration

4.1 Logging In

**Note:**

If the login screen does not display, enter the default router IP address of 192.168.0.1.

Note:

The default user name is `admin` and the default password is `admin`.

1. At the login screen enter a user name and a password.
2. Click `Login` to continue.

EnGenius®
THE LEADER IN LONG RANGE WIRELESS

Username

Password

4.2 Viewing the Dash Board

The main screen, or dashboard, provides access to all of the router's services.

The screenshot shows the EnGenius router dashboard. At the top left is the EnGenius logo. The main area is divided into three columns: 'Status' (left), 'Device List' (middle), and 'Device List' (right). The 'Status' column contains a table of router information. The 'Device List' column shows 'WAN Disconnected' and 'WAN Cable Disconnected'. The rightmost column shows 'Wireless 2.4GHz On' and 'Wireless 5GHz On'. At the bottom are 'Map' and 'Wizard' buttons. On the right side, there is a vertical navigation menu with icons for Home, Setup Wizard, Logout, Language, and Network Settings. Blue lines connect these menu items to their corresponding icons on the dashboard.

| | |
|---------------------|--------------------|
| Application Version | 1.0.2 |
| Hardware Version | 1.0.0 |
| Serial Number | 000000001 |
| MAC Address | 00:AA:BB:CC:DD:11 |
| Attain IP Protocol | Dynamic IP Address |
| IP Address | --- |
| Subnet Mask | --- |
| Default Gateway | --- |
| Wireless 2.4GHz : | |
| SSID | EnGeniusCCDD10 |
| Security Type | undefined |
| Wireless 5GHz : | |
| SSID | EnGeniusCCDD14 |
| Security Type | undefined |

Navigation menu items (from top to bottom): Home, Setup Wizard, Logout, Language, Network Settings.

Bottom buttons: Map, Wizard.

Callouts:

- Start the setup wizard. (points to Wizard button)
- View router information and connection status (points to Status column)

Services

The `Home`, `Setup Wizard`, `Network Settings` and `Exit` links are the main service areas.

Home

The `Home` link displays the dashboard screen.

Setup Wizard

The `Setup Wizard` link starts the wizard that automatically configures the router. Refer to “Detecting the Internet Connection” on page 5-1.

Network Settings

The `Network Settings` link displays the menus to manually configure the router. Refer to “Web Menus Overview” on page 4-4.

Language

The `Language` link displays the menu to set the OSD language. Refer to “Configuring Languages” on page 6-12.

Logout


The `Logout` link closes the router configuration software.

4.3 Web Menus Overview

System

View and edit settings that affect system functionality.

- **Status** Display the summary of the current system status.
- **LAN** Configure the wired network.
- **DHCP** Configure dynamically allocated IP addresses.
- **Log** View recorded system operations and network activity events.
- **Monitor** View the current network traffic bandwidth usage.
- **Language** Configure the application menu and GUI language.

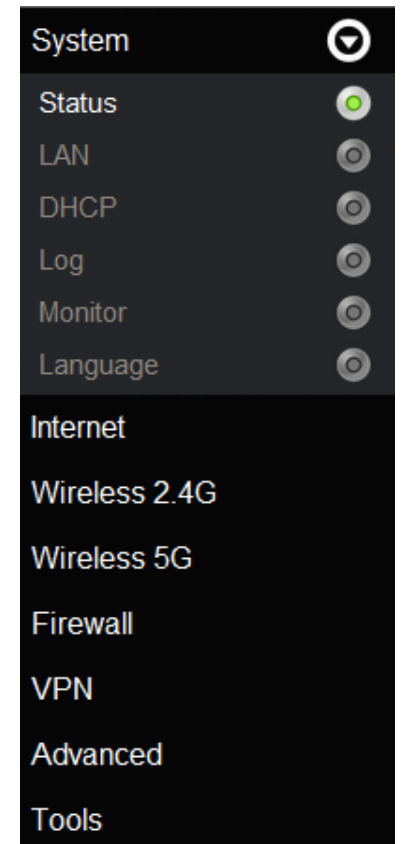

Internet

View and edit settings that affect network connectivity.


- **Status** Display the summary of the Internet status and type of connection.
- **Dynamic IP** Setup a dynamic IP connection to an Internet service provider (ISP).
- **Static IP** Setup a static IP connection to an ISP.
- **PPPoE** Setup a PPPoE connection to an ISP.
- **PPTP** Setup a PPTP connection to an ISP.
- **L2TP** Setup an L2TP connection to an ISP.



Wireless 2.4G

View and edit settings for 2.4G wireless network connectivity.

- **Basic** Configure the minimum settings required to setup a wireless network connection.
- **Advanced** Configure the advanced network settings.
- **Security** Configure the wireless network security settings.
- **Filter** Configure a list of clients that are allowed to wirelessly connect to the network.
- **WPS** Automate the connection between the a wireless device and the router using an 8-digit PIN.
- **Client List** View the 2.4G wireless devices currently connected to the network.

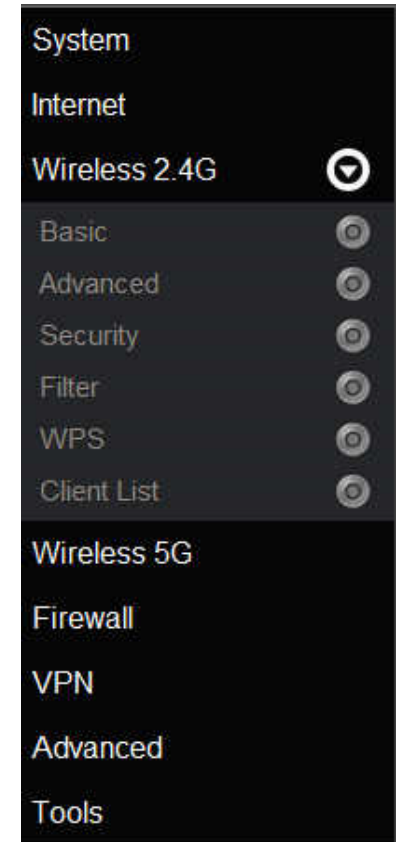

Wireless 5G

View and edit settings for 5G wireless network connectivity.


- **Basic** Configure the minimum settings required to setup a wireless network connection.
- **Advanced** Configure the advanced network settings.
- **Security** Configure the wireless network security settings.
- **Filter** Configure a list of clients that are allowed to wirelessly connect to the network.
- **WPS** Automate the connection between the a wireless device and the router using an 8-digit PIN.
- **Client List** View the 5G wireless devices currently connected to the network.



Firewall

View and configure settings for firewall rule sets.


- **Basic** Enable or disable the network firewall.
- **Advanced** Configure virtual private network (VPN) packets.
- **DMZ** Redirect packets from the WAN port IP address to a particular IP address on the LAN.
- **DoS** Enable or disable blocking of denial of service (DoS) attacks.

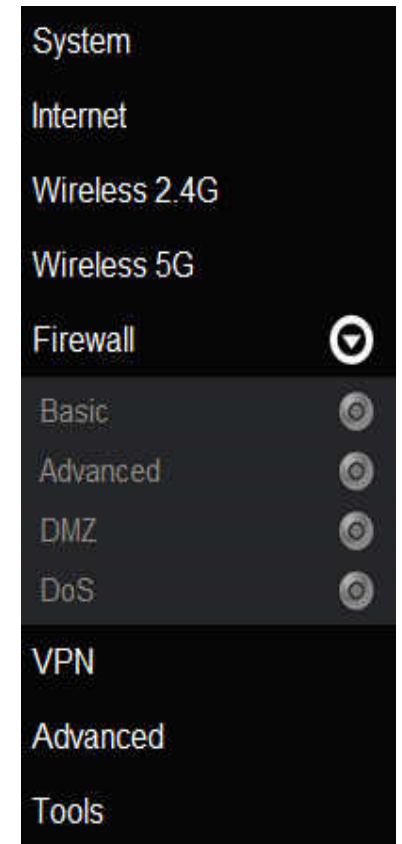

Virtual Private Network

View and configure settings for VPN tunnelling.

- **Status** View the status of current VPN tunnels.
- **Profile Setting** Manually configure VPN tunnels.
- **User Setting** Configure users, user ID and password combinations, and assign access to specific VPN tunnels.
- **Wizard** Automatically configure VPN tunnels with guidance from the software.

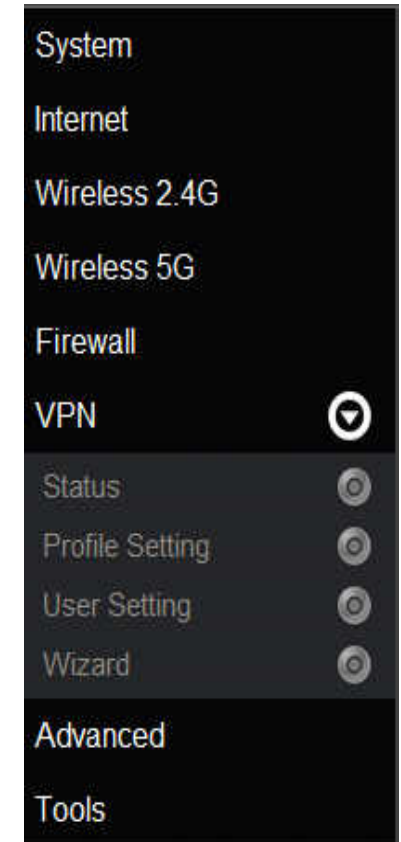

Advanced

View and configure advanced system and network settings.


- **NAT** Enable or disable Network Address Translation (NAT).
- **Port Mapping** Re-direct a range of service port numbers to a specified LAN IP address.
- **Port Forwarding** Configure server applications to send and receive data from specific ports on the network.
- **Port Triggering** Configure applications that require multiple connections and different inbound and outbound connections.
- **ALG** Configure the application layer gateway (ALG).
- **UPnP** Enable or disable Universal Plug and Play (UPnP) functionality.
- **IGMP** Enable or disable the Internet Group Multicast Protocol (IGMP).
- **QoS** Configure the network quality of service (QoS) setting by prioritizing the uplink and downlink bandwidth.
- **Routing** Configure static routing.
- **WOL** Configure wake on LAN (WOL) to turn on a computer over the network.
- **USB port** Configure the router's USB port to server or NetUSB mode.



Tools

View and configure system and network tools settings.

- **Admin** Configure the administrator password used to login to the router.
- **Time** Configure the system time on the router.
- **DDNS** Map a static domain name to a dynamic IP address.
- **Diagnosis** Check if a specific computer is connected to the LAN.
- **Firmware** Update the router's firmware.
- **Backup** Load or save configuration settings from a backup file or restore the factory default settings.
- **Reset** Manually reset the router.

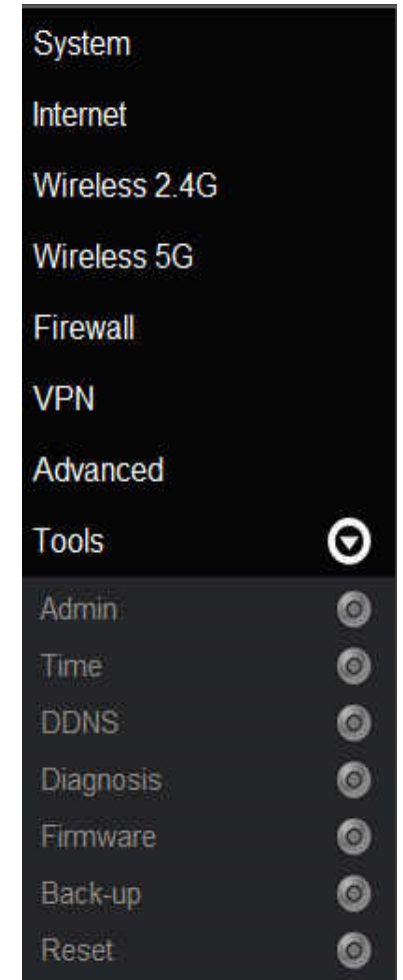


Installation Setup Wizard


5.1 Detecting the Internet Connection

Use the Wizard to automatically detect the type of Internet connection.

1. Insert the ESR600H/ESR750H Installation CD into your CD-ROM drive to display the EnGenius Smart Wizard screen.

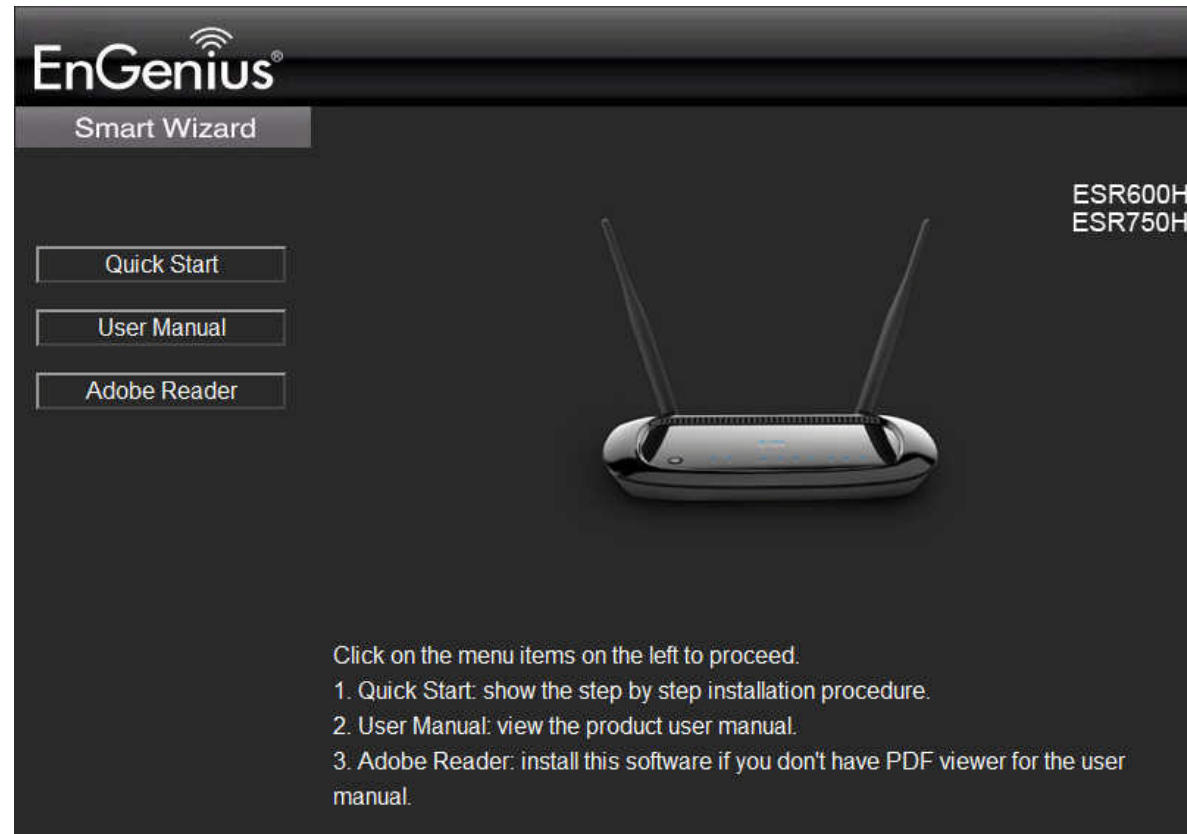


2. Click `Quick Start` to continue and display the Wizard Introduction screen.

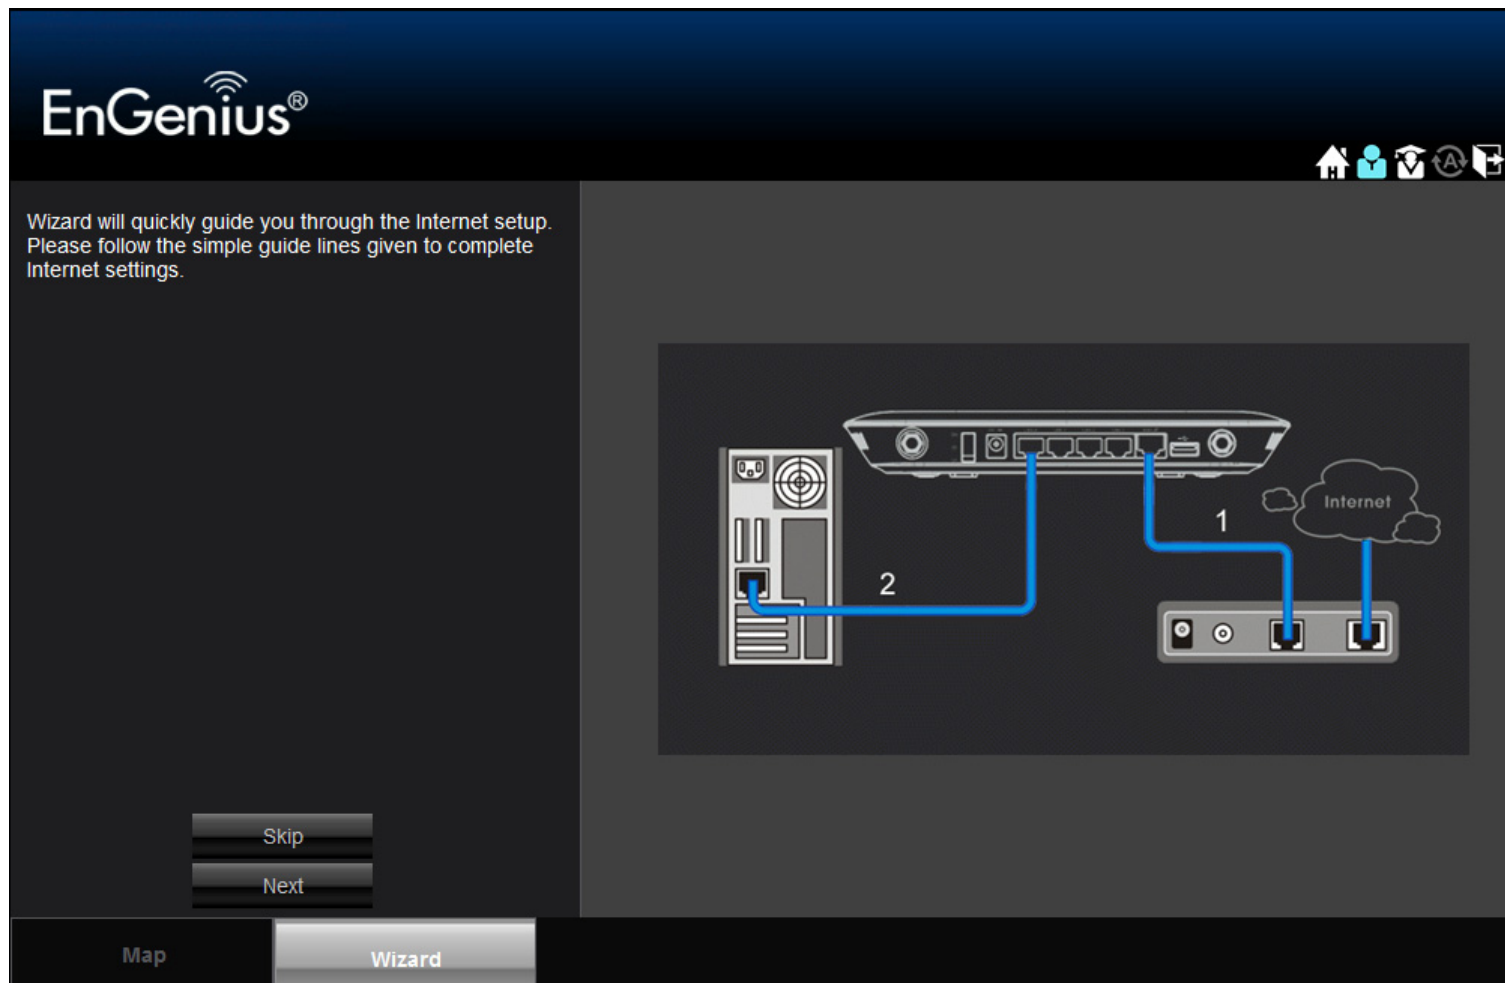

3. Click **Next** to continue or **Skip** to cancel the wizard.

- The Wizard displays a progress bar while detecting the type of Internet connection.

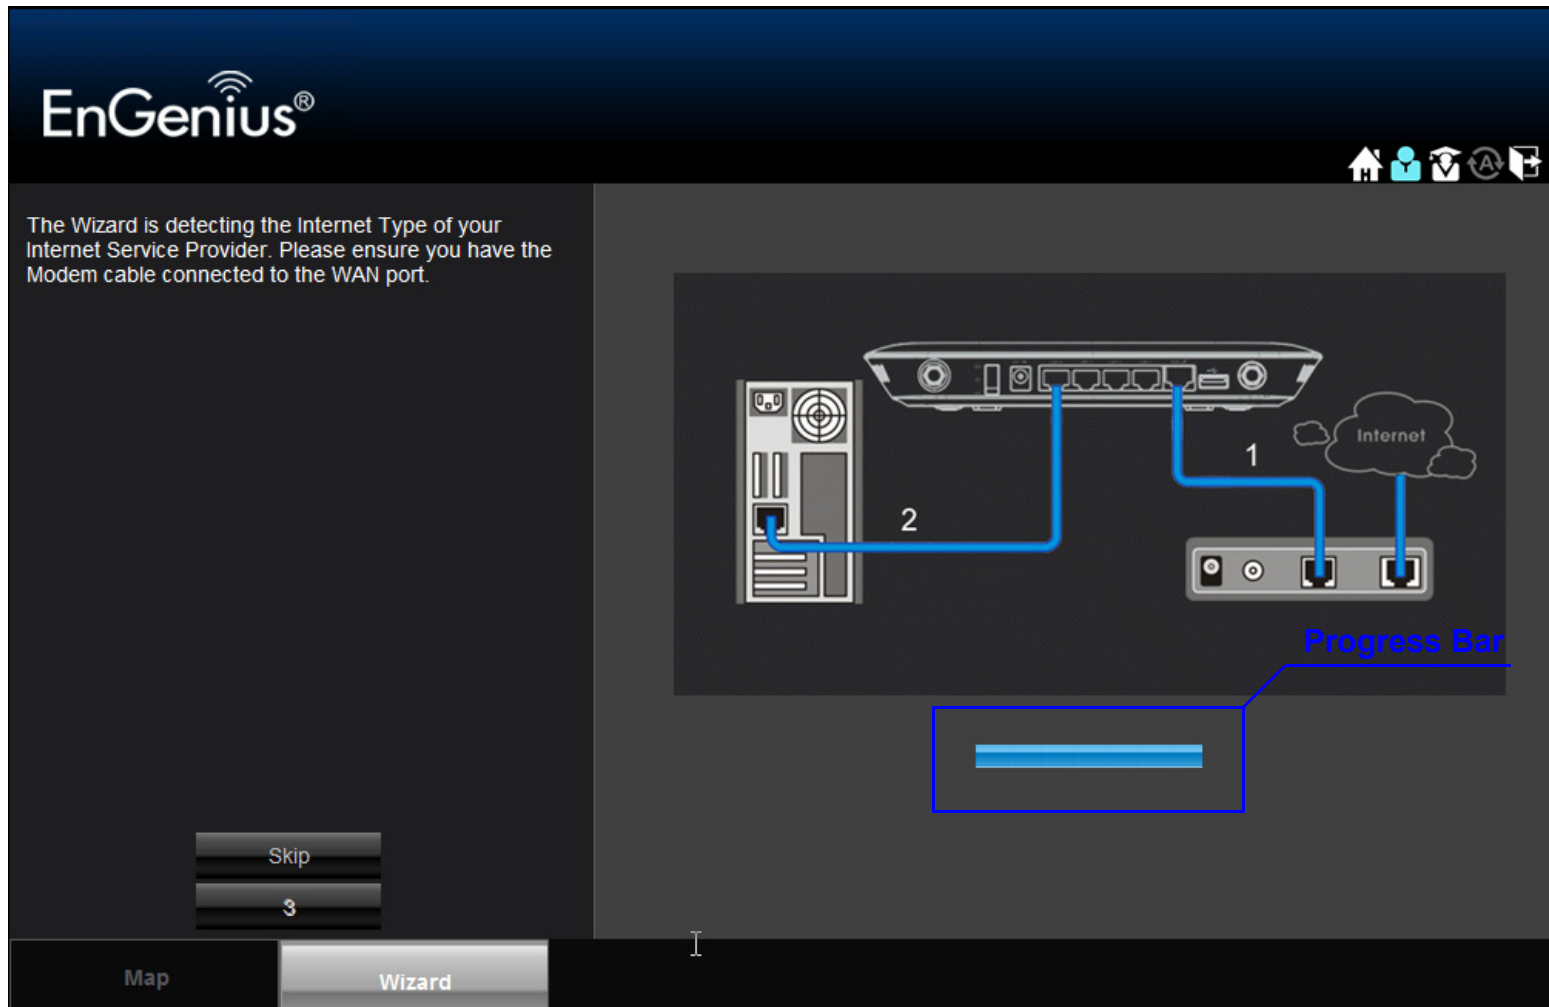

**Note:**

This process may take several seconds.

5. If the ESR600H/ESR750H can not detect the type of Internet connection, the following screen is displayed.

EnGenius®

Login Method: DHCP

Host Name: _____

MAC: 00:AA:BB:CC:DD:11

Clone MAC Address

The Wizard cannot detect the Internet Type of your Internet Service Provider. Please choose your service type manually.

Rescan

Skip

Next

Map Wizard

DHCP

Dynamic IP addressing assigns a different IP address each time a device connects to an ISP service provider. The service is most commonly used by ISP cable providers.

Please wait..

6. Select a login method from the dropdown list.

7. Fill in the required information.

**Note:**

There are four methods available to connect to the Internet: DHCP, Static IP, PPPoE and LT2P. For a description of each method, refer to “Link Layers” on page C-1. For configuration instructions, refer to “Configuring Dynamic IP” on page 6-14, “Configuring Static IP” on page 6-16, “Configuring PPPoE” on page 6-17 and “Configuring L2TP” on page 6-22.

8. Click `Next` to save these settings and continue to the next step; click `Rescan` to detect the Internet connection method; click `Skip` to discard changes and continue to the next step.

9. For the Wireless 2.4G connection, in the SSID text field enter a router name and in the Key text field enter a password.

**WARNING!**

Select High as the security level to best secure the wireless network.

The screenshot displays the EnGenius wireless configuration interface. At the top left is the EnGenius logo. The main heading is "Wireless 2.4GHz" with the instruction "Please choose the security level in the security bar Strength:". Three radio buttons are visible: "None" (with a grey shield icon), "Medium" (with a blue shield icon), and "High" (with a gold shield icon). The "High" option is selected. Below the radio buttons are two text input fields: "SSID:" containing "EnGeniusCCDD10" and "Key:" containing "1234567890". To the right of the security level selection, the "High" option is detailed: "High" followed by "This option offers WPA encryption technology with Pre-Shared Key protection, which provides more secure wireless connections." At the bottom left, there are "Skip" and "Next" buttons. At the bottom center, there is a "Wizard" button. The bottom left corner of the interface shows "Map" and "Wizard" tabs.

10. For the Wireless 5G connection, in the SSID text field enter a router name and in the Key text field enter a password.


**WARNING!**

Select High as the security level to best secure the wireless network.

The screenshot shows the EnGenius Wireless 5GHz configuration screen. At the top left is the EnGenius logo. Below it, the text reads "Wireless 5GHz" and "Please choose the security level in the security bar Strength:". There are three radio button options: "None" (with a silver shield icon), "Medium" (with a blue shield icon), and "High" (with a gold shield icon). The "High" option is selected. Below these options are two text input fields: "SSID:" containing "EnGeniusCCDD14" and "Key:" containing "1234567890". At the bottom left are "Skip" and "Next" buttons. At the bottom center is a "Wizard" button. The right side of the screen shows the "High" security level description: "This option offers WPA encryption technology with Pre-Shared Key protection, which provides more secure wireless connections." A progress bar is visible at the bottom of the right panel.

11. Click `Next` to save these settings or click `Skip` to discard changes and continue to the next step.

12. Review the settings.

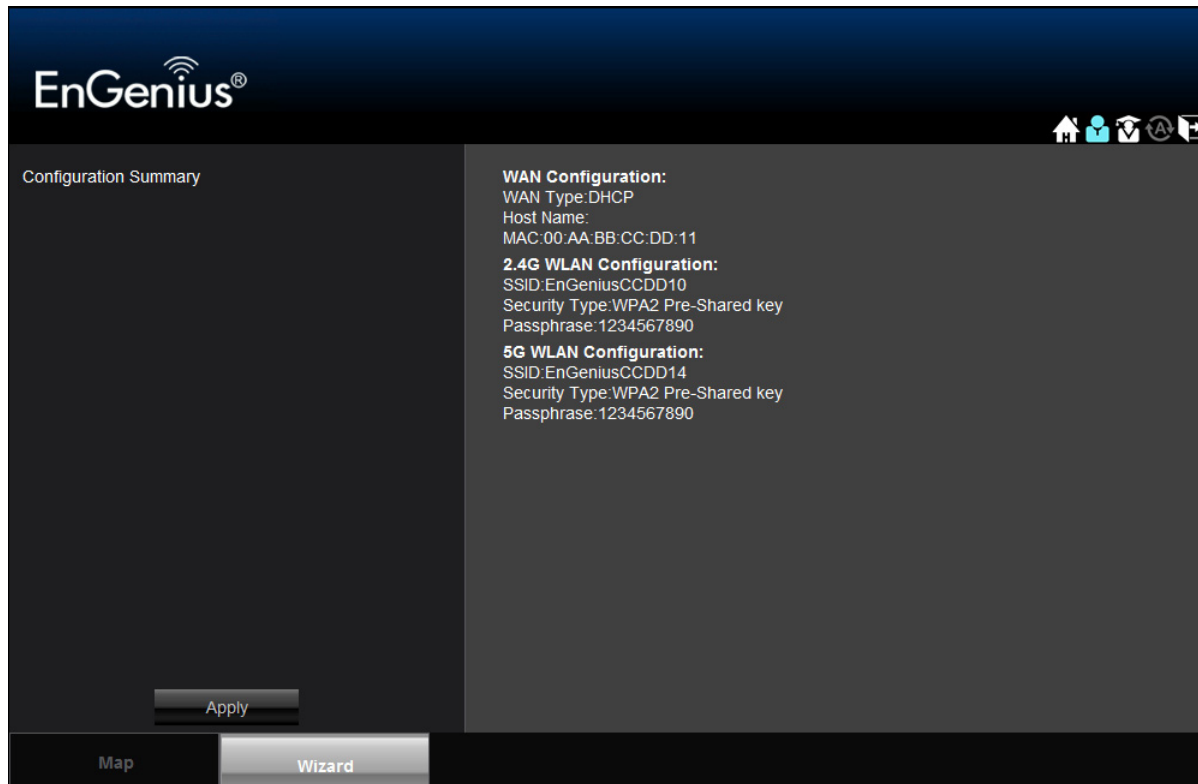

13. Click `Apply` to save the information entered in the previous steps.
The ESR600H/ESR750H setup is complete.

Basic Network Settings

6.1 System Setup

6.1.1 Viewing System Status

The status page shows the summary of the current system status including system (hardware/software version, date/time), Internet connection (WAN), wired network (LAN) and wireless network (WLAN) information.

System

- **Model** The model name of the ESR600H/ESR750H.
- **Mode** The router's operating mode (AP / Router / WDS).
- **Uptime** The amount of time the device has been active.
- **Current Date/Time** The current system date and time.
- **Hardware Version** The hardware version number of the ESR600H/ESR750H.
- **Serial Number** The serial number of the ESR600H/ESR750H. The serial number is required for customer service or support.
- **Application Version** The firmware version number of the ESR600H/ESR750H.

Note:

To update the firmware visit www.engeniusnetworks.com.

| System | | |
|---------------------|----------------------------------|--|
| Model | Wireless Gigabit Dualband Router | |
| Mode | AP Router | |
| Uptime | 17 min 22 sec | |
| Current Date/Time | 2011/01/01 00:18:19 | |
| Hardware Version | 1.0.0 | |
| Serial Number | 000000001 | |
| Application Version | 1.0.0 | |

WAN Settings

- **Attain IP Protocol** Displays the IP protocol in use for the ESR600H/ESR750H. It can be a dynamic or static IP address.
- **IP Address** The router's IP address as designated by an ISP provider.
- **Subnet Mask** The router's WAN subnet mask as designated by an ISP provider.
- **Default Gateway** The router's gateway address as designated by an ISP provider.
- **MAC Address** The router's WAN MAC address. The router's MAC address is located on the label on the back side of the router.
- **Primary DNS** The primary DNS of an ISP provider.
- **Secondary DNS** The secondary DNS of an ISP provider.

| WAN Settings | |
|--------------------|--------------------|
| Attain IP Protocol | Dynamic IP Address |
| IP Address | --- |
| Subnet Mask | --- |
| Default Gateway | --- |
| MAC Address | 00:AA:BB:CC:DD:11 |
| Primary DNS | --- |
| Secondary DNS | --- |

LAN Settings

- **IP Address** The router's local IP address. The default LAN IP address is **192.168.0.1**.
- **Subnet Mask** The router's local subnet mask.
- **DHCP Server:** The DHCP setting status (Default: **Enabled**).
- **MAC Address** The router's LAN MAC address.

LAN Settings

| | |
|-------------|-------------------|
| IP Address | 192.168.1.220 |
| Subnet Mask | 255.255.255.0 |
| DHCP Server | Enabled |
| MAC Address | 00:00:00:9A:C0:64 |

Wireless 2.4G Setting

- **Channel** The communications channel used by all stations, or computing devices, on the network.
- **ESSID** The ID value of a set of one or more interconnected basic service sets (BSSs).
- **Security** The security setting status (Default: **Disabled**).
- **BSSID** The unique ID of the BSS using the above channel value on this router. The ID is the MAC address of the BSSs access point.
- **Associated Clients** The number of clients associated with this SSID.

WLAN Settings

Wireless 2.4G Setting

Channel 11

SSID_1

ESSID EnGeniusCCDD10

Security Disable

BSSID 00:00:00:9A:C0:64

Associated Clients 0

Wireless 5G Setting

- **Channel** The communications channel used by all stations, or computing devices, on the network.
- **ESSID** The ID value of a set of one or more interconnected basic service sets (BSSs).
- **Security** The security setting status (Default: **Disabled**).
- **BSSID** The unique ID of the BSS using the above channel value on this router. The ID is the MAC address of the BSSs access point.
- **Associated Clients** The number of clients associated with this SSID.

| WLAN Settings | |
|---------------------|-------------------|
| Wireless 5G Setting | |
| Channel | 149 |
| SSID_1 | |
| ESSID | EnGeniusCCDD14 |
| Security | Disable |
| BSSID | 00:00:00:9A:C0:68 |
| Associated Clients | 0 |

6.1.2 Configuring LAN

Configure the wired network settings in the LAN section. The router's IP is defined in the `IP Address` field. The default setting of the DHCP server is set to enabled so that network clients can be automatically assigned a virtual IP addresses. Advanced users may configure DNS server settings to meet specific requirements. Changing the settings in this section are not necessary for most situations.

**Note:**

Keep the default values if you are uncertain of the settings values.

LAN IP

IP Address Configure the router's LAN IP address.

IP Subnet Mask Configure the router's LAN Subnet Mask

802.1d Spanning Tree The 802.1d Spanning Tree settings is disabled by default. When enabled, the spanning tree protocol is applied to prevent network loops (transmissions won't pass the same node twice to reach the destination).

| LAN IP | |
|----------------------|---|
| IP Address | 192.168.1.220 |
| IP Subnet Mask | 255.255.255.0 |
| 802.1d Spanning Tree | Disabled <input type="button" value="v"/> |

DHCP Server

The DHCP server assigns IP addresses to the devices on the LAN.

DHCP Server Enable or disable the DHCP server (Default: **Enabled**).

Lease Time Configure the amount of time each allocated IP address can be used by a client.

Start IP The first IP address in the range of addresses assigned by the router.

End IP The last IP address in the range of addresses assigned by the router.

Domain Name: The domain name of the router.


| DHCP Server | |
|-------------|--|
| DHCP Server | Enabled <input type="button" value="v"/> |
| Lease Time | Forever <input type="button" value="v"/> |
| Start IP | 192.168.1.100 |
| End IP | 192.168.1.200 |
| Domain Name | esr-750h |

DNS Server

The domain name system (DNS) server translates a domain or website name into a uniform resource locator (URL), or Internet address. There are four options to choose from: From ISP, User-Defined, DNS Relay or None. Select `From ISP` to retrieve the DNS address value from the ISP; select `User-Defined` to assign a custom DNS server address; select `DNS Relay` to forward all queries to a relay, which in turn sends them to an ISP's DNS server; select `None` to assign no server.

First DNS Server Configure the first, or primary, DNS server. (Default = **DNS Relay**)

Second DNS Server Configure the second, or secondary, DNS server. (Default = **None**)

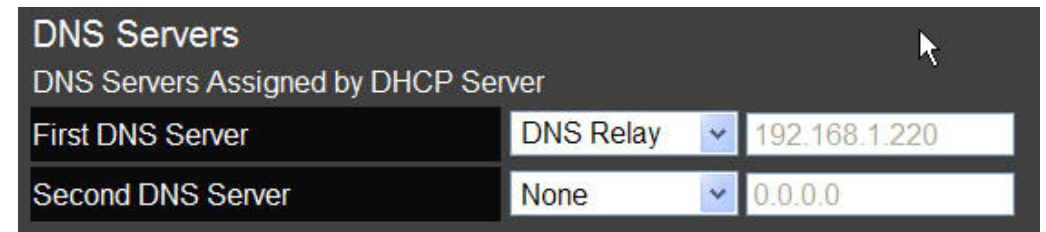

| DNS Servers | | |
|-------------------------------------|-----------|---------------|
| DNS Servers Assigned by DHCP Server | | |
| First DNS Server | DNS Relay | 192.168.1.220 |
| Second DNS Server | None | 0.0.0.0 |

Click `Apply` to save the settings.



6.1.3 Configuring DHCP

View active dynamically allocated IP (DHCP) addresses and configure and view static DHCP IP addresses.



WARNING!

Do not modify the settings in this section without a thorough understanding of the parameters.

DHCP Client Table

Displays the connected DHCP clients whose IP addresses are assigned by the DHCP server on the LAN.

Click `Refresh` to update the table.

| DHCP Client Table | | |
|-------------------|-------------|-----------------|
| IP Address | MAC Address | Expiration Time |
| No DHCP. | | |
| Refresh | | |

Enable Static DHCP IP

Click `Enable Static DHCP IP` to add more static DHCP IP addresses.

Click `Reset` to return the table to its previous state.

| ■ Enable Static DHCP IP | |
|-------------------------|----------------------|
| IP Address | MAC Address |
| <input type="text"/> | <input type="text"/> |
| Add | Reset |

Current Static DHCP Table

Active static DHCP addresses are listed along with the associated MAC addresses.

Click `Delete Selected` to remove a selected address.

Click `Delete All` to remove all addresses from the table.

Click `Reset` to return the table to its previous state.

Click `Apply` to save the settings.




6.1.4 Configuring Logging

The logging service records and displays important system information and activity on the network. The events are stored in a memory buffer with older data overwritten by newer when the buffer is full.

Log Message List

Shows the current system operations and network activity.

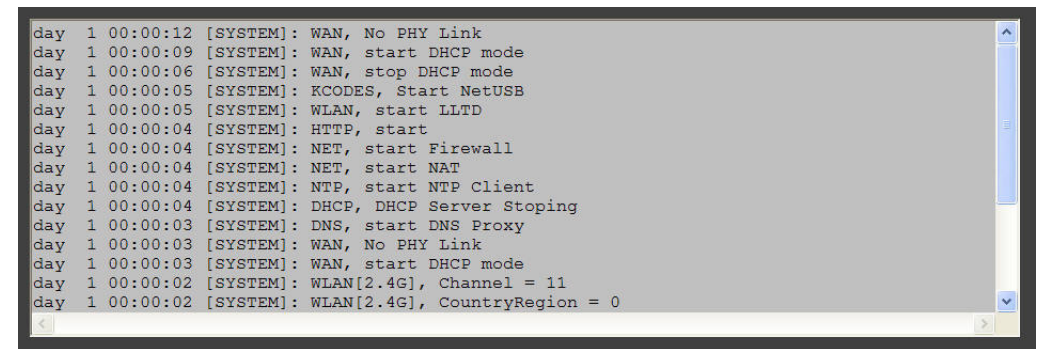
A screenshot of a log message list window. The window has a dark background and a light-colored text area. The text is white and shows a list of system events. The events are timestamped and include details about network activity, such as WAN, DHCP, WLAN, and DNS. The window has a scroll bar on the right side and a close button in the top right corner.

```
day 1 00:00:12 [SYSTEM]: WAN, No PHY Link
day 1 00:00:09 [SYSTEM]: WAN, start DHCP mode
day 1 00:00:06 [SYSTEM]: WAN, stop DHCP mode
day 1 00:00:05 [SYSTEM]: KCODES, Start NetUSB
day 1 00:00:05 [SYSTEM]: WLAN, start LLTD
day 1 00:00:04 [SYSTEM]: HTTP, start
day 1 00:00:04 [SYSTEM]: NET, start Firewall
day 1 00:00:04 [SYSTEM]: NET, start NAT
day 1 00:00:04 [SYSTEM]: NTP, start NTP Client
day 1 00:00:04 [SYSTEM]: DHCP, DHCP Server Stopping
day 1 00:00:03 [SYSTEM]: DNS, start DNS Proxy
day 1 00:00:03 [SYSTEM]: WAN, No PHY Link
day 1 00:00:03 [SYSTEM]: WAN, start DHCP mode
day 1 00:00:02 [SYSTEM]: WLAN[2.4G], Channel = 11
day 1 00:00:02 [SYSTEM]: WLAN[2.4G], CountryRegion = 0
```

Click **Save** to store data to a log file.

Click **Clear** to empty the log file.


Click **Refresh** to empty the log file and begin updating it with new data.



6.1.5 Monitoring Bandwidth Usage

View bandwidth usage for LAN and WLAN traffic.


Displays the bandwidth usage for the WLAN and LAN networks.

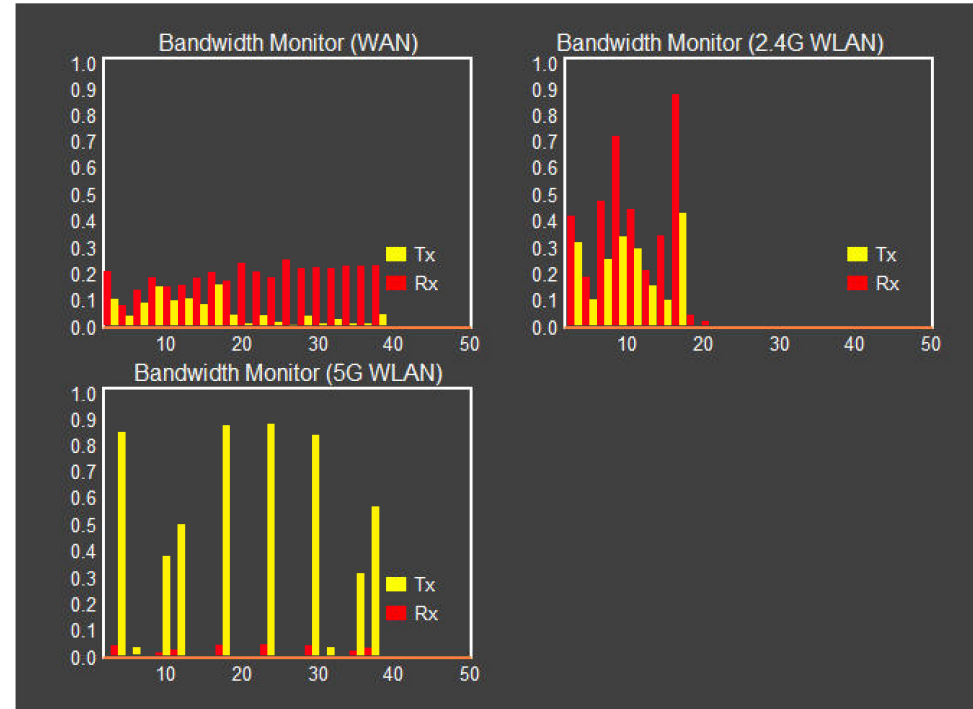

6.1.6 Configuring Languages

The router supports multiple languages for using the graphical user interface (GUI).

Select the language to use from the dropdown list.

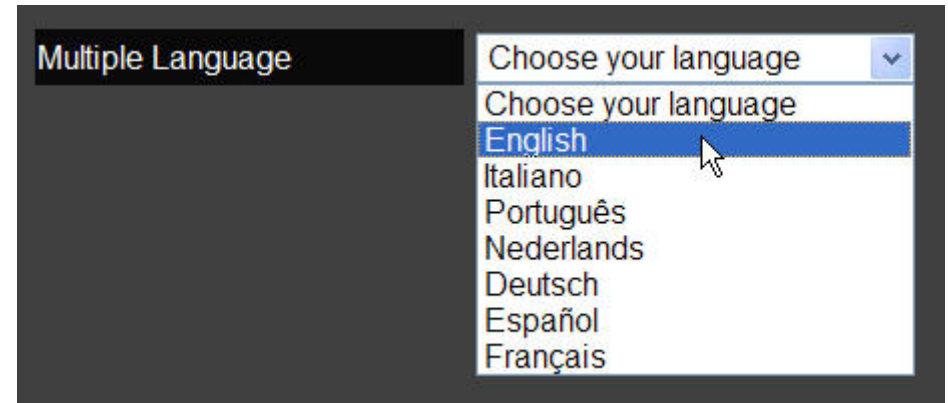

6.2 Configuring WAN Settings

6.2.1 View WAN Status

The WAN Settings, or Internet Status, page shows a summary of the current Internet connection information. This section is also shown on the System Status page.

WAN Settings

- **Attain IP Protocol** Display the IP Protocol type used for the ESR600H/ESR750H (**Dynamic IP Address** or **Static IP Address**).
- **IP Address** The router's WAN IP address.
- **Subnet Mask** The router's WAN subnet mask.
- **Default Gateway** The ISP's gateway IP address.
- **MAC Address** The router's WAN MAC address. The router's MAC address is located on the label on the back side of the router.
- **Primary DNS** The primary DNS address of an ISP provider.
- **Secondary DNS:** The secondary DNS address of an ISP provider.

WAN Settings

| Attain IP Protocol | Dynamic IP Address |
|--------------------|--------------------|
| IP Address | --- |
| Subnet Mask | --- |
| Default Gateway | --- |
| MAC Address | 00:AA:BB:CC:DD:11 |
| Primary DNS | --- |
| Secondary DNS | --- |

6.2.2 Configuring Dynamic IP

Dynamic IP addressing assigns a different IP address each time a device connects to an ISP service provider. The service is most commonly used by ISP cable providers.

Dynamic IP

- **Host name** Assign a name for the internet connection type. This field can be blank.
- **MTU** Configure the maximum transmission unit (MTU). The MTU specifies the largest packet size permitted for an internet transmission. The factory default MTU size for Dynamic IP (DHCP) is 1500. The MTU size can be set between 512 and 1500.
- **Clone MAC** Enter the MAC address of the devices' network interface card (NIC) in the MAC address field and click `Clone MAC`.

| | |
|-------------|---|
| Hostname | <input type="text"/> |
| MTU | <input type="text" value="1500"/> (512<=MTU Value <=1500) |
| MAC Address | <input type="text" value="00:00:00:00:00:00"/> <input type="button" value="Clone MAC"/> |

Note:

Some ISP providers require registering the MAC address of the network interface card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the router's MAC address with the MAC address of the device's NIC.

DNS Servers

The DNS server translates a domain or website name into a uniform resource locator (URL), or Internet address. There are two options to choose from: From ISP or User-Defined. Select `From ISP` to retrieve the DNS address value from the ISP; select `User-Defined` to assign a custom DNS server address.

- **DNS Server** Configure the type of DNS server. (Default = **From ISP**)
- **First DNS Server** Configure the first, or primary, DNS server.
- **Second DNS Server:** Configure the second, or secondary, DNS server.

Click `Apply` to save the settings.

| DNS Servers | |
|-------------------|---|
| DNS Servers Type | From ISP <input type="button" value="v"/> |
| First DNS Server | 0.0.0.0 |
| Second DNS Server | 0.0.0.0 |

| | |
|--------------------------------------|---------------------------------------|
| <input type="button" value="Apply"/> | <input type="button" value="Cancel"/> |
|--------------------------------------|---------------------------------------|

6.2.3 Configuring Static IP

Setting a static IP address allows an administrator to set a specific IP address for the router and guarantees that it can not be assigned a different address.

Static IP

- **IP Address** The router's WAN IP address.
- **Subnet Mask** The router's WAN subnet mask.
- **Default Gateway** The router's gateway address.
- **Primary DNS** The primary DNS server address.
- **Secondary DNS** The secondary DNS server address.
- **MTU** The maximum transmission unit (MTU) specifies the largest packet size permitted for an internet transmission. The factory default MTU size for static IP is 1500. The MTU size can be set between 512 and 1500.

Click `Apply` to save the settings.

| | |
|-----------------|---|
| IP Address | <input type="text" value="172.1.1.1"/> |
| IP Subnet Mask | <input type="text" value="255.255.0.0"/> |
| Default Gateway | <input type="text" value="172.1.1.254"/> |
| Primary DNS | <input type="text"/> |
| Secondary DNS | <input type="text"/> |
| MTU | <input type="text" value="1500"/> (512<=MTU Value <=1500) |

| | |
|--------------------------------------|---------------------------------------|
| <input type="button" value="Apply"/> | <input type="button" value="Cancel"/> |
|--------------------------------------|---------------------------------------|

6.2.4 Configuring PPPoE

Point-to-Point Protocol over Ethernet (PPPoE) is used mainly by ISPs that provide DSL modems to connect to the Internet.

- **Login** Enter the username assigned by an ISP.
- **Password** Enter the password assigned by an ISP.
- **Service Name** Enter the service name of an ISP (optional).
- **MTU** Enter the maximum transmission unit (MTU). The MTU specifies the largest packet size permitted for an internet transmission (PPPoE default: 1492). The MTU size can be set between 512 and 1492.
- **Authentication Type** Select the type of authentication provided by the ISP: `Auto`, `PAP`, or `CHAP`. If unsure of the best setting, select `Auto`.

| | |
|---------------------|---|
| Username | <input type="text"/> |
| Password | <input type="password"/> |
| Service Name | <input type="text"/> |
| MTU | <input type="text" value="1492"/> (512<=MTU Value <=1492) |
| Authentication Type | Auto <input type="button" value="v"/> |

- **Type** Configure the connection type between the router and the ISP. Choose between `Keep Connection`, `Automatic Connection` or `Manual Connection`.
- **Idle Timeout** Configure the maximum idle time (1 to 1,000 minutes) allowed for an inactive connection.
- **Clone MAC** Enter the MAC address of the devices' network interface card (NIC) in the MAC address field and click `Clone MAC`.

Note:

Some ISP providers require registering the MAC address of the network interface card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the router's MAC address with the MAC address of the device's NIC.

Click `Apply` to save the settings or `Cancel` to discard the changes.

| | | |
|--------------|-------------------|-------------------|
| Type | Keep Connection | ▼ |
| Idle Timeout | 10 | (1-1000 Minutes) |
| MAC Address | 00:00:00:00:00:00 | Clone MAC |

| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|


6.2.5 Configuring PPTP

The point-to-point tunnelling protocol (PPTP) is used in association with virtual private networks (VPNs). There are two parts to a PPTP connection: the WAN interface settings and the PPTP settings.

WAN Interface Settings

Dynamic IP Address

- **WAN Interface Type** Select `Dynamic IP Address` to assign an IP address provided by an ISP.
- **Hostname** Enter a host name of an ISP. (optional).
- **Clone MAC** Enter the MAC address of the device's network interface card (NIC) in the MAC address field and click `Clone MAC`.

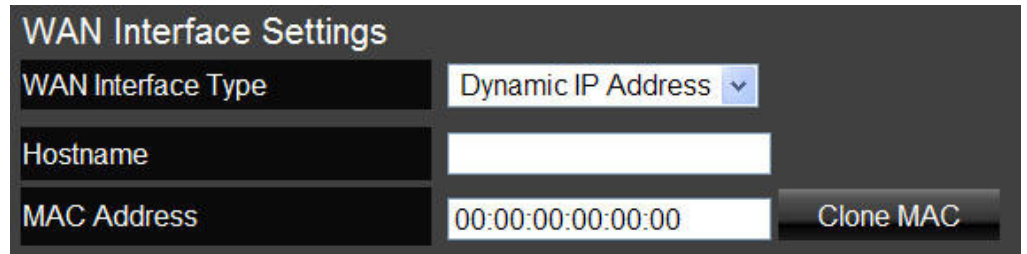


| WAN Interface Settings | |
|------------------------|--|
| WAN Interface Type | Dynamic IP Address ▾ |
| Hostname | <input type="text"/> |
| MAC Address | 00:00:00:00:00:00 <input type="button" value="Clone MAC"/> |

Note:

Some ISP providers require registering the MAC address of the network interface card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the router's MAC address with the MAC address of the device's NIC.

Static IP Address

- **WAN Interface Type** Select `Static IP Address` to assign a specific IP address for the router.
- **My IP Address** Enter the custom IP address.
- **My Subnet Mask** Enter the custom subnet mask.
- **Gateway IP Address** Enter the custom gateway IP address.

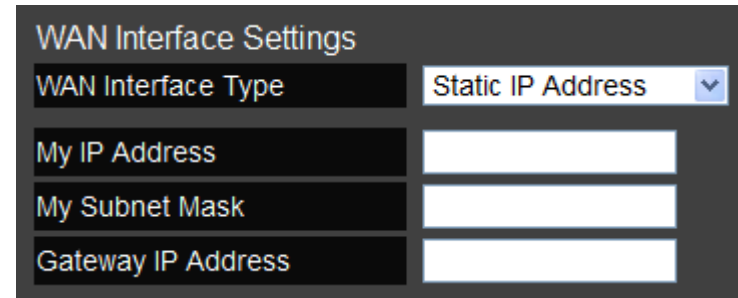

The screenshot shows a configuration window titled "WAN Interface Settings". It contains four rows of settings:

| WAN Interface Settings | |
|------------------------|--|
| WAN Interface Type | Static IP Address <input type="button" value="v"/> |
| My IP Address | <input type="text"/> |
| My Subnet Mask | <input type="text"/> |
| Gateway IP Address | <input type="text"/> |

PPTP Settings

- **User Name** Enter the username assigned by your ISP.
- **Password:** Enter the password assigned by your ISP.
- **Service IP Address:** Enter the PPTP server IP address provided by your ISP.
- **Connection ID:** Enter the connection ID provided by your ISP (optional).
- **MTU** Enter the maximum transmission unit (MTU). The MTU specifies the largest packet size (Default: 1462) permitted for an internet transmission. The MTU size can be set between 512 and 1492.
- **Type** Configure the connection type between the router and the ISP. Choose between `Keep Connection`, `Automatic Connection` or `Manual Connection`.
- **Idle Timeout** Configure the maximum amount of time, in minutes, allowed for inactive Internet connection. The Internet connection will be dropped when the maximum idle time is reached. Valid values are between one and one thousand.

Click `Apply` to save the settings or `Cancel` to discard the changes.

| PPTP Settings | |
|--------------------|---|
| Username | <input type="text"/> |
| Password | <input type="password"/> |
| Service IP Address | <input type="text"/> |
| Connection ID | <input type="text" value="0"/> (Optional) |
| MTU | <input type="text" value="1462"/> (512<=MTU Value <=1492) |
| Type | <input type="text" value="Keep Connection"/> ▼ |
| Idle Timeout | <input type="text" value="10"/> (1-1000 Minutes) |

| | |
|--------------------------------------|---------------------------------------|
| <input type="button" value="Apply"/> | <input type="button" value="Cancel"/> |
|--------------------------------------|---------------------------------------|


6.2.6 Configuring L2TP

The layer 2 tunneling protocol (L2TP) is used in association with virtual private networks (VPNs). There are two parts to a L2TP connection: the WAN interface settings and the L2TP settings.

WAN Interface Settings

Dynamic IP Address

- **WAN Interface Type** Select `Dynamic IP Address` to assign an IP address provided by an ISP.
- **Hostname** Enter a host name of an ISP (optional).
- **Clone MAC** Enter the MAC address of the device's network interface card (NIC) in the MAC address field and click `Clone MAC`.

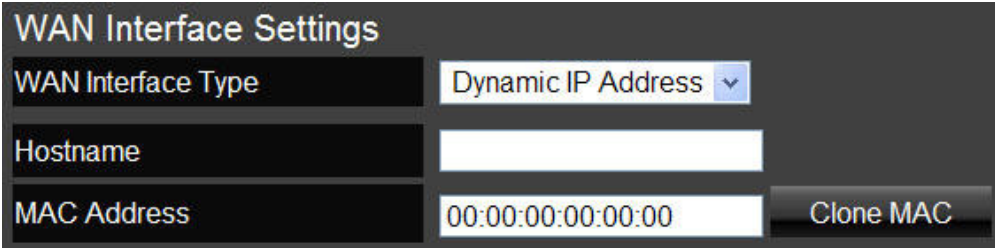


| WAN Interface Settings | |
|------------------------|--|
| WAN Interface Type | Dynamic IP Address ▾ |
| Hostname | <input type="text"/> |
| MAC Address | 00:00:00:00:00:00 <input type="button" value="Clone MAC"/> |

Note:

Some ISP providers require registering the MAC address of the network interface card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the router's MAC address with the MAC address of the device's NIC.

Static IP Address

- **WAN Interface Type** Select `Static IP Address` to assign a specific IP address for the router.
- **My IP Address** Enter the custom IP address.
- **My Subnet Mask** Enter the custom subnet mask.
- **Gateway IP Address** Enter the custom gateway IP address.

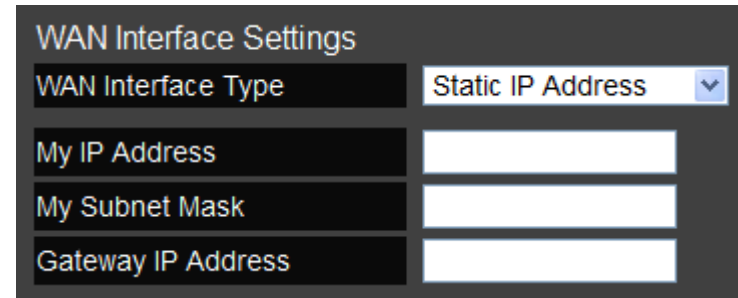

The screenshot shows a configuration window titled "WAN Interface Settings". It contains four rows of settings:

| WAN Interface Settings | |
|------------------------|--|
| WAN Interface Type | Static IP Address <input type="button" value="v"/> |
| My IP Address | <input type="text"/> |
| My Subnet Mask | <input type="text"/> |
| Gateway IP Address | <input type="text"/> |

L2TP Settings

- **User Name** Enter the username assigned by an ISP.
- **Password:** Enter the password assigned by an ISP.
- **Service IP Address:** Enter the L2TP server IP address provided by an ISP.
- **Connection ID:** Enter the connection ID provided by an ISP (optional).
- **MTU** Enter the maximum transmission unit (MTU). The MTU specifies the largest packet size (Default: 1460) permitted for an internet transmission. The MTU size can be set between 512 and 1492.
- **Type** Configure the connection type between the router and the ISP. Choose between `Keep Connection`, `Automatic Connection` or `Manual Connection`.
- **Idle Timeout** Configure the maximum amount of time, in minutes, allowed for inactive Internet connection. The Internet connection will be dropped when the maximum idle time is reached. Valid values are between one and one thousand.

Click `Apply` to save the settings or `Cancel` to discard the changes.


| L2TP Settings | | |
|--------------------|--|-------------------------|
| Username | <input type="text"/> | |
| Password | <input type="password"/> | |
| Service IP Address | <input type="text"/> | |
| MTU | <input type="text" value="1460"/> | (512<=MTU Value <=1492) |
| Type | Keep Connection <input type="button" value="v"/> | |
| Idle Timeout | <input type="text" value="10"/> | (1-1000 Minutes) |

| | |
|--------------------------------------|---------------------------------------|
| <input type="button" value="Apply"/> | <input type="button" value="Cancel"/> |
|--------------------------------------|---------------------------------------|

6.3 Wireless 2.4G LAN Setup

6.3.1 Configuring Basic Settings

- **Radio** Enable or disable the wireless radio. If the wireless radio is disabled, wireless access points are not available.
- **Mode** Select the wireless operating mode for the router. Two modes are available: Access Point or Wireless Distribution System (WDS) mode.
 - **AP** Provides a connection access point for wireless devices.
 - **WDS** Allows the wireless network to be expanded using multiple access points without wired connections.

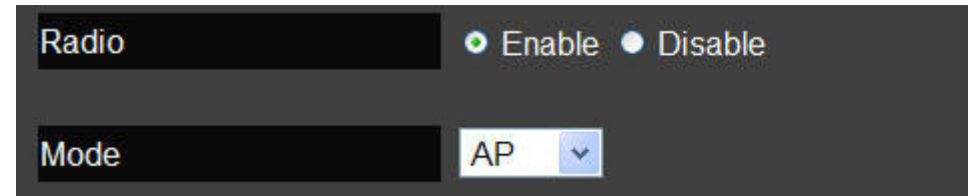

Access Point Mode

Configure the wireless settings of the router in access point mode.

- **Band:** Select a wireless standard for the network from the following options:
 - 2.4 GHz (B)
 - 2.4 GHz (G)
 - 2.4 GHz (N)
 - 2.4 GHz (B+G)
 - 2.4 GHz (B+G+N)
- **Enable SSID#** Select the number of wireless groups, between one and four, available on the network.
- **SSID[#]** Enter the name of the wireless network(s).
- **Auto Channel** Enable or disable having the router automatically select a channel for the wireless network. Auto channel is enabled by default. Select disable to manually assign a specific channel. (Default = **Disable**)
 - **Check Channel Time** When auto channel is enabled, select time period that the system checks the appropriate channel for the router.
 - **Channel** When auto channel is disabled, select a channel to assign to the wireless network. Valid value are from one to eleven in the US and one to thirteen in the EU.

| | |
|--------------|-------------------------|
| Band | 2.4 GHz (802.11b/g/n) ▼ |
| Enable SSID# | 1 ▼ |
| SSID1 | EnGeniusCCDD10 |

| | |
|--------------------|---|
| Auto Channel | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Check Channel Time | Half Day ▼ |

| | |
|--------------|---|
| Auto Channel | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| Channel | 11 ▼ |

Wireless Distribution System Mode

Configure the router's wireless settings in WDS mode.

- **Channel** Select a channel to assign to the wireless network. Valid values are from one to eleven in the US and one to thirteen in the EU.
- **MAC Address [#]** Enter the MAC address(es) for the wireless access point(s) that are part of the WDS.
- **WDS Data Rate** Select the data rate for the WDS.
- **Set Security** Click `Set Security` to display the WDS security settings screen. For security configuration settings, refer to “WDS Security Settings Screen” on page 6-28.

Click `Apply` to save the settings or `Cancel` to discard changes.

| | |
|---------------|--------------|
| Channel | 11 ▾ |
| MAC Address 1 | 000000000000 |
| MAC Address 2 | 000000000000 |
| MAC Address 3 | 000000000000 |
| MAC Address 4 | 000000000000 |
| WDS Data Rate | 300M ▾ |
| Set Security | Set Security |

| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

WDS Security Settings Screen

Select the type of WDS encryption (Disable, WEP or WPA Pre-Shared Key) for the wireless network.

Wired Equivalent Privacy (WEP)

- **Key Length** Select between 64-bit and 128-encryption.
- **Key Format** Select the type of characters used for the WEP Key: ASCII (5 characters) or Hexadecimal (10 characters).
- **Default Key** Select the default encryption key for wireless transactions.
- **Encryption Key [#]** Enter the encryption key(s) used to encrypt the data packets during data transmission.

Click **Apply** to save the settings or **Cancel** to discard changes.

This page allows you setup the WDS security. The value depends on your AP Security settings.

| | |
|--------------------|----------------------|
| Encryption : | WEP |
| Key Length : | 64-bit |
| Key Format : | ASCII (5 characters) |
| Default key : | Key 1 |
| Encryption Key 1 : | <input type="text"/> |
| Encryption Key 2 : | <input type="text"/> |
| Encryption Key 3 : | <input type="text"/> |
| Encryption Key 4 : | <input type="text"/> |

Apply **Cancel**

Wi-Fi Protected Access (WPA) Pre-Shared Key

- **WPA Type** Select the type of WPA.
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Government standard packet encryption which is stronger than TKIP.
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
 - **Pre-Shared Key Type** Select the type of pre-shared key as `Passphrase` (ASCII) or `Hexadecimal`.
 - **Pre-Shared Key** Enter the pre-shared Key value.
- Click `Apply` to save the settings or `Cancel` to discard changes.

This page allows you setup the WDS security. The value depends on your AP Security settings.

| | |
|-------------------------|--|
| Encryption : | WPA Pre-Shared key ▾ |
| WPA Type : | <input checked="" type="radio"/> WPA(TKIP) <input type="radio"/> WPA2(AES) |
| Pre-Shared Key Format : | Passphrase ▾ |
| Pre-Shared Key : | <input type="text"/> |

6.3.2 Configuring Advanced Settings

Advanced settings parameters available on the router.



WARNING!

Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

- **Fragment Threshold** Enter the maximum size of a packet during data transmission. A value too low could lead to low performance.
- **RTS Threshold** Enter the RTS threshold. If the packet size is smaller than the RTS threshold, the ESR600H/ESR750H does not use RTS/CTS to send the data packet.
- **Beacon Interval** Enter the beacon interval. This is the amount of time that the ESR600H/ESR750H sets to synchronize the network.
- **Delivery Traffic Indication Message (DTIM) Period** Enter the DTIM period. The DTIM is a countdown period informing clients of the next point of broadcast and multi-cast of messages over the network. Valid values are between 1 and 255.

| | | |
|--------------------|------|--------------|
| Fragment Threshold | 2346 | (256–2346) |
| RTS Threshold | 2347 | (1-2347) |
| Beacon Interval | 100 | (20-1024 ms) |
| DTIM Period | 1 | (1-255) |

- **N Data Rate** Select the N data rate. This is the rate in which the ESR600H/ESR750H will transmit data packets to wireless N compatible devices.
- **Channel Bandwidth** Select the channel bandwidth. The factory default is `Auto 20/40MHz`. The default setting provides the best performance by auto selecting channel bandwidth.
- **Preamble Type** Select the preamble type. `Long Preamble` provides better LAN compatibility and `Short Preamble` provides better wireless performance.
- **CTS Protection** Select the type of CTS protection. Using CTS Protection can lower the data collisions between Wireless B and Wireless G devices and lower data throughput.
- **Tx Power** Select the wireless signal strength level. Valid values are between 10% and 100%.

Click `Apply` to save the settings or `Cancel` to discard changes.

| | |
|-------------------|---|
| N Data Rate | Auto |
| Channel Bandwidth | <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 20 MHz |
| Preamble Type | <input checked="" type="radio"/> Long Preamble <input type="radio"/> Short Preamble |
| CTS Protection | <input checked="" type="radio"/> Auto <input type="radio"/> Always <input type="radio"/> None |
| Tx Power | 100 % |


| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

6.3.3 Configuring Security

Enable security options on the wireless network to prevent intrusions to systems on the wireless network.

- **SSID Selection** Select the wireless network group to change the wireless security settings for.
- **Broadcast SSID** Enable or disable broadcast SSID. Choose whether or not the wireless group is visible to other members.
- **Wi-Fi Multimedia (WMM)** Enable or disable quality of service (QoS) to optimize the streaming for bandwidth sensitive data such as HDTV video streaming, online gaming, VoIP, videoconferencing, and etc.
- **Encryption** Select the encrypt type for the router.

Click `Apply` to save the settings.

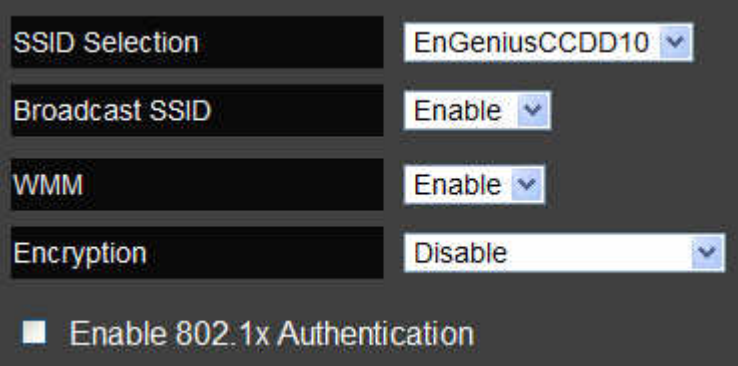

| | |
|---|----------------|
| SSID Selection | EnGeniusCCDD10 |
| Broadcast SSID | Enable |
| WMM | Enable |
| Encryption | Disable |
| <input type="checkbox"/> Enable 802.1x Authentication | |



| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

Encryption Type

Wired Equivalent Privacy (WEP)

- **Authentication Type** Select the type of authentication.
 - **Open System** Wireless stations can associate with the ESR600H/ESR750H without WEP encryption
 - **Shared Key** Devices must provide the corresponding WEP key(s) when connecting to the ESR600H/ESR750H.
 - **Auto**
- **Key Length** Select between 64-bit and 128-encryption.
- **Key Type** Select the type of characters used for the WEP Key: ASCII (5 characters) or Hexadecimal (10 characters).
- **Encryption Key [#]** Enter the encryption key(s) used to encrypt the data packets during data transmission.

Click `Apply` to save the settings.

| | |
|---|--|
| Encryption | WEP |
| Authentication Type | <input type="radio"/> Open System <input type="radio"/> Shared Key <input checked="" type="radio"/> Auto |
| Key Length | 64-bit |
| Key Type | ASCII (5 characters) |
| Default key | Key 1 |
| Encryption Key 1 | ***** |
| Encryption Key 2 | ***** |
| Encryption Key 3 | ***** |
| Encryption Key 4 | ***** |
| <input type="checkbox"/> Enable 802.1x Authentication | |

| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

Encryption: Wi-Fi Protected Access (WPA) Pre-Shared Key

- **WPA Type** Select the type of WPA.
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Government standard packet encryption which is stronger than TKIP.
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
- **Pre-Shared Key Type** Select the type of pre-shared key as `Passphrase` (ASCII) or `Hexadecimal`.
- **Pre-Shared Key** Enter the pre-shared Key value.

Click `Apply` to save the settings.



The screenshot shows a configuration window for WPA Pre-Shared Key. It has a dark background with white text. The 'Encryption' dropdown is set to 'WPA Pre-Shared key'. The 'WPA Type' section has three radio buttons: 'WPA(TKIP)' (selected), 'WPA2(AES)', and 'WPA2 Mixed'. The 'Pre-Shared Key Type' dropdown is set to 'Passphrase'. The 'Pre-Shared Key' field is an empty white text box.




The screenshot shows two buttons: 'Apply' and 'Cancel', both in a dark grey box with white text.

Encryption: WPA RADIUS

Use a RADIUS server to authenticate wireless stations and provide a session key to encrypt data during communications.

- **WPA Type** Select the type of Wireless Protected Access (WPA).
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Protects unauthorized access by verifying network users (encryption is stronger than TKIP).
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
- **RADIUS Server IP Address:** Enter the IP address of the server.
- **RADIUS Server Port:** Enter the port number of the server.
- **RADIUS Server Password:** Enter the password of the server.

Click `Apply` to save the settings or `Cancel` to discard changes.

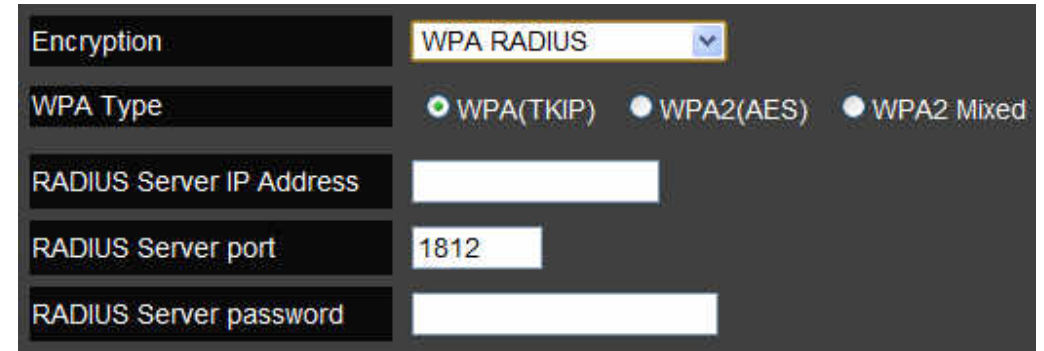

The screenshot shows a configuration dialog box with a dark background and light text. It contains the following fields and options:

- Encryption:** A dropdown menu set to "WPA RADIUS".
- WPA Type:** Three radio buttons: "WPA(TKIP)" (selected), "WPA2(AES)", and "WPA2 Mixed".
- RADIUS Server IP Address:** An empty text input field.
- RADIUS Server port:** A text input field containing the number "1812".
- RADIUS Server password:** An empty text input field.



The screenshot shows two buttons: "Apply" and "Cancel", both with a dark background and light text.

6.3.4 Configuring Filter



WARNING!

Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

When `Enable Wireless Access Control` is selected, only wireless clients with MAC addresses listed in the table are allowed to connect to the wireless network.

Enable Wireless Access Control

- **Description** Enter a description of the device allowed to connect to the network.
- **MAC Address** Enter the MAC address of the wireless device.

| <input type="checkbox"/> Enable Wireless Access Control | |
|---|----------------------|
| Description | MAC Address |
| <input type="text"/> | <input type="text"/> |

Click `Add` to append a new device to the list or `Reset` to discard changes.

MAC Address Filtering Table

- **No.** The sequence number of the device.
- **Description** The description of the device.
- **MAC Address** The MAC address of the device.
- **Select** Indicates the device(s) that can have actions performed on them.

Click `Delete Selected` to remove selected devices from the list.

Click `Delete All` to remove all devices from the list.

Click `Reset` to discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.



| No. | Description | MAC Address | Select |
|-----|-------------|-------------|--------|
|-----|-------------|-------------|--------|

`Delete Selected` `Delete All` `Reset`



6.3.5 Configuring Wi-Fi Protected Setup

Wi-Fi protected setup (WPS) is an easy way to allow wireless clients to connect to the ESR600H/ESR750H. Automate the connection between the device and the ESR600H/ESR750H using a button or a PIN.

- **WPS** Enable or disable WPS.
- **WPS Current Status** A notification of whether or not wireless security is configured.
- **Self Pin Code** An 8-digit PIN which is required when configuring the router for the first time in Windows 7 or Vista.
- **SSID** The name of the wireless network.
- **Authentication Mode** The current security settings for the corresponding SSID.
- **Passphrase Key** A randomly generated key created by the ESR600H/ESR750H during WPS.
- **WPS via Push Button** Click `Start to Process` to activate WPS.
- **WPS via PIN** Enter the PIN of a wireless device click `Start to Process` to activate WPS.

The screenshot displays the WPS configuration interface. At the top, the 'WPS' section is checked and labeled 'Enable'. Below this is the 'Wi-Fi Protected Setup Information' section, which includes the following fields and buttons:


| | | |
|---------------------|-------------------------------|------------------------------------|
| WPS Current Status | Configured | <code>Release Configuration</code> |
| Self Pin Code | 34259368 | |
| SSID | EnGeniusCCDD10 | |
| Authentication Mode | Disable | |
| Passphrase Key | <input type="text"/> | |
| WPS Via Push Button | <code>Start to Process</code> | |
| WPS via PIN | <input type="text"/> | <code>Start to Process</code> |

6.3.6 Configuring Client List

View the 2.4G wireless devices currently connected to the ESR600H/ESR750H.

- **Interface** The type of network connected to the device.
- **MAC Address** The MAC address of device connected to network.
- **Signal** The signal strength of the device connected to the network.
- **Idle Time** The amount of time the connected device has not been active on the network.

Click `Refresh` to refill the list with currently connected devices.

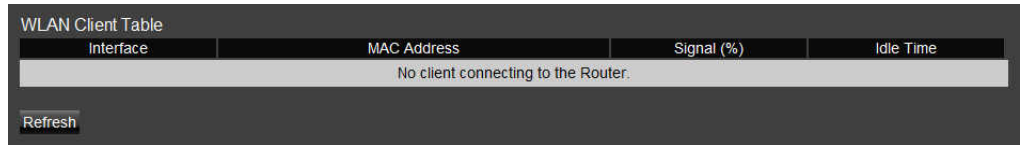


| Interface | MAC Address | Signal (%) | Idle Time |
|-------------------------------------|-------------|------------|-----------|
| No client connecting to the Router. | | | |

Refresh

6.4 Wireless LAN 5G Setup

6.4.1 Configuring Basic Settings

- **Radio** Enable or disable the wireless radio. If the wireless radio is disabled, wireless access points are not available.
- **Mode** Select the wireless operating mode for the router. Two modes are available: Access Point or Wireless Distribution System (WDS) mode.
 - **AP** Provides an access point for wireless devices to connect to.
 - **WDS** Access points expand the wireless coverage area by connecting to each other and acting as one.

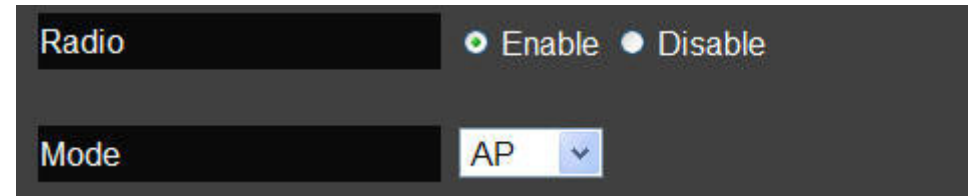

The screenshot shows a configuration interface with two settings:

- Radio**: A radio button control where the **Enable** option is selected (indicated by a green dot) and the **Disable** option is unselected (indicated by a grey dot).
- Mode**: A dropdown menu currently displaying **AP** with a downward arrow icon to its right.

Access Point Mode

Configure the wireless settings of the router in access point mode.

- **Band:** Select a wireless standard for the network from the following options:
 - 5 GHz (802.11 a)
 - 5 GHz (802.11 n)
 - 5 GHz (802.11 a/n)
- **Enable SSID#** Select the number of wireless groups, between one and four, available on the network.
- **SSID[#]** Enter the name of the wireless network(s).
- **Auto Channel** Enable or disable having the router automatically select a channel for the wireless network. Auto channel is enabled by default. Select disable to manually assign a specific channel. (Default = **Disable**)
 - **Check Channel Time** When auto channel is enabled, select time period that the system checks the appropriate channel for the router.
 - **Channel** When auto channel is disabled, select a channel to assign to the wireless network.

| | |
|---------------|---------------------|
| Band | 5 GHz (802.11a/n) ▼ |
| Enabled SSID# | 1 ▼ |
| SSID1 | EnGeniusCCDD14 |

| | |
|--------------------|---|
| Auto Channel | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Check Channel Time | Half Day ▼ |

| | |
|--------------|---|
| Auto Channel | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| Channel | 149 5.745 GHz ▼ |

Wireless Distribution System Mode

Configure the wireless settings of the router in WDS mode.

- **Channel** Select a channel to assign to the wireless network.
- **MAC Address [#]** Enter the MAC address(es) for the wireless access point(s) that are part of the WDS.
- **WDS Data Rate** Select the data rate for the WDS.
- **Set Security** Click `Set Security` to display the WDS security settings screen. For security configuration settings, refer to “WDS Security Settings Screen” on page 6-43.

Click `Apply` to save the settings or `Cancel` to discard changes.

| | |
|---------------|-----------------|
| Channel | 149 5.745 GHz ▾ |
| MAC Address 1 | 000000000000 |
| MAC Address 2 | 000000000000 |
| MAC Address 3 | 000000000000 |
| MAC Address 4 | 000000000000 |
| Set Security | Set Security |

| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

WDS Security Settings Screen

Select the type of WDS encryption (Disable, WEP or WPA Pre-Shared Key) for the wireless network.

Wired Equivalent Privacy (WEP)

- **Key Length** Select between 64-bit and 128-encryption.
- **Key Format** Select the type of characters used for the WEP Key: ASCII (5 characters) or Hexadecimal (10 characters).
- **Default Key** Select the default encryption key for wireless transactions.
- **Encryption Key [#]** Enter the encryption key(s) used to encrypt the data packets during data transmission.

Click **Apply** to save the settings or **Cancel** to discard changes.

This page allows you setup the WDS security. The value depends on your AP Security settings.

| | |
|--------------------|----------------------|
| Encryption : | WEP |
| Key Length : | 64-bit |
| Key Format : | ASCII (5 characters) |
| Default key : | Key 1 |
| Encryption Key 1 : | <input type="text"/> |
| Encryption Key 2 : | <input type="text"/> |
| Encryption Key 3 : | <input type="text"/> |
| Encryption Key 4 : | <input type="text"/> |

Wi-Fi Protected Access (WPA) Pre-Shared Key

- **WPA Type** Select the type of WPA.
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Government standard packet encryption which is stronger than TKIP.
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
 - **Pre-Shared Key Type** Select the type of pre-shared key as `Passphrase` (ASCII) or `Hexadecimal`.
 - **Pre-Shared Key** Enter the pre-shared Key value.
- Click `Apply` to save the settings or `Cancel` to discard changes.

This page allows you setup the WDS security. The value depends on your AP Security settings.

| | |
|-------------------------|--|
| Encryption : | WPA Pre-Shared key ▾ |
| WPA Type : | <input checked="" type="radio"/> WPA(TKIP) <input type="radio"/> WPA2(AES) |
| Pre-Shared Key Format : | Passphrase ▾ |
| Pre-Shared Key : | <input type="text"/> |

6.4.2 Configuring Advanced Settings

Advanced settings parameters available on the router.



WARNING!

Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

- **Fragment Threshold** Enter the maximum size of a packet during data transmission. A value too low could lead to low performance.
- **RTS Threshold** Enter the RTS threshold. If the packet size is smaller than the RTS threshold, the ESR600H/ESR750H will not use RTS/CTS to send the data packet.
- **Beacon Interval** Enter the beacon interval. This is the amount of time that the ESR600H/ESR750H will synchronize the network.
- **Delivery Traffic Indication Message (DTIM) Period** Enter the DTIM period. The DTIM is a countdown period informing clients of the next point of broadcast and multi-cast of messages over the network. Valid values are between 1 and 255.

| | | |
|--------------------|------|--------------|
| Fragment Threshold | 2346 | (256–2346) |
| RTS Threshold | 2347 | (1-2347) |
| Beacon Interval | 100 | (20-1024 ms) |
| DTIM Period | 1 | (1-255) |

- **Data Rate:** Select the data rate. This is the rate in which the ESR600H/ESR750H will transmit data packets to wireless devices.
- **N Data Rate** Select the N data rate. This is the rate in which the ESR600H/ESR750H will transmit data packets to wireless N compatible devices.
- **Channel Bandwidth** Select the channel bandwidth. The factory default is `Auto 20/40MHz`. The default setting provides the best performance by auto selecting channel bandwidth.
- **Preamble Type** Select the preamble type. `Long Preamble` provides better LAN compatibility and `Short Preamble` provides better wireless performance.
- **Tx Power** Select the wireless signal strength level. Valid values are between 10% and 100%.
- **Country Selection** Select the country where the wireless network is located.

Click `Apply` to save the settings or `Cancel` to discard changes.

| | |
|-------------------|---|
| Data Rate | Auto |
| N Data Rate | Auto |
| Channel Bandwidth | <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 20 MHz |
| Preamble Type | <input checked="" type="radio"/> Long Preamble <input type="radio"/> Short Preamble |

| | |
|-------------------|------------|
| Tx Power | 100 % |
| Country Selection | 158 TAIWAN |


| | |
|-------|--------|
| Apply | Cancel |
|-------|--------|

6.4.3 Configuring Security

Enable security options on the wireless network to prevent intrusions to systems on the wireless network.

- **SSID Selection** Select the wireless network group to change the wireless security settings for.
- **Broadcast SSID** Enable or disable broadcast SSID. Choose whether or not the wireless group is visible to other members.
- **Wi-Fi Multimedia (WMM)** Enable or disable quality of service (QoS) to optimize the streaming for bandwidth sensitive data such as HDTV video streaming, online gaming, VoIP, videoconferencing, and etc.
- **Encryption** Select the encrypt type for the router.

Click `Apply` to save the settings.

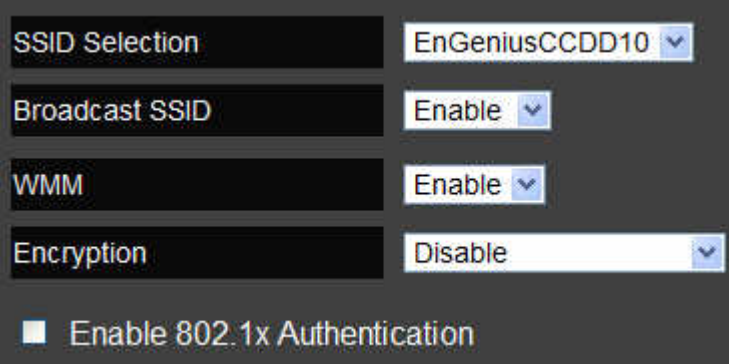

| | |
|----------------|----------------|
| SSID Selection | EnGeniusCCDD10 |
| Broadcast SSID | Enable |
| WMM | Enable |
| Encryption | Disable |

Enable 802.1x Authentication



Apply Cancel

Encryption Type

Wired Equivalent Privacy (WEP)

- **Authentication Type** Select the type of authentication.
 - **Open System** Wireless stations can associate with the ESR600H/ESR750H without WEP encryption
 - **Shared Key** Devices must provide the corresponding WEP key [up to 4] when connecting to the ESR600H/ESR750H.
 - **Auto** The ESR600H/ESR750H automatically generates a passphrase.
- **Key Length** Select between 64-bit and 128-encryption.
- **Key Type** Select the type of characters used for the WEP Key: ASCII (5 characters) or Hexadecimal (10 characters).
- **Encryption Key [#]** Enter the encryption key(s) used to encrypt the data packets during data transmission.

Click `Apply` to save the settings.

Note:

Do not use WEP type unless your device can not be upgraded to support WPA. Newer encryption types use stronger encryption than WEP.

The screenshot shows a configuration window for WEP encryption. The settings are as follows:

| | |
|---------------------|--|
| Encryption | WEP |
| Authentication Type | <input type="radio"/> Open System <input type="radio"/> Shared Key <input checked="" type="radio"/> Auto |
| Key Length | 64-bit |
| Key Type | ASCII (5 characters) |
| Default key | Key 1 |
| Encryption Key 1 | ***** |
| Encryption Key 2 | ***** |
| Encryption Key 3 | ***** |
| Encryption Key 4 | ***** |


At the bottom, there is a checkbox labeled "Enable 802.1x Authentication" which is currently unchecked.

Two buttons are shown: "Apply" and "Cancel".

Encryption: Wi-Fi Protected Access (WPA) Pre-Shared Key

- **WPA Type** Select the type of WPA.
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Government standard packet encryption which is stronger than TKIP.
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
- **Pre-Shared Key Type** Select the type of pre-shared key as `Passphrase` (ASCII) or `Hexadecimal`.
- **Pre-Shared Key** Enter the pre-shared Key value.

Click `Apply` to save the settings.

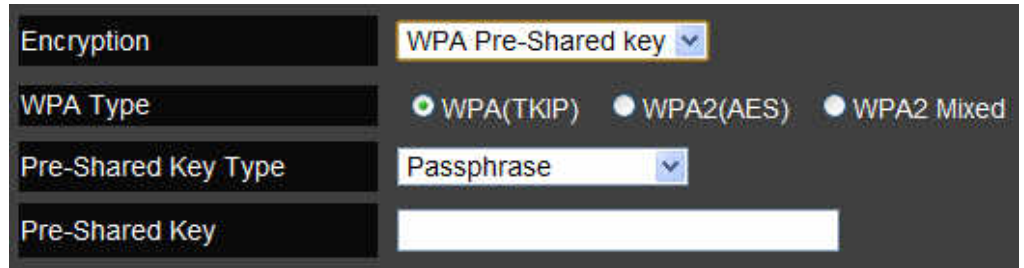

The screenshot shows a configuration window for WPA Pre-Shared Key. It has a dark background with white text. The 'Encryption' dropdown is set to 'WPA Pre-Shared key'. The 'WPA Type' section has three radio buttons: 'WPA(TKIP)' (selected), 'WPA2(AES)', and 'WPA2 Mixed'. The 'Pre-Shared Key Type' dropdown is set to 'Passphrase'. The 'Pre-Shared Key' field is empty.




The screenshot shows two buttons: 'Apply' and 'Cancel'.

Encryption: WPA RADIUS

Use a RADIUS server to authenticate wireless stations and provide a session key to encrypt data during communications.

- **WPA Type** Select the type of Wireless Protected Access (WPA).
 - **WPA Temporal Key Integrity Protocol (TKIP)** Generates a 128-bit key for each packet.
 - **WPA2 Advanced Encryption Standard (AES)** Protects unauthorized access by verifying network users (encryption is stronger than TKIP).
 - **WPA2 Mixed** Mixed mode allows device to try WPA2 first, and if that fails selects WPA type.
- **RADIUS Server IP Address:** Enter the IP address of the server.
- **RADIUS Server Port:** Enter the port number of the server.
- **RADIUS Server Password:** Enter the password of the server.

Click `Apply` to save the settings or `Cancel` to discard changes.

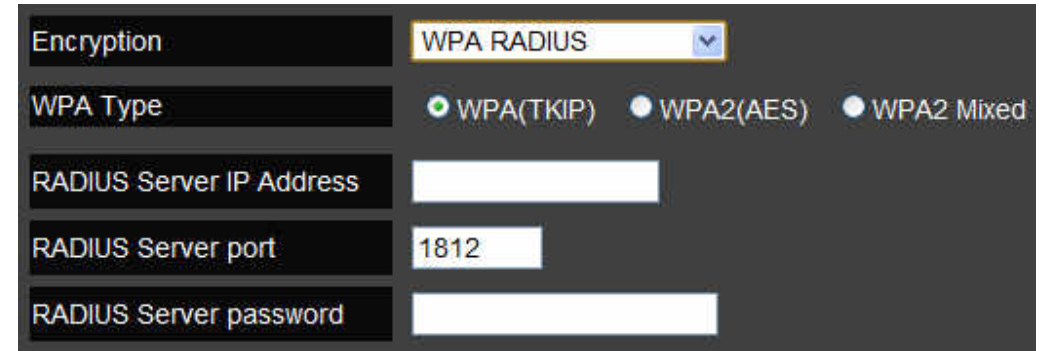

The screenshot shows a configuration dialog box for WPA RADIUS. It has a dark background with white text and input fields. The 'Encryption' dropdown is set to 'WPA RADIUS'. Under 'WPA Type', three radio buttons are visible: 'WPA(TKIP)' is selected, 'WPA2(AES)' is unselected, and 'WPA2 Mixed' is unselected. Below these are three input fields: 'RADIUS Server IP Address' (empty), 'RADIUS Server port' (containing '1812'), and 'RADIUS Server password' (empty).



The screenshot shows two buttons: 'Apply' and 'Cancel', both in a dark grey box with white text.

6.4.4 Configuring Filters



WARNING!

Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

When `Enable Wireless Access Control` is selected, only wireless clients with MAC addresses listed in the table are allowed to connect to the wireless network.

Enable Wireless Access Control

- **Description** Enter a description of the device allowed to connect to the network.
- **MAC Address** Enter the MAC address of the wireless device.

| <input type="checkbox"/> Enable Wireless Access Control | |
|---|----------------------|
| Description | MAC Address |
| <input type="text"/> | <input type="text"/> |

Click `Add` to append a new device to the list or `Reset` to discard changes.

MAC Address Filtering Table

- **No.** The sequence number of the device.
- **Description** The description of the device.
- **MAC Address** The MAC address of the device.
- **Select** Indicates the device(s) that can have actions performed on them.

Click `Delete Selected` to remove selected devices from the list.

Click `Delete All` to remove all devices from the list.

Click `Reset` to discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.



| No. | Description | MAC Address | Select |
|-----|-------------|-------------|--------|
|-----|-------------|-------------|--------|

`Delete Selected` `Delete All` `Reset`



6.4.5 Configuring Wi-Fi Protected Setup

Wi-Fi protected setup (WPS) is an easy way to allow wireless clients to connect to the ESR600H/ESR750H. Automate the connection between the device and the ESR600H/ESR750H using a button or a PIN.

- **WPS** Enable or disable WPS.
- **WPS Current Status** A notification of whether or not wireless security is configured.
- **Self Pin Code** An 8-digit PIN which is required when configuring the router for the first time in Windows 7 or Vista.
- **SSID** The name of the wireless network.
- **Authentication Mode** The current security settings for the corresponding SSID.
- **Passphrase Key** A randomly generated key created by the ESR600H/ESR750H during WPS.
- **WPS via Push Button** Click `Start to Process` to activate WPS.
- **WPS via PIN** Enter the PIN of a wireless device click `Start to Process` to activate WPS.

The screenshot displays the WPS configuration interface. At the top, the 'WPS' section is checked and labeled 'Enable'. Below this is the 'Wi-Fi Protected Setup Information' section, which includes the following fields and buttons:


| | | |
|---------------------|-------------------------------|------------------------------------|
| WPS Current Status | Configured | <code>Release Configuration</code> |
| Self Pin Code | 34259368 | |
| SSID | EnGeniusCCDD10 | |
| Authentication Mode | Disable | |
| Passphrase Key | <input type="text"/> | |
| WPS Via Push Button | <code>Start to Process</code> | |
| WPS via PIN | <input type="text"/> | <code>Start to Process</code> |

6.4.6 Configuring Client List

View the 5G wireless devices currently connected to the ESR600H/ESR750H.

- **Interface** The type of network connected to the device.
- **MAC Address** The MAC address of device connected to network.
- **Signal** The signal strength of the device connected to the network.
- **Idle Time** The amount of time the connected device has not been active on the network.

Click `Refresh` to refill the list with currently connected devices.

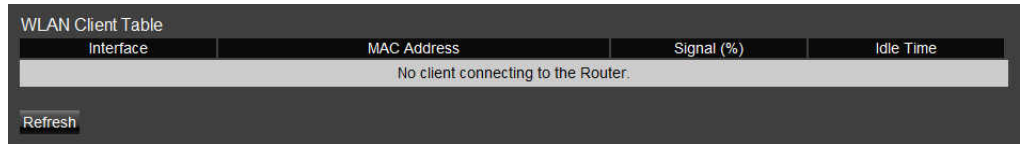

| Interface | MAC Address | Signal (%) | Idle Time |
|-------------------------------------|-------------|------------|-----------|
| No client connecting to the Router. | | | |

Refresh

6.5 Firewall Setup

6.5.1 Configure Basic Settings

The ESR600H/ESR750H firewall automatically detects and blocks Denial of Service (DoS) attacks. URL blocking, packet filtering and stateful packet inspection (SPI) are also supported. The details of the attack and the timestamp are recorded in the security log.

Firewall Enable or disable the firewall of the ESR600H/ESR750H.

Click `Apply` to save the settings or `Cancel` to discard changes.



6.5.2 Configuring Advanced Settings

The router supports VPN pass-through which allows virtual private networking (VPN) packets to pass through the firewall.

- **VPN Pass-through** Click `Select` to allow VPN packets to pass through the firewall.
- **VPN L2TP Pass-through** Click `Select` to allow an L2TP connection method over a VPN.
- **VPN PPTP Pass-through** Click `Select` to allow a PPTP connection method over a VPN.
- **VPN IPsec Pass-through** Click `Select` to allow an IPsec connection method over a VPN.

| Description | Select |
|------------------------|-------------------------------------|
| VPN L2TP Pass-Through | <input checked="" type="checkbox"/> |
| VPN PPTP Pass-Through | <input checked="" type="checkbox"/> |
| VPN IPsec Pass-Through | <input checked="" type="checkbox"/> |
| IPv6 Pass-Through | <input checked="" type="checkbox"/> |
| PPPoE Pass-Through | <input type="checkbox"/> |

Click `Apply` to save the settings or `Cancel` to discard changes.



Note:

VPN L2TP Pass-through, VPN PPTP Pass-through, and VPN IPsec Pass-through are enabled by factory default.

6.5.3 Configuring Demilitarized Zone

Configuring a device on the LAN as a demilitarized zone (DMZ) host allows unrestricted two-way Internet access for Internet applications, such as online video games, to run from behind the NAT firewall. The DMZ function allows the router to redirect all packets going to the WAN port IP address to a particular IP address on the LAN. The difference between the virtual server and the DMZ function is that a virtual server redirects a particular service or Internet application, such as FTP, to a particular LAN client or server, whereas a DMZ redirects all packets, regardless of the service, going to the WAN IP address to a particular LAN client or server.

A DMZ host allows a computer to have all its connections and ports completely open during data transmission.



WARNING!

The PC defined as a DMZ host is not protected by the firewall and is vulnerable to malicious network attacks. Do not store or manage sensitive information on the DMZ host.

- **Enable DMZ** Click `Enable DMZ` to activate DMZ functionality.
- **Local IP Address** Enter an IP address of a device on the LAN.

Click `Apply` to save the settings or `Cancel` to discard changes.

Enable DMZ

Local IP Address < Please select a PC. ▾

Apply Cancel

6.5.4 Configuring Denial of Service

To enable blocking of denial of service (DoS) attacks, select the DoS option in the Firewall section.

DoS attacks can flood the internet connection with the continuous transmission of data. Blocking these attacks ensures that the internet connection is always available.

WAN Settings

Block DoS Enable or disable blocking DoS attacks.

Click `Apply` to save the settings or `Cancel` to discard changes.



6.6 Virtual Private Network Setup

A Virtual Private Network (VPN) provides a secure connection between two remote locations or two users over the Internet. It provides authentication to securely encrypt data communicated between the two remote endpoints. The ESR600H/ESR750H supports up to 5 VPN tunnels, making it ideal for small-office and home-office (SOHO) users.



Note:

It is highly recommended to start with the Wizard to establish VPN tunnels. If you are an advanced user and would like to manually configure VPN Settings, select Profile Setting for advanced VPN setting.

6.6.1 Viewing Status

View the status of currently configured VPN tunnels.


- **No.** The sequence number of the VPN tunnel.
- **Name** The name of the VPN tunnel.
- **Type** The type of VPN tunnel.
- **Gateway/Peer IP Address** The VPN gateway or peer IP address.
- **Transmit Packets** The number of packets transmitted.
- **Received Packets** The number of packets received.
- **Uptime** The amount of time the VPN has been active.
- **Select** Indicates the device(s) that can have actions performed on them.

| No. | Name | Type | Gateway/Peer IP address | Transmit Packets | Received Packets | Uptime | Select |
|---------|------|------------|-------------------------|------------------|------------------|--------|--------|
| Connect | | Disconnect | | | | | |

6.6.2 Using the Virtual Private Network Wizard

The virtual private network (VPN) wizard guides the administrator through setting up a VPN over four different connection methods.


The VPN setup wizard introduction screen.

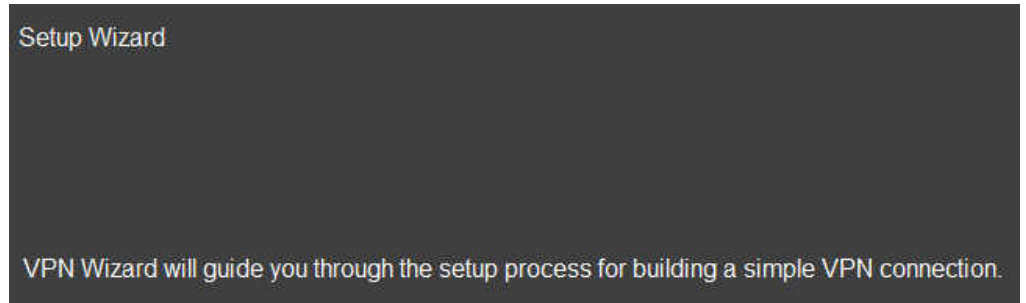

Click `Next` to continue.



Create a name for the VPN tunnel in the Name field.


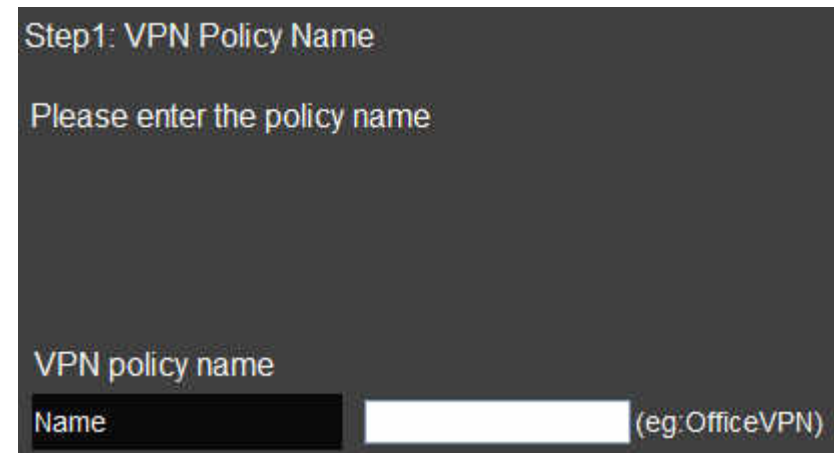


Click **Back** to return to the previous step;

Click **Next** to continue with the setup;

Click **Cancel** to stop the setup.

Select the type of VPN connection method to setup.

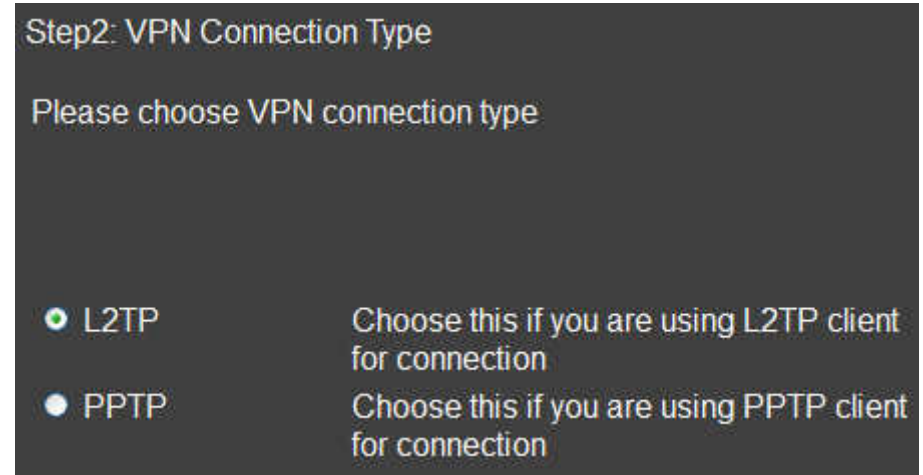

L2TP

- **User Name** Enter the user name used to connect to L2TP server
- **Password** Enter the password used to connect to L2TP server

VPN Server IP Settings

- **Server IP** Enter an IP address which is different from the router's LAN IP address.
For example:
ESR600H/ESR750H default IP: 192.168.0.1
Configure the IP address as 10.0.174.45
- **Remote IP Range** Enter an IP range under the same subnet as the above server IP.
For example:
Server IP address is 10.0.174.45
Remote IP range is 10.0.174.66 – 100

IMPORTANT:

The remote IP range should not include the server IP address to avoid a network conflict.

Click **Back** to return to the previous step.

Click **Next** to continue with the setup.

Click **Cancel** to stop the setup.

Step4: VPN L2TP Setting

Please enter the setting of L2TP

L2TP Settings

| | | |
|----------------|-----------|--------------|
| Authentication | MSCHAP_V2 | |
| User Name | admin | (eg: guest) |
| password | | (eg: nk9543) |



VPN Server IP Setting

| | | |
|-----------------|--|------------------------------|
| Server IP | | (eg: 10.0.174.45) |
| Remote IP Range | | - [] (eg: 10.0.174.66 -100) |

Back Next Cancel

If the setup is successful, the following screen is displayed.
To enable the VPN policy immediately, click the check box.

Click `Back` to return to the previous step.
Click `Apply` to save the settings and continue.
Click `Cancel` to stop the setup.

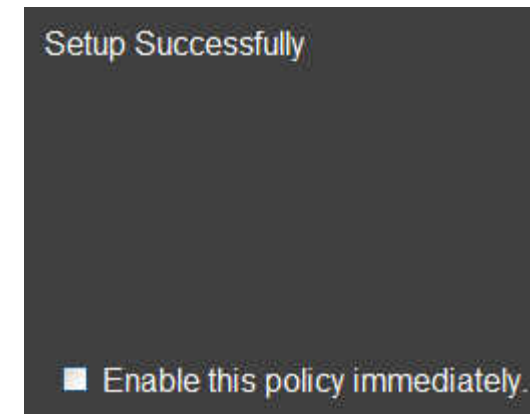

PPTP

- **User Name** Enter the user name used to connect to the PPTP server.
- **Password:** Enter the password used to connect to the PPTP server.

VPN Server IP Settings

- **Server IP:** Enter an IP address which is different from the router's LAN IP address.
For example:
ESR600H/ESR750H default IP: 192.168.0.1
Configure the IP address as 10.0.174.45
- **Remote IP Range:** Enter an IP range under the same subnet as the above server IP.
For example:
Server IP address is 10.0.174.45
Remote IP range is 10.0.174.66 – 100

IMPORTANT:

The remote IP range should not include the server IP address to avoid a network conflict.

Click **Back** to return to the previous step.

Click **Next** to continue with the setup.

Click **Cancel** to stop the setup.

Step4: VPN PPTP Setting

Please enter the setting of PPTP

PPTP Settings

| | | |
|----------------|-----------|--------------|
| Authentication | MSCHAP_V2 | |
| User Name | admin | (eg: guest) |
| Password | | (eg: nk9543) |



VPN Server IP Setting

| | | |
|-----------------|--|------------------------------|
| Server IP | | (eg: 10.0.174.45) |
| Remote IP Range | | - [] (eg: 10.0.174.66 -100) |

Back Next Cancel

If the setup is successful, the following screen is displayed.
To enable the VPN policy immediately, click the check box.

Click `Back` to return to the previous step.
Click `Apply` to save the settings and continue.
Click `Cancel` to stop the setup.

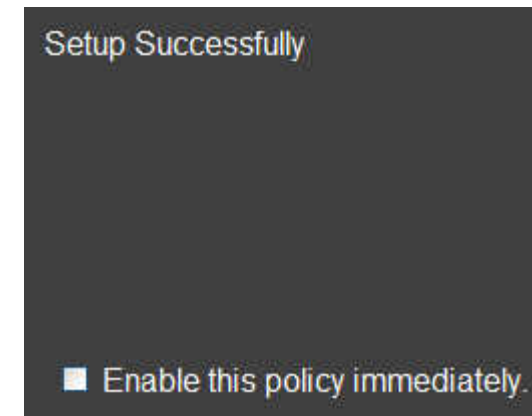

6.6.3 Configuring a VPN Tunnel Profile

Manually configure a VPN tunnel profile.

Click **Add** to begin creating a new VPN tunnel profile.

| No. | Enable | Name | Type | Local Address | Remote Address | Crypto-suite | Gateway | Select |
|------------|-------------|------------------------|------|-------------------|----------------|--------------|---------|--------|
| Add | Edit | Delete Selected | | Delete All | | | | |

On the General tab, enter the following information:

- **Name** The name of the VPN tunnel profile.
- **Connection Type:** Select a connection type.


| General | PPTP | Network |
|-----------------|----------------------|----------------------------------|
| Name | <input type="text"/> | |
| Connection Type | PPTP | <input type="button" value="v"/> |

PPTP

On the PPTP tab, enter the following information:

- **Authentication** There are three authentication algorithms: Select CHAP, PAP, or MSCHAP_V2.
- **Available Users/Member** Displays created users from the User Settings available to connect to PPTP server. Select the users in the list to include in the VPN tunnel, then click >> to add users to the Member field. Click << if you want to remove users from the Member box.

Click [Add](#) to manually add available users.

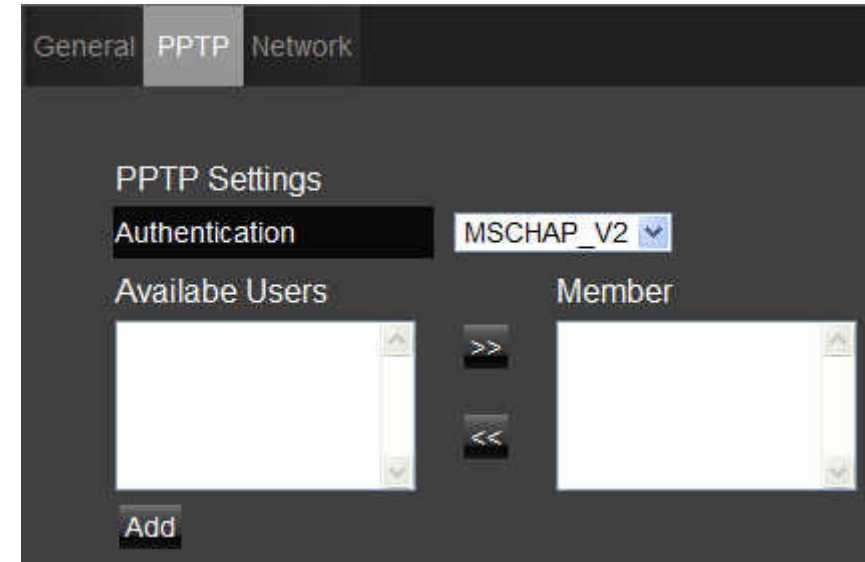

On the Network tab, enter the following information:


VPN Server IP Setting

- **Server IP** Enter an IP address which is different from the router's LAN IP address.
For example: the default LAN IP of the ESR600H/ESR750H is 192.168.0.1. set the server IP address as 10.2.2.1.
- **Remote IP Range** Enter an IP range under the same subnet of the above server IP.
For example: if the server IP address is 10.2.2.1, create a remote IP range of 10.2.2.10 – 20.
Remote IP range is 10.0.174.66 – 100

IMPORTANT:

The remote IP range should not include the server IP address to avoid a network conflict.

Click `Apply` to save the settings or `Cancel` to discard changes.

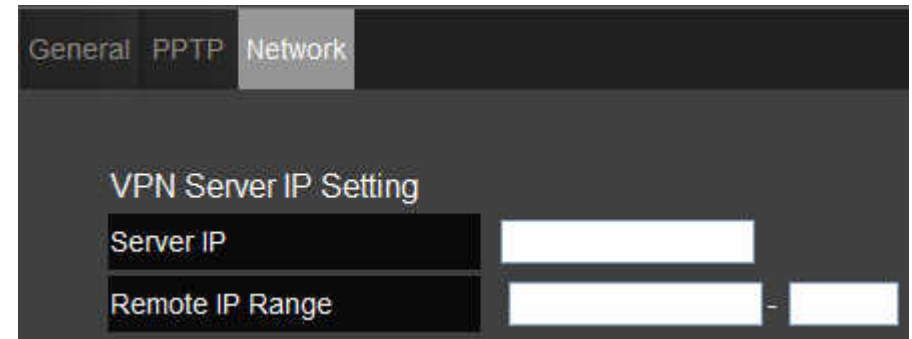

The screenshot shows a configuration window with three tabs: 'General', 'PPTP', and 'Network'. The 'Network' tab is selected. Below the tabs, the title 'VPN Server IP Setting' is displayed. There are two input fields: 'Server IP' and 'Remote IP Range'. The 'Remote IP Range' field is split into two parts by a hyphen, representing a range of IP addresses.




The screenshot shows two buttons: 'Apply' and 'Cancel', both in a dark grey style with white text.

L2TP

On the L2TP tab, enter the following information:

- **Authentication:** there are three authentication algorithms. Please select CHAP, PAP, or MSCHAP_V2.
- **Available Users/Member:** The users who you created in the User Setting to connect to L2TP server will be displayed. Select the users in the list who you wish to include in the VPN tunnel, and click the forward arrow to then add them to the Member Box. Click the backward arrow if you want to remove users from the Member box.

Click **Add** to manually add available users.

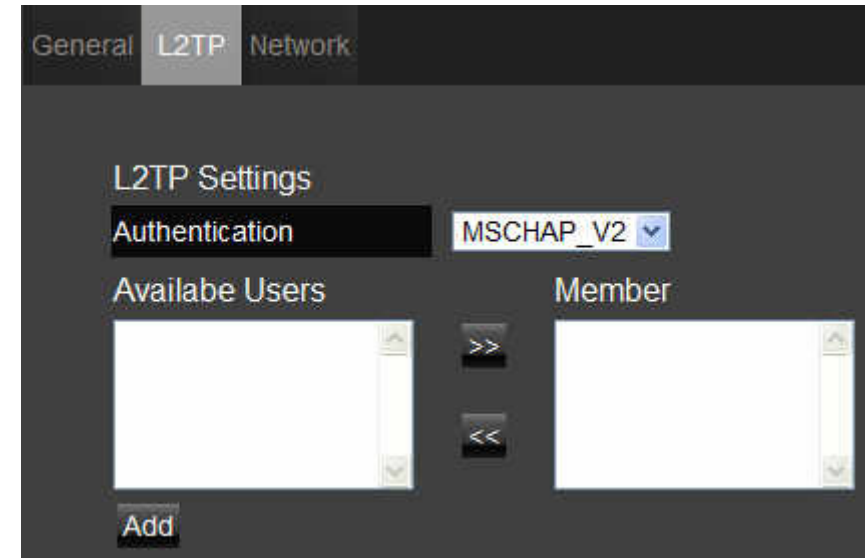

On the Network tab, enter the following information:


VPN Server IP Setting

- **Server IP:** enter an IP address which is different from your router's LAN IP address.
For example:
If the LAN IP of the ESR600H/ESR750H is 192.168.0.1, configure the server IP address as 10.2.2.1.
- **Remote IP Range:** enter an IP range under the same subnet of the above server IP.
For example:
If the server IP address is 10.2.2.1, configure a remote IP range of 10.2.2.10 – 20.

IMPORTANT:

The remote IP range should not include the server IP address to avoid a network conflict.

Click `Apply` to save the settings or `Cancel` to discard changes.

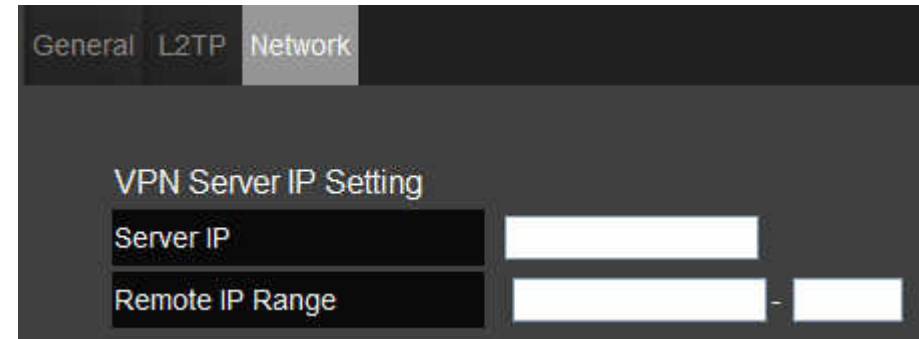

The screenshot shows a configuration window with three tabs: 'General', 'L2TP', and 'Network'. The 'Network' tab is selected. Below the tabs, the title 'VPN Server IP Setting' is displayed. There are two input fields: 'Server IP' and 'Remote IP Range'. The 'Remote IP Range' field is split into two sub-fields by a hyphen, representing the start and end of the IP range.



The screenshot shows two buttons: 'Apply' and 'Cancel', positioned side-by-side.

6.6.4 Configuring a User Profile

To manually setup a VPN tunnel, create a user profile and then a VPN profile.

Creating a User Profile

- **Name** Enter the name to connect to an L2TP or PPTP VPN tunnel.
- **Password** Enter the password to connect to an L2TP or PPTP VPN tunnel.
- **Confirm** Enter the password again to confirm the password entered above.

Click **Add** to add a user to the VPN user table or **Reset** to discard changes.

Table of Current VPN Users

Click **Delete Selected** to remove selected devices from the list.

Click **Delete All** to remove all devices from the list.

Click **Reset** to discard changes.

Click **Apply** to save the settings or **Cancel** to discard changes.

| Current VPN User Table | | |
|--|-----------|--------|
| No. | User Name | Select |
| <div style="display: flex; justify-content: space-around;"> Delete Selected Delete All Reset </div> | | |

6.7 Advanced Network Settings

6.7.1 NAT Setup

Network address translation (NAT) allows users on the LAN to access the Internet through a single Public IP Address or multiple Public IP Addresses. NAT provides firewall protection from hacker attacks and allows for mapping LAN IP addresses to WAN IP addresses with key services such as websites, FTP, video game servers, etc.

Click `Enable` or `Disable` to activate or deactivate the NAT.



Click `Apply` to save the settings or `Cancel` to discard changes.




6.7.2 Port Mapping Setup

Port Mapping allows you to redirect a particular range of service port numbers from the WAN to a particular LAN IP address.

- **Enable Port Mapping** Click `Enable Port Mapping` to activate port mapping.
- **Description** Enter notes or details about the mapped port range configuration.
- **Local IP** Enter the local IP address of the server behind the NAT firewall.
- **Protocol** Select the protocol to use for mapping from the following: `TCP`, `UDP` or `Both`.
- **Port Range** Enter the range of ports to be forwarded.

Click `Add` to append a new device to the list or `Reset` to discard changes.

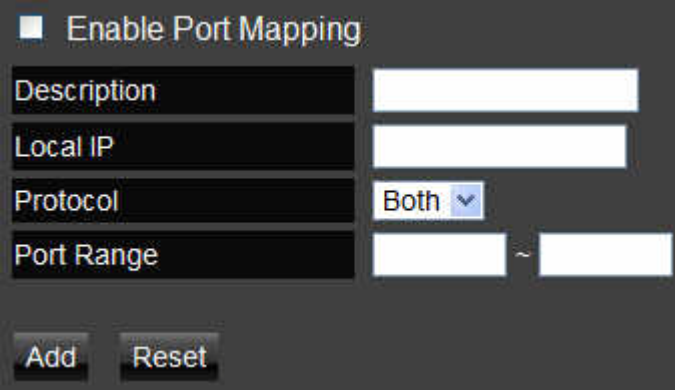

The screenshot displays a configuration panel for port mapping. At the top, there is a checkbox labeled "Enable Port Mapping". Below this, there are four input fields: "Description" (a text box), "Local IP" (an IP address field), "Protocol" (a dropdown menu currently set to "Both"), and "Port Range" (two text boxes separated by a tilde symbol). At the bottom of the panel, there are two buttons: "Add" and "Reset".

Current Port Mapping Table

Displays a list of mapped port ranges in use on the network.

- **No.** The sequence number of the mapped port range.
- **Description** Notes or details about the mapped port range.
- **Local IP** IP address of the server for the mapped port range.
- **Type** The protocol used to communicate with the WAN ports and LAN server.
- **Port Range** The range of mapped ports.
- **Select** Indicates the device(s) that can have actions performed on them.

Click `Delete Selected` to remove selected devices from the list.

Click `Delete All` to remove all devices from the list.

Click `Reset` to discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.

| Current Port Mapping Table | | | | | |
|--|-------------|----------|------|------------|--------|
| No. | Description | Local IP | Type | Port Range | Select |
| <div style="display: flex; justify-content: space-around;"> Delete Selected Delete All Reset </div> | | | | | |




6.7.3 Port Forwarding Setup

Port forwarding enables multiple server applications on a LAN to serve clients on a WAN over a single WAN IP address. The router accepts incoming client packets, filters them based on the destination WAN, or public, port and protocol and forwards the packets to the appropriate LAN, or local, port. Unlike the DMZ feature, port forwarding protects LAN devices behind the firewall.

- **Enable Port Forwarding** Click `Enable Port Forwarding` to active port forwarding.
- **Description** Enter notes or details about the forwarded port configuration.
- **Local IP** Enter the local IP address of the server behind the NAT firewall.
- **Protocol** Select the protocol to use for mapping from the following: `TCP`, `UDP` or `Both`.
- **Local Port** Enter the LAN port number that WAN client packets will be forward to.
- **Public Port** Enter the WAN port number that clients will send their packets to.

Click `Add` to append a new configuration to the table or `Reset` to discard changes.

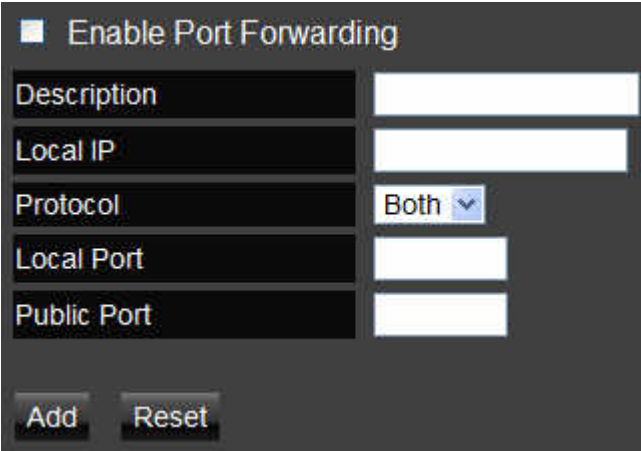

| | |
|---|----------------------|
| <input type="checkbox"/> Enable Port Forwarding | |
| Description | <input type="text"/> |
| Local IP | <input type="text"/> |
| Protocol | Both ▾ |
| Local Port | <input type="text"/> |
| Public Port | <input type="text"/> |
| <code>Add</code> | <code>Reset</code> |

Current Port Forwarding Table

The table of current port forwarding configurations.

Click `Delete Selected` to remove selected devices from the list.

Click `Delete All` to remove all devices from the list.

Click `Reset` to discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.



| No. | Description | Local IP | Local Port | Type | Public Port | Select |
|-----|-------------|----------|------------|------|-------------|--------|
|-----|-------------|----------|------------|------|-------------|--------|

`Delete Selected` `Delete All` `Reset`



6.7.4 Port Triggering Setup

Some applications, such as online games, videoconferencing and VoIP telephony, require multiple ports for inbound and outbound traffic. If an application requires both an incoming and an outgoing port simultaneously, it is possible to configure static port forwarding to handle the packets. That is not an optimal solution because a static IP address must be configured for each device. With port triggering an application, local port or range of ports and a communication protocol can be mapped to a specific public port. Sending packets out over the local port triggers the router to open an incoming local port that is mapped to the same public port and application as the outgoing local port(s). The local application can communicate over the incoming and outgoing ports without the need for creating a fixed address.

- **Enable Port Triggering** Click `Enable Trigger Port` to activate port triggering.
- **Description** Enter notes or details about the port triggered configuration.
- **Popular Applications** Select a default application or add a new one.
- **Trigger Port** Enter the application's outbound port number(s).
- **Trigger Type** Select the protocol to use for port triggering from the following: `TCP`, `UDP` or `Both`.
- **Public Port** Enter the inbound port(s) for the application in the following format: `2300-2400` or `47624`.
- **Public Type** Select the protocol to use for the inbound port from the following: `TCP`, `UDP` or `Both`.

Click `Add` to append a new configuration to the table or `Reset` to discard changes.

The screenshot shows a configuration form titled "Enable Trigger Port" with a checkbox. Below the checkbox are several fields: "Description" (text input), "Popular Applications" (dropdown menu with "Add" button), "Trigger Port" (text input with a tilde separator), "Trigger Type" (dropdown menu), "Public Port" (text input), and "Public Type" (dropdown menu). At the bottom are "Add" and "Reset" buttons.

Current Port Triggering Table

The list of current port triggering configurations.

Click `Delete Selected` to remove selected devices from the list.

Click `Delete All` to remove all devices from the list.

Click `Reset` to discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.



| No. | Trigger Port | Trigger Type | Public Port | Public Type | Name | Select |
|-----|--------------|--------------|-------------|-------------|------|--------|
|-----|--------------|--------------|-------------|-------------|------|--------|

`Delete Selected` `Delete All` `Reset`



6.7.5 Application Layer Gateway Setup

The ALG (Application Layer Gateway) serves as a window between correspondent application processes so that they may exchange information on an open environment.

Select the listed applications that need ALG support and then the router will authorize them to pass through the NAT gateway.

| Description | Select |
|-------------|--------------------------|
| H323 | <input type="checkbox"/> |
| MMS | <input type="checkbox"/> |
| TFTP | <input type="checkbox"/> |
| Egg | <input type="checkbox"/> |
| IRC | <input type="checkbox"/> |
| Amanda | <input type="checkbox"/> |
| Quake3 | <input type="checkbox"/> |
| Talk | <input type="checkbox"/> |
| IPsec | <input type="checkbox"/> |
| FTP | <input type="checkbox"/> |
| SIP | <input type="checkbox"/> |
| RTSP | <input type="checkbox"/> |

Click **Apply** to save the settings or **Cancel** to discard changes.



6.7.6 Universal Plug and Play Setup

UPnP helps internet devices, such as gaming and videoconferencing, to access the network and connect to other registered UPnP devices.

Click `Enable` or `Disable` to activate or deactivate UPnP.


Click `Apply` to save the settings or `Cancel` to discard changes.



6.7.7 Internet Group Multicast Protocol Setup

Internet Group Multicast Protocol (IGMP) is a network-layer protocol used to establish membership in a multicast group.

Click `Enable` or `Disable` to activate or deactivate IGMP.



Click `Apply` to save the settings or `Cancel` to discard changes.



6.7.8 Quality of Service Setup

QoS can prioritize bandwidth use such as video streaming, online gaming, VoIP telephony and videoconferencing to ensure stable and efficient network performance.

Total Bandwidth Settings

Uplink Select the maximum bandwidth speed for outbound traffic.

Downlink Select the maximum bandwidth speed for inbound traffic.

Note:

Click `Disabled` if you do not want to prioritize any data or protocol.



The screenshot displays the 'Total Bandwidth Settings' section of a network configuration interface. It features two dropdown menus: 'Uplink' and 'Downlink', both set to 'Full'. Below these, the 'QoS' section has three radio button options: 'Priority Queue', 'Bandwidth Allocation', and 'Disabled'. The 'Disabled' option is selected, indicated by a green dot.

Priority Queue

Set network resource usage based on specific protocols or port ranges. Incoming packets are processed based on the protocols' position within the queue.

Unlimited Priority Queue

- **Local IP Address** Enter the local IP address of a device on the network. This device's activity is not restricted by the QoS feature.
- **High/Low Priority Queue:** Specify the priority for different protocols. Additional protocols and port ranges can be added.

QoS Priority Queue Bandwidth Allocation Disabled

Unlimited Priority Queue

| Local IP Address | Description |
|----------------------|--|
| <input type="text"/> | The IP address will not be bounded in the QoS limitation |

High/Low Priority Queue

| Protocol | High Priority | Low Priority | Specific Port |
|---------------------------|-----------------------|----------------------------------|--|
| FTP | <input type="radio"/> | <input checked="" type="radio"/> | 20,21 |
| HTTP | <input type="radio"/> | <input checked="" type="radio"/> | 80 |
| TELNET | <input type="radio"/> | <input checked="" type="radio"/> | 23 |
| SMTP | <input type="radio"/> | <input checked="" type="radio"/> | 25 |
| POP3 | <input type="radio"/> | <input checked="" type="radio"/> | 110 |
| Name <input type="text"/> | <input type="radio"/> | <input checked="" type="radio"/> | Both <input type="text"/> ~ <input type="text"/> |
| Name <input type="text"/> | <input type="radio"/> | <input checked="" type="radio"/> | Both <input type="text"/> ~ <input type="text"/> |
| Name <input type="text"/> | <input type="radio"/> | <input checked="" type="radio"/> | Both <input type="text"/> ~ <input type="text"/> |

Apply Cancel

Bandwidth Allocation

Set network resource usage, for inbound and outbound traffic, based on local IP and port ranges.

- **Type** Select `Download` or `Upload` to specific the direction of packet traffic.
- **Local IP Range** Enter the local IP range of the current configuration.
- **Protocol** Select the protocol to manage for the current configuration.
- **Port Range** Enter the local port range of the current configuration.
- **Policy** Select `Min` or `Max` to specify the type of configuration policy.
- **Rate (bps):** Select the bandwidth rate, in bits per second (bps), of the current configuration.

QoS Priority Queue Bandwidth Allocation Disabled

Type

Local IP range ~

Protocol

Port Range ~

Policy

Rate(bps)

Current QoS Table

| No. | Type | Local IP range | Protocol | Port Range | Policy | Rate(bps) | Select |
|---|------|----------------|----------|------------|--------|-----------|--------|
| <input type="button" value="Delete Selected"/> <input type="button" value="Delete All"/> <input type="button" value="Reset"/> | | | | | | | |

Click `Add` to save the settings and list the configuration in the Current QoS table or `Reset` the discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.



6.7.9 Routing Setup


Typically static routing does not need to be setup because the ESR600H/ESR750H has adequate routing information after it has been configured for Internet access. Static routing is only necessary if the router is connected to network under a different subnets.

**Note:**

To enable a static routing, NAT must be disabled.

NAT Disabled

Click `Enable` or `Disable` to activate or deactivate Static Routing.

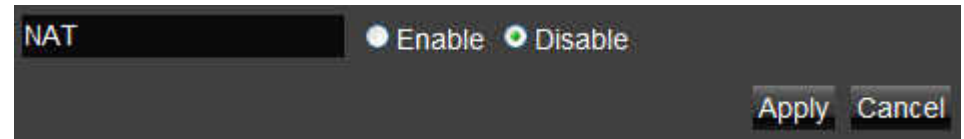

NAT Enabled

If the router is connected with a network under the different subnet, the routing setup allows the network connection within two different subnets.

- **Enable Static Routing** Click `Enable Static Routing` to activate the feature.
- **Destination LAN IP** Enter the LAN IP address of the destination device.
- **Subnet Mask** Enter the Subnet Mask of the destination device.
- **Default Gateway** Enter the default gateway IP address for the destination device.
- **Hops** Enter the maximum number of hops within the static routing that a packet is allowed to travel.

Click `Add` to save the settings and list the configuration in the Current Static Routing table or `Reset` the discard changes.

Click `Apply` to save the settings or `Cancel` to discard changes.

If you would like to enable Static Routing, please disable NAT function. Thus the packets can be forwarded based upon your routing policies.

Enable Static Routing

Destination LAN IP

Subnet Mask

Default Gateway

Hops

Interface LAN ▾

`Add` `Reset`

Current Static Routing Table

| No. | Destination LAN IP | Subnet Mask | Default Gateway | Hops | Interface | Select |
|--|--------------------|-------------|-----------------|------|-----------|--------|
| <p><code>Delete Selected</code> <code>Delete All</code> <code>Reset</code></p> | | | | | | |

`Apply` `Cancel`

`Apply` `Cancel`

6.7.10 Wake on LAN Setup

Wake on LAN setup (WOL) allows the administrator to activate a computer over the network.

Enable WOL over WAN Click `Enable WOL over WAN` to activate the feature.

Server Port Enter the server port of the device to activate.

Wake MAC Address Enter the MAC address of the device to activate. Click `Start` to activate the device.

Click `Apply` to save the settings or `Cancel` to discard changes.



6.7.11 USB Port Setup

The USB Port feature allows the router to be used as a file server or a virtual USB port on a local device. To enable NetUSB mode, the Control Center software must be installed on the intended device. For more information about the ESR600H/ESR750H's wireless services, refer to "USB Services" on page 7-0.

USB Access Mode

- **Access Mode** Select `Server Mode` or `NetUSB Mode`.
- **Server Name** Enter the name of the Samba server.
- **Workgroup** Enter the name of the Windows workgroup.
- **Description (optional)** Enter an optional description of the server.
- **Administrator** Enter the administrator's user ID.
- **New Password** Enter a new administrator password.
- **Confirm Password** Enter the administrator's password again for confirmation.

USB Access Mode

Server Mode NetUSB Mode

Server Information


| | |
|------------------------|-----------|
| Server Name | SMBSERVER |
| Workgroup | WORKGROUP |
| Description (optional) | |
| Administrator | admin |
| New Password | |
| Confirm Password | |

NetUSB Mode

Server Mode Click `Server Mode` to enable the router's USB port as a server.

NetUSB Mode Click `NetUSB Mode` to enable the router's USB port as a virtual, local USB port.

Click `Apply` to save the settings or `Cancel` to discard changes.



6.8 Tools Setup

6.8.1 Configuring the Administrator Account

Change the router's system password as well as setup a device to remotely configure the settings.

- **Old Password:** Enter the existing administrator password.
- **New Password:** Enter the new administrator password.
- **Repeat New Password:** Re-type the new administrator password.

Remote Management

- **Host Address:** Enter the designated host IP Address.
- **Port:** Enter the port number (Default: **8080**) for remote accessing management web interface.
- **Enable:** Select to enable remote management.

Click `Apply` to save the settings or `Cancel` to discard changes.

You can change the password that you use to access the router, this is not your ISP account password.

| | |
|---------------------|----------------------|
| Old Password | <input type="text"/> |
| New Password | <input type="text"/> |
| Repeat New Password | <input type="text"/> |

| Host Address | port | Enable |
|----------------------|------|--------------------------|
| <input type="text"/> | 8080 | <input type="checkbox"/> |

`Apply` `Cancel`

`Apply` `Cancel`




Note:

To access the settings of the ESR600H/ESR750H remotely, enter the router's WAN IP address and port number.

6.8.2 Configuring the Router's Time

Change the system time of the ESR600H/ESR750H and setup automatic updates through a network time protocol server (NTP).

- **Time Setup** Select how the router obtains the current time.
- **Time Zone** Select the time zone for the router.
- **NTP Time Server** Enter the domain name or IP address of an NTP server.
- **Enable Daylight Saving** Click to enable or disable daylight savings time.
- **Start Time** Select the date and time when daylight savings time starts.
- **End Time** Select the date and time when daylight savings time ends.

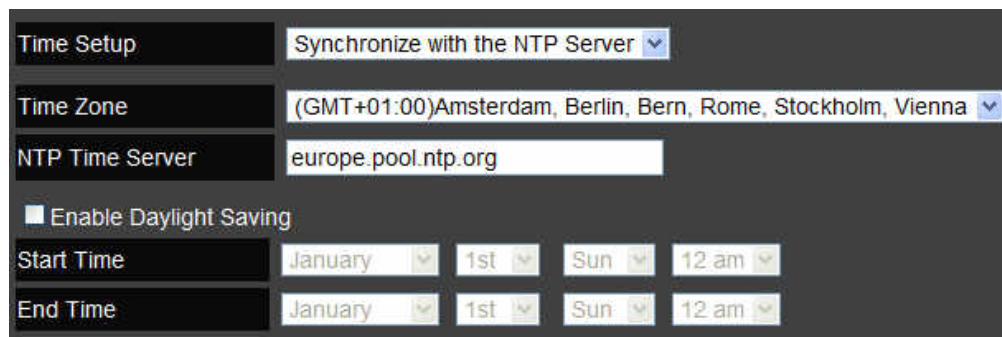

The screenshot shows the 'Time Setup' configuration page. It includes the following fields and options:

- Time Setup:** A dropdown menu set to 'Synchronize with the NTP Server'.
- Time Zone:** A dropdown menu set to '(GMT+01:00)Amsterdam, Berlin, Bern, Rome, Stockholm, Vienna'.
- NTP Time Server:** A text input field containing 'europe.pool.ntp.org'.
- Enable Daylight Saving:** An unchecked checkbox.
- Start Time:** Four dropdown menus set to 'January', '1st', 'Sun', and '12 am'.
- End Time:** Four dropdown menus set to 'January', '1st', 'Sun', and '12 am'.

6.8.3 Configuring Dynamic Domain Name Service

Dynamic domain name service (DDNS) allows the administrator to map a static domain name to a dynamic IP address. A DDNS service provider, such as DynDNS, ZoneEdit or CyberGate, must provide an account, password, and static domain name to use this feature. DDNS particularly benefits end users that have their own websites or FTP sites.

- **Dynamic DNS** Enable or Disable DDNS.
- **Server Address** Select the DDNS Server Address.
- **Host Name** Enter the DDNS provider static domain name.
- **Username** Enter the username given by the DDNS provider.
- **Password** Enter the password given by the DDNS provider.



The screenshot shows a configuration panel for Dynamic DNS. At the top, there is a section labeled 'Dynamic DNS' with two radio buttons: 'Enable' (which is selected) and 'Disable'. Below this, there are four input fields: 'Server Address' with a dropdown menu showing '3322(qdns)', 'Host Name' with an empty text box, 'Username' with an empty text box, and 'Password' with an empty text box.

6.8.4 Diagnosing a Network Connection

The diagnosis feature allow the administrator to verify that another device is available on the network and is accepting request packets. If the ping result returns `alive`, it means a device is on line. This feature does not work if the target device is behind a firewall or has security software installed.

- **Address to Ping** Enter IP address of the device to ping.
- **Ping Result** View the result message from the ping test.



The screenshot shows a dark-themed user interface for network diagnosis. It features two input fields stacked vertically. The top field is labeled 'Address to Ping' and the bottom field is labeled 'Ping Result'. To the right of the top input field is a 'Start' button. The interface is designed for entering an IP address and viewing the results of a ping test.

6.8.5 Upgrading Firmware

Firmware is system software that operates and allows the administrator to interact with the router.



WARNING!

Upgrading firmware through a wireless connection is not recommended. Firmware upgrading must be performed while connected to an Ethernet (LAN port) with all other clients disconnected.

To update the firmware version, follow these steps:

1. Download the appropriate firmware approved by EnGenius Networks from an approved web site.
2. Click `Choose File`.
3. Browse the file system and select the firmware file.
4. Click `Apply`.

You can upgrade the firmware of the router in this page. Ensure, the firmware you want to use is on the local hard drive of your computer. Click on `Browse` to browse and locate the firmware to be used for your update.

`Choose File` No file chosen

`Apply` `Cancel`

6.8.6 Backing Up Settings

Store multiple settings versions by saving the settings to a configuration file on the device.

- **Restore to factory default** Click `Reset` to restore the ESR600H/ESR750H to factory defaults.
- **Backup Settings** Click `Save` to save the current configuration on the ESR600H/ESR750H to a *.dlf file.
- **Restore Settings** To restore saved settings, do the following:
 - a. Click `Choose File`.
 - b. Browse the file system for location of the settings file (*.dlf).
 - c. Click `Upload`.



6.8.7 Rebooting the Device

This feature allows the administrator to reboot the router in the event of a system hang up.


Click `Apply` to reset the device.

In the event the system stops responding correctly or stops functioning, you can perform a reset. Your settings will not be changed. To perform the reset, click on the `APPLY` button.

Apply

USB Services

The ESR600H/ESR750H provides two ways to access USB devices over a network: server mode and NetUSB mode. In server mode, the router allows USB storage devices to act as a file servers which can be shared by users connected to the same network. In NetUSB mode, or USB over IP, the router allows users to connect to remote USB non-storage devices, such as speakers, on the same network.

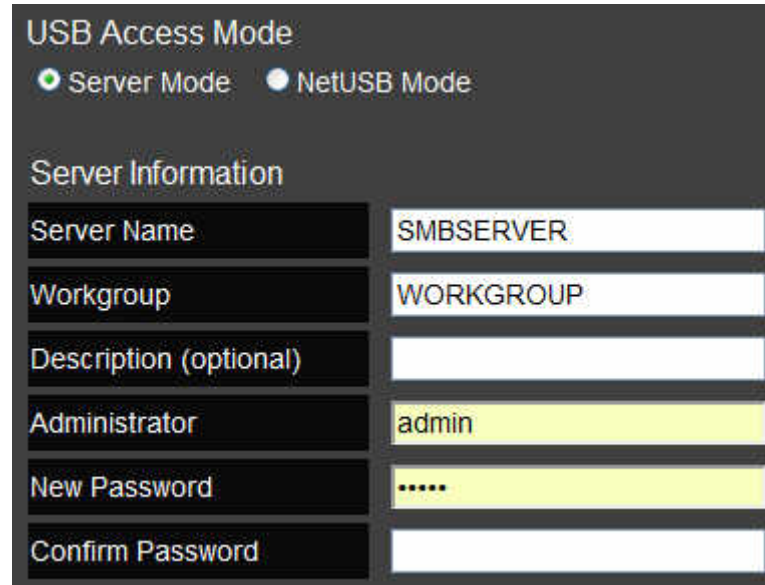

The screenshot shows the 'USB Access Mode' configuration page. At the top, there are two radio buttons: 'Server Mode' (which is selected) and 'NetUSB Mode'. Below this is a section titled 'Server Information' containing several input fields:

| Field | Value |
|------------------------|-----------|
| Server Name | SMBSERVER |
| Workgroup | WORKGROUP |
| Description (optional) | |
| Administrator | admin |
| New Password | ***** |
| Confirm Password | |

7.1 USB Over IP

7.1.1 Using the USB Device Server

Introduction

NetUSB is a *USB over IP* technology that transparently redirects all USB packets to a TCP/IP network channel. The technology allows a USB device to be used as if it were connected directly to a PC when actually the USB device is remotely connected to the ESR600H/ESR750H Dual Concurrent Wireless Router.

Connect & Disconnect

Connecting to a USB device with the EnGenius USB Control Center simulates plugging a USB device into a PC. Similarly, *disconnecting* a USB device simulates unplugging a USB device from a PC. Once connected, the USB device can be used as if it were physically connected to the PC. Only one PC can connect to the USB device at a time so no other PC can connect this USB device until the USB device is disconnected.

Subnet Issue


In order for a PC to use the NetUSB technology, both the PC and USB device server must be on the same subnet. To determine the USB device server's subnet, open the Control Centre software let it search for available devices. All available USB device servers are listed in the control center. If a server is not on the same subnet as the PC, the server is highlighted in red. If the server is on the same subnet, it is highlighted in blue and can be used with NetUSB. To configure the USB device server to be on the same subnet as the PC, modify the device server's IP address to use the same subnet or switch the server to use DHCP mode.

Installation of a USB Device Driver


Some USB devices, like printers or multifunction printers (MFPs), require installing a vendor-supplied driver. For USB devices that do not need to a driver installed, skip this section.

To install a USB device driver, do the following:

1. Insert the CDROM into the CDROM drive and run the “autorun” program.
2. Follow the instructions of the installation program to install driver.
3. When the installation program prompts to plug-in the USB device, run the *Control Center*.
4. In the Control Center, click the USB device server that has the USB device attached.
5. Click the USB device as in the following figure.

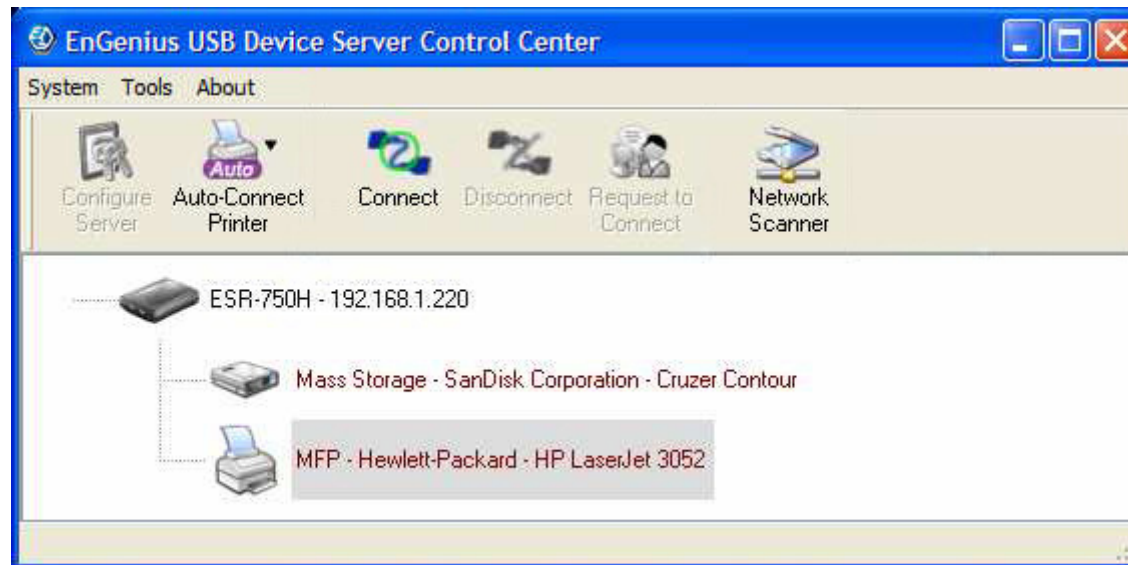

6. Click **Connect**. The message *Manually Connect by your_computer_name* is shown, as the following figure.

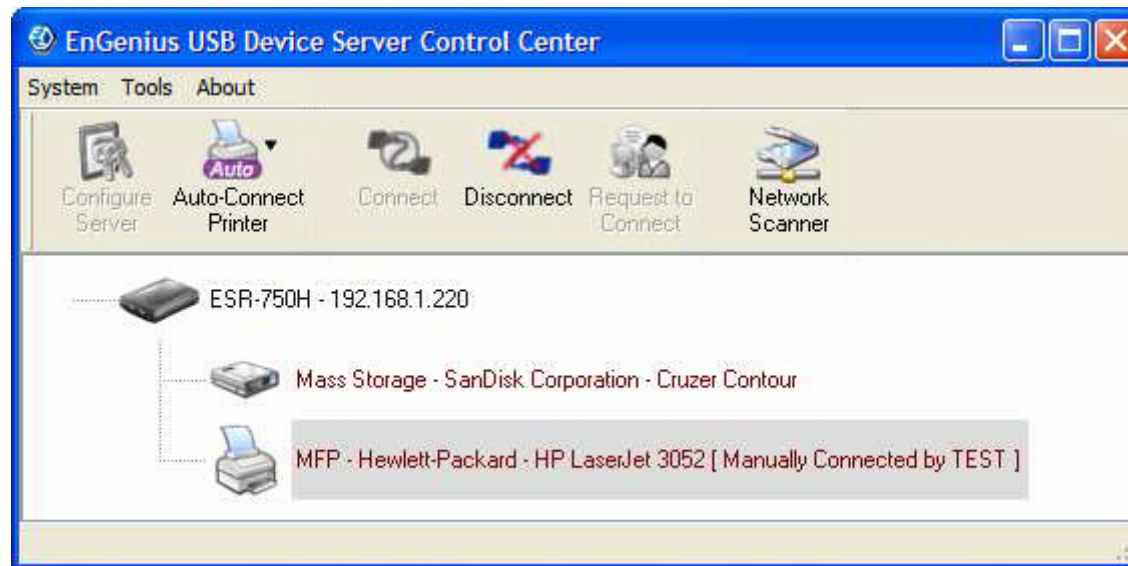


7. The installation program detects the USB device and continues the installation.

8. After the installation is complete, select the USB device in the Control Center and click `Disconnect` to disconnect the USB device.


The USB device driver has been successfully installed.

Using the USB Device Server

1. In the Control Center, click the USB device server that has the USB device attached.
2. Select the USB device.

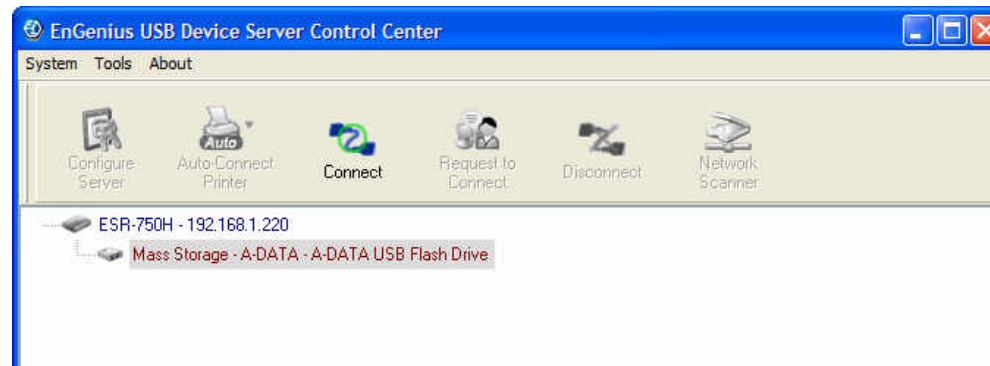

3. Click Connect. The message `Manually Connect by your_computer_name` is shown.

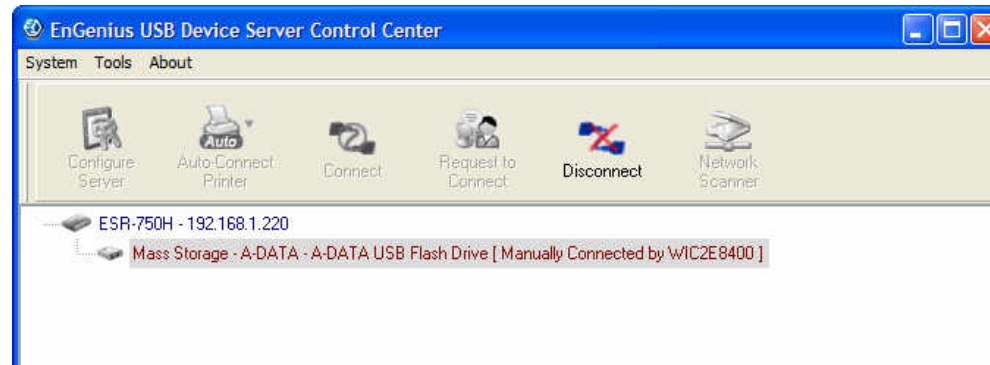

4. The PC detects the USB device connection.
5. Use the USB device as if it were connected directly to the PC's USB port.
6. To finish using the USB device, Select the USB device in the Control Center and click `Disconnect` to disconnect the USB device. Other PCs can not connect to the USB device while it is in use by another PC.

7.1.2 Printer and Scanner Sharing

Auto-Connected Printers

The method described in the previous section, refer to “Using the USB Device Server” on page 7-5, demonstrated manually connecting and disconnecting to a virtual USB device. That procedure applies to USB storage devices but not to printers, scanners or multifunction printers (MFPs). For these devices, the USB device server supports auto-connect so users don’t need to manually connect and disconnect when using the USB device. The following instructions demonstrate how to use this feature.


**Note:**

A device driver must be installed for the USB device with the Control Centre for the auto-connect feature to work. Refer to “Installation of a USB Device Driver” on page 7-3.


To use the auto-connect feature, do the following:

1. Connect the USB printer to the device server’s USB port.
2. Open the Control Centre software to perform a search of available devices.
3. In the Control Center, select the USB device server that has the printer attached.
4. Select the printer.

5. Click Auto Connect Printer.

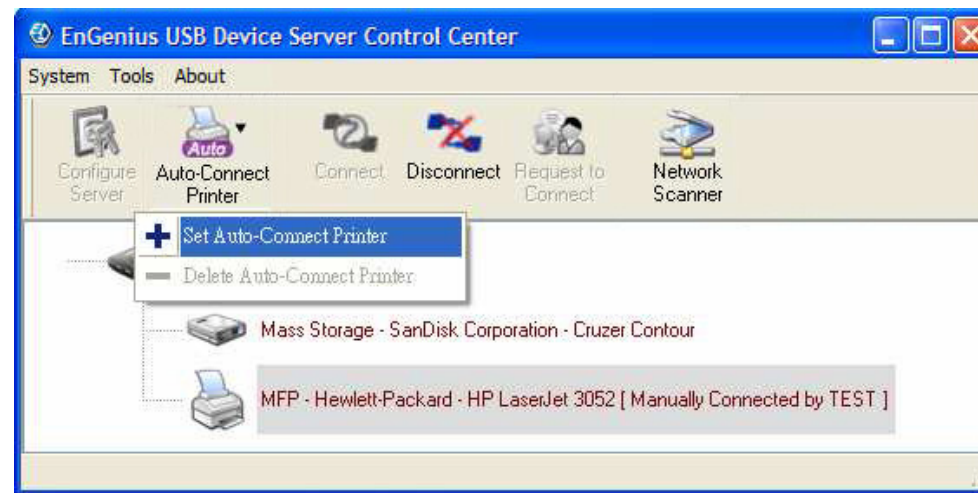

6. Select `Set Auto-Connect Printer` on the context menu to display the *Add to Auto-Connect Printer List* dialogue.

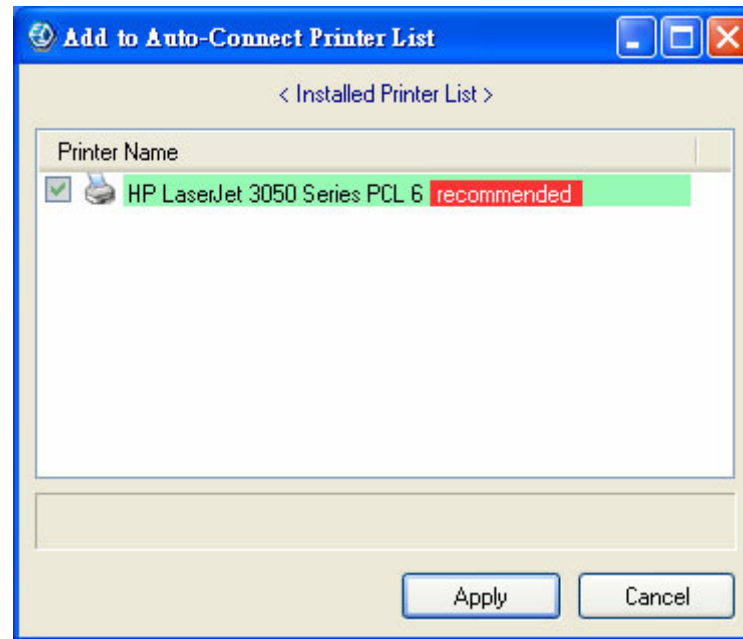

Note:

The selected printer in the dialogue must match the physical printer attached to the USB device server.

7. Select a printer from the list.
8. Click `Apply`.


9. The printer is displayed in the list with the label `Auto-Connected Printer` in red.



Viewing a List of Auto-Connected Printers

To view the list of auto-connected printers, do the following:

1. Click the `Tools` menu item on the Control Centre.
2. Click the `Auto-Connect Printer List` submenu item to display the *Auto-Connect Printer List* dialogue.

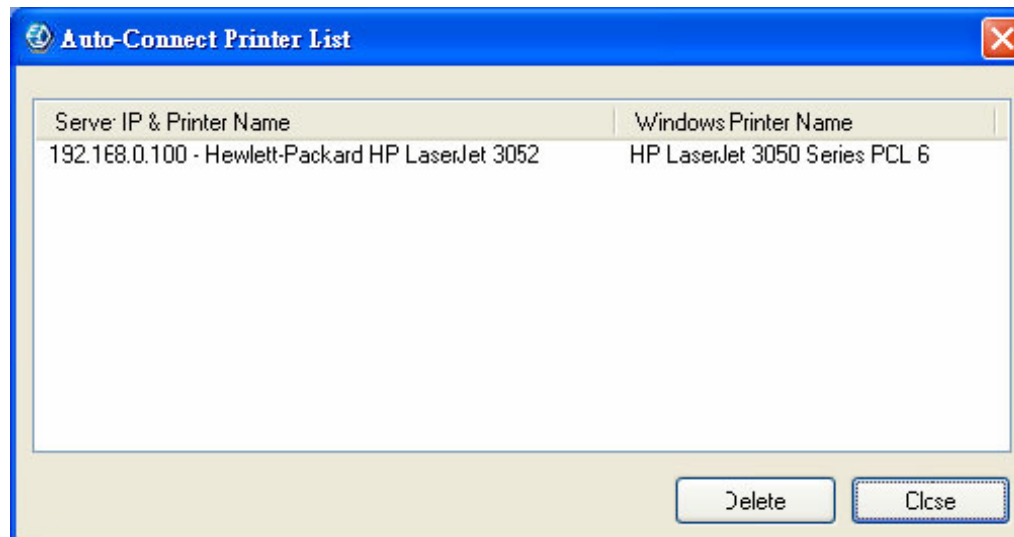

Removing a Printer from the Auto-Connect List

To remove a printer from the list, do the following:

1. Click the `Tools` menu item on the Control Centre.
2. Click the `Auto-Connect Printer List` submenu item to display the *Auto-Connect Printer List* dialogue.
3. Select the printer to remove.
4. Click `Delete`.

Printing to an Auto-Connected Printer

**Note:**

The Control Centre software must be running to issue a print job to an auto-connected printer.

Perform a print operation in the usual manner but make sure to select auto-connected printer in the software's printer options. The Control Centre manages the auto-connect operation with the USB device printer each time a print job is requested, so no manual intervention is required.

Configuring the Control Centre as a Windows Service


**Note:**

This feature is enabled by default.

The Control Centre must be running for a USB device printer to be available to PCs on the network. Instead of manually opening the software after every login, it is possible to configure the it as a Windows service.

To configure the Control Centre as a Windows service, do the following:

1. Click the `Tools` menu item on the Control Centre.
2. Click the `Configuration` submenu item to display the *Control Centre - Configure* dialogue.

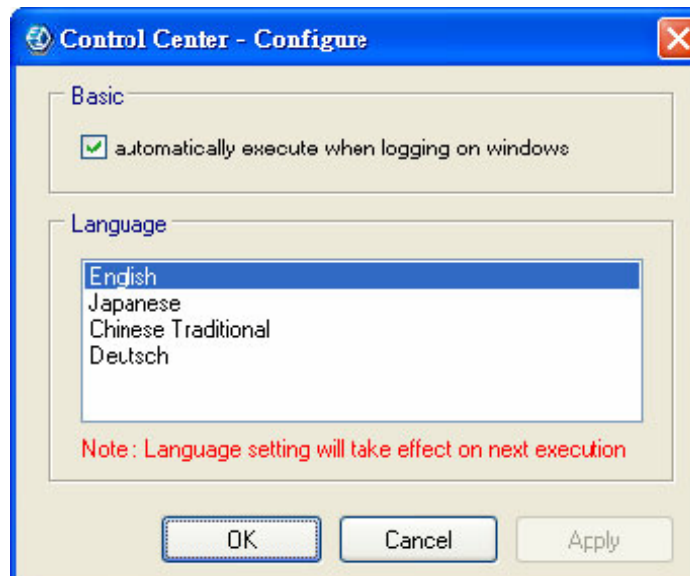

3. Click `Automatically execute when logging on Windows`.
4. To complete the operation, do the following:


- Click `OK` to save the settings and close the dialogue.
- Click `Cancel` to discard changes and close the dialogue.
- Click `Apply` to save the settings but keep the dialogue open.

Network Scanners


Scanning with a USB Scanning Device and NetUSB

To use a USB scanning device, do the following:

1. Connect the USB scanner to the device server's USB port.
2. Open the Control Centre software to perform a search of available devices.
3. In the Control Center, select the USB device server that has the scanner attached.
4. Select the scanner.

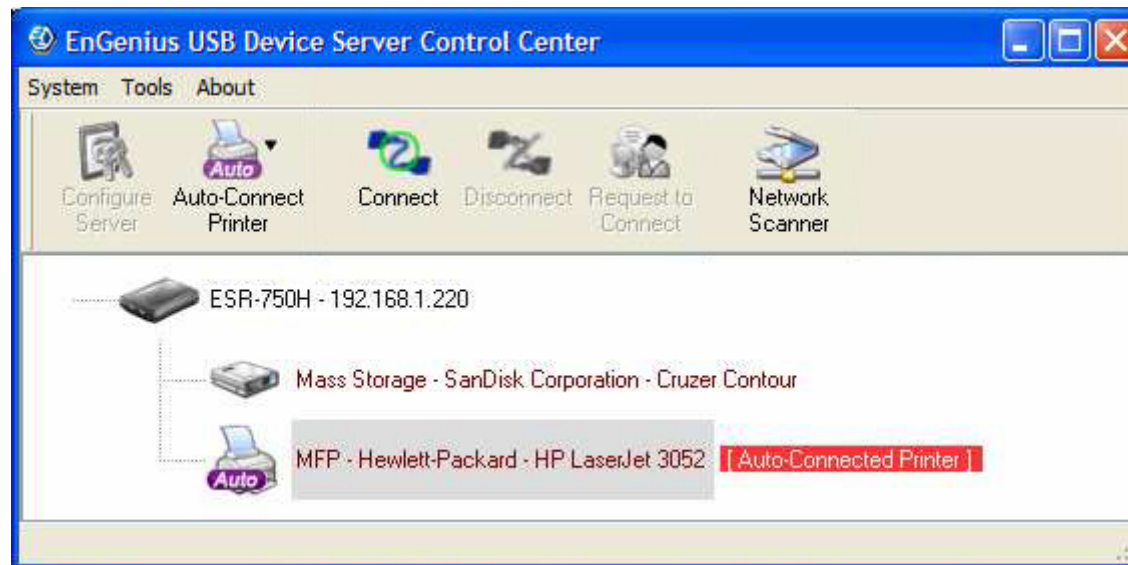


5. Click `Network Scanner` to connect to the device and display the following dialogue.

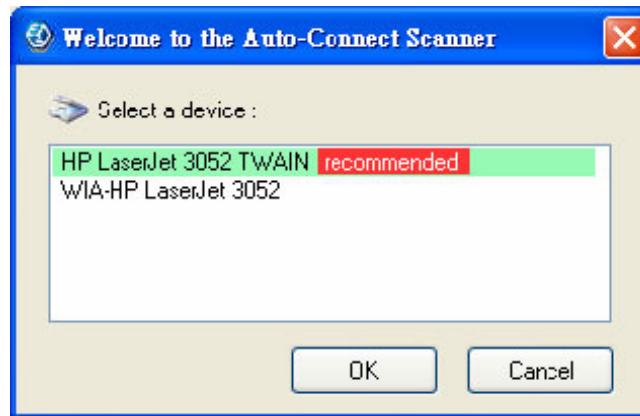

6. Select a scanner device in the list.

7. Click **OK** to display the scanner device configuration dialogue.

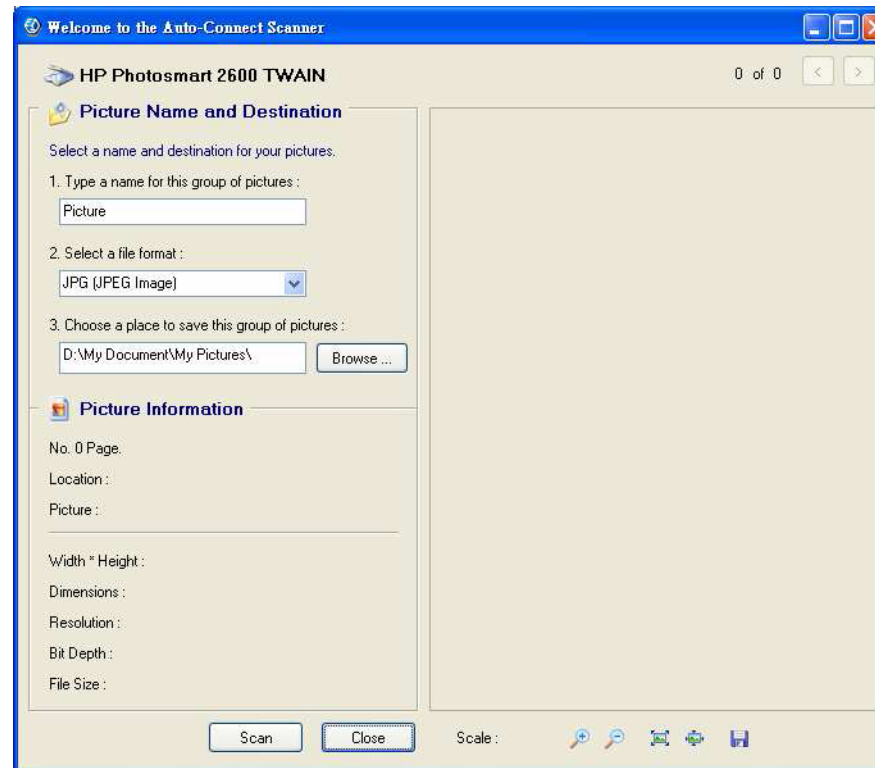


8. Perform the scan operation.

9. After the scan operation is complete, close the `Auto-Connect Scanner` dialogue (step 5).


10. The Control Centre automatically disconnects the scanning device.

7.1.3 Storage

USB storage device must be manually connected. After you connecting to a USB storage device, the PC displays a new disk. If the USB storage device is a flash drive, the new disk is displayed as a removable disk.

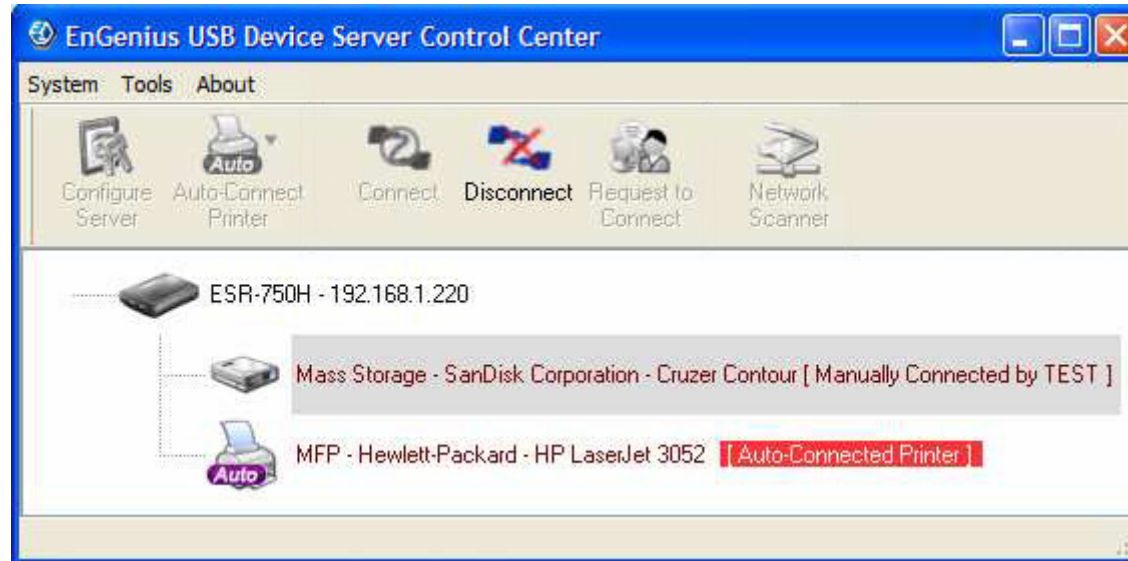

The USB storage device can be viewed the system tray in the *Remote Devices* icon.



Remove the USB storage device in the usual manner.




In the Control Center, select the USB storage device and click `Disconnect` to disconnect the USB storage device.

Request to Connect

If a USB device is manually connected by another user, it can not be connected by another PC. There is a way to send a message to the PC using the device and request control. In the Control Centre, click `Request to Connect` to display the following dialogue.



A dialogue is displayed to the controlling PC requesting control of the storage device.

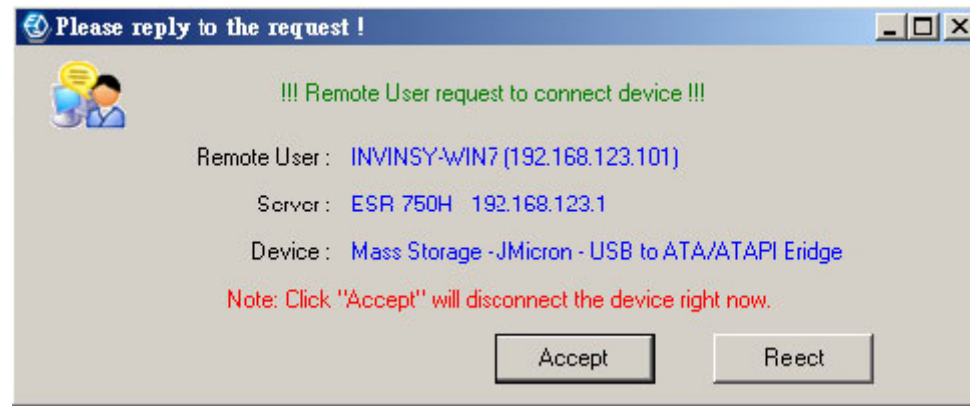

The controlling PC has the option to accept or reject the request. Click `Accept` to close the dialogue and relinquish control or `Reject` to keep control.

Quitting the Control Center

The Control Center does not close completely by clicking the system close button. The application windows disappears and closes to the system tray. There are two ways to completely close the Control Center. The first way is selecting the `Exit` sub-menu item in the `File` menu of the Control Center. The second way is right-clicking the icon of the Control Center in the system tray and selecting the `Exit` sub-menu item.

Limitations

There are some limitations to using the NetUSB technology.

1. It supports Windows 2000/XP/2003/Vista and above.
2. Only one PC can get the ownership of the same USB device at the same time.

7.1.4 shAir Music

**Note:**


The shAir Music feature is only available with the ESR750H model.

Using USB Speakers with shAir


**Note:**

If USB speakers are detected by the iOS device, there is no need to use the Control Center software.


1. Connect the USB speakers to the device server's USB port.
2. Open the Control Centre software to perform a search of available devices.
3. In the Control Center, select the USB device server that has the speakers attached.

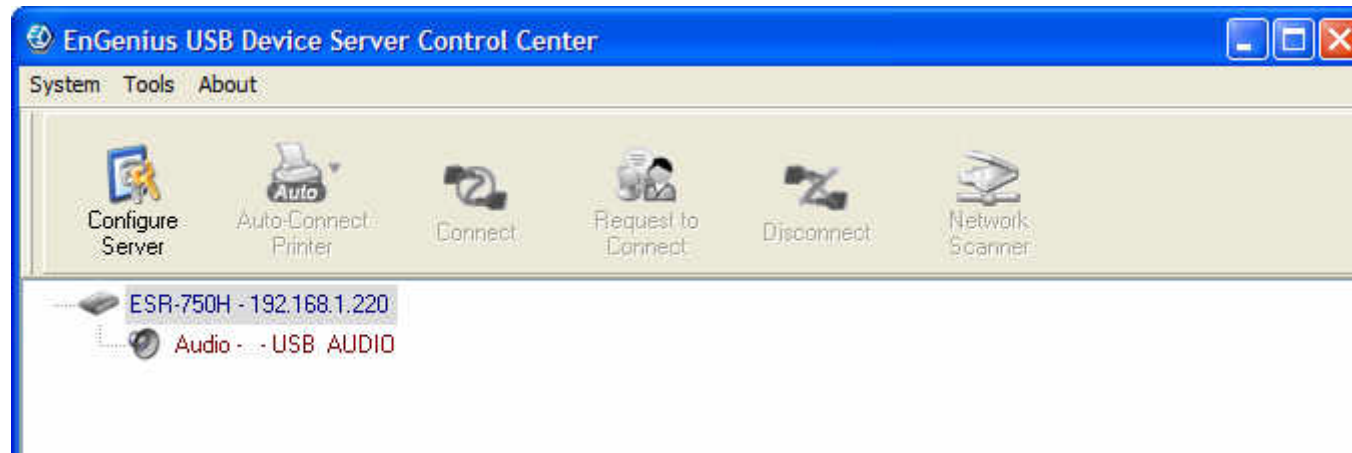

4. Select the USB speaker device.

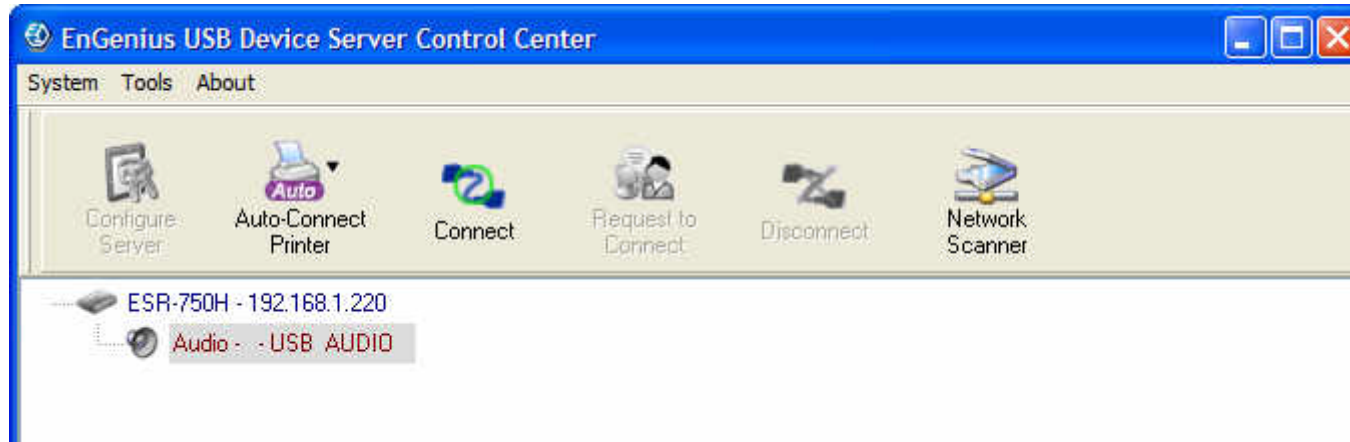


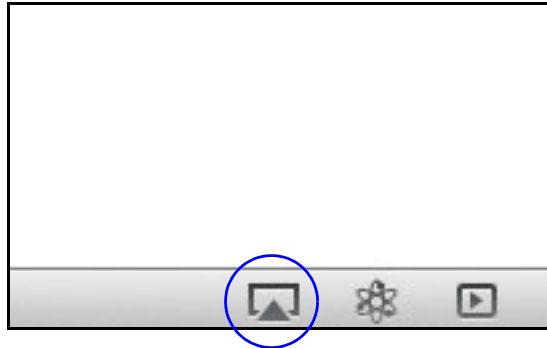
5. Click Connect. The message `Manually Connect by your_computer_name` is shown.

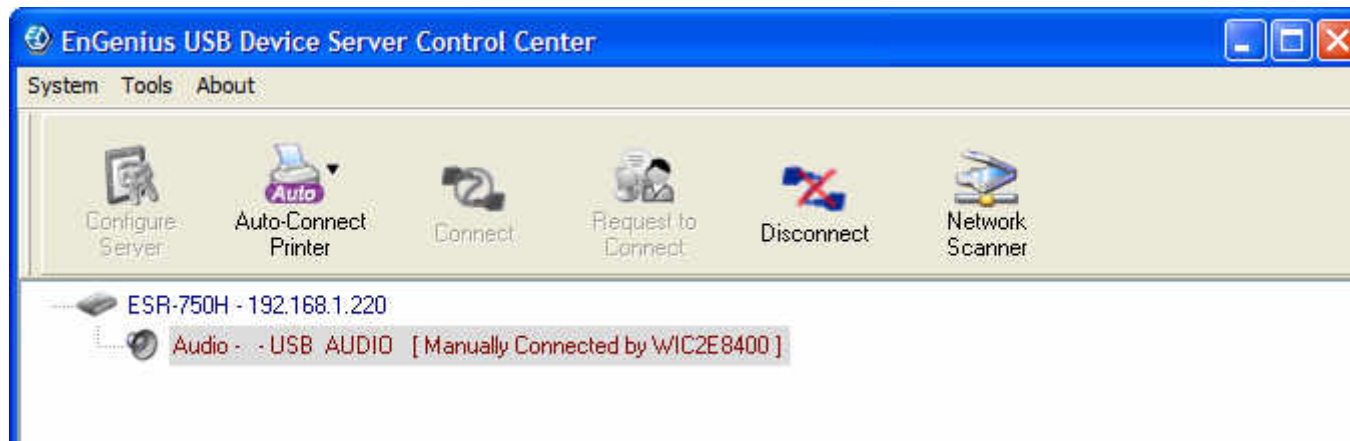

6. The USB speaker device is available for use with iOS devices.

Play Music from iTunes

1. Install iTunes 10, or later, on a Mac or PC that is connected to the same network as your shAir Music Server.
2. Launch iTunes and click the AirPlay icon  displayed in the lower right of the window and select your shAir Music device from the list.



3. Choose a song and click play in iTunes.
4. The music will stream to your shAir Music Server.

Multiple Speakers

You can easily stream music from iTunes to multiple speakers in your home.

1. Click the AirPlay icon and select `Multiple Speakers` from the list.
2. Click the speakers you want to use.

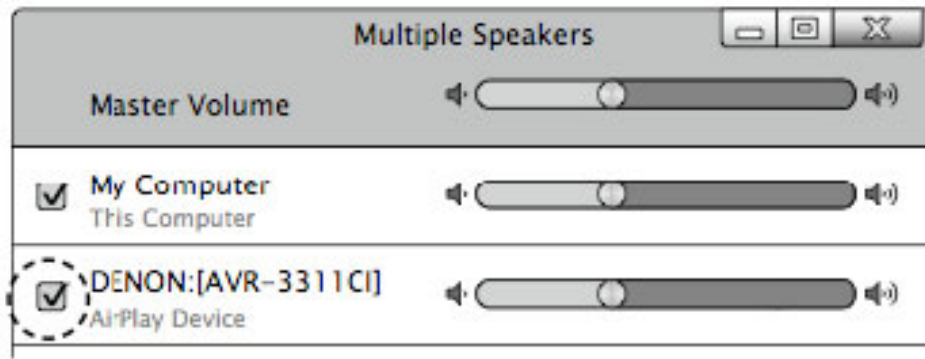


Figure 7-1. shAir Music Server Connected to iTunes

Streaming Music Stored from an iOS Device Directly to the shAir Music Server

If you update your “iPhone/iPod touch/iPad” to iOS 4.2.1 or later, you can stream music stored in your “iPhone/iPod touch/iPad” directly to your shAir Music Server.

1. Tap the AirPlay icon  .



2. Select the speaker you want to use.




7.2 Samba

This chapter describes the file server function which allows USB storage devices to be shared across a network by using SMB: NetBIOS over TCP/IP protocol.

Preliminary

1. This product supports file formats FAT12/16/32 and NTFS. The NTFS write operation is only supported in NetUSB mode.
2. EnGenius Networks is not responsible for the loss or corruption of data in memory devices, including hard disks; EnGenius Networks is not responsible for the leaking, manipulation, loss, or corruption of data in memory devices connected to the Server after unauthorized access.
3. In order to use the USB Mass Storage device connected to the server, the USB device must be turned on.

Connecting USB Mass Storage to the Server

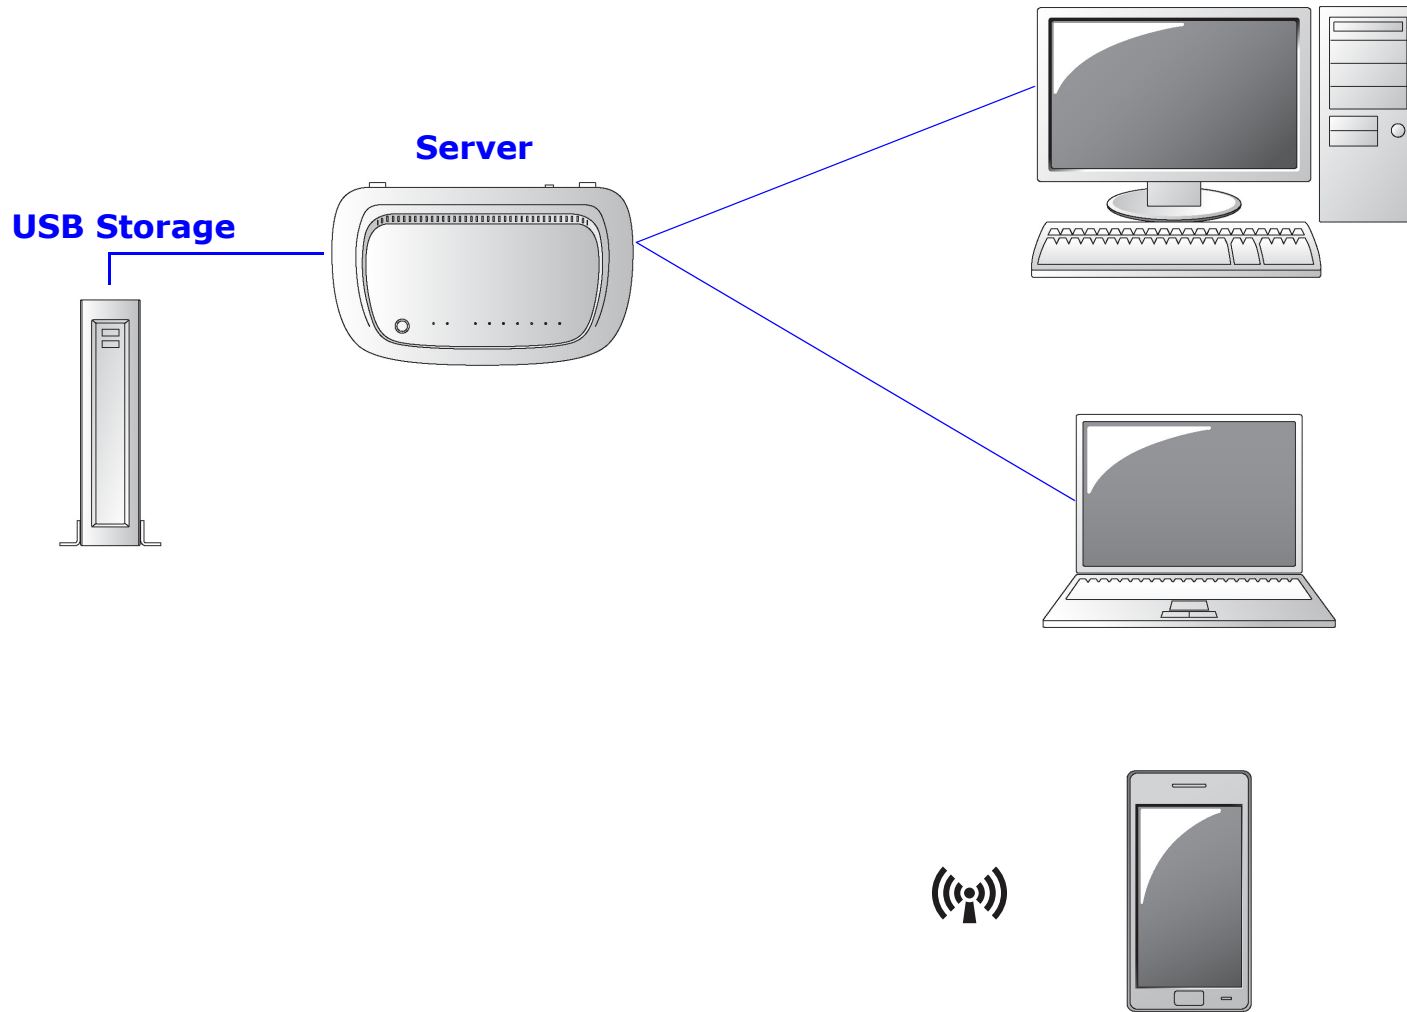

Supported Codepages

What is Codepage?

Used by the system to encode and interpret string characters. Codepage formats are not the same for each language. Some languages, such as Japanese have multibyte characters, while others, such as English and German, need only one byte to represent each character.

Filename Encoding of FAT File System

This is known as an 8.3 file name, a short file name using codepage encoding. The FAT file system also supports file names that can be up to 255 characters long. This is known as a long file name using Unicode (UTF-16) encoding.

When do You Need to Configure Codepage?

The Server supports Windows codepages. If users want to communicate files using SMB on Windows 98/Me/2000 with the Server, they have to set their Server codepage to be same as the codepage that their Windows PC is using.

Configuring the Server's Codepages

Users can use the following methods to set the Server's codepage.

1. Start Control Center and Auto-searching Server window will appear.
2. If the tool finds the Servers in your local area network, select the Server from the Server List and click "Configure Server" button.
3. The Web manager will show, click `Config` button and enter the server administrator username (default: admin) and password (default: admin).
4. After you have logged in successfully, setting General configuration dialog appears.
5. Select your codepage form File Server Codepage box and click Apply.

Using Shared Storage by USB Server Mode for Windows

1. Connect a USB storage device to this product.
2. Select My Network Places.
3. Click Display the Computers of Workgroup.
4. Double click the Microsoft Windows Network icon.
5. Double click the Workgroup that the Server belongs to. The default Workgroup name is “WORKGROUP”. You can refer to Control Center or the Server’s web pages to get it. You will see that the Server is displayed as its server name.
6. If you cannot find Workgroup name of the Server in Microsoft Windows Network, you can select Search for Computer... in My Network Places and enter the Server Name of the Server to find it.
7. Double click this Server Name icon.

**Note:**

If you use SMB on Windows 98 SE/ME, you must login to your Windows 98 SE/ME using the same user name as in the Server’s User Account.

8. The shared folders will be listed as sdax where x represents the x-th disk with respect to the USB port.
9. Perform Open, Paste, Remove or Copy the files to the shared folders.

Appendix A

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

**Important:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This device complies with FCC RF Exposure limits set forth for an uncontrolled environment, under 47 CFR 2.1093 paragraph (d)(2).

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Appendix B

Industry Canada Statement

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.



Important:

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Appendix C

Link Layers

There are different ways of connecting your personal computer (PC) or mobile computing device to the Internet. Here are four of the most common ways and how to connect to the Internet using them.

Dynamic IP Address (DHCP)

A DHCP of connection is where your internet connection is usually always on and your internet service provider automatically provides you with an IP address. A DHCP connection is usually from a Cable internet service.

Static IP

To set up a Static IP connection, enter the following: IP Address of the Internet Connection, Subnet Mask, Default Gateway, and both DNS Servers. This information can be obtained by either your Internet Service provider or Network Administrator. If your internet service provider requires a username and password to connect, you will then be prompted to enter the correct information.

MTU: Maximum Transmission Unit. It specifies the largest packet size permitted for internet transmission. The factory default MTU size of Static IP is 1500. If you wish to manually change the MTU size, set it between 512 and 1500.

Point-to-Point Protocol over Ethernet (PPPoE)

Point-to-Point Protocol over Ethernet (PPPoE): To set up a PPPoE connection, enter the Username, Password, and Service (name) of the internet connection provided by your ISP. Click Next and the ESR300H should connect to the internet successfully. A PPPoE connection is usually from a DSL internet service.

1. Login: The username or e-mail address that the internet connection uses to access internet connectivity.
2. Password: The password that corresponds to the username or e-mail address used to connect to the internet in the PPPoE.
3. Service Name: The Service Name is optional. This is to signify the name of the Internet Service Provider.
4. MTU: Maximum Transmission Unit. It specifies the largest packet size permitted for internet transmission. The factory default MTU size of Static IP is 1500. If you wish to manually change the MTU size, set it between 512 and 1500.
5. Point-to-Point Tunneling Protocol (PPTP)

To set up a PPTP connection, enter the type of WAN connection (Static IP or DHCP). After, depending on the type of WAN, follow the instructions of DHCP or Static IP to fill out the corresponding information. Then, proceed to enter the Username, Password, Service, and Connection ID of the PPTP internet connection. Once completed, click Next. Once configured, the internet connection will successfully connect.

Layer 2 Tunneling Protocol (L2TP)

To set up an L2TP connection, enter the type of WAN connection (Static IP or DHCP). After, depending on the type of WAN, follow the instructions of DHCP or Static IP to fill out the corresponding information. Then, proceed to enter the Username, Password, and Service. Click next when completed. Once configured, the internet connection will successfully connect.

MTU: Maximum Transmission Unit. It specifies the largest packet size permitted for internet transmission. The factory default MTU size of Static IP is 1500. If you wish to manually change the MTU size, set it between 512 and 1500.

Appendix D

WorldWide Technical Support

| REGION/COUNTRY OF PURCHASE | SERVICE CENTRE | SERVICE INFORMATION | |
|----------------------------|------------------|---------------------|--|
| Canada | CANADA | web site | www.engeniuscanada.com |
| | | email | rma@engeniuscanada.com |
| | | contact numbers | Toll-Free: (+1)888-397-2788 Local: (+1)905-940-8181 |
| | | hours of operation | Monday - Friday 9:00AM to 5:30PM (GMT-5) |
| USA | LOS ANGELES, USA | web site | www.engeniustech.com |
| | | email | support@engeniustech.com |
| | | forum | www.engeniusforum.com |
| | | contact numbers | Toll-Free: (+1) 888-735-7888 ext.518 Local: (+1) 714-432-8668 |
| | | hours of operation | Monday - Friday 8:00 AM to 5:30 PM PST (GMT-8) |

| REGION/COUNTRY OF PURCHASE | SERVICE CENTRE | SERVICE INFORMATION | |
|---|----------------|---------------------|--|
| Mexico, Central and South America | MIAMI, USA | web site | www.senaousa.com |
| | | email | fae@senaousa.com |
| | | forum | www.engeniusforum.com |
| | | contact numbers | Miami: (+1) 305-592-5666 Sao Paulo, Brazil: (+55)11-3957-0303 D.F., Mexico:(+52)55-1163-8894 |
| | | hours of operation | Monday - Friday 8:00 AM to 5:30PM EST (GMT-5) |
| Singapore, Cambodia, Indonesia, Malaysia, Thailand, Philippines, Vietnam China, Hong Kong, Korea, India South Africa Europe Oceania | SINGAPORE | web site | www.engeniustech.com.sg |
| | | email | techsupport@engeniustech.com.sg |
| | | contact numbers | (+65) 6227 1088 |
| | | hours of operation | Monday - Friday 9:00 AM - 6:00 PM (GMT+8) |

| REGION/COUNTRY OF PURCHASE | SERVICE CENTRE | SERVICE INFORMATION | |
|--|----------------|---------------------|--|
| Africa Middle East Russia CIS / Armenia, Azerbaijan, Balerus, Georgia, Kazakhstan, Kyrgyzstan, Moldova, Tajikistan, Turkmenistan, Ukraine, Uzbekistan Turkey Afghanistan Pakistan Bangladesh, Maldives, Nepal, Sri Lanka | DUBAI, UAE | web site | www.engenius-me.com |
| | | email | support@engenius-me.com |
| | | contact numbers | (+971) 4357 5599 |
| | | hours of operation | Monday - Friday 9:00 AM - 5:00 PM (GMT+4) |
| Other | TAIWAN | web site | www.engeniusnetworks.com |
| | | email | technology@sena.com |

Note:

- * Service hours are based on the local time of the service center.
- * Please visit the regional website for the customer service latest information.