



## Neutron Series Switches

# Neutron Series Managed Gigabit Switches

Optimal Performance, Enterprise Features & Robust Management Options


Neutron Series EWS Managed Gigabit Switches offer enterprise-class features, simplified network configuration, monitoring, and management options and optimal network performance for small to mid-size organizations.

Choose between 8-, 24-, and 48-Gigabit ports and Power-over-Ethernet (PoE+)-ready Layer 2 switches with 1-10 Gbps SFP+ ports. EWS Managed Switch model options also include desktop and rack mountable, fanless and SmartFan designs.

EWS Managed Gigabit Switches support easy deployment and operation. Organizations with limited IT support and budgets can create a reliable, efficiently managed network in no time.

## Features & Benefits

- 10/100/1000 GbE Ports
- On-Board Network Management Tools
- 802.3at/af PoE+ Ready
- Network Troubleshooting, Monitoring & Email Alerts
- 1-10 Gbps SFP+ Slots Extend Connectivity via Fiber Uplinks, Redundancy & Failover
- Full-Featured Layer 2 Switching
- Topology View Displays Network Devices & Relationships
- Added Bonus: License-Free AP Management Built-In
- Added Bonus: License-Free Remote Management With ezMaster™

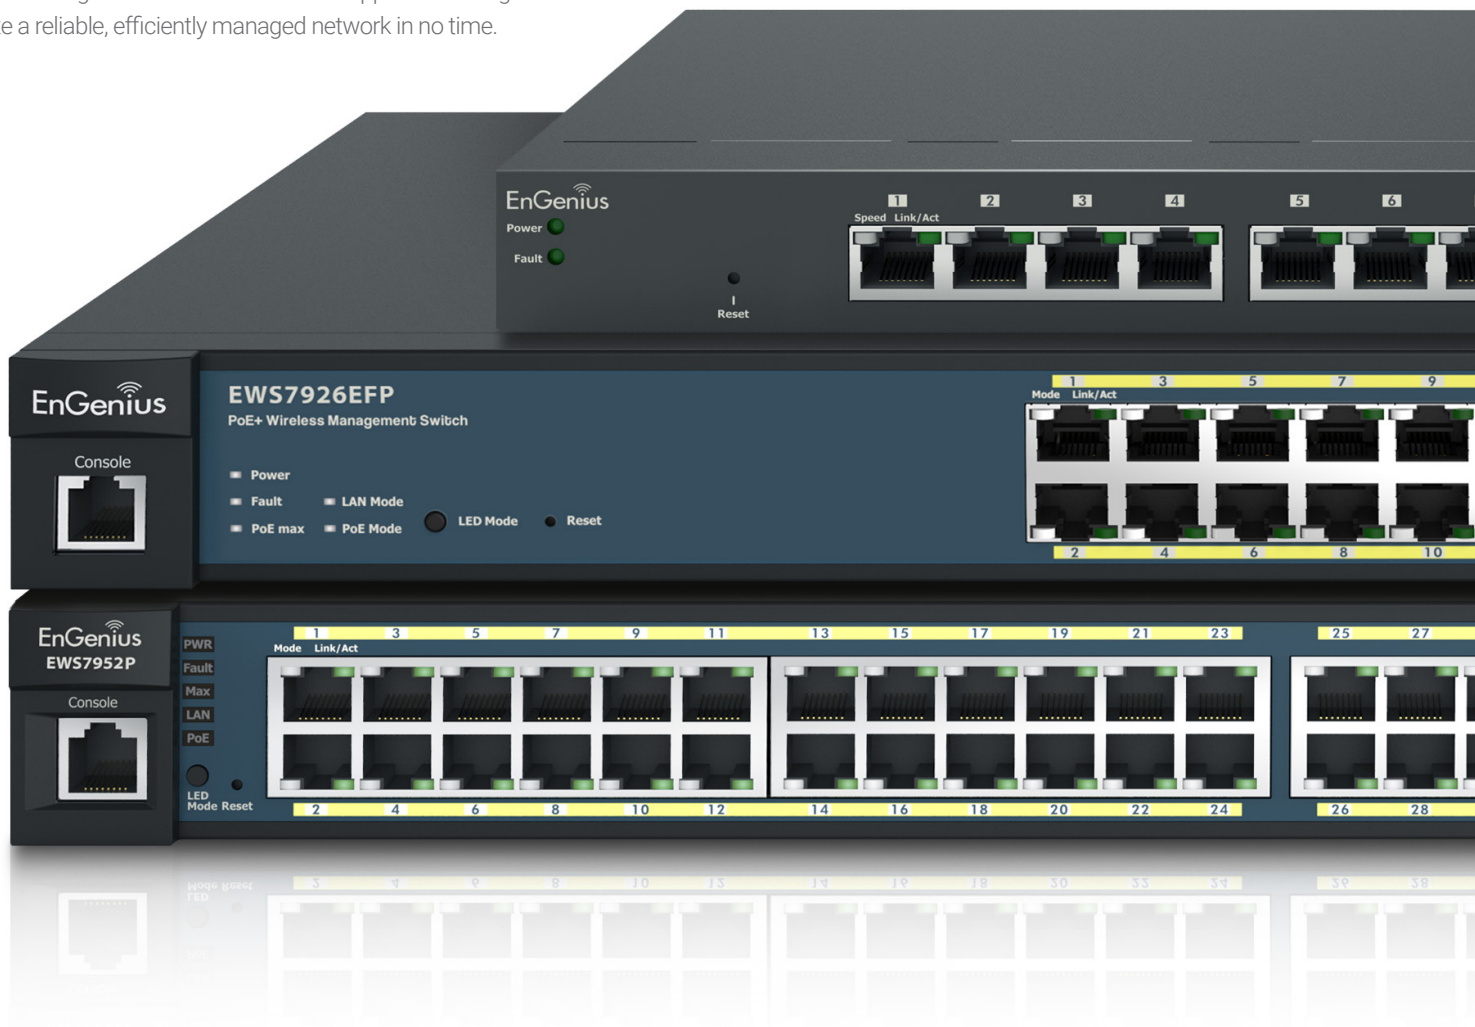

## In-Switch Management

### Simplified Network Management, Visibility & Troubleshooting

Achieve network management, visibility, and troubleshooting locally through the switch's on-board Web interface tools. Establish event-based email alerts for notification of predetermined activities.

### Supports 4 Different Types of Management

#### 1 Wired LAN Only

Manage via third-party SNMP manager



#### 2 Wired LAN+ Local Management

Manage locally via on-board tools



#### 3 Wired LAN + Wireless APs + Local Management

Manage locally via built-in controller




#### 4 Wired LAN + Wireless APs + Remote Management

Manage remote and distributed networks via ezMaster™



## In-Depth Network Visibility

Network Topology View automatically maps the network deployment to display device relationships across the infrastructure. Troubleshoot issues without manual tracking, and access the management interface of other EWS Switches directly from Topology View with QuickLink.

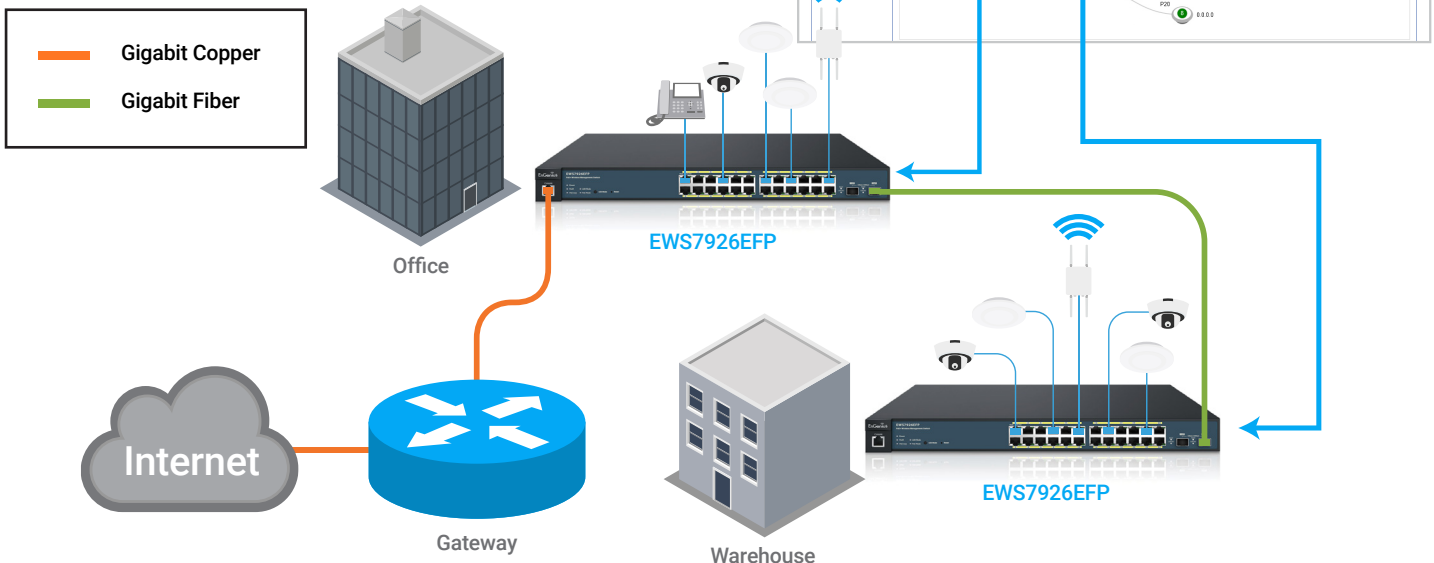


## Full-Feature Layer 2 Gigabit Switching

### High-Speed Gigabit

Provide reliable Gigabit access for networked devices and reduce delays that interrupt communications. The switch's 1 or 10 Gbps SFP+ slot options are suitable for connecting wired network segments throughout buildings that extend beyond the limitations of Ethernet cabling.

### Power & Connect Multiple Devices

Optimize the installation and power management of network devices such as access points, IP cameras, and VoIP phones by providing 802.3at/af PoE+ power and data on all ports. Regulate power budgets according to device requirements and remotely power cycle individual ports.

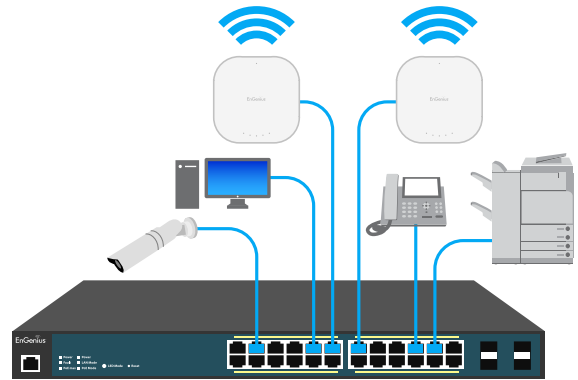

## Network Traffic Management

Neutron full-featured Layer 2 Switches offer performance-enhancing features that reduce multicasting traffic, speed up port blocking and port forwarding, and increase bandwidth via load balancing. Control each port's available bandwidth speeds for connected devices like APs in areas where more or less speed is needed, such as in lobbies or conference rooms.



## VLAN/Voice & Quality of Service

Segment the network by departments or traffic types for increased performance and security with 802.1Q VLAN. While 802.1p Class of Service prioritizes compliant VoIP and video traffic ensuring bandwidth intensive, time-sensitive data is forwarded immediately for clear, smooth voice and video delivery.

## Access Control & Security

Protect the network via 802.1X port-based client authentication and security through a RADIUS server. Utilizing Access Control Lists (ACLs), administrators can see who has access to network segments while screening traffic from unauthorized MAC or IP addresses. Establish a Guest VLAN to grant and limit Internet resources for visitors while keeping the network secure.

## Network Monitoring & Troubleshooting

Enable 3rd party SNMP management and monitor the network's performance by viewing port statistics, system logs, and RMON data. Perform port diagnostics through Ping Tests, diagnose cable failure and trace the route data takes through the network to troubleshoot slowdowns or connection issues.

## Added Bonus: License-Free Access Point & Remote Management

### Locally Manage Network Devices With On-Board Tools

Quickly discover, configure and monitor network devices and manage up to 50 APs, Switches, or IP Cameras within the local subnet, license-free, through the switch's suite of wireless management features.

### Centrally Manage Wired & Wireless Devices via ezMaster


Manage Access Points, Switches, and IP Cameras through ezMaster Network Management Software for remote, centralized management of hundreds of devices across the network or multiple sites regardless of size or location without licensing or subscription fees.

Utilize ezWiFi Planner and upload your designed Wi-Fi floorplans into the switch's interface or ezMaster to show optimized Access Point placement.







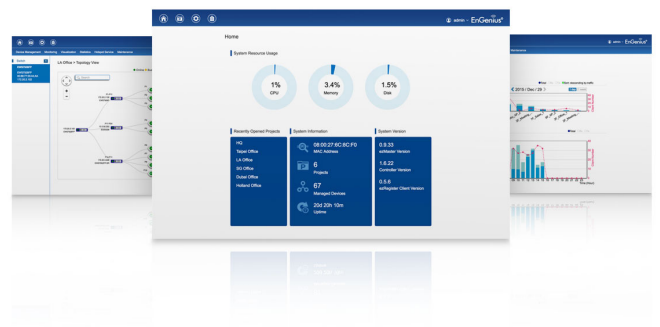


### Simplified Device Management

Centralized device management is easy through both the switch's on-board tools and ezMaster Software. Group devices for streamlined configuration, provisioning and monitoring; view wired and wireless traffic via a comprehensive at-a-glance dashboard and get rich analytics and reporting.



## Managed Gigabit PoE+ Switches

							
Models	EWS7952FP	EWS7952P	EWS7926EFP	EWS1200-28TFP	EWS7928P	EWS5912FP	EWS2910P
10/100/1000 Base-T, POE+	48	48	24	24	24	8	8
10/100/1000/10000 SFP+ Ports	-	-	2	-	-	-	-
10/100/1000 SFP Ports	4	4	-	4	4	2	2
RJ45 Console Port	•	•	•	•	•	•	-
Auto Uplink Gigabit Ports	-	-	-	-	-	2	-
Rackmount	19" 1U	19" 1U	19" 1U	19" 1U	19" 1U	13" 1U	9.45" (desktop)
Total PoE Budget	740W	410W	410W	410W	185W	130W	61.6W
PoE+ Capable Ports	1-48	1-48	1-24	1-24	1-24	1-8	1-8 (802.3af only)
Switching Capacity	104 Gbps	104 Gbps	56 Gbps	56 Gbps	56 Gbps	24 Gbps	20 Gbps
Forwarding Mode	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward	Store-and-forward
MAC Address Table	8k	8k	8k	8k	8k	8k	8k
Packet Buffer Memory	1.5 MB	1.5 MB	512 KB	512 KB	512 KB	512 KB	512 KB
Power Source	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz	100 to 240 VAC 50/60Hz
Full Load Power Consumption	885.23 Watts	509 Watts	409.74 Watts	409.74 Watts	235.3 Watts	152.8 Watts	79.4 Watts
Management	Wireless AP Controller, ezMaster Network Management Software, Web GUI, CLI, SNMP, RMON, HTTPS, Dual Image						
Wireless EWS AP Support	Up to 50	Up to 50	Up to 50	Up to 50	Up to 50	Up to 50	Up to 50
Advanced QoS with IPv4/IPv6 Multicast Filtering	IGMP and MLD Snooping						
Auto-VoIP	•	•	•	•	•	•	•
VLANs	Max 4094 Static Groups, Voice VLAN						
Network Standards	IEEE 802.3 Ethernet IEEE 802.3i 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3z Gigabit Ethernet 1000Base-SX/LX IEEE 802.3ad Link Aggregation (Trunking) IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.1p Quality of Service IEEE 802.1X RADIUS Access Control IEEE 802.3az Energy Efficient Ethernet						

## Technical Specifications

### Network Ports

#### EWS2910P

8 x 10/100/1000 Mbps Ports

2 x 100/1000 Mbps SFP Slot

#### EWS5912FP

8 x 10/100/1000 Mbps Ports

2 x 100/1000 Mbps SFP Slot

2 x 100/1000 Mbps Uplink

1 x RJ45 Console Port

#### EWS7928P/EWS1200-28TFP/EWS7926EFP

24 x 10/100/1000 Mbps Ports

2 x 10/100/1000/10000 SFP+ Slot (EWS7926EFP only)

4 x 100/1000 Mbps SFP Slot (EWS7928P/EWS1200-28TFP only)

1 x RJ45 Console Port

#### EWS7952FP/EWS7952P

48 x 10/100/1000 Mbps Ports

4 x 100/1000 Mbps SFP Slot

1 x RJ45 Console Port

### Switching Capacity

**EWS2910P:** 20 Gbps

**EWS5912FP:** 24 Gbps

**EWS7928P/EWS1200-28TFP/EWS7926EFP:** 56 Gbps

**EWS7952FP/EWS7952P:** 104 Gbps

### Forwarding Mode

Store and Forward

### SDRAM

256 MB

### Flash Memory

32 MB

#### EWS1200-28TFP/EWS7952P/EWS5912FP/ EWS2910P

Packet Buffer Memory: 512 KB

#### EWS7952FP/EWS7952P

Packet Buffer Memory: 1.5 MB

### PoE Capable Ports

#### EWS2910P

PoE Standard: Ports 1~8 Support IEEE 802.3af

#### EWS5912FP

PoE Standard: Ports 1~8 Support IEEE 802.3at/af

#### EWS7928P/EWS1200-28TFP/EWS7926EFP

PoE Standard: Ports 1~24 Support IEEE 802.3at/af

#### EWS7952FP/EWS7952P

PoE Standard: Ports 1~48 Support IEEE802.3at/af

### PoE Output

**EWS2910P** Ports 1~8 Output Up to 15W

**EWS5912FP** Ports 1~8 Output Up to 30W

**EWS7928P** All Gigabit Ethernet Ports Up to 30W

**EWS1200-28TFP/EWS7926EFP** All Gigabit Ethernet Ports Up to 30W

**EWS7952FP/EWS7952P** All Gigabit Ethernet Ports Up to 30W

### Total PoE Budget

**EWS2910P:** 61.6W

**EWS5912FP:** 130W

**EWS7928P:** 185W

**EWS1200-28TFP/EWS7926EFP:** 410W

**EWS7952P:** 410W

**EWS7952FP:** 740W

### Power & Source

#### EWS7952FP

Full Load Power Consumption: 885.23 Watts

110 to 240 VAC 50/60Hz

#### EWS7952P

Full Load Power Consumption: 509 Watts

110 to 240 VAC 50/60Hz

#### EWS1200-28TFP/EWS7926EFP

Full Load Power Consumption: 409.74 Watts

110 to 240 VAC 50/60Hz

#### EWS7928P

Full Load Power Consumption: 235.3 Watts

110 to 240 VAC 50/60Hz

#### EWS5912FP

Full Load Power Consumption: 152.8 Watts

110 to 240 VAC 50/60Hz

#### EWS2910P

Full Load Power Consumption: 79.4 Watts

110 to 240 VAC 50/60Hz

### LED Indicators

1 x Power LED

1 x Fault LED

1 x PoE Max LED

1 x LAN Mode LED

1 x PoE Mode LED

Copper Ports: LAN/PoE Mode, Link/Act

SFP Ports: Link/Act, Speed (EWS2910P, EWS7952FP, EWS7926EFP only)

### Software Features

#### Layer 2 Features

802.3ad Link Aggregation

- Maximum of 8 Groups/8 Ports per Group

Port Mirroring

- One-to-One

- Many-to-One

Spanning Tree Protocol

- 802.1D Spanning Tree Protocol (STP)

- 802.1w Rapid Spanning Tree Protocol (RSTP)

- 802.1s Multiple Spanning Tree Protocol (MSTP)

MAC Address Table

- 8K Entries

Static MAC Address

- 256 Entries

802.1ab Link Layer Discovery Protocol

IGMP Snooping

- IGMP v1/v2/v3 Snooping

- Supports 4094 IGMP Groups

- IGMP per VLAN

- IGMP Snooping Querier

- IGMP Snooping Fast Leave

MLD Snooping

- MDL Snooping v1/v2

- Supports 4,094 MLD Groups

- MLD per VLAN

Jumbo Frame

- Up to 9,216 bytes

802.3x Flow Control

802.3az Energy Efficient Ethernet

### VLAN

802.1Q Support

VLAN Group

- Max 4,094 Static VLAN Groups

Voice VLAN

## Technical Specifications continued

### QoS

802.1p Quality of Service

- 8 Queues per Port

Queue Handling

- Strict
- Weighted Round Robin (WRR)

QoS Based on:

- 802.1p Priority
- DSCP

Bandwidth Control

- Port-Based (Ingress/Egress, 64 Kbps~1000 Mbps)

Broadcast/Unknown Multicast/Unknown Unicast Storm Control

### Access Control List (ACL)

Layer 2/3

- Supports Maximum 32 Entries (ACL)
- Supports Maximum 256 Entries (ACE)

ACL Based on:

- MAC Address
- VLAN ID
- 802.1p Priority
- Ethertype
- IP Address
- Protocol Type
- DSCP

### Security

802.1X

- Guest VLAN
- Port-Based Access Control

Supports RADIUS Authentication

Port Security

- Up to 256 MAC Addresses per Port

Port Isolation

DoS Attack Prevention

BPDU Attack Prevention

### Monitoring

Port Statistics

System Log

RMON

### Management

Web Graphical User Interface (GUI)

Command Line Interface (CLI)

BootP/DHCP Client/DHCPv6 Client

SSH Server

Telnet Server

TFTP Client

HTTPS

SNMP

### Management continued

Web Graphical User Interface (GUI)

Command Line Interface (CLI)

BootP/DHCP Client/DHCPv6 Client

SSH Server

Telnet Server

TFTP Client

HTTPS

SNMP

- Supports v1/v2c/v3

SNMP Trap

SNTP

Configuration Restore/Backup

Dual Images

Email Alerts

### PoE Management

Power On/Off Per Port

Power Class Configuration

Power Feeding with Priority

User Defined Power Limit

### Diagnostic

Cable Diagnostic

Ping Test

Trace Route

IPv6 Ping Test

### MIB/RFC Standards

RFC1213

RFC1493

RFC1757

RFC2674

RFC 2863

### Wireless Management Features (with Neutron Series Access Points & ezMaster)

AP Supported (up to 50 APs in controller mode)

Access Point Auto Discovery & Provisioning

Access Point Auto IP-Assignment

Access Point Group Management

Remote Access Point Rebooting

Access Point Device Name Editing

Access Point Radio Settings

Band Steering

Traffic Shaping

Fast Roaming (802.11k & 802.11r)

Pre-Authentication (802.11i & 802.11x)

PMK Caching (802.11i)

RSSI Threshold

Access Point Client Limiting

Client Fingerprinting

Wireless Security (WEP, WPA/WPA2 Enterprise, WPA/WPA2 PSK)

### Wireless Management Features (with Neutron Series Access Points & ezMaster) continued

AP VLAN Management

VLANs for Access Point- Multiple SSIDs

Secured Guest Network

Capture Portal

Access Point Status Monitoring

Rogue AP Detection

Email Alert

Wireless Client Monitoring

Background Scanning

Wireless Traffic & Usage Statistics

Real-Time Throughput Monitoring

Visual Topology View

Floor Plan View

Map View

Wireless Coverage Display

Secure Control Messaging (SSL Certificate)

Local MAC Address Database

Remote MAC Address Database (RADIUS)

Unified Configuration Import/Export

Intelligent Diagnostics

Bulk Firmware Upgrade Capability

One-Click Update

Kick/Ban Clients

Wi-Fi Scheduler

### ezMaster System Requirements

#### Recommended environment for managing 500 APs

CPU: Intel® Core™ i7 Quad-core or above

RAM: 4 GB minimum

HDD: 500 GB (actual requirement dependent on log size)

OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

#### Recommended environment for managing 1,000+ APs

CPU: Intel® Xeon® Processor E3 or above

RAM: 4 GB minimum

HDD: 500 GB (actual requirement dependent on log size)

OS: Microsoft® Windows® 7 or later + VMware® Player 7.0 or compatible virtualization software

#### Browser Requirements

Internet Explorer 10 or better

Firefox 34.0 or better

Chrome 31.0 or better

Safari 8.0 or better

#### Network Topology Requirements

At sites where APs are deployed: A DHCP-enabled network for APs to obtain an IP address

## Technical Specifications continued

### Environmental & Mechanical

#### Temperature Range

##### EWS2910P

Operating: 32°F to 104°F (0°C to 40°C)

Storage Temperature: -40°F to 158°F (-40°C to 70°C)

##### EWS5912FP/EWS7928P/EWS1200-28TFP/ EWS7926EFP/EWS7952FP/EWS7952P

Operating: 32°F to 122°F (0°C to 50°C)

Storage Temperature: -40°F to 158°F (-40°C to 70°C)

#### Humidity (non-condensing)

Operating: 5% - 95%

### Device Dimensions & Weights

#### EWS2910P

Weight: 1.36 lbs. (620 g)

Width: 9.45" (240 mm)

Length: 4.13" (105 mm)

Height: 1.06" (27 mm)

#### EWS5912FP

Weight: 4.4 lbs. (1.9 kg)

Width: 13.00" (330.20 mm)

Length: 9" (228.60 mm)

Height: 1.73" (43.94 mm)

#### EWS7928P

Weight: 7.82 lbs. (3.5 kg)

Width: 17.3" (439 mm)

Length: 10.24" (260 mm)

Height: 1.73" (44 mm)

### Device Dimensions & Weights continued

#### EWS1200-28TFP/EWS7926EFP

Weight: 7.82 lbs. (3.5 kg)

Width: 17.3" (439 mm)

Length: 10.24" (260 mm)

Height: 1.73" (44 mm)

#### EWS7952P

Weight: 12.3 lbs. (5.6 kg)

Width: 17.32" (440 mm)

Length: 10.23" (260 mm)

Height: 1.73" (44 mm)

#### EWS7952FP

Weight: 14.15 lbs. (6.4 kg)

Width: 17.32" (439.9 mm)

Length: 16.14" (409.9 mm)

Height: 1.73" (43.9 mm)

### Package Contents

1x EWS Managed Gigabit Switch

1x Quick Installation Guide

#### EWS2910P

1x Power Adapter

1x Power Cord

1x Wall Mount Kit

1x Ground Screw Set

#### EWS5912FP/EWS7928P/EWS7926EFP/ EWS7952FP/EWS7952P

1x Power Cord

1x RJ45 Console Cable

1x Rack Mount Kit



### Certifications

CE, FCC, IC



### Warranty

1 Year

## Desktop

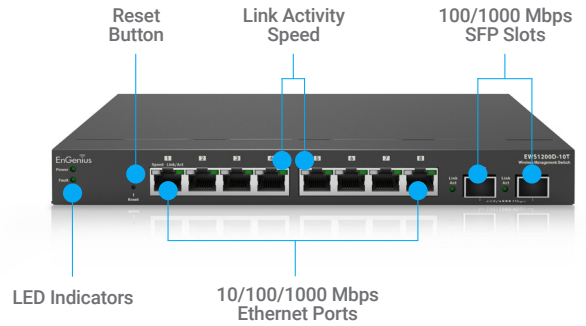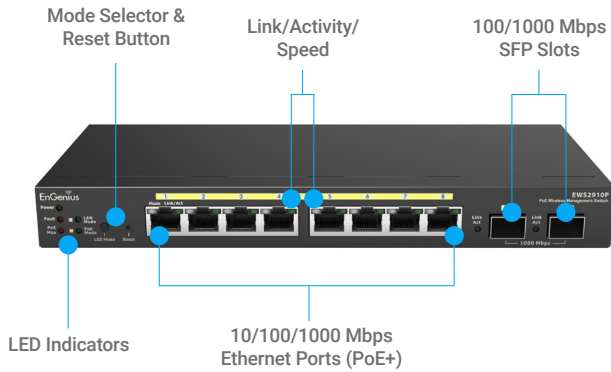

## Rackmount

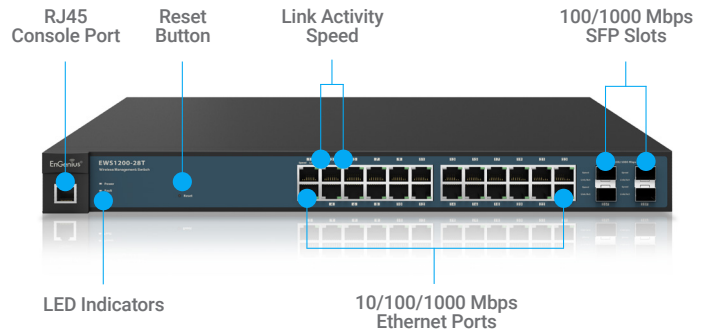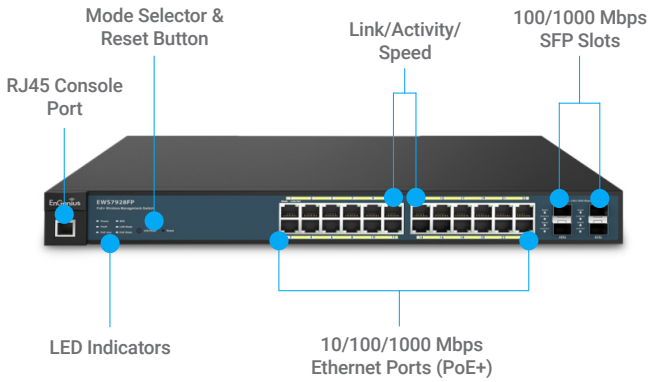

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network. Transmission Power (Tx Power) is subject to local regulation; Actual Tx Power may be different than stated following local regulation.

## EnGenius Networks Europe BV

Fellenoord 180, 5611 ZB Eindhoven - Nederland

e | sales@engeniustnetworks.eu t | +31 40 8200 888 w | www.engeniustnetworks.eu

Version 20190115EN

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. All rights reserved.