



The Neutron Series **Distributed Network Management Solution**

Gigabit Managed Smart Switch with Wireless Controller



Best Value Managed Smart Switches

The EnGenius EWS1210-26TFP Gigabit Managed Smart Switch family is introduced to provide a new network expanding solution under Neutron Series. EWS1210-26TFP is available for various deployment needs from small businesses to enterprise businesses which are equipped with Gigabit connectivity. With rich L2 management manageability featured, IT managers, VARs, and MSPs can take the advantage of quick deployment, simplified maintenance, and seamless upgrades with lower total cost of ownership making it a lucrative solution for businesses looking for the best combination of features, performance and value.

Rich-featured Layer 2 Manageability

The EnGenius EWS1200 family includes Layer 2 switching features such as IGMP Snooping, MLD Snooping, Port Mirroring, Rapid Spanning Tree, Multiple Spanning Tree, Spanning Tree, VLAN group, Voice VLAN, ACL, 802.1X port security, SNMP v1/v2c/v3 and IEEE802.3ad Link Aggregation Control Protocol (LACP). The IEEE 802.3x Flow Control function allows servers to directly connect to the switch for fast, reliable data transfer. Network maintenance features include Spanning Tree and Cable Diagnostics. IT managers, VARs, and MSPs who are expanding network deployments for businesses, schools, resorts and hotels, or other expansive venues can expect superior performance and reliability at a value price point that is much more attractive than from larger, more enterprise focused network brands.

Simplifying WLAN Management

Besides its powerful Layer 2 switch features, the EWS1200 also excels as a full featured wireless controller, capable of managing up to 50 Neutron APs. Neutron Switches can automatically discover any supported EnGenius APs connected to the network with a simple click of a mouse, self-configure and become instantly manageable. Simply log into the device via a web browser and assign APs into cluster groups. Wireless Radio, Wireless Security and other AP configurations can all be easily applied to multiple APs simultaneously, eliminating the time consuming process of configuring each and every wireless AP individually. Any organization with limited IT engineer and budget can create a stable and secure wireless network in no time. Without additional costs or license purchasing necessary, network administrators can manage and monitor both wired and wireless nodes through a single web interface.

Features

- > 10/100/1000 Mbps Ethernet Ports
- > 1/10 Gbps SFP+ slots for longer connectivity via fiber uplinks and for uplink redundancy and failover
- > Manage and monitor up to 50 wireless APs
- > IGMP and MLD snooping provides advanced multicast filtering
- > IEEE802.3ad Link Aggregation
- > STP/RSTP/MSTP
- > Access Control List/ Port Security
- > IEEE802.1X and RADIUS Authentication
- > SNMP v1/v2c/v3
- > Voice VLAN for fast and reliable deployment of VoIP
- > Energy Efficient Ethernet (IEEE802.3az) support for better energy saving when more EEE-compliant end devices are available in the market
- > Advanced QoS with IPv4/IPv6 ingress traffic filtering (ACLs) and prioritization
- > Easy to manage via Web-Based Management GUI for switch deployment
- > Dual firmware images, improving reliability and uptime for your network
- > ezMaster compatible
- > Maximum 410W PoE budget and compliance with 802.3af/at standard

Easy Network Management and Visibility

EWS1200 family Switches are designed for easy network management and can be quickly added to an existing rack of other branded L2 and L3 switches. Configuring the switch can be made through an intuitive and user-friendly Web interface for efficient management. The Switch also includes SNMP (v1, v2c and v3) to collect and track data for network health monitoring, device management, and easily critical IT controls and policy enforcement. The Link Layer Discovery Protocol (LLDP) feature allows family switches and other connecting network devices to announce and display their identity and capabilities on the local network, which helps IT managers better manage, troubleshoot or correct issues that may arise within the network.

VLAN and Voice VLAN

EWS1200 family Switches support 802.1Q VLANs for convergence improvement and bandwidth utilization. The switch automates the process of setting up VoIP devices on a network. Voice VLAN guarantees clear quality and efficient transmission for all voice communications. VLANs also provide a means of securing each broadcast domain, segregating them from each other. VLANs can be configured to segment departmental resources. VLANs implemented on an SMB network help to restrict access to sensitive information from one department to another.

Making the Network More Secure

The EWS1200 family switches also support 802.1X port-based authentication, so IT managers can authenticate clients via external RADIUS servers. In addition, the Access Control List (ACL) feature enhances network security and protects the network by screening traffic from unauthorized MAC or IP addresses.

Multicast Support

The EWS1200 family supports IGMP Snooping, MLD Snooping, and VLAN for multicast applications. By passively snooping IGMP packets transferred between the switch and the IP multicast host, registration information is recorded and sorted into multicast groups. The switch can then intelligently forward traffic to specified ports that request multicast traffic. MLD Snooping enhances efficiency in selective distribution by forwarding IPv6 multicast data to receiving ports, rather than flooding all ports in a VLAN.

QoS for Smoother Video Conferences and Clearer Phone Calls

Priority queueing ensures high-priority traffic being delivered efficiently, even encountering congestion from high traffic bursts. The ability to prioritize traffic makes it possible to provide quality of latency-sensitive services and applications in despite of increasing traffic loads. For mission critical environments, 802.1D, 802.1w and 802.1s Spanning Tree Protocols (STP) can benefit users to configure the switch with a redundant backup bridge path so transmission and reception of packets can be guaranteed in the event of any failed switch on the network. To create a streamlined network, 802.1p Priority Tagging places a priority tag in a specified frame to be identified from the queue once received and to be recognized for giving priority ahead of other frames. IEEE 802.1p enables administrators to assign and designate traffic priority that assures of applications quality such as clear and jitter-free VoIP and video conferencing.

Energy Saving

The EnGenius EWS1200 family is capable of conserving power without sacrificing operation performance. With the Energy Efficient Ethernet (EEE) standard, the network will automatically decrease its power usage when traffic is low with no setup required. The switches can also detect the length of connected cables to automatically reduce power usage on shorter cable connections.

Technical Specifications

General Features

- Switching Capacity: 92Gbps

Forwarding Mode: Store and Forward

SDRAM: 256MB

Flash Memory: 32MB

Port Functions

24 x 10/100/1000 Mbps Ports

2x 1/10 Gbps SFP+ Slots

1 x RJ45 Console Port

Power Consumption and PoE Capacity

DUT: 23.2W without PoE capacity

PoE Standard: Supports IEEE 802.3af/at for 1~24 ports

Power Budget on PoE : 410W

LED Indications

Power LED

Fault LED

Interface

Link/Activity/Speed (per Ethernet port)

Link/Activity/Speed (per SFP slot)

Environmental Specifications

Temperature Range

Operating Temperature: 0 to 50°C

Storage Temperature: -20°C to 70°C

Humidity

5% ~ 95% (Non-condensing)

Package Content

EnGenius Switch

Power Cord

Rack-mount Kit

Quick Installation Guide

Physical Specifications

Weight: 3.5kg

Dimensions (W x D x H): 439 x 260 x 44 mm

Software Features

L2 Features

802.3ad Link Aggregation

- Maximum of 8 groups/8 ports per group

Port Mirroring

- One-to-One

- Many-to-One

Spanning Tree Protocol

- 802.1D Spanning Tree Protocol (STP)

- 802.1w Rapid Spanning Tree Protocol (RSTP)

- 802.1s Multiple Spanning Tree Protocol (MSTP)

MAC Address Table

- 8K entries

Static MAC Address

- 256 entries

802.1ab Link Layer Discovery Protocol

IGMP Snooping

- IGMP v1/v2/v3 Snooping

- Supports 256 IGMP Groups

- IGMP per VLAN

- IGMP Snooping Querier

- IGMP Snooping Fast Leave

MLD Snooping

- MLD Snooping v1/v2

- Supports 256 MLD groups

Access Control List (ACL)

Layer 2/3

- Supports Max. 50 Entries (ACL)

- Supports Max. 256 Entries (ACE)

802.3az Energy Efficient Ethernet

VLAN

802.1Q VLAN Tag supported

VLAN Group


Technical Specifications

- Max 4094 Static VLAN Groups	Port Isolation
Voice VLAN	DoS Attack Prevention
QoS	BPDU Attack Prevention
802.1p Quality of Service	Monitoring
- 8 queues per port	Port Statistics
Queue Handling	System Log
- Strict	RMON
- Weighted Round Robin (WRR)	Management
QoS based on	Web Graphical User Interface (GUI)
- 802.1p Priority	Command Line Interface (CLI)
- DSCP	BootIP/DHCP Client/DHCPv6 Client
Bandwidth Control	SSH Server
- Port-based (Ingress/Egress, 64 Mbps~1000Mbps)	Telnet Server
Broadcast/Unknown Multicast/ Unknown Unicast Storm Control	TFTP Client
Access Control List (ACL)	HTTPS
Layer 2/3	SNMP
- Supports Max. 50 Entries (ACL)	- Supports v1/v2c/v3
- Supports Max. 256 Entries (ACE)	SNMP Trap
ACL based on	SNTP
- MAC Address	Configuration Restore/Backup
- VLAN ID	Dual Images
- 802.1p Priority	Diagnostic
- Ethertype	Cable Diagnostic
- IP Address	Ping Test
- Protocol Type	Trace Route
- DSCP	MIB/RFC Standards
Security	RFC1213
802.1X	RFC1493
- Guest VLAN	RFC1757
- Port-based Access Control	RFC2674
Supports RADIUS Authentication	RF2863
Port Security	
- up to 256 MAC Addresses per Port	

Technical Specifications

Wireless Management Features	
Manage up to 50 EWS Neutron Access Points	Bulk Firmware Upgrade Capability
Access Point Auto Discovery and Provisioning	One-Click Update
Access Point Auto IP Assignment	Intelligent Diagnostics
Access Point Cluster Management	Kick/Ban Clients
Remote Access Point Rebooting	
Access Point Device Name Editing	
Access Point Radio Settings	
Band Steering and advanced configuration	
Traffic Shaping per SSID/user	
RSSI Threshold per radio	
Fast Roaming	
Access Point Client Limiting	
Client Fingerprinting	
Wireless Security (WEP, WPA/WPA2 Enterprise, WPA/WPA2 PSK)	
AP VLAN Management	
VLANs for Access Point- Multiple SSIDs	
Secured Guest Network	
Captive Portal	
Access Point Status Monitoring	
Rogue AP Detection	
Wireless Client Monitoring	
Background Scanning	
Email Alert	
Wireless Traffic & Usage Statistics	
Real-time Throughput Monitoring	
Visual Topology View	
Floor Plan View	
Map View	
Wireless Coverage Display	
Secure Control Messaging (SSL Certificate)	
Local MAC Address Database	
Remote MAC Address Database (RADIUS)	
Unified Configuration Import / Export	

Interface

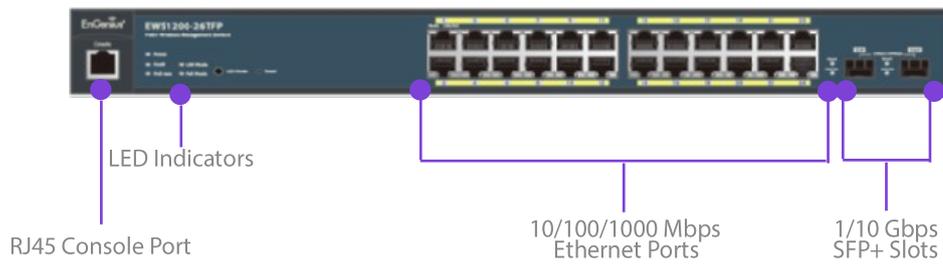

HQ , Taiwan
www.engeniusnetworks.com
Costa Mesa, California, USA | (+1) 714 432 8668
www.engeniustech.com
Dubai, UAE | (+971) 4 357 5599
www.engenius-me.com

Singapore | (+65) 6227 1088
www.engeniustech.com.sg
Miami, USA | (+1) 305 887 7378
pg.engeniustech.com eg.engeniustech.com
Eindhoven, Netherlands | (+31) 40 8200 888
www.engeniusnetworks.eu

EnGenius®

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2017 EnGenius Technologies, Inc. All rights reserved. Compliant with FCC - This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

Version 1.1— 8/14/2017