

Configuring Cloudpath to Work With Ruckus Dynamic Pre-Shared Key (DPSK)

Supporting Software Release 5.2

Copyright Notice and Proprietary Information

Copyright © 2018 Ruckus Networks, an ARRIS company. All rights reserved.

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from Ruckus Networks ("Ruckus"). Ruckus reserves the right to revise or change this content from time to time without obligation on the part of Ruckus to provide notification of such revision or change.

Destination Control Statement

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.

Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, RUCKUS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. Ruckus does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. Ruckus does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise. As a condition of your use of the Materials, you warrant to Ruckus that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

Limitation of Liability

IN NO EVENT SHALL RUCKUS, ARRIS, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIES, LICENSORS AND THIRD PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF RUCKUS HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS.

If you are dissatisfied with the Materials or with the associated terms of use, your sole and exclusive remedy is to discontinue their use.

Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

Trademarks

The Ruckus, Ruckus Wireless, Ruckus logo, Big Dog design, BeamFlex, ChannelFly, Edgelron, FastIron, HyperEdge, ICX, IronPoint, OPENG, Xclaim, and ZoneFlex and trademarks are registered in the U.S. and other countries. Ruckus Networks, Dynamic PSK, MediaFlex, FlexMaster, Simply Better Wireless, SmartCast, SmartCell, SmartMesh, SpeedFlex, Unleashed, ZoneDirector and ZoneFlex are Ruckus trademarks worldwide. Other names and brands mentioned in these materials may be claimed as the property of others.

Wi-Fi Alliance[®], Wi-Fi[®], the Wi-Fi logo, the Wi-Fi CERTIFIED logo, Wi-Fi Protected Access[®] (WPA), the Wi-Fi Protected Setup logo, and WMM[®] are registered trademarks of Wi-Fi Alliance. Wi-Fi Protected Setup[™], Wi-Fi Multimedia[™], and WPA2[™] are trademarks of Wi-Fi Alliance.

Contents

Overview of DPSK Configuration.....	6
Configuring a DPSK WLAN on a Ruckus ZoneDirector Controller.....	6
Obtaining Information about the ZoneDirector Controller.....	12
Configuring a DPSK WLAN on a Ruckus SmartZone Controller.....	13
Obtaining Information about the SmartZone Controller.....	19
Configuring DPSK on Cloudpath to Integrate with ZoneDirector.....	20
Adding a DPSK Plugin to the Workflow.....	20
Adding a Device Configuration to the Workflow.....	27
Testing the DPSK User Experience.....	30
Troubleshooting Tips.....	30
Configuring DPSK on Cloudpath to Integrate with SmartZone.....	31
Adding a DPSK Plugin to the Workflow.....	31
Adding a Device Configuration to the Workflow.....	37
Testing the DPSK User Experience.....	40
Troubleshooting Tips.....	40

Overview of DPSK Configuration

Ruckus DPSK creates a unique 63-byte encryption key for each user upon accessing the wireless LAN for the first time and then automatically configures end devices with the requisite wireless settings, such as SSID and unique passphrase, without manual intervention.

Ruckus DPSK is one of several encryption methods you can use with Cloudpath.

This guide provides the basic configuration steps you need to set up your Ruckus wireless controller (ZoneDirector or SmartZone) and Cloudpath system with Ruckus DPSK.

If you will be using a Ruckus ZoneDirector controller to set up DPSK, follow the procedures in these sections:

1. [Configuring a DPSK WLAN on a Ruckus ZoneDirector Controller](#) on page 6
2. [Configuring DPSK on Cloudpath to Integrate with ZoneDirector](#) on page 20

If you will be using a Ruckus SmartZone controller to set up DPSK, follow the procedures in these sections:

1. [Configuring a DPSK WLAN on a Ruckus SmartZone Controller](#) on page 13
2. [Configuring DPSK on Cloudpath to Integrate with SmartZone](#) on page 31

Configuring a DPSK WLAN on a Ruckus ZoneDirector Controller

You can configure a DPSK WLAN on a Ruckus Wireless ZoneDirector controller so that you can then use DPSK as one method of onboarding users to Cloudpath.

Follow these steps to configure a DPSK WLAN on a Ruckus ZoneDirector controller.

NOTE

The procedure shown in this section is based on the user interface of a ZoneDirector controller version 10.0. Different versions of ZoneDirector may have minor differences in terms of which configuration options appear in what sections of a screen.

1. Log in to your Ruckus ZoneDirector controller.
2. Navigate to **Configure > WLANs**.

- Under the WLAN List section, click **Create New**.
The **Create New** section of the screen is displayed.

FIGURE 1 Create New WLAN on ZoneDirector

The screenshot shows the 'Create New' configuration page for a WLAN. The page is organized into several sections:

- General Options:** Includes fields for 'Name/ESSID*' (with a 'New Name' input) and 'ESSID' (with a 'New Name' input), and a 'Description' field.
- WLAN Usages:** Contains a 'Type' section with radio buttons for:
 - Standard Usage (For most regular wireless network usages.)
 - Guest Access (Guest access policies and access control will be applied.)
 - Hotspot Service (WISPr)
 - Hotspot 2.0
 - Autonomous
 - Social Media
- Authentication Options:** Includes a 'Method' section with radio buttons for:
 - Open
 - 802.1x EAP
 - MAC Address
 - 802.1x EAP + MAC Address
 A 'Fast BSS Transition' section has a checkbox for 'Enable 802.11r FT Roaming' (unchecked) with a note: '(Recommended to enable 802.11k Neighbor-list Report for assistant.)'
- Encryption Options:** Includes a 'Method' section with radio buttons for:
 - WPA2
 - WPA Mixed
 - WEP-64 (40 bit)
 - WEP-128 (104 bit)
 - None
- Options:** Includes several checkboxes:
 - Enable captive portal/Web authentication (Users will be redirected to a Web portal for authentication before they can access the WLAN.)
 - Isolate wireless client traffic from other clients on the same AP.
 - Isolate wireless client traffic from all hosts on the same VLAN/subnet.
 - Enable Zero-IT Activation (WLAN users are provided with wireless configuration installer after they log in.)
 There are also dropdown menus for 'Authentication Server' (set to 'Local Database') and 'WhiteList' (set to 'No WhiteList'), each with a 'Create New' button.
- Priority:** Includes radio buttons for 'High' (selected) and 'Low'.

At the bottom of the form, there is a link for 'Advanced Options' and two buttons: 'OK' and 'Cancel'.

NOTE

Unless otherwise specified in the remaining steps, you do not have to change default values. The procedure described here is specific to Cloudpath; for information about any fields that are not described here, refer to your controller documentation.

- Complete the General Options section:

FIGURE 2 General Options Section of Creating a New WLAN

General Options	
Name/ESSID*	<input type="text" value="dpsk test"/> ESSID <input type="text" value="dpsk test"/>
Description	<input type="text"/>

- Name: Enter a meaningful name for the DPSK WLAN you are creating.
- ESSID: When you click in this field, the name you entered in the Name field also appears in this field.

- In the WLAN Usages section, use the default selection of Standard Usage.

FIGURE 3 WLAN Usage section of Creating a New WLAN

WLAN Usages	
Type	<input checked="" type="radio"/> Standard Usage (For most regular wireless network usages.)
	<input type="radio"/> Guest Access (Guest access policies and access control will be applied.)
	<input type="radio"/> Hotspot Service (WISPr)
	<input type="radio"/> Hotspot 2.0
	<input type="radio"/> Autonomous
	<input type="radio"/> Social Media

- In the Authentication Options section, be sure that the default selection of Open is selected.

FIGURE 4 Authentication Options section of Creating a New WLAN

Authentication Options	
Method	<input checked="" type="radio"/> Open <input type="radio"/> 802.1x EAP <input type="radio"/> MAC Address <input type="radio"/> 802.1x EAP + MAC Address
Fast BSS Transition	<input type="checkbox"/> Enable 802.11r FT Roaming <small>(Recommended to enable 802.11k Neighbor-list Report for assistant.)</small>

- In the Encryption Options section, choose WPA2 for the Method. When you choose WPA2, the Encryption Options section expands:

FIGURE 5 Encryptions Options section after choosing WPA2 as the Method

Encryption Options	
Method	<input checked="" type="radio"/> WPA2 <input type="radio"/> WPA-Mixed <input type="radio"/> WEP-64 (40 bit) <input type="radio"/> WEP-128 (104 bit) <input type="radio"/> None
Algorithm	<input checked="" type="radio"/> AES <input type="radio"/> Auto (TKIP+AES)
Passphrase*	<input type="text"/>
802.11w MFP	<input checked="" type="radio"/> Disabled <input type="radio"/> Optional <input type="radio"/> Required

- In the Algorithm field in the Encryption Options section shown above, be sure that the default value of AES is selected.
- In the Passphrase field in the Encryption Options section shown above, enter a passphrase for the DPSK WLAN that you are creating, and make note of this passphrase. The minimum length is eight characters.

10. The Options section appears as follows in its default state, which is prior to you enabling Zero-IT Activation:

FIGURE 6 Options Section Before Enabling Zero-IT Activation

a) Check the Enable Zero-IT Activation box.

The Options screen expands to add Dynamic PSK:

FIGURE 7 Dynamic PSK Added When You Enable Zero-IT Activation

b) Check the Enable Dynamic PSK box, and enter the number of characters you want to be required for the passphrase. Make sure that the value you select complies with the security policy of your company. The default is 62.

When you select the Enable Dynamic PSK checkbox, the Secure D-PSK option is automatically selected, and the Expire D-PSK and Limit D-PSK options appear.

FIGURE 8 Enabling Dynamic PSK

Dynamic PSK™	<input checked="" type="checkbox"/> Enable Dynamic PSK with <input type="text" value="10"/> character passphrase <input checked="" type="radio"/> Secure D-PSK (The key will include nearly all printable ASCII characters.) <input type="radio"/> Mobile Friendly D-PSK (The key will include numbers, lower case and upper case letters.)
Expire D-PSK	Set when the D-PSK should expire <input type="text" value="Unlimited"/> Validity Period: <input checked="" type="radio"/> Effective from first use <input type="radio"/> Effective from creation time
Limit D-PSK	<input type="checkbox"/> Limit D-PSK generation per user to <input type="text" value="1"/> devices (Currently allow 1~4 devices per user.)
Priority	<input checked="" type="radio"/> High <input type="radio"/> Low

- c) You can keep the Secure D-PSK option selected, or you can choose Mobile Friendly D-PSK instead, based on the security policy of your company.
- d) For the Expire D-PSK and Limit D-PSK options, you can again keep the default values or change them, based on the security policy of your company.

11. In the Advanced Options section, there are many fields (not shown here), but you can also use all the default values.

12. Click **OK**.

Your newly created DPSK WLAN should now appear in the WLAN List at the top of the WLANs screen, "dpsk test" in this example:

FIGURE 9 Newly Created WLAN Appears in WLAN List

WLAN List						
This table lists your current WLANs and provides basic details about them. Click Create New to add another WLAN, or click Edit to make changes to an existing WLAN.						
<input type="checkbox"/>	Name	ESSID	Description	Authentication	Encryption	Actions
<input type="checkbox"/>	dpsk test	dpsk test		Open	WPA2	Edit Clone
<input type="checkbox"/>	HQ1-Jeff	HQ1-Jeff	HQ1-Jeff	802.1x EAP	WPA2	Edit Clone
<input type="checkbox"/>	Jeff PSK	Jeff PSK		Open	WPA2	Edit Clone

To review the completed configuration or to make any configuration changes, click the **Edit** button.

Before you configure your Cloudpath system to use the DPSK WLAN you just created, you need to obtain some information about the ZoneDirector controller that you will need when you perform configuration on your Cloudpath system. Refer to the following section.

Obtaining Information about the ZoneDirector Controller

You will need the following information when you perform the necessary configuration in Cloudpath.

- Obtain the local device IP address of your ZoneDirector controller. Navigate to **Configure > System**. In the Device IP Settings section of the screen, shown below, locate the IP address, which is 10.176.214.26 in the screen below. Be sure to write down this IP address because you will need it for the configuration in Cloudpath.

FIGURE 10 Obtaining the Local Device IP Address of the ZoneDirector

Device IP Settings

If ZoneDirector is on a IPv6 network, you can turn on its IPv6 support.

Enable IPv6 Support

If ZoneDirector was assigned static network addressing, click "Manual" and make the correct entries. If you click "DHCP", no "Manual" entries are needed.

IPv4 Configuration

Manual DHCP

IP Address*	10.176.214.26
Netmask*	255.255.254.0
Gateway*	10.26.0.1
Primary DNS Server	10.176.4.10
Secondary DNS Server	10.176.4.11
Access VLAN*	1

- Enable Northbound Portal Interface Support. Navigate to **Configure > System**. Scroll down until you locate the "Network Management" section of the screen, then click on it to expand it.


Then, scroll up until you locate the Northbound Portal Interface section, shown in the illustration below.

Check the box to enable Northbound Portal Interface Support, then create a Password. Click **Apply**.

NOTE

Be sure to write down the password you create for the Northbound Interface because you will need it when you perform the corresponding configuration on your Cloudpath system.

FIGURE 11 Enabling Northbound Portal Interface Support on ZoneDirector

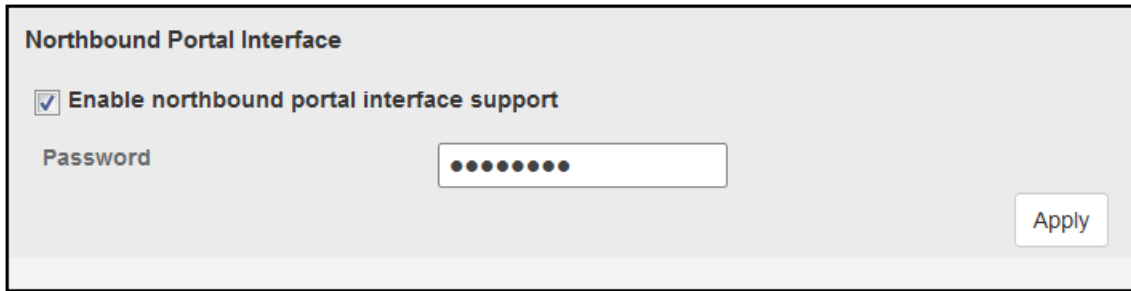

Now, proceed to [Configuring DPSK on Cloudpath to Integrate with ZoneDirector](#) on page 20.

Configuring a DPSK WLAN on a Ruckus SmartZone Controller

You can configure a DPSK WLAN on a Ruckus Wireless SmartZone controller so that you can then use DPSK as one method of onboarding users to Cloudpath.

Follow these steps to configure a DPSK WLAN on a Ruckus SmartZone controller.


NOTE

The procedure shown in this section is based on the user interface of a SmartZone controller version 3.5.1. Different versions of SmartZone may have minor differences in terms of which configuration options appear in what sections of a screen.

1. Log in to your Ruckus SmartZone controller.
2. Click the **Wireless LANS** tab.

The following screen appears:


FIGURE 12 Wireless LANs Screen

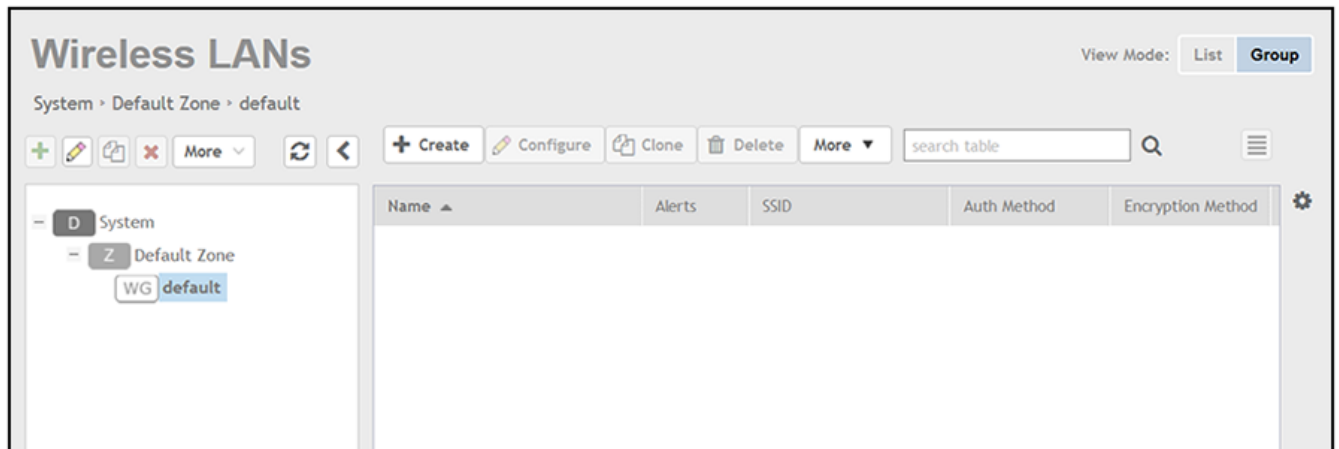

3. On the Wireless LANs screen, click the **+ Create** button.

The Create WLAN Configuration appears. This screen is shown below (with each area of the screen in a collapsed view):

FIGURE 13 Create WLAN Configuration Screen on SmartZone

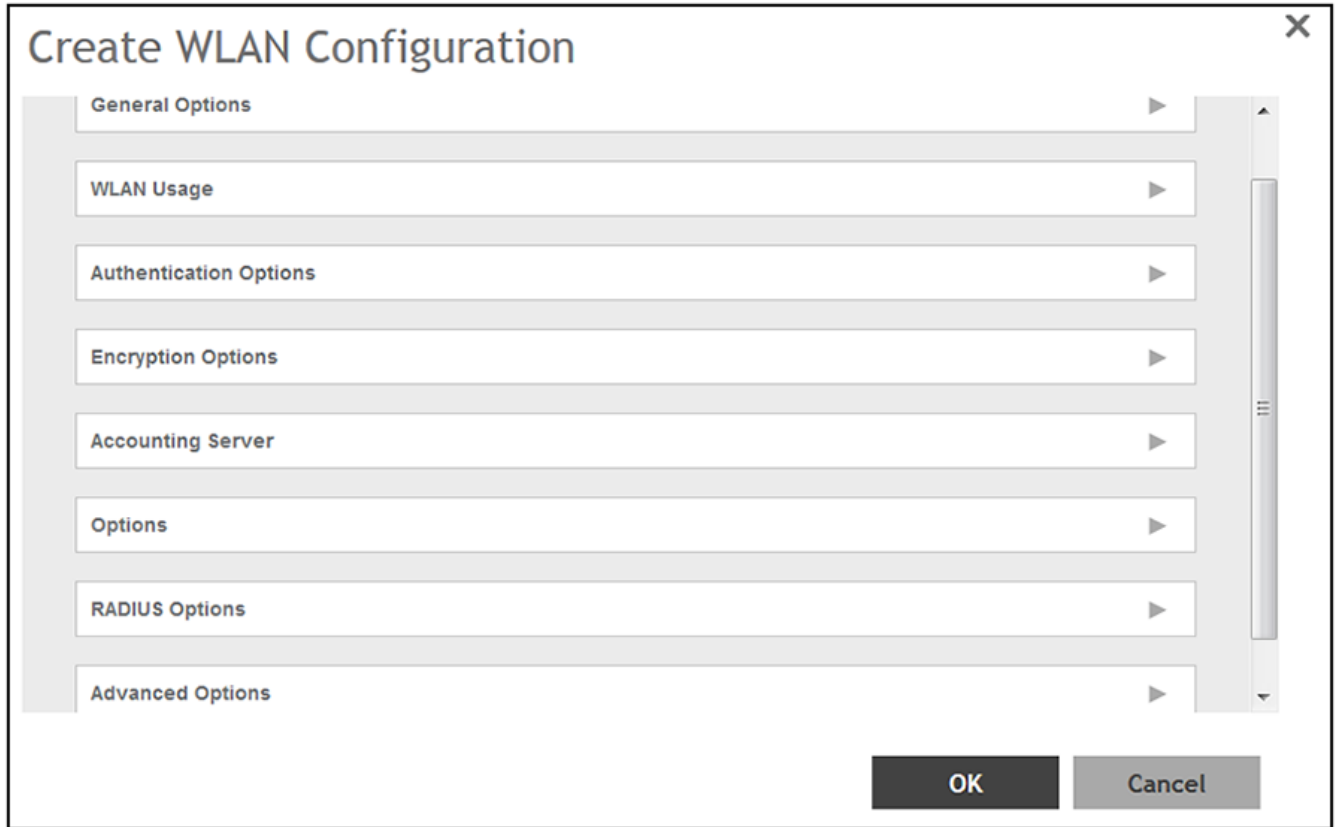

NOTE

Unless otherwise specified in the remaining steps, you do not have to change default values. The procedure described here is specific to Cloudpath; for information about any fields that are not described here, refer to your controller documentation.

- Complete the General Options section of the screen:

FIGURE 14 General Options Section of the Create WLAN Configuration Screen

The screenshot shows the 'General Options' section of the configuration screen. It contains the following fields and controls:

- Name:** A text input field containing 'DPSK vSZ 351'.
- SSID:** A text input field containing 'DPSK vSZ 351'.
- Description:** An empty text input field.
- Zone:** A dropdown menu with 'Z Default Zone' selected.
- WLAN Group:** A dropdown menu with 'default' selected.
- + Create:** A button to save the configuration.

- Name: Enter a meaningful name for the DPSK WLAN you are creating.
 - SSID: When you click in this field, the name you entered above also appears in this field.
 - Zone: From the drop-down list, select the zone in which the DPSK WLAN will reside. This can be the default zone.
- In the WLAN Usage section of the screen, use the default selection of Standard usage.

FIGURE 15 WLAN Usage section of the Create WLAN Configuration Screen

The screenshot shows the 'WLAN Usage' section of the configuration screen. It contains the following options:

- Access Network:** A checkbox labeled 'Tunnel WLAN traffic through Ruckus GRE' which is currently unchecked.
- Authentication Type:** A group of radio buttons with 'Standard usage (For most regular wireless networks)' selected. Other options include 'Hotspot (WISPr)', 'Guest Access', 'Web Authentication', 'Hotspot 2.0 Access', 'Hotspot 2.0 Secure Onboarding (OSEN)', and 'WeChat'.

- In the Authentication Options section of the screen, be sure that the default selection of Open is selected.

FIGURE 16 Authentication Options section of the Create WLAN Configuration Screen

The screenshot shows the 'Authentication Options' section of the configuration screen. It contains the following options:

- Method:** A dropdown menu with 'Open' selected. Other options include '802.1x EAP' and 'MAC Address'.

7. In the Encryptions Options section of the screen, you must select "WPA2," which expands the section as follows:

FIGURE 17 Encryption Options Section After Selecting WPA2 Method

Encryption Options

* Method: WPA2 WPA-Mixed WEP-64 (40 bits) WEP-128 (104 bits) None

* Algorithm: AES AUTO

Passphrase: Show

802.11r Fast Roaming: Enable 802.11r Fast BSS Transition

* 802.11w MFP: Disabled Capable Required

* Dynamic PSK: Disable Internal External

NOTE

The Dynamic PSK field may appear in a different section of the screen on other versions of SmartZone.

- a) The Algorithm field must be AES, which is the default.
- b) In the Passphrase field, enter a passphrase for the DPSK WLAN that you are creating, and make note of this passphrase. The minimum length is eight characters.
- c) In the Dynamic PSK field, select **Internal**. Once you make this selection, DPSK is enabled, and the screen expands again, allowing you to complete the configuration of this section of the screen:

FIGURE 18 Encryptions Options Expanded After Enabling DPSK

- In the DPSK Length field, enter a value that complies with the security policy of your company. The default is 62.
 - For DPSK Type, choose the option that complies with the security policy of your company. The default is Secure DPSK.
 - For DPSK Expiration, use the drop-down menu to select a value that complies with the security policy of your company. The default value is Unlimited.
8. In the Accounting Server section, you can use the drop-down list to select an already-configured AAA accounting server, or you can use the **+ Create** button to create one.

FIGURE 19 Accounting Server Section of the Create WLAN Configuration Screen

9. In the Options section, you can use the default values, shown below:

FIGURE 20 Options Section of the Create WLAN Configuration Screen

The screenshot shows the 'Options' section of the configuration interface. It includes the following settings:

- Acct Delay Time:** Enable
- Wireless Client Isolation:** Disable Enable (Isolate wireless client traffic from all hosts on the same VLAN/subnet)
- Isolation Whitelist:** Gateway Only (Automatic) [dropdown] + Create
(The whitelist requires entries for the subnet gateway and other allowed hosts.)
(The whitelist can only contain wired destinations; wireless clients are not supported on the whitelist.)
- Priority:** High Low

10. In the RADIUS Options section, you can use the default values, shown below:

FIGURE 21 RADIUS Options section

The screenshot shows the 'RADIUS Options' section with the following settings:


- NAS ID:** WLAN BSSID AP MAC User-defined: [text box]
- Delimiter:** Dash Colon
- NAS Request Timeout:** [3] Seconds
- NAS Max Number of Retries:** [2] Times
- NAS Reconnect Primary:** [5] Minute (1-60)
- Called STA ID:** WLAN BSSID AP MAC None AP GROUP
- NAS IP:** Disabled SZ Control IP User-defined: [text box]

11. In the Advanced Options section, there are many fields (not shown here), but you can also use all the default values.

- Click **OK** to create the Wireless LAN with DPSK enabled.

Your Wireless LAN is created. To review the completed configuration or to make any configuration changes, click the **Configure** tab when the Wireless LAN is highlighted.

FIGURE 22 Click the Configure Tab to View or Edit the Wireless LAN Configuration

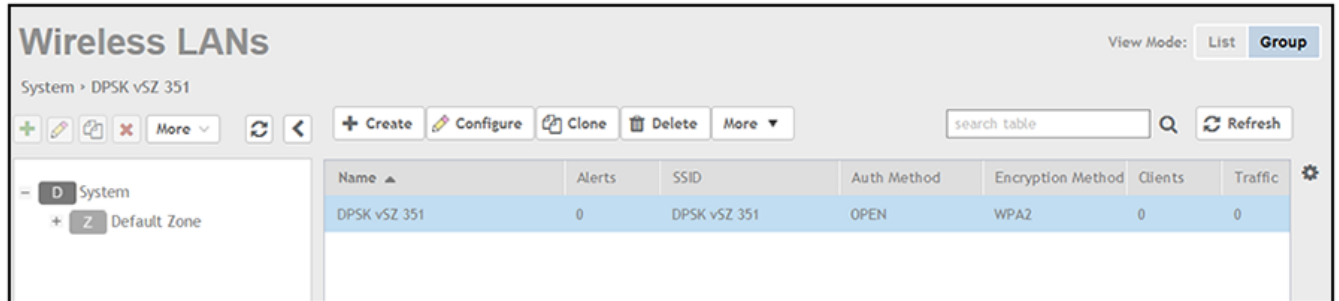


Before you configure your Cloudpath system to use the DPSK WLAN you just created, you need to obtain some information about the SmartZone controller that you will need when you perform configuration on your Cloudpath system. Refer to the following section.

Obtaining Information about the SmartZone Controller

You will need the following information when you perform the necessary configuration in Cloudpath.

- Obtain the Management IP address. Navigate to **System > Cluster**. In the Control Planes section of the screen, shown below, locate the IP address under "IP (Management & AP Control)." Be sure to write down this IP address because you will need it during configuration on your Cloudpath system.

FIGURE 23 Obtaining the Management IP Address on SmartZone

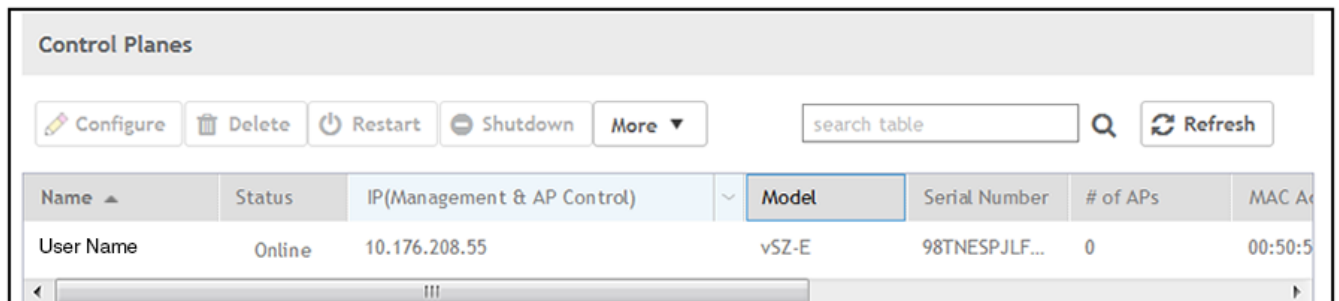


- Enable Northbound Portal Interface Support. Navigate to **Systems > General Settings**.

In the Northbound Interface tab, shown below, check the box to enable Northbound Portal Interface Support, then create a User Name and Password. Click **OK**.

NOTE

Be sure to write down the Northbound Interface user name and password you create because you will need this information when you perform corresponding configuration on your Cloudpath system. **Tip:** You may want to use the same administrator credentials that you use to log in to the SmartZone Controller.

FIGURE 24 Enabling Northbound Portal Interface Support on SmartZone

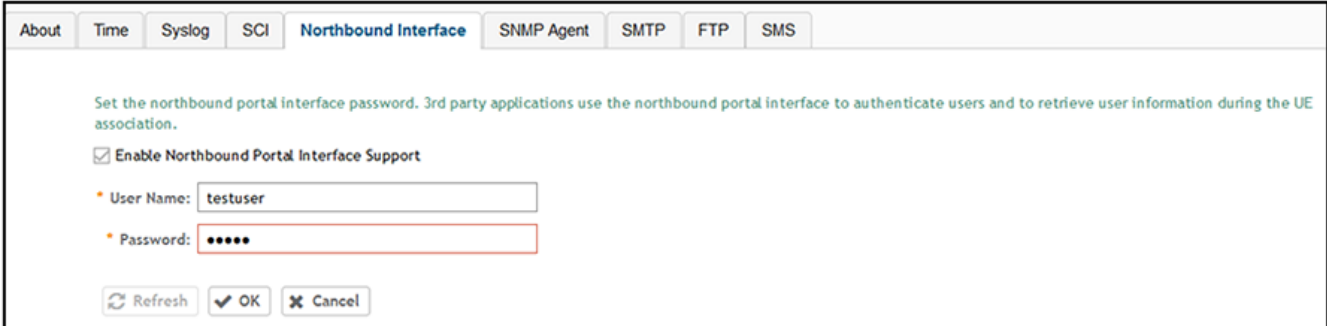

The screenshot shows a configuration window with several tabs: About, Time, Syslog, SCI, Northbound Interface (selected), SNMP Agent, SMTP, FTP, and SMS. Below the tabs, there is a text instruction: "Set the northbound portal interface password. 3rd party applications use the northbound portal interface to authenticate users and to retrieve user information during the UE association." Below this, the "Enable Northbound Portal Interface Support" checkbox is checked. There are two input fields: "User Name" with the value "testuser" and "Password" which is masked with six dots. At the bottom, there are three buttons: "Refresh" (with a circular arrow icon), "OK" (with a checkmark icon), and "Cancel" (with an 'X' icon).

Now, proceed to [Configuring DPSK on Cloudpath to Integrate with SmartZone](#) on page 31.

Configuring DPSK on Cloudpath to Integrate with ZoneDirector

Once you configure a DPSK WLAN on your controller, you need to add a corresponding DPSK configuration to a workflow on your Cloudpath system.

This procedure in this section includes steps for:

- Adding a DPSK Plugin to the Workflow

NOTE

The concept of workflows and how to create one is described in detail in the *Cloudpath Deployment Guide* and the *Cloudpath Quick Start Guide*. Therefore, the purpose of the procedure in this section is to demonstrate how to add a DPSK branch (with a DPSK plugin) to an existing workflow. The same steps included below could also be used to create a new workflow with a DPSK plugin.


- [Adding a Device Configuration to the Workflow](#) on page 27
- [Testing the DPSK User Experience](#) on page 30
- [Troubleshooting Tips](#) on page 30

Adding a DPSK Plugin to the Workflow

1. Log in to the Cloudpath user interface.
2. Go to **Configuration > Workflows**.

3. Click on a workflow to which you want to add a DPSK branch. An example of a very simple workflow before adding a DPSK branch is shown below:

FIGURE 25 Workflow Before Adding DPSK Branch

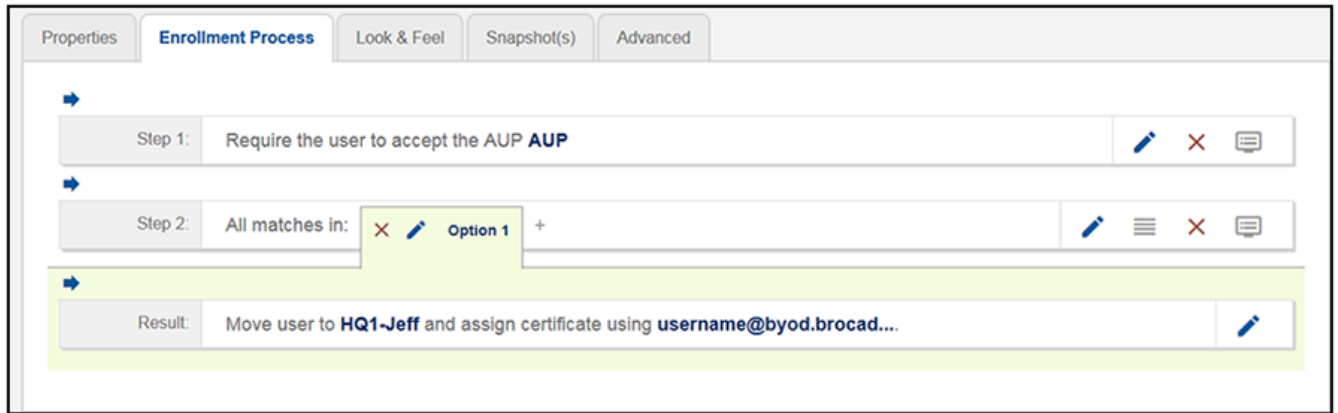

4. Click the + button to create a new branch in your workflow.

The Webpage Display Information screen is displayed, as shown below, and you add the necessary information.

FIGURE 26 Webpage Display Information Screen is Displayed When You Add a Branch to a Workflow

Webpage Display Information

Sample User Display:

Short Name: DPSK

Display Title: DPSK

Display Text:

Enabled:

Icon File: Default: Using default file. [↓](#)

Upload: No file selected.


[> Filters & Restrictions](#)

Enter a Short Name and Display Title, and, optionally, Display Text, then click **Save**.

5. You are presented with a screen called **Configuration > Workflows > Modify Step** that shows the branch options. Click **Done** if the display is correct.


6. Check that your newly named branch ("DPSK" in this example) now appears in your workflow, as shown below:

FIGURE 27 New Branch Name ("DPSK") Appears in Workflow

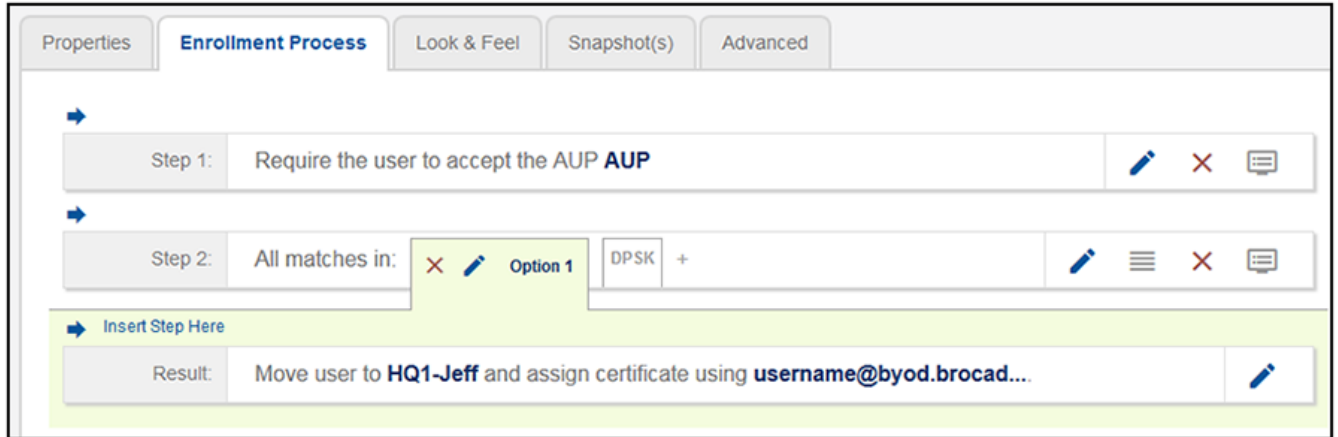

7. Highlight the newly added "DPSK" branch in your workflow, and insert a step below it, as shown in the following figure:

FIGURE 28 Adding a Step Below the New DPSK Branch of the Workflow

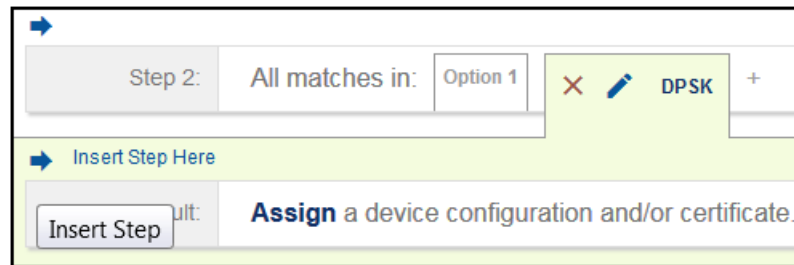

8. You are presented with a list of plugins. Scroll down toward the bottom of the list and select the Ruckus DPSK plugin shown below, then click **Next** at the top of the screen.

FIGURE 29 Ruckus DPSK Plugin to Select



Configuring DPSK on Cloudpath to Integrate with ZoneDirector
Adding a DPSK Plugin to the Workflow

9. The "What DPSK configuration do you want to use?" screen is displayed. The default is to create a new configuration. For the purposes of this example, the default setting is used. Click **Next** at the top of the screen.

FIGURE 30 What DPSK Configuration to Use?

What DPSK configuration do you want to use?

A new DPSK configuration.
Creates a new DPSK configuration.

An existing DPSK configuration.
Select the existing DPSK to use:

10. The Create DPSK screen is displayed. The required fields are described after the following illustration:

FIGURE 31 Create DPSK Screen Contains Several Fields to Configure

Create DPSK

Ruckus Northbound Portal Interface

Notification

- Display Name: Enter a descriptive name for your DPSK configuration. This can be any name you wish.
- Controller Type: Select ZoneDirector from the drop-down list.
- WLAN IP/DNS: This is the local device IP address of the ZoneDirector controller where you configured the DPSK WLAN you are using. For information on how to obtain this IP address, refer to [Figure 10](#) on page 12.
- API Password: This is the Northbound Portal Interface password that you set on ZoneDirector. For information about where you created that password, refer to [Figure 11](#) on page 13.
- Key Length: Enter the same value that you configured in the "Enable Dynamic PSK With ..." field in [Figure 8](#) on page 11.
- SSID: This is the SSID that you configured for the DPSK WLAN when you created it on ZoneDirector. For more information about where you created this SSID, refer to [Figure 2](#) on page 8.

Configuring DPSK on Cloudpath to Integrate with ZoneDirector

Adding a DPSK Plugin to the Workflow

- VLAN ID: Enter the ID of the VLAN in which users will be placed upon successfully migrating to the DPSK SSID.


When you have completed filling out the fields, click **Save** at the top of the screen.

NOTE

The configuration will not save unless the connectivity between Cloudpath and the controller is correctly set.

You are returned to the workflow, and the new "Generate a DPSK via Ruckus Controller" step has been added, as shown in the following screen:

FIGURE 32 Workflow After DPSK Step has been Added

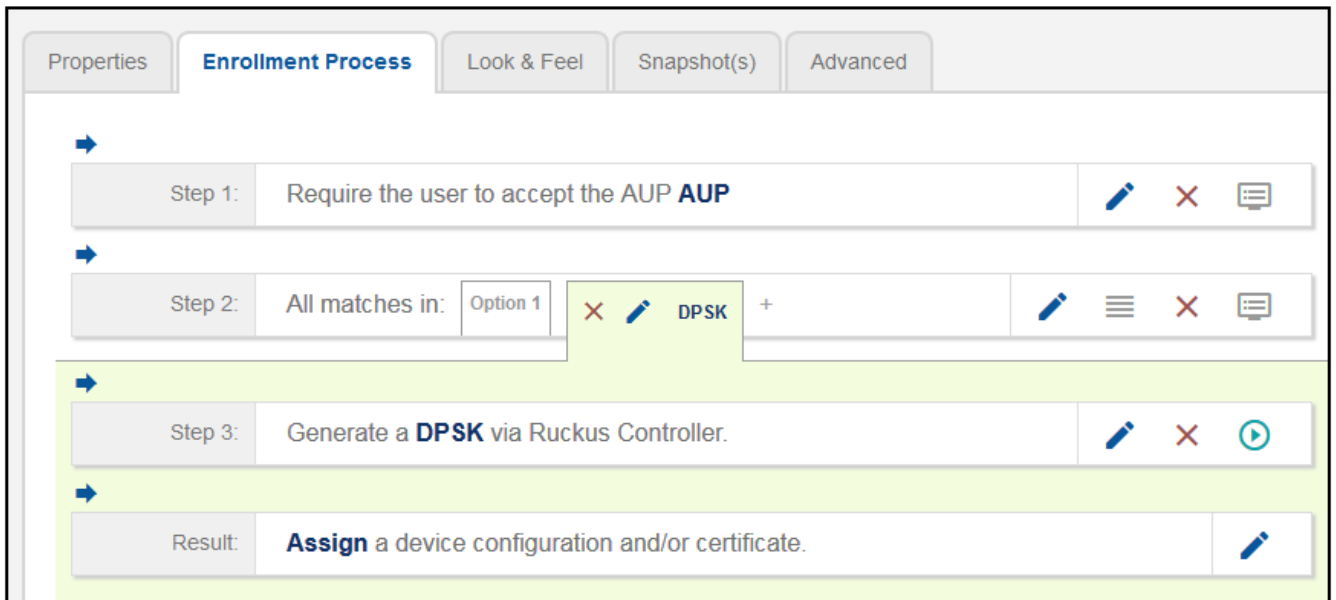


Adding a Device Configuration to the Workflow

1. In the workflow, click the pencil icon to the right of the Result called "Assign a device configuration and/or certificate."

The following screen appears:

FIGURE 33 Device Configuration Selection Screen

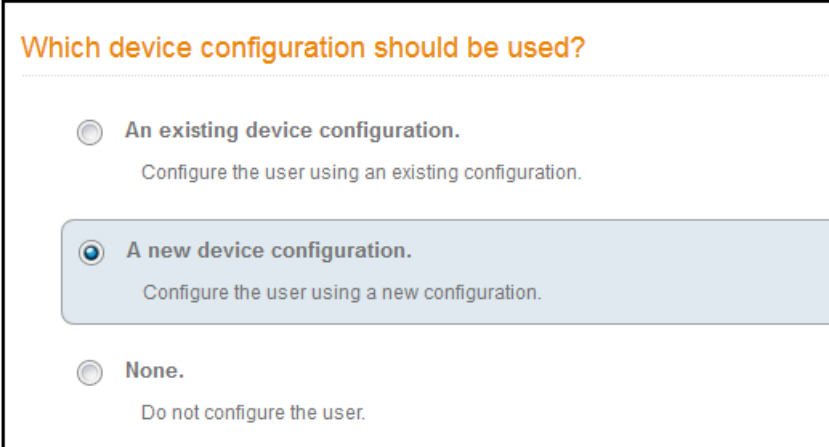

Which device configuration should be used?

An existing device configuration.
Configure the user using an existing configuration.

A new device configuration.
Configure the user using a new configuration.

None.
Do not configure the user.

Configuring DPSK on Cloudpath to Integrate with ZoneDirector Adding a Device Configuration to the Workflow

2. Select "A new device configuration," then click **Next**.

The Connection Type screen is displayed. Required fields are described below the screen.

FIGURE 34 Connection Type Screen

Connection Type

Select the connection method(s) this device configuration supports:

Wireless Connections

Wired 802.1X Connections

SSID: *

Authentication Style:


Is this SSID Broadcast?:

- The Wireless Connections button must be selected.
- SSID: This name must match the DPSK WLAN exactly. It is the name configured in [Figure 2](#) on page 8
- Authentication Style: Select Ruckus Dynamic PSK from the drop-down list.
- Is this SSID Broadcast?: Leave the default value of Yes, the SSID is broadcast.

Click **Next**.

- For the screens you are presented with next, you can keep all the default values and continue to click **Next** to progress through the screens, until you get to the following screen:


FIGURE 35 Certificate Template Screen

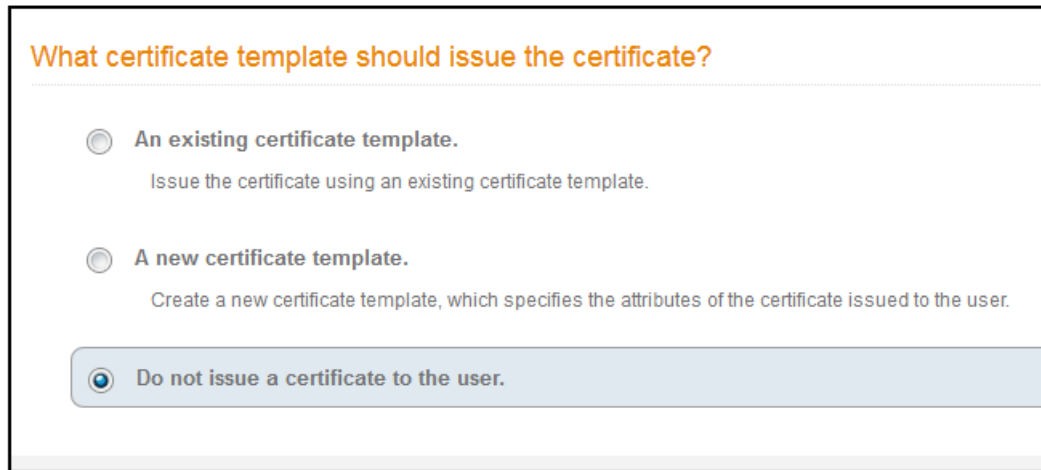

It is recommended to choose the "Do not issue a certificate to the user" option for DPSK configuration. After selecting this option, click **Next**.

- You are returned to the workflow. Make sure the Result step has been added successfully, as shown below:

FIGURE 36 Workflow After Completing the Device Configuration "Result"

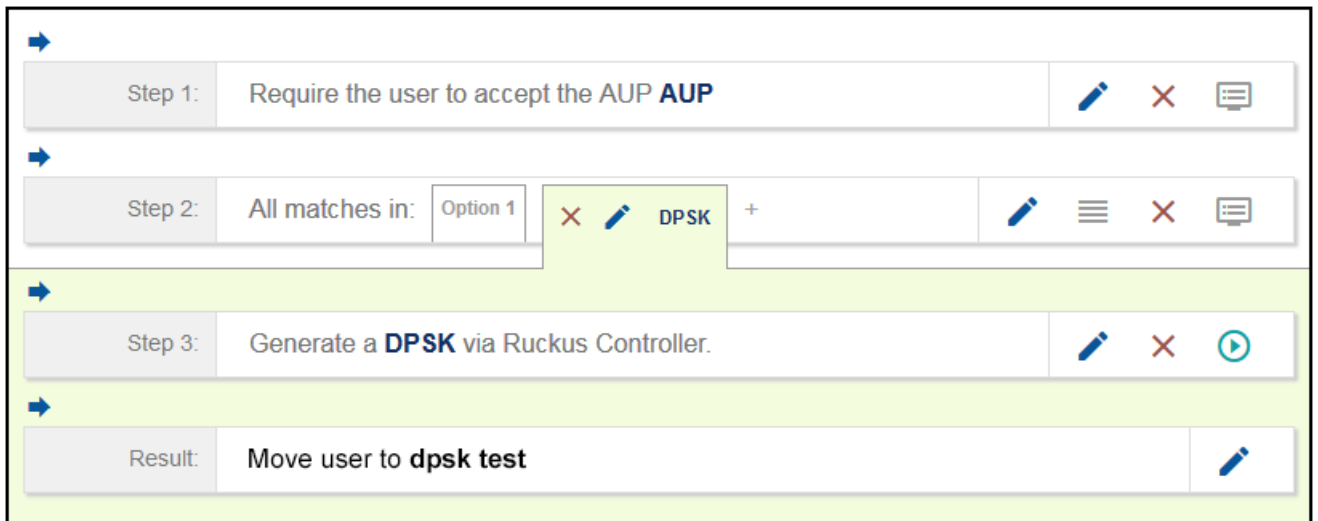


Publish the workflow by clicking the **Publish** icon to the left of the workflow name at the top of the **Configuration > Workflows** screen.

Testing the DPSK User Experience

1. Test the Enrollment process by clicking on the enrollment portal URL for the workflow at the top of the **Configuration > Workflows** screen.
2. When you are presented with the Welcome screen, click **Start**.
3. When you are presented with various branches of your workflow, click the "DPSK" branch:

FIGURE 37 Testing the Workflow - DPSK Branch

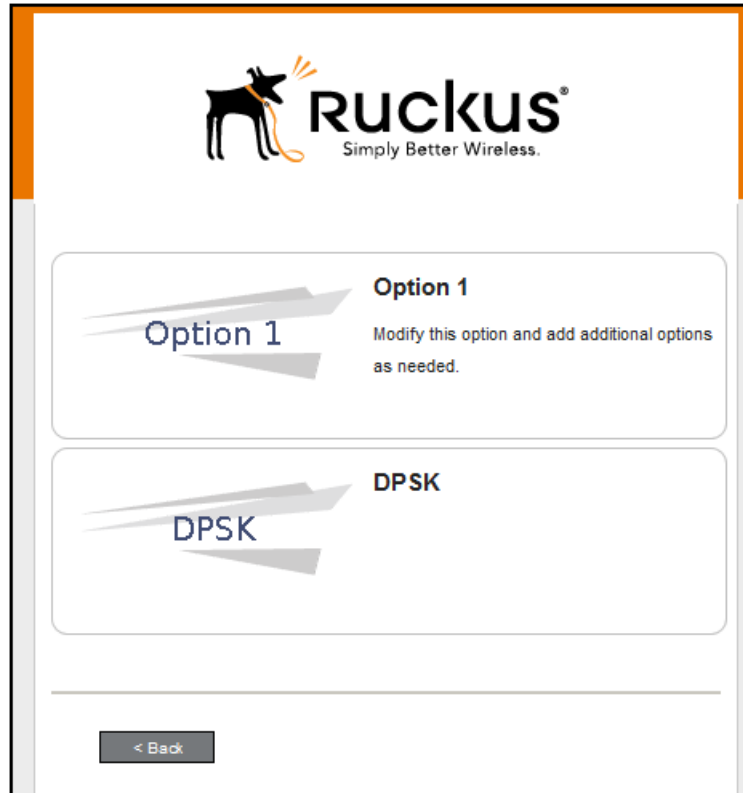

4. Proceed with the enrollment. If enrollment is successful, you will receive some status screens indicating the following status as the process is in progress:
 - "Configuring this device"
 - "Attempting to connect to the network"
 - "Congratulations! You are now connected to the network."

Troubleshooting Tips

If an error occurs during the workflow-publishing or enrollment process, check the following:

- Make sure that your DPSK WLAN configuration settings on Cloudpath match what you configured on the controller.
- Make sure that your Northbound Interface administrative username and password are identical on Cloudpath and the controller.
- Make sure that you have selected **Ruckus Dynamic PSK** as the Authentication Style in the Cloudpath Connection Type screen.

- Make sure that you have added the correct Cloudpath DPSK SSID to the final result step in your workflow.

Configuring DPSK on Cloudpath to Integrate with SmartZone

Once you configure a DPSK Wireless LAN on your controller, you need to add a corresponding DPSK configuration to a workflow on your Cloudpath system.

This procedure in this section includes steps for:

- Adding the DPSK plugin to a workflow

NOTE


The concept of workflows and how to create one is described in detail in the *Cloudpath Deployment Guide* and the *Cloudpath Quick Start Guide*. Therefore, the purpose of the procedure in this section is to demonstrate how to add a DPSK branch (with a DPSK plugin) to an existing workflow. The same steps included below could also be used to create a new workflow with a DPSK plugin.

- [Adding a Device Configuration to the Workflow](#) on page 37
- [Testing the DPSK User Experience](#) on page 40
- [Troubleshooting Tips](#) on page 40

Adding a DPSK Plugin to the Workflow

1. Log in to the Cloudpath user interface.
2. Go to **Configuration > Workflows**.
3. Click on a workflow to which you want to add a DPSK branch. An example of a very simple workflow before adding a DPSK branch is shown below:

FIGURE 38 Workflow Before Adding DPSK Branch

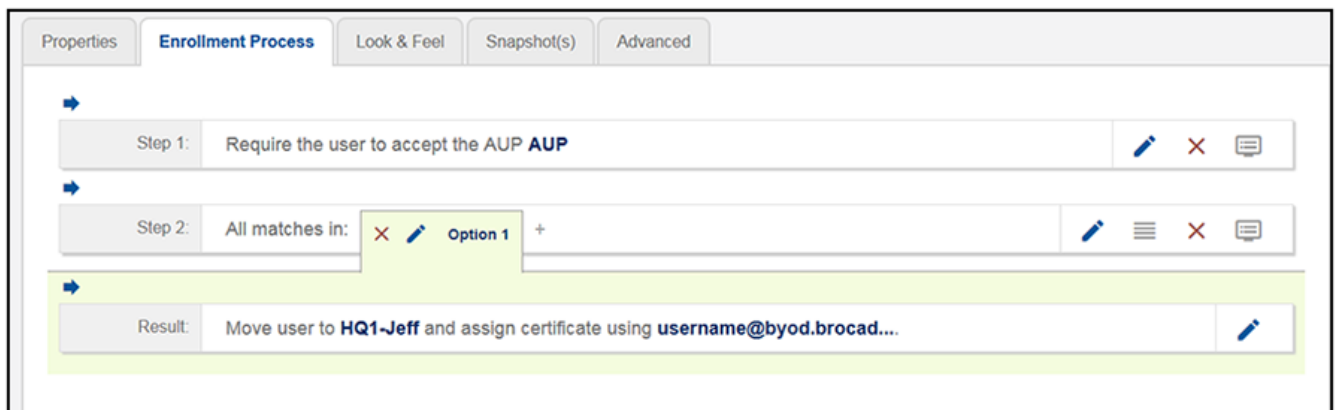

4. Click the + button to create a new branch in your workflow.

The Webpage Display Information screen is displayed, as shown below, and you add the necessary information.

FIGURE 39 Webpage Display Information Screen is Displayed When You Add a Branch to a Workflow

Webpage Display Information

Sample User Display:

Short Name: DPSK

Display Title: DPSK

Display Text:

Enabled:

Icon File: Default: Using default file. [↓](#)

Upload: No file selected.


[> Filters & Restrictions](#)

Enter a Short Name and Display Title, and, optionally, Display Text, then click **Save**.

5. You are presented with a screen called **Configuration > Workflows > Modify Step** that shows the branch options. Click **Done** if the display is correct.


6. Check that your newly named branch ("DPSK" in this example) now appears in your workflow, as shown below:

FIGURE 40 New Branch Name ("DPSK") Appears in Workflow

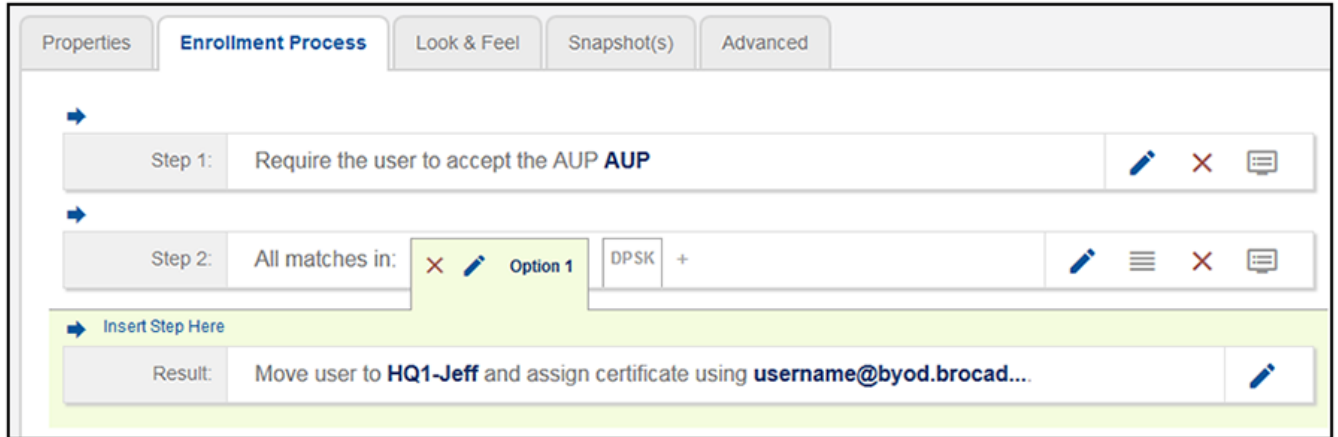

7. Highlight the newly added "DPSK" branch in your workflow, and insert a step below it, as shown in the following figure:

FIGURE 41 Adding a Step Below the New DPSK Branch of the Workflow

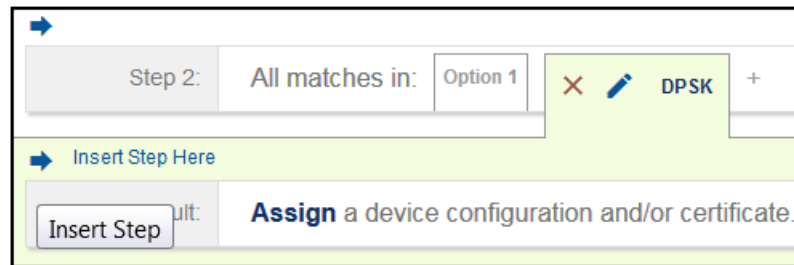

8. You are presented with a list of plugins. Scroll down toward the bottom of the list and select the Ruckus DPSK plugin shown below, then click **Next** at the top of the screen.

FIGURE 42 Ruckus DPSK Plugin to Select



Configuring DPSK on Cloudpath to Integrate with SmartZone
Adding a DPSK Plugin to the Workflow

9. The "What DPSK configuration do you want to use?" screen is displayed. The default is to create a new configuration. For the purposes of this example, the default setting is used. Click **Next** at the top of the screen.

FIGURE 43 What DPSK Configuration to Use?

What DPSK configuration do you want to use?

A new DPSK configuration.
Creates a new DPSK configuration.

An existing DPSK configuration.
Select the existing DPSK to use:

10. The Create DPSK screen is displayed. The required fields are described after the following illustration:

FIGURE 44 Create DPSK Screen Contains Several Fields to Configure

Create DPSK

Display Name: JR DPSK *

Description:

Ruckus Northbound Portal Interface

Controller Type: SmartZone ▼

WLAN IP/DNS: 10.176.208.55 *

Username: testuser *

Password: ●●●●●● *

Zone Name: Default Zone *

SSID: DPSK vSZ 351 *

VLAN ID: 10

Notification

Email Subject: PSK Assignment

Email Template:
The following PSK has been assigned to you:

\${DPSK}

This PSK is registered to you and usable on only one device. The variable \${DPSK} can be used to represent the DPSK.

- Display Name: Enter a descriptive name for your DPSK configuration. This can be any name you wish.
- Controller Type: Select SmartZone from the drop-down list.
- WLAN IP/DNS: This is the IP address of the SmartZone controller where you configured the DPSK Wireless LAN you are using. For information on how to obtain this IP address, refer to [Figure 23](#) on page 19.
- Username: This is the Northbound Portal Interface username that you set on SmartZone. For information about where you created that username, refer to [Figure 24](#) on page 20.
- Password: This is the Northbound Portal Interface password that you set on SmartZone. For information about where you created that password, refer to [Figure 24](#) on page 20.

Configuring DPSK on Cloudpath to Integrate with SmartZone

Adding a DPSK Plugin to the Workflow

- **Zone Name:** This is the name of the zone that the SmartZone controller belongs to. If the controller belongs to the default zone, leave this field blank.
- **SSID:** This is the SSID that you configured for the DPSK Wireless LAN when you created it on SmartZone. For more information about where you created this SSID, refer to [Figure 14](#) on page 15.
- **VLAN ID:** Enter the ID of the VLAN in which users will be placed upon successfully migrating to the DPSK SSID.


When you have completed filling out the fields, click **Save** at the top of the screen.

NOTE

The configuration will not save unless the connectivity between Cloudpath and the controller is correctly set.

You are returned to the workflow, and the new "Generate a DPSK via Ruckus Controller" step has been added, as shown in the following screen:

FIGURE 45 Workflow After DPSK Step has been Added

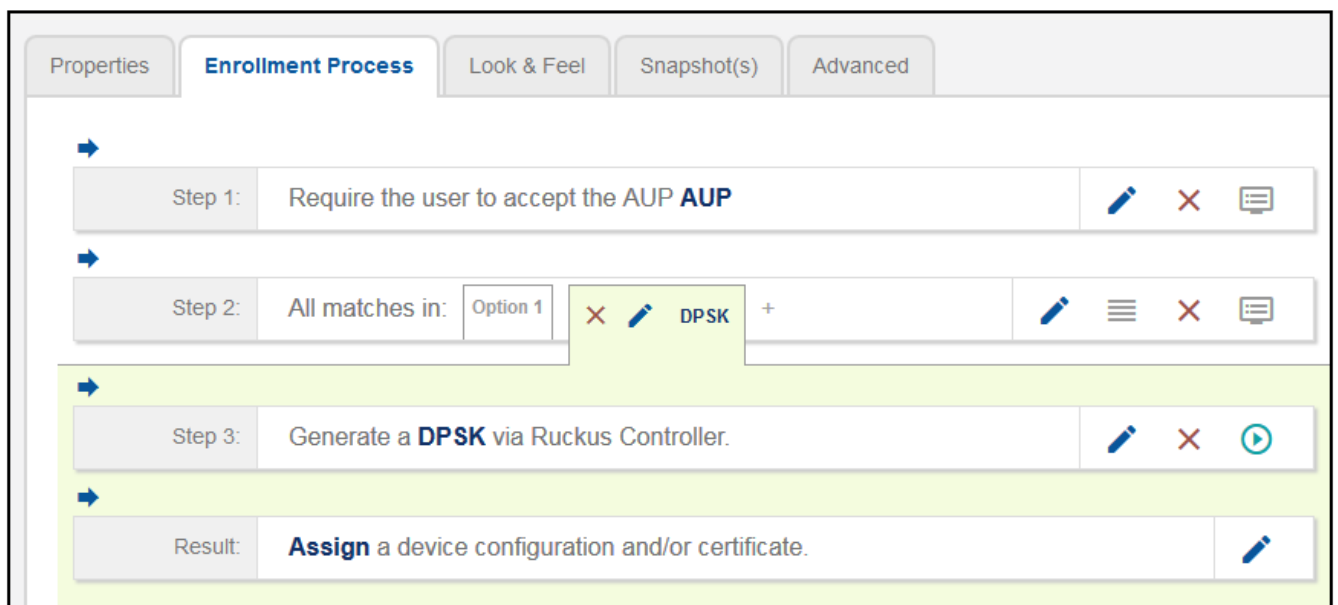


Adding a Device Configuration to the Workflow

1. In the workflow, click the pencil icon to the right of the Result called "Assign a device configuration and/or certificate."

The following screen appears:

FIGURE 46 Device Configuration Selection Screen

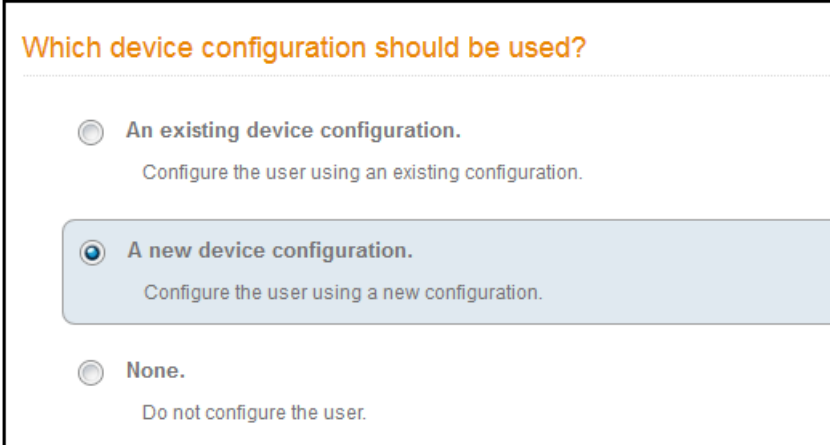

Which device configuration should be used?

- An existing device configuration.**
Configure the user using an existing configuration.
- A new device configuration.**
Configure the user using a new configuration.
- None.**
Do not configure the user.

Configuring DPSK on Cloudpath to Integrate with SmartZone

Adding a Device Configuration to the Workflow

2. Select "A new device configuration," then click **Next**.

The Connection Type screen is displayed. Required fields are described below the screen.

FIGURE 47 Connection Type Screen

Connection Type

Select the connection method(s) this device configuration supports:

Wireless Connections

Wired 802.1X Connections

Wireless Connections:


- SSID: DPSK vSZ 351 *
- Authentication Style: Ruckus Dynamic PSK
- Is this SSID Broadcast?: Yes, the SSID is broadcast.

- The Wireless Connections button must be selected.
- SSID: This name must match the DPSK WLAN exactly. It is the name configured in [Figure 14](#) on page 15.
- Authentication Style: Select Ruckus Dynamic PSK from the drop-down list.
- Is this SSID Broadcast?: Leave the default value of Yes, the SSID is broadcast.

Click **Next**.

3. For the screens you are presented with next, you can keep all the default values and continue to click **Next** to progress through the screens, until you get to the following screen:


FIGURE 48 Certificate Template Screen

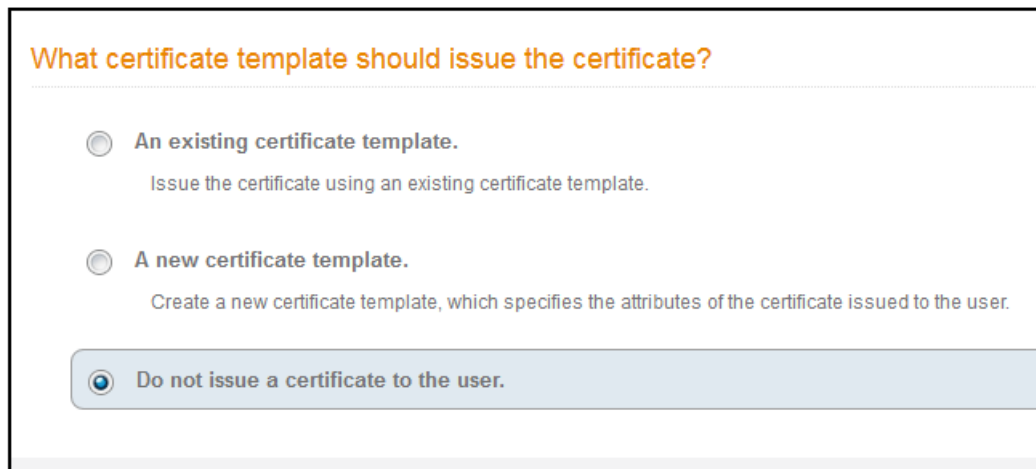

It is recommended to choose the "Do not issue a certificate to the user" option for DPSK configuration. After selecting this option, click **Next**.

4. You are returned to the workflow. Make sure the Result step has been added successfully, as shown below:

FIGURE 49 Workflow After Completing the Device Configuration "Result"

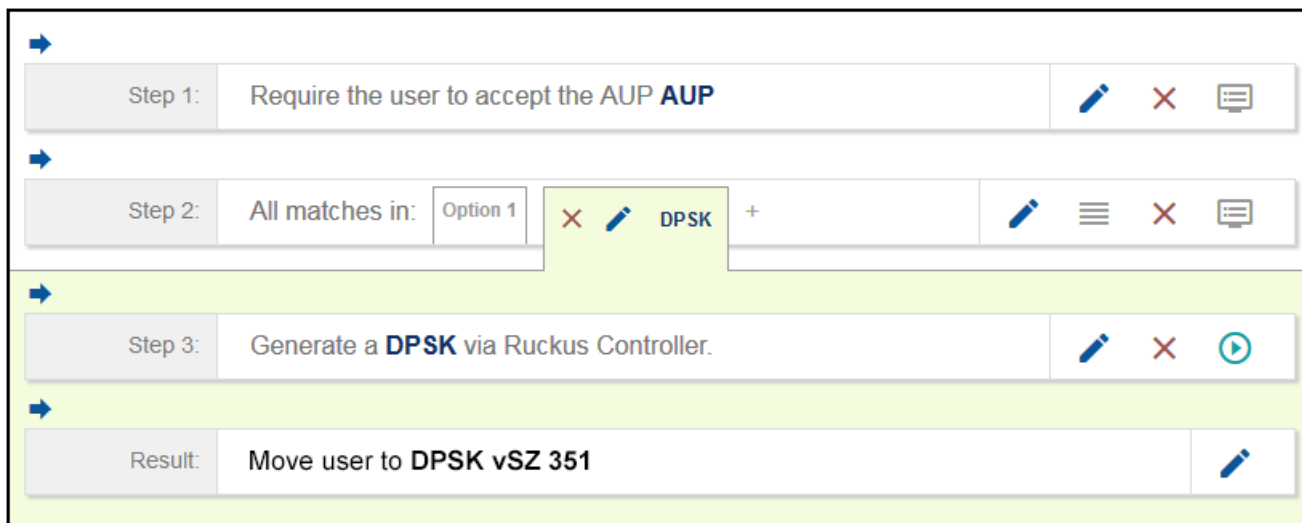


Publish the workflow by clicking the **Publish** icon to the left of the workflow name at the top of the **Configuration > Workflows** screen.

Testing the DPSK User Experience

1. Test the Enrollment process by clicking on the enrollment portal URL for the workflow at the top of the **Configuration > Workflows** screen.
2. When you are presented with the Welcome screen, click **Start**.
3. When you are presented with various branches of your workflow, click the "DPSK" branch:

FIGURE 50 Testing the Workflow - DPSK Branch

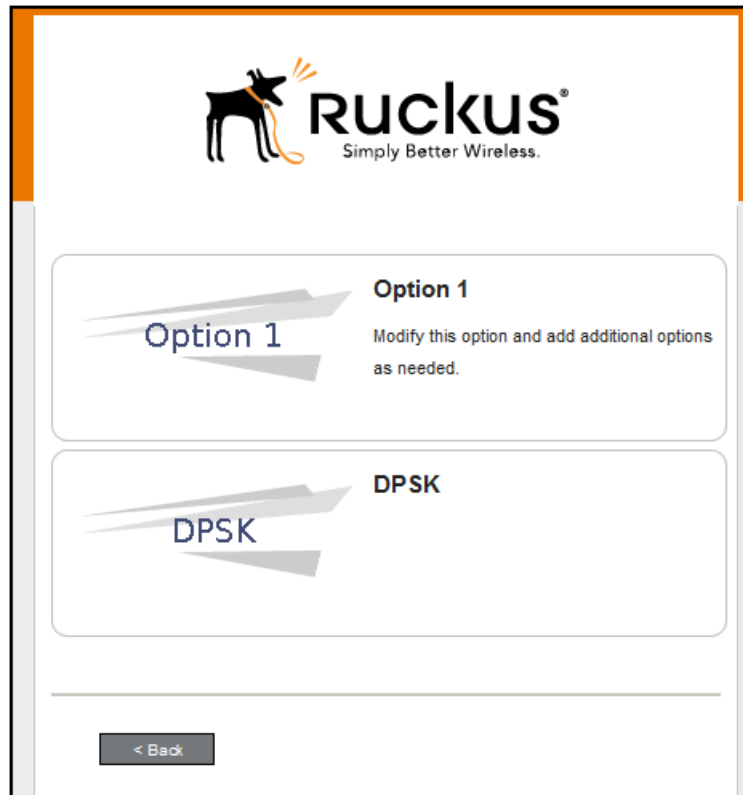

4. Proceed with the enrollment. If enrollment is successful, you will receive some status screens indicating the following status as the process is in progress:
 - "Configuring this device"
 - "Attempting to connect to the network"
 - "Congratulations! You are now connected to the network."

Troubleshooting Tips

If an error occurs during the workflow-publishing or enrollment process, check the following:

- Make sure that your DPSK WLAN configuration settings on Cloudpath match what you configured on the controller.
- Make sure that your Northbound Interface administrative username and password are identical on Cloudpath and the controller.
- Make sure that you have selected **Ruckus Dynamic PSK** as the Authentication Style in the Cloudpath Connection Type screen.

- Make sure that you have added the correct Cloudpath DPSK SSID to the final result step in your workflow.



Copyright © 2018 Ruckus Networks, an ARRIS company. All rights reserved.
350 West Java Dr., Sunnyvale, CA 94089 USA
www.ruckuswireless.com