

# Ruckus Virtual SmartZone Getting Started Guide, 5.1.1

Supporting SmartZone Release 5.1.1

# Copyright, Trademark and Proprietary Rights Information

© 2019 ARRIS Enterprises LLC. All rights reserved.

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS International plc and/or its affiliates ("ARRIS"). ARRIS reserves the right to revise or change this content from time to time without obligation on the part of ARRIS to provide notification of such revision or change.

## Export Restrictions

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

*These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.*

## Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, ARRIS DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. ARRIS does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. ARRIS does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise. As a condition of your use of the Materials, you warrant to ARRIS that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

## Limitation of Liability

IN NO EVENT SHALL ARRIS, ARRIS AFFILIATES, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIERS, LICENSORS AND THIRD PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF ARRIS HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

## Trademarks

ARRIS, the ARRIS logo, Ruckus, Ruckus Wireless, Ruckus Networks, Ruckus logo, the Big Dog design, BeamFlex, ChannelFly, EdgIron, FastIron, HyperEdge, ICX, IronPoint, OPENG, SmartCell, Unleashed, Xclaim, ZoneFlex are trademarks of ARRIS International plc and/or its affiliates. Wi-Fi Alliance, Wi-Fi, the Wi-Fi logo, the Wi-Fi CERTIFIED logo, Wi-Fi Protected Access (WPA), the Wi-Fi Protected Setup logo, and WMM are registered trademarks of Wi-Fi Alliance. Wi-Fi Protected Setup™, Wi-Fi Multimedia™, and WPA2™ are trademarks of Wi-Fi Alliance. All other trademarks are the property of their respective owners.

# Contents

---

|                                                                      |            |
|----------------------------------------------------------------------|------------|
| <b>Preface.....</b>                                                  | <b>7</b>   |
| Document Conventions.....                                            | 7          |
| Notes, Cautions, and Warnings.....                                   | 7          |
| Command Syntax Conventions.....                                      | 8          |
| Document Feedback.....                                               | 8          |
| Ruckus Product Documentation Resources.....                          | 8          |
| Online Training Resources.....                                       | 9          |
| Contacting Ruckus Customer Services and Support.....                 | 9          |
| What Support Do I Need?.....                                         | 9          |
| Open a Case.....                                                     | 9          |
| Self-Service Resources.....                                          | 9          |
| <b>About This Guide.....</b>                                         | <b>11</b>  |
| About This Guide.....                                                | 11         |
| Notice Conventions.....                                              | 11         |
| <b>Installation Preparation.....</b>                                 | <b>13</b>  |
| Obtaining the vSZ Distribution.....                                  | 13         |
| Preparing the vSZ Interface Settings to Use.....                     | 13         |
| Virtual SmartZone Required Resources.....                            | 14         |
| Clustering Limitations .....                                         | 16         |
| Clustering Limitations for vSZ-H.....                                | 16         |
| Clustering Limitations for vSZ-E.....                                | 16         |
| <b>Installing the vSZ on a Hypervisor.....</b>                       | <b>17</b>  |
| Preparing a Hypervisor.....                                          | 17         |
| Installing the vSZ on VMWare vSphere Hypervisor.....                 | 17         |
| Before You Begin.....                                                | 17         |
| Creating a vSZ Instance from the OVA File.....                       | 17         |
| Allocating Resources and Assigning Network Interfaces.....           | 28         |
| Powering on the vSZ virtual machine.....                             | 30         |
| Installing the vSZ on Windows Server Hyper V.....                    | 30         |
| Installing the vSZ on a Kernel based Virtual Machine Hypervisor..... | 42         |
| Extracting the vSZ Image.....                                        | 42         |
| Setting Up the vSZ.....                                              | 46         |
| Installing the vSZ on an OpenStack Hypervisor.....                   | 54         |
| Configuring System Settings.....                                     | 54         |
| Installing OpenStack.....                                            | 56         |
| Accessing the OpenStack Dashboard.....                               | 61         |
| Creating Global Items.....                                           | 62         |
| Creating Project Items.....                                          | 75         |
| Deploying three-interface vSZ without built-in SNAT.....             | 80         |
| Deploying One-interface vSZ with built-in SNAT.....                  | 87         |
| Setting up a vSZ Cluster.....                                        | 104        |
| <b>Installing the vSZ on Microsoft Azure.....</b>                    | <b>105</b> |
| Introduction.....                                                    | 105        |
| Logging into Microsoft Azure.....                                    | 105        |

|                                                                                    |            |
|------------------------------------------------------------------------------------|------------|
| Creating a Resource Group.....                                                     | 107        |
| Creating a Storage Account and Container.....                                      | 110        |
| Uploading the vSZ Image to Microsoft Azure.....                                    | 115        |
| Creating a Virtual Network.....                                                    | 116        |
| Creating Network Security Groups.....                                              | 119        |
| Creating a vSZ Image on Microsoft Azure.....                                       | 126        |
| Updating the Disk Size According to Resource Plan.....                             | 137        |
| <b>Installing vSZ on the Google Computing Engine.....</b>                          | <b>143</b> |
| Introduction.....                                                                  | 143        |
| Logging into GCE and Selecting a Project.....                                      | 143        |
| Creating a Storage Bucket.....                                                     | 147        |
| Uploading the vSZ Image to a Storage Bucket.....                                   | 151        |
| Creating a vSZ Image for Virtual Machines.....                                     | 153        |
| Creating a Network and Configuring Firewall Rules.....                             | 156        |
| Creating a Virtual Machine Instance.....                                           | 160        |
| <b>Installing vSZ on Amazon Web Services.....</b>                                  | <b>167</b> |
| Installing AWS CLI.....                                                            | 167        |
| Creating a VM Import Service Role.....                                             | 168        |
| Installing vSZ on AWS.....                                                         | 169        |
| Logging into AWS.....                                                              | 169        |
| Creating a Storage Bucket.....                                                     | 171        |
| Uploading vSZ Image to a Storage.....                                              | 172        |
| AWS Service Policy.....                                                            | 173        |
| Importing the vSZ Image.....                                                       | 174        |
| Creating the vSZ Instance.....                                                     | 176        |
| Configuring AWS for a vSZ Instance.....                                            | 183        |
| Attach a New Disk Volume.....                                                      | 183        |
| Allocate a Public IP Address.....                                                  | 185        |
| Change Security Group.....                                                         | 186        |
| Deleting a vSZ Instance.....                                                       | 187        |
| <b>Configuring the Virtual Machine Interfaces.....</b>                             | <b>191</b> |
| Configuring the Virtual Machine Interfaces.....                                    | 191        |
| Setting Up the vSZ with One Interface.....                                         | 191        |
| Setting Up the vSZ with Three Interfaces.....                                      | 203        |
| Important Notes About Selecting the System Default Gateway.....                    | 205        |
| <b>Using the Setup Wizard to Install vSZ.....</b>                                  | <b>207</b> |
| Before You Begin.....                                                              | 207        |
| Step 1: Start the Setup Wizard and Set the Language.....                           | 208        |
| Step 2: Select the Profile Configuration That Corresponds to Your vSZ License..... | 208        |
| Step 3: Configure the Management IP Address Settings.....                          | 210        |
| Important Notes About Selecting the System Default Gateway.....                    | 211        |
| Step 4: Configure Dual Mode IP Address Settings Using CLI.....                     | 211        |
| Step 5: Configure the Cluster Settings.....                                        | 221        |
| If This vSZ Is Forming a New Cluster.....                                          | 222        |
| If This vSZ Is Joining an Existing Cluster.....                                    | 222        |
| Step 6: Set the Administrator Password.....                                        | 223        |
| Step 7: Verify the Settings.....                                                   | 224        |
| Logging On to the Web Interface.....                                               | 226        |

|                                                                                  |            |
|----------------------------------------------------------------------------------|------------|
| <b>Deployment of vSZ.....</b>                                                    | <b>227</b> |
| Deploy vSZ on ESXi Server.....                                                   | 227        |
| Hardware Requirement and Prerequisite for ESXi Server.....                       | 227        |
| Topology for vSZ Deployment on ESXi 5.5 Server.....                              | 228        |
| Deployment Procedure on the ESXi Server.....                                     | 230        |
| Connect to vSZ Using CLI on ESXi Server.....                                     | 239        |
| Deploy vSZ on Linux Server.....                                                  | 245        |
| Hardware Requirement and Prerequisite for LINUX CentOS 7.....                    | 245        |
| Topology for vSZ Deployment on LINUX CentOS7.....                                | 246        |
| Deployment Procedure on the LINUX Server.....                                    | 249        |
| Connect to vSZ Using CLI on LINUX Server.....                                    | 260        |
| <b>Upgrading the Controller for Microsoft Azure, AWS, and GCE Platforms.....</b> | <b>267</b> |
| Upgrading the Controller for Microsoft Azure, AWS, and GCE Platforms.....        | 267        |
| Upgrading the Controller Software.....                                           | 267        |
| Verifying the Upgrade.....                                                       | 270        |
| Rolling Back to a Previous Software Version.....                                 | 270        |
| Backing Up and Restoring Clusters.....                                           | 271        |



# Preface

- Document Conventions..... 7
- Command Syntax Conventions..... 8
- Document Feedback..... 8
- Ruckus Product Documentation Resources..... 8
- Online Training Resources..... 9
- Contacting Ruckus Customer Services and Support..... 9

## Document Conventions

The following table lists the text conventions that are used throughout this guide.

**TABLE 1** Text Conventions

| Convention     | Description                                                                                                   | Example                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| monospace      | Identifies command syntax examples                                                                            | <code>device(config)# interface ethernet 1/1/6</code>                     |
| <b>bold</b>    | User interface (UI) components such as screen or page names, keyboard keys, software buttons, and field names | On the <b>Start</b> menu, click <b>All Programs</b> .                     |
| <i>italics</i> | Publication titles                                                                                            | Refer to the <i>Ruckus Small Cell Release Notes</i> for more information. |

## Notes, Cautions, and Warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

### NOTE

A NOTE provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

### ATTENTION

An ATTENTION statement indicates some information that you must read before continuing with the current action or task.



### CAUTION

A CAUTION statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.



### DANGER

A DANGER statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.

# Command Syntax Conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

| Convention                         | Description                                                                                                                                                             |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>bold text</b>                   | Identifies command names, keywords, and command options.                                                                                                                |
| <i>italic text</i>                 | Identifies a variable.                                                                                                                                                  |
| [ ]                                | Syntax components displayed within square brackets are optional.<br>Default responses to system prompts are enclosed in square brackets.                                |
| { <b>x</b>   <b>y</b>   <b>z</b> } | A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.                                           |
| <b>x</b>   <b>y</b>                | A vertical bar separates mutually exclusive elements.                                                                                                                   |
| < >                                | Nonprinting characters, for example, passwords, are enclosed in angle brackets.                                                                                         |
| ...                                | Repeat the previous element, for example, <i>member[member...]</i> .                                                                                                    |
| \                                  | Indicates a “soft” line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash. |

## Document Feedback

Ruckus is interested in improving its documentation and welcomes your comments and suggestions.

You can email your comments to Ruckus at [ruckus-docs@arris.com](mailto:ruckus-docs@arris.com).

When contacting us, include the following information:

- Document title and release number
- Document part number (on the cover page)
- Page number (if appropriate)

For example:

- Ruckus SmartZone Upgrade Guide, Release 5.0
- Part number: 800-71850-001 Rev A
- Page 7

## Ruckus Product Documentation Resources

Visit the Ruckus website to locate related documentation for your product and additional Ruckus resources.

Release Notes and other user documentation are available at <https://support.ruckuswireless.com/documents>. You can locate the documentation by product or perform a text search. Access to Release Notes requires an active support contract and a Ruckus Support Portal user account. Other technical documentation content is available without logging in to the Ruckus Support Portal.

White papers, data sheets, and other product documentation are available at <https://www.ruckuswireless.com>.



## Online Training Resources

To access a variety of online Ruckus training modules, including free introductory courses to wireless networking essentials, site surveys, and Ruckus products, visit the Ruckus Training Portal at <https://training.ruckuswireless.com>.

## Contacting Ruckus Customer Services and Support

The Customer Services and Support (CSS) organization is available to provide assistance to customers with active warranties on their Ruckus products, and customers and partners with active support contracts.

For product support information and details on contacting the Support Team, go directly to the Ruckus Support Portal using <https://support.ruckuswireless.com>, or go to <https://www.ruckuswireless.com> and select **Support**.

### What Support Do I Need?

Technical issues are usually described in terms of priority (or severity). To determine if you need to call and open a case or access the self-service resources, use the following criteria:

- Priority 1 (P1)—Critical. Network or service is down and business is impacted. No known workaround. Go to the **Open a Case** section.
- Priority 2 (P2)—High. Network or service is impacted, but not down. Business impact may be high. Workaround may be available. Go to the **Open a Case** section.
- Priority 3 (P3)—Medium. Network or service is moderately impacted, but most business remains functional. Go to the **Self-Service Resources** section.
- Priority 4 (P4)—Low. Requests for information, product documentation, or product enhancements. Go to the **Self-Service Resources** section.

### Open a Case

When your entire network is down (P1), or severely impacted (P2), call the appropriate telephone number listed below to get help:

- Continental United States: 1-855-782-5871
- Canada: 1-855-782-5871
- Europe, Middle East, Africa, Central and South America, and Asia Pacific, toll-free numbers are available at <https://support.ruckuswireless.com/contact-us> and Live Chat is also available.
- Worldwide toll number for our support organization. Phone charges will apply: +1-650-265-0903

We suggest that you keep a physical note of the appropriate support number in case you have an entire network outage.

### Self-Service Resources

The Ruckus Support Portal at <https://support.ruckuswireless.com> offers a number of tools to help you to research and resolve problems with your Ruckus products, including:

- Technical Documentation—<https://support.ruckuswireless.com/documents>

## Preface

### Contacting Ruckus Customer Services and Support

- Community Forums—<https://forums.ruckuswireless.com/ruckuswireless/categories>
- Knowledge Base Articles—<https://support.ruckuswireless.com/answers>
- Software Downloads and Release Notes—[https://support.ruckuswireless.com/#products\\_grid](https://support.ruckuswireless.com/#products_grid)
- Security Bulletins—<https://support.ruckuswireless.com/security>

Using these resources will help you to resolve some issues, and will provide TAC with additional data from your troubleshooting analysis if you still require assistance through a support case or RMA. If you still require help, open and manage your case at [https://support.ruckuswireless.com/case\\_management](https://support.ruckuswireless.com/case_management).

# About This Guide

---

- About This Guide..... 11

## About This Guide

This Virtual SmartZone (vSZ) Getting Started Guide provides information on how to set up the vSZ virtual appliance on the network. You can install the vSZ on any of the supported hypervisors.

Topics covered in this guide include preparing your chosen hypervisor, installing the vSZ image on to the hypervisor, and completing the vSZ Setup Wizard.

This guide is intended for use by those responsible for installing and setting up network equipment. Consequently, it assumes a basic working knowledge of local area networking, wireless networking, and wireless devices.

### NOTE

If release notes are shipped with your product and the information there differs from the information in this guide, follow the instructions in the release notes.

Most user guides and release notes are available in Adobe Acrobat Reader Portable Document Format (PDF) or HTML on the Ruckus Networks support website at <https://support.ruckuswireless.com/documents>.

## Notice Conventions

The following table lists the notice conventions that are used throughout this guide.

**TABLE 2** Notice Conventions

| Notice Type | Description                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------|
| NOTE        | Information that describes important features or instructions                                                  |
| CAUTION!    | Information that alerts you to potential loss of data or potential damage to an application, system, or device |
| WARNING!    | Information that alerts you to potential personal injury                                                       |



# Installation Preparation

- Obtaining the vSZ Distribution..... 13
- Preparing the vSZ Interface Settings to Use.....13
- Virtual SmartZone Required Resources.....14
- Clustering Limitations ..... 16

## Obtaining the vSZ Distribution

You have to download the .OVA file and documentation for the controller from the vSZ download page on the Ruckus Networks support website. The vSZ distribution package, which is based on the Open Virtualization Format (OVF) framework, consists of a virtual appliance.

Open Virtualization Format contains the following files:

- Description file (.ovf)
- Manifest file (.mf)
- Virtual machine state file (.vmdk)

## Preparing the vSZ Interface Settings to Use

vSZ comes with the option to operate with either one (1) network interface or three (3) network interfaces. Once the network interface configuration has been made and setup executed, the number of network interfaces can no longer be modified.



### CAUTION

**If you choose to operate the vSZ with three network interfaces, you must configure the three vSZ interfaces to be on three different subnets when you run the Setup Wizard. Failure to do so may result in loss of access to the web interface or failure of system functions and services.**

- IP address
- Netmask
- Gateway
- Primary DNS server
- Secondary DNS server

**TABLE 3** vSZ interfaces

| Interface        | Description                                                                                                                                         |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| AP               | Used for AP configuration and client traffic                                                                                                        |
| Cluster          | Used for cluster traffic                                                                                                                            |
| Management (Web) | Used for management traffic. The IP address that you assign to this interface will be the IP address at which you can access the vSZ web interface. |

# Virtual SmartZone Required Resources

Before upgrading vSZ to this release, verify that the virtual machine on which vSZ is installed has sufficient resources to handle the number of APs, wireless clients and ICX Switches that you plan to manage. See the tables below for the **required** virtual machine system resources.

The values for vCPU, RAM, and Disk Size are linked together and cannot be changed individually. When changing one of these parameters, all three values need to **match exactly** with an existing Resource Level. Taking vSZ-H Resource Level 5 as an example: when adjusting the number of vCPU from 4 to 6, the amount of RAM needs to be adjusted to 22GB and the Disk Size needs to be adjusted to 300GB, thereby matching all the values of Resource Level 6.



### WARNING

These vSZ required resources may change from release to release. Before upgrading vSZ, always check the required resource tables for the release to which you are upgrading.

### NOTE

When initially building up the network it can use a higher Resource Level than needed for the number of APs first deployed, if all the three parameters (vCPU, RAM and Disk Size) **match exactly** with that higher Resource Level.

### ATTENTION

It is recommended that there should be only one concurrent CLI connection per cluster when configuring vSZ.

In the following tables the high scale resources are broken into two tables for easy readability. These tables are based on the *AP Count Range*.

**TABLE 4** vSZ High Scale required resources

| AP Count Range |        | Max Clients | Nodes per Cluster | AP Count per Node (without Switch) | AP/Switch Capacity Ratio | Maximum Switch (w/o AP) |
|----------------|--------|-------------|-------------------|------------------------------------|--------------------------|-------------------------|
| From           | To     |             |                   | Max                                |                          | Max                     |
| 10,001         | 30,000 | 300,000     | 4                 | 10,000                             | 5 : 1                    | 6,000                   |
|                | 20,000 | 200,000     | 3                 |                                    | 5 : 1                    | 4,000                   |
| 5,001          | 10,000 | 100,000     | 1-2               | 10,000                             | 5 : 1                    | 2,000                   |
| 2,501          | 5,000  | 50,000      | 1-2               | 5,000                              | 5 : 1                    | 1,000                   |
| 1,001          | 2,500  | 50,000      | 1-2               | 2,500                              | 5 : 1                    | 500                     |
| 501            | 1,000  | 20,000      | 1-2               | 1,000                              | 5 : 1                    | 200                     |
| 101            | 500    | 10,000      | 1-2               | 500                                | 5 : 1                    | 100                     |
| 1              | 100    | 2,000       | 1-2               | 100                                | 5 : 1                    | 20                      |

**TABLE 5** vSZ High Scale required resources

| AP Count Range |        | vCPU                                                | RAM               | Disk Size | Preserved Events | Concurrent CLI Connection      | Resource Level |
|----------------|--------|-----------------------------------------------------|-------------------|-----------|------------------|--------------------------------|----------------|
| From           | To     | Logic Processor <sup>[1][2]</sup><br><sub>[3]</sub> | GB <sup>[1]</sup> | GB        | Max              | Max (per node not per cluster) |                |
| 10,001         | 30,000 | 24                                                  | 48                | 600       | 3 M              | 4                              | 8              |
|                | 20,000 |                                                     |                   |           |                  |                                |                |
| 5,001          | 10,000 | 24                                                  | 48                | 600       | 3 M              | 4                              | 7              |
| 2,501          | 5,000  | 12                                                  | 28                | 300       | 2 M              | 2                              | 6.5            |

**TABLE 5** vSZ High Scale required resources (continued)

| AP Count Range |       | vCPU | RAM | Disk Size | Preserved Events | Concurrent CLI Connection | Resource Level |
|----------------|-------|------|-----|-----------|------------------|---------------------------|----------------|
| 1,001          | 2,500 | 6    | 22  | 300       | 1.5 M            | 2                         | 6              |
| 501            | 1,000 | 4    | 18  | 100       | 600 K            | 2                         | 5              |
| 101            | 500   | 4    | 16  | 100       | 300 K            | 2                         | 4              |
| 1              | 100   | 2+   | 13  | 100       | 60 K             | 2                         | 3              |

In the following tables the essential scale resources are broken into two tables for easy readability. These tables are based on the *AP Count Range*.

**TABLE 6** vSZ Essentials required resources

| AP Count Range |       | Maximum Clients | Nodes per Cluster | AP Count per Node | AP/Switch Capacity Ratio | Maximum Switch (w/o AP) |
|----------------|-------|-----------------|-------------------|-------------------|--------------------------|-------------------------|
| From           | To    |                 |                   | Max               |                          | Max                     |
| 1025           | 3,000 | 60,000          | 4                 | 1,024             | 5 : 1                    | 600                     |
|                | 2,000 | 40,000          | 3                 |                   | 5 : 1                    | 400                     |
| 501            | 1,024 | 25,000          | 1-2               | 1,024             | 5 : 1                    | 204                     |
| 101            | 500   | 10,000          | 1-2               | 500               | 5 : 1                    | 100                     |
| 1              | 100   | 2,000           | 1-2               | 100               | 5 : 1                    | 20                      |

**NOTE**

The recommended vCPU core for the vSZ-E with **AP Count Range** 1 through 100 is 2-4.

**TABLE 7** vSZ Essentials required resources

| AP Count Range |       | vCPU                      | RAM    | Disk Size | Preserved Events | Concurrent CLI Connection      | Resource Level |
|----------------|-------|---------------------------|--------|-----------|------------------|--------------------------------|----------------|
| From           | To    | Logic Processor [1][2][3] | GB [1] | GB        | Max              | Max (per node not per cluster) |                |
| 1025           | 3,000 | 8                         | 18     | 250       | 10 K             | 2                              | 3              |
|                | 2,000 |                           |        |           |                  |                                |                |
| 501            | 1,024 | 8                         | 18     | 250       | 10 K             | 2                              | 2              |
| 101            | 500   | 4                         | 16     | 100       | 5 K              | 2                              | 1.5            |
| 1              | 100   | 2+                        | 13     | 100       | 1 K              | 2                              | 1              |

**NOTE**

Logic Processor <sup>1</sup> vCPU requirement is based on Intel Xeon CPU E5- 2630v2 @2.60 GHz.

Logic Processor <sup>2</sup> Azure with low CPU throughput unsupported. The vSZ with the lowest resource plan (2 core CPU, 13 GB memory) can NOT be supported due to the low CPU throughput on Azure.

Logic Processor <sup>3</sup> vSZ-H and vSZ-E have different report interval. For example, AP sends the status to vSZ-E every 90 seconds but to vSZ-H it is sent every 180 seconds, which means that vSZ-E need more CPU in scaling environment based on the resource level.

# Clustering Limitations

The following are the limitations for vSZ-H and vSZ-E.

## Clustering Limitations for vSZ-H

- vSZ-H supports up to 10,000 APs per node or 30,000 APs per cluster, assuming proper system resources are made available. It supports clustering of up to 4 nodes when using Resource Level 6.
- At 4 nodes, the maximum number of APs and clients that can be supported are 30,000 and 300,000 respectively.

## Clustering Limitations for vSZ-E

- vSZ-E supports up to 1,024 APs per node or 3000 APs per cluster, assuming proper system resources are available. It supports clustering of up to 4 nodes when using Resource Level 2.
- Above 2 nodes in a cluster at Resource Level 2, additional 2 CPU cores need to be added to each node to support the added search capabilities and replication.
- At 4 nodes, the maximum number of APs and clients that can be supported are 3,000 and 60,000 respectively.
- NAT operation for vSZ cluster: Currently, each node requires its own public IP address for its NAT'ed interface. As such, a 1:1 NAT is recommended for setting up a cluster behind a NAT environment.



# Installing the vSZ on a Hypervisor

- Preparing a Hypervisor..... 17
- Installing the vSZ on VMWare vSphere Hypervisor..... 17
- Installing the vSZ on Windows Server Hyper V..... 30
- Installing the vSZ on a Kernel based Virtual Machine Hypervisor..... 42
- Installing the vSZ on an OpenStack Hypervisor..... 54

## Preparing a Hypervisor

This section lists the hypervisors (and their release versions) on which you can install the vSZ.

**TABLE 8** Hypervisors that the vSZ supports

| Vendor    | Hypervisor             | Version                          |
|-----------|------------------------|----------------------------------|
| VMWare    | ESXi                   | 6.7 and later                    |
| Windows   | Windows Server Hyper-V | Windows Server Hyper-V (2012 R2) |
| KVM       | CentOS                 | 7.4 (64bit)                      |
| OpenStack | CentOS                 | 7-x86_64-Minimal-1804.iso        |

## Installing the vSZ on VMWare vSphere Hypervisor

You have to install the vSZ on a VMWare vSphere hypervisor.

### Before You Begin

You have to complete the prerequisites before installing the vSZ on VMWare vSphere.

Verify that you have the prerequisites before installing the vSZ on VMWare vSphere.

- Verify that vSphere client is installed.
- You can deploy the vSZ only on hosts that are running ESXi version 6.7 and later.
- The vSZ appliance requires at least 100GB of disk space and is limited to a maximum size of 600GB. The vSZ appliance can be deployed with thinprovisioned virtual disks that can grow to the maximum size of 600GB.

### Creating a vSZ Instance from the OVA File

You can create a vSZ instance using the vSphere Web Client.


Before continuing, ensure you have already downloaded the vSZ distribution package. See Obtaining the vSZ Distribution for more information.

Follow these steps to create a vSZ instance from the OVA file.

1. Use the VMWare vSphere client to log on to the ESXi management interface.


2. Click **File**> **Deploy OVF Template**. The Source screen of the **Deploy OVF Template** wizard appears.

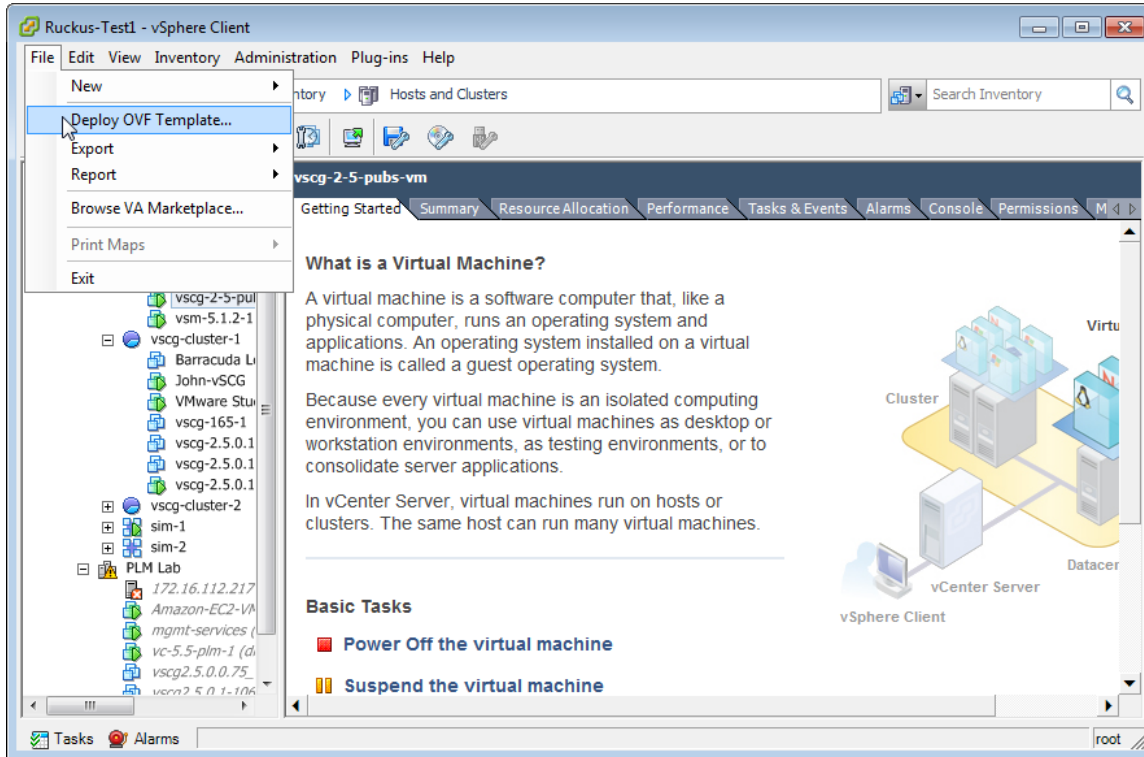**FIGURE 1** Click Deploy OVF Template




3. Click **Browse** to locate the .ova file that you downloaded earlier. Select the template.

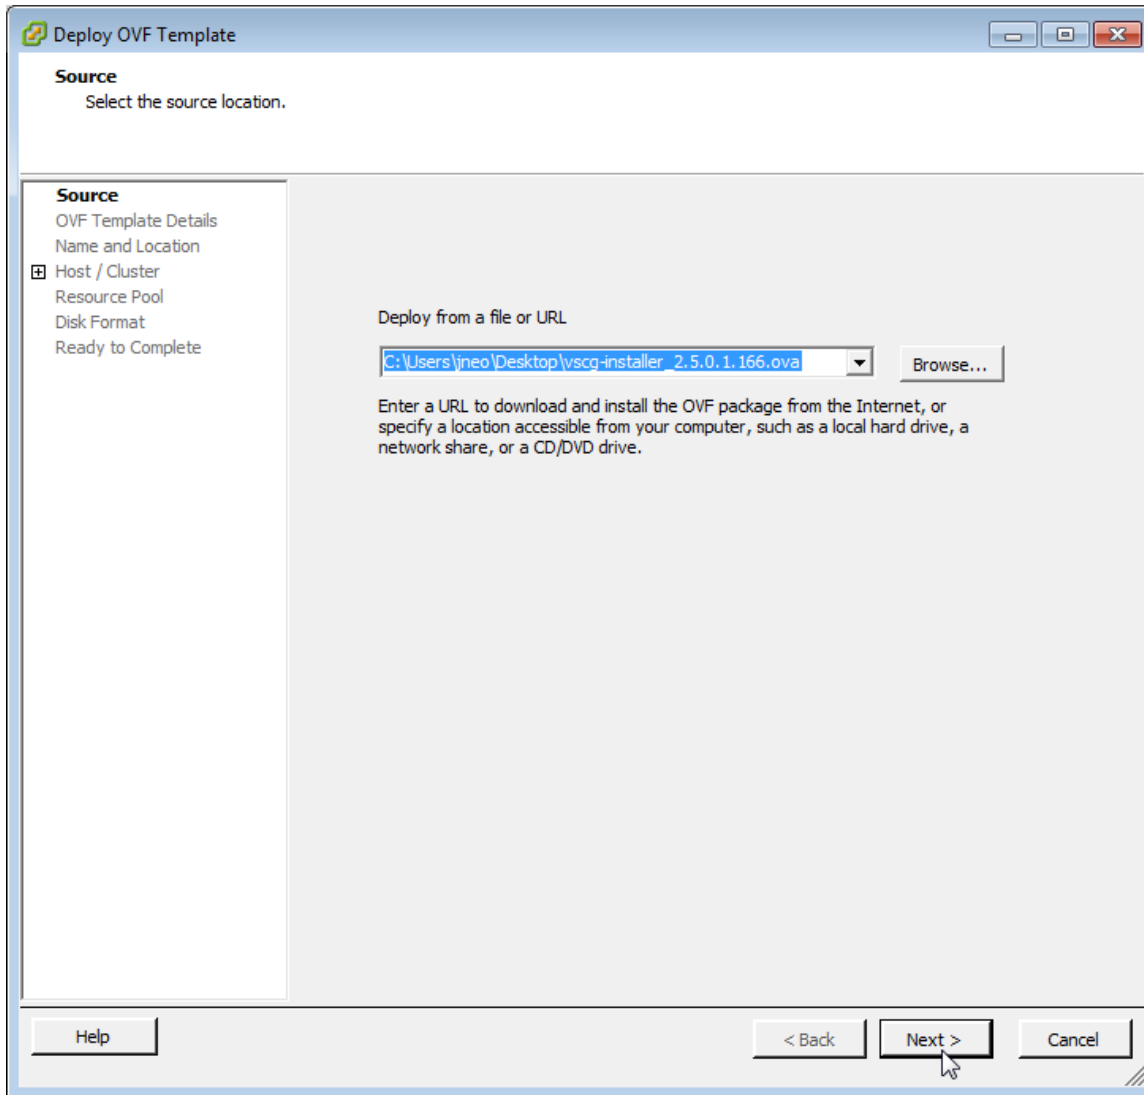**FIGURE 2** Click Browse, and then locate and select .ova file



4. Click **Next**. The **OVF Template Details** screen appears.

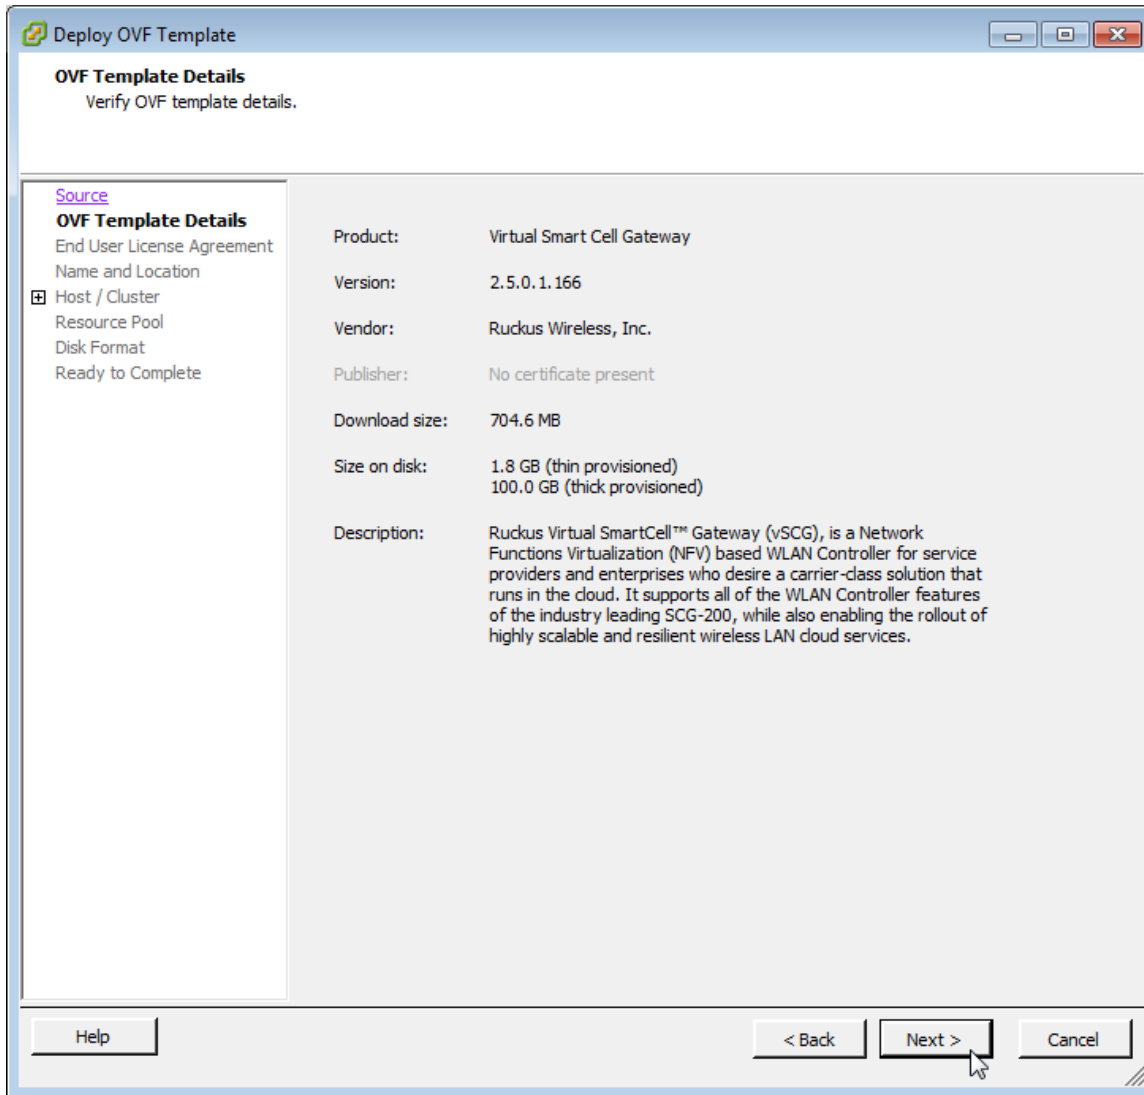
**FIGURE 3** The OVF Template Details screen



5. Review the OVA virtual appliance details, and then click **Next**. The End User License Agreement (EULA) screen appears.

- Click **Accept** to agree to the EULA terms, and then click **Next**. The **Host/Cluster** screen appears.

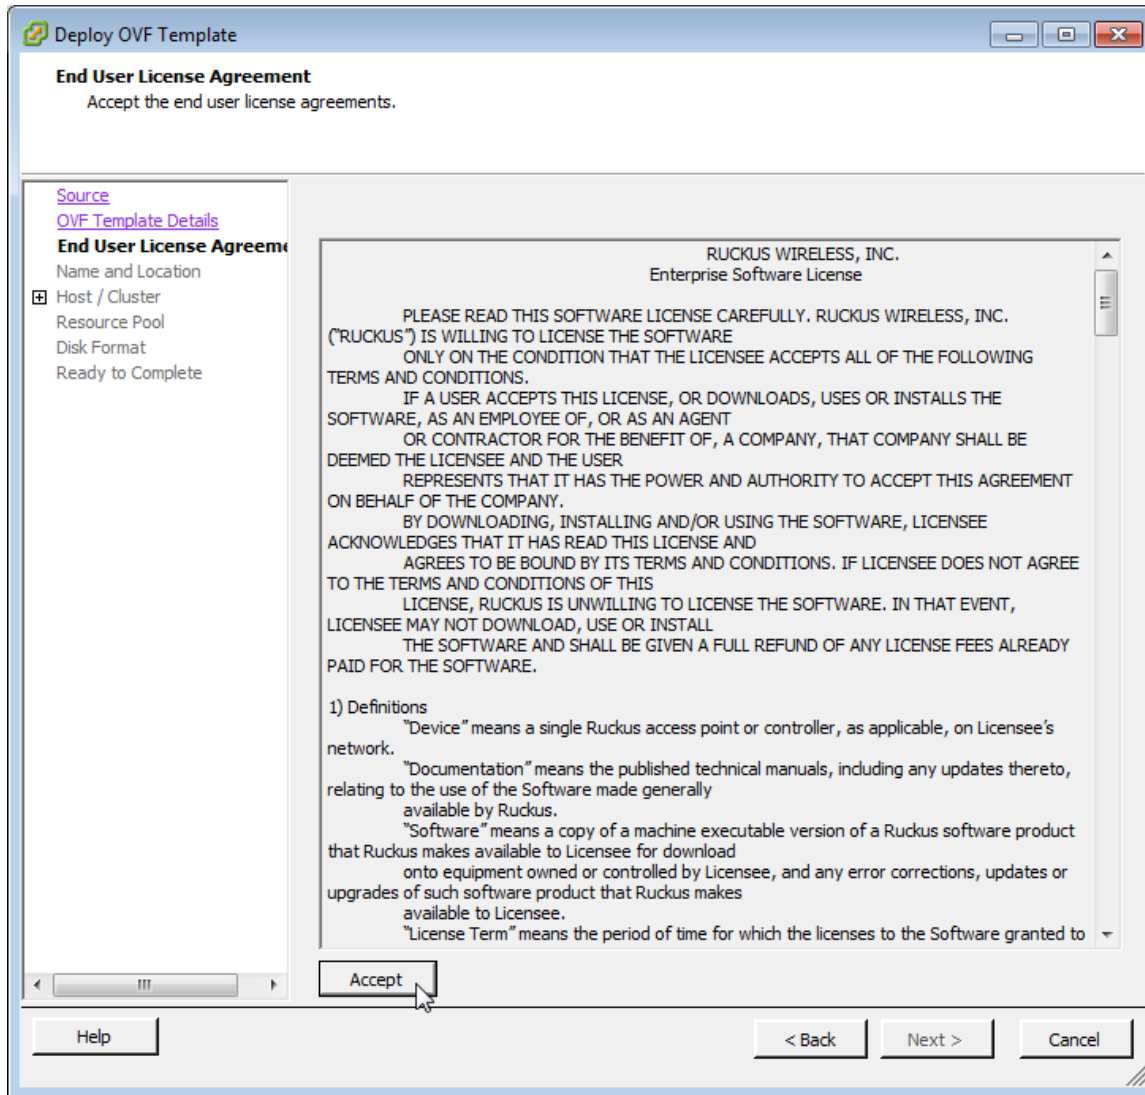**FIGURE 4** Accept the EULA for the vSZ OVA




## Installing the vSZ on a Hypervisor

### Installing the vSZ on VMWare vSphere Hypervisor


7. Select the host or cluster on which you want to run the deployed template, and then click **Next**. The **Resource Pool** screen appears.

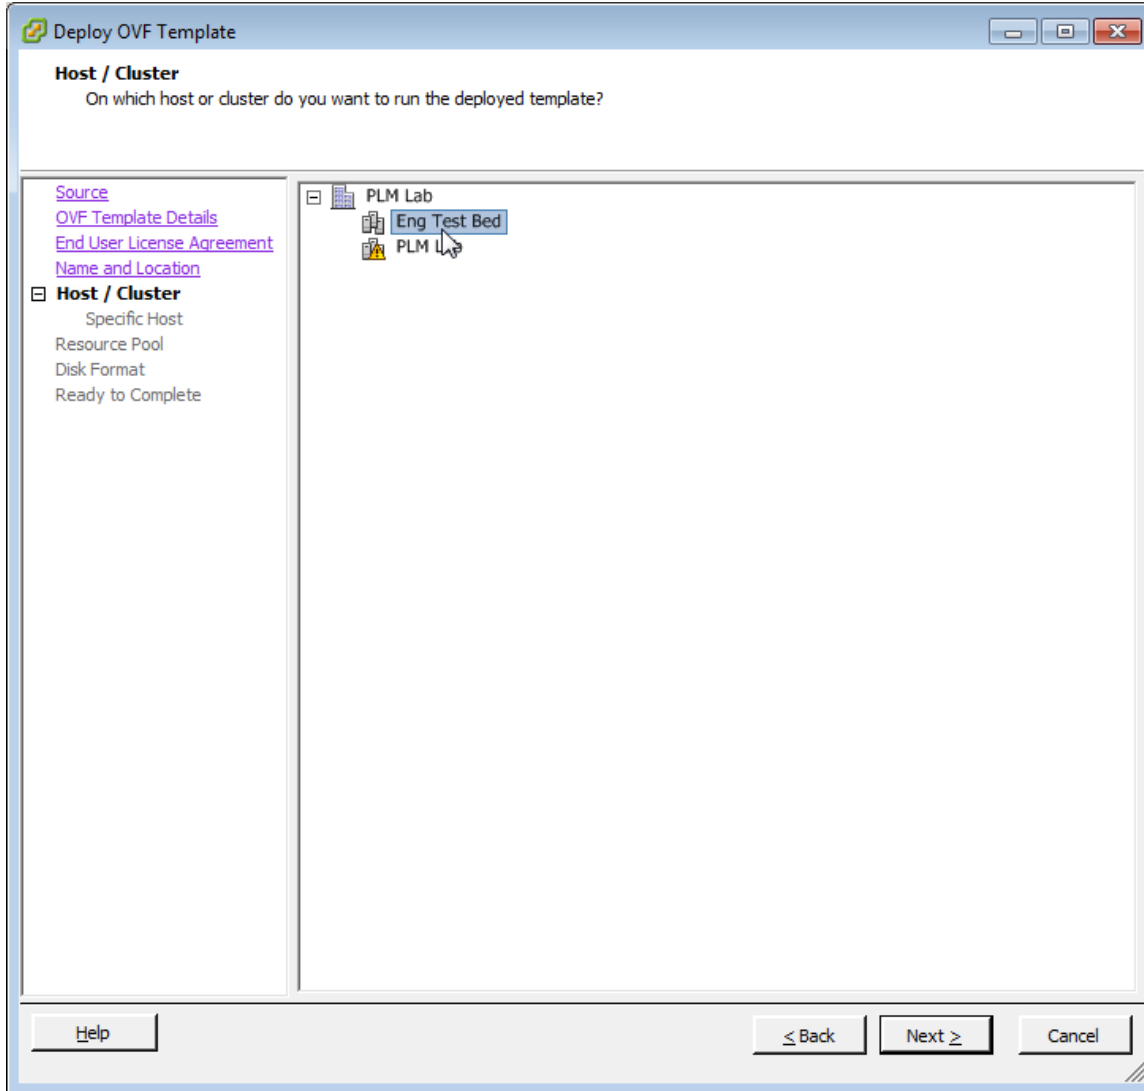**FIGURE 5** Select the destination host or cluster




8. Select the resource pool within which you want to deploy the template, and then click **Next**. The storage screen appears.

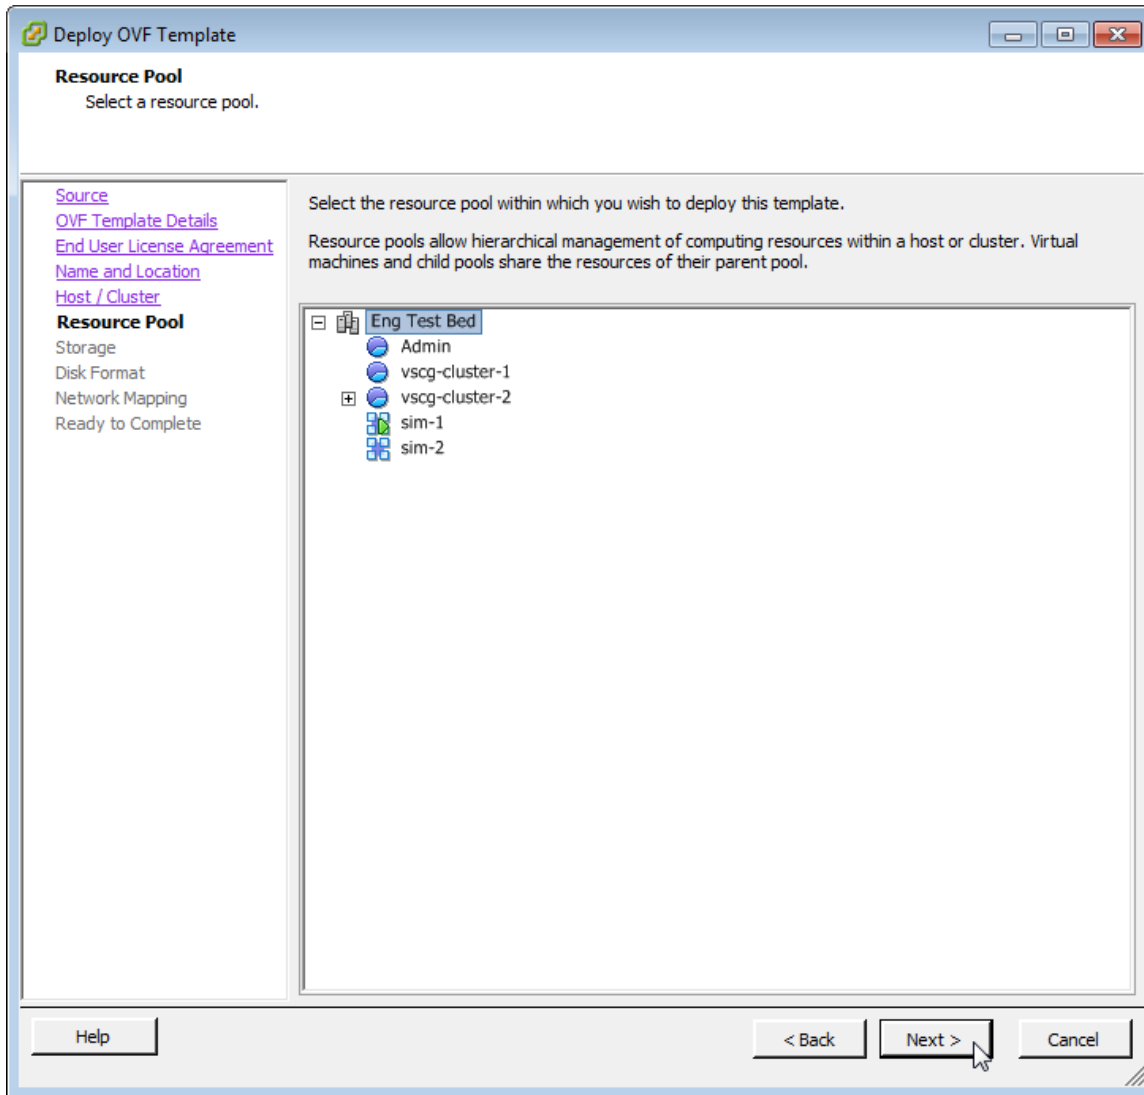**FIGURE 6** Select the resource pool for the OVA template



9. Select the destination storage (data store) for virtual machine files, and then click **Next**. The **Disk Format** screen appears.

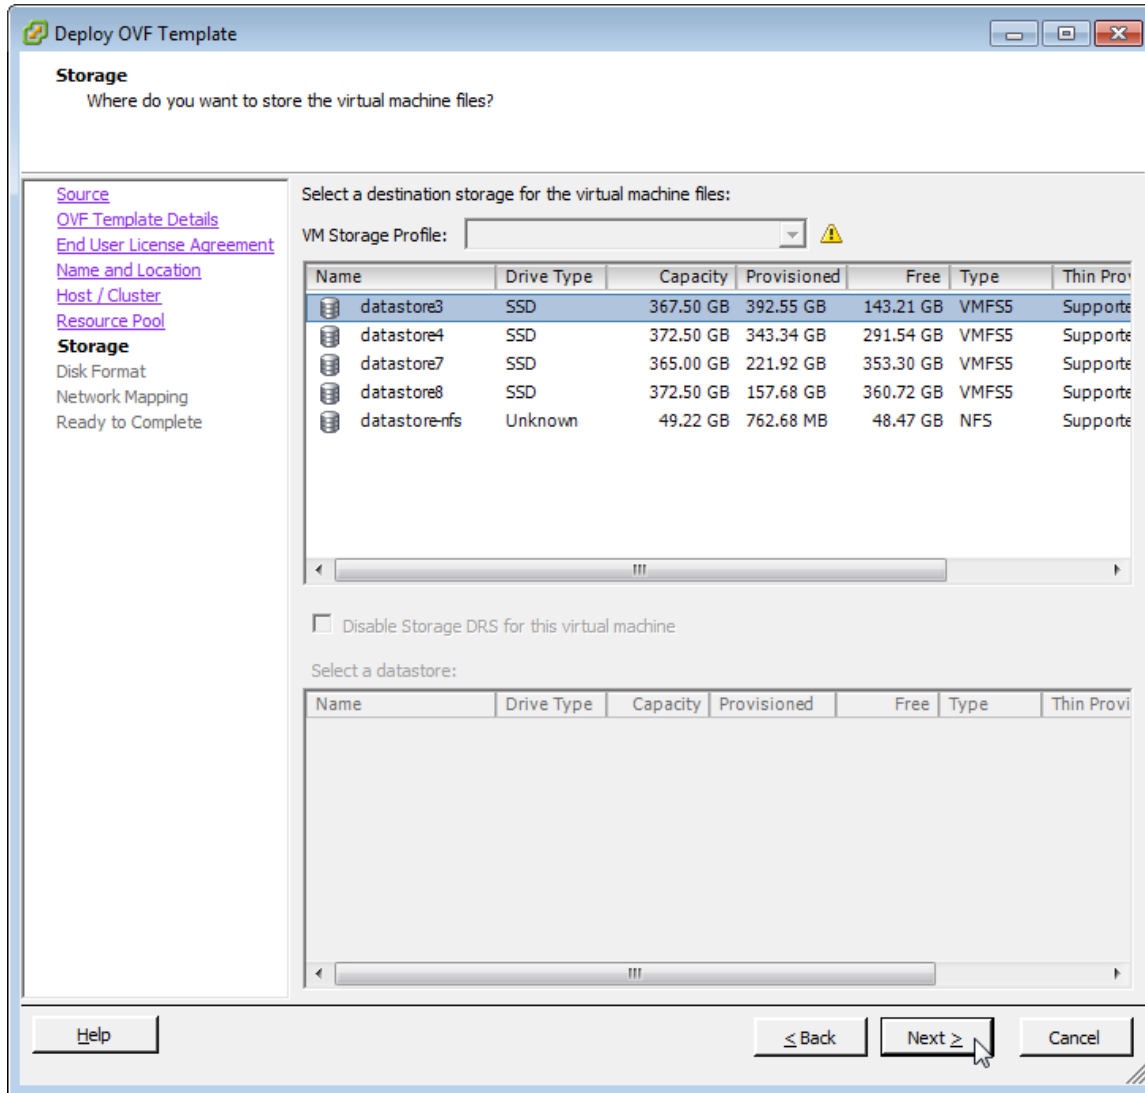
**FIGURE 7** Select the data store for the virtual machine files





10. Select the disk format that is appropriate for your deployment scenario. Options include:
- Thick Provision Lazy Zeroed
  - Thick Provision Eager Zeroed
  - Thin Provision

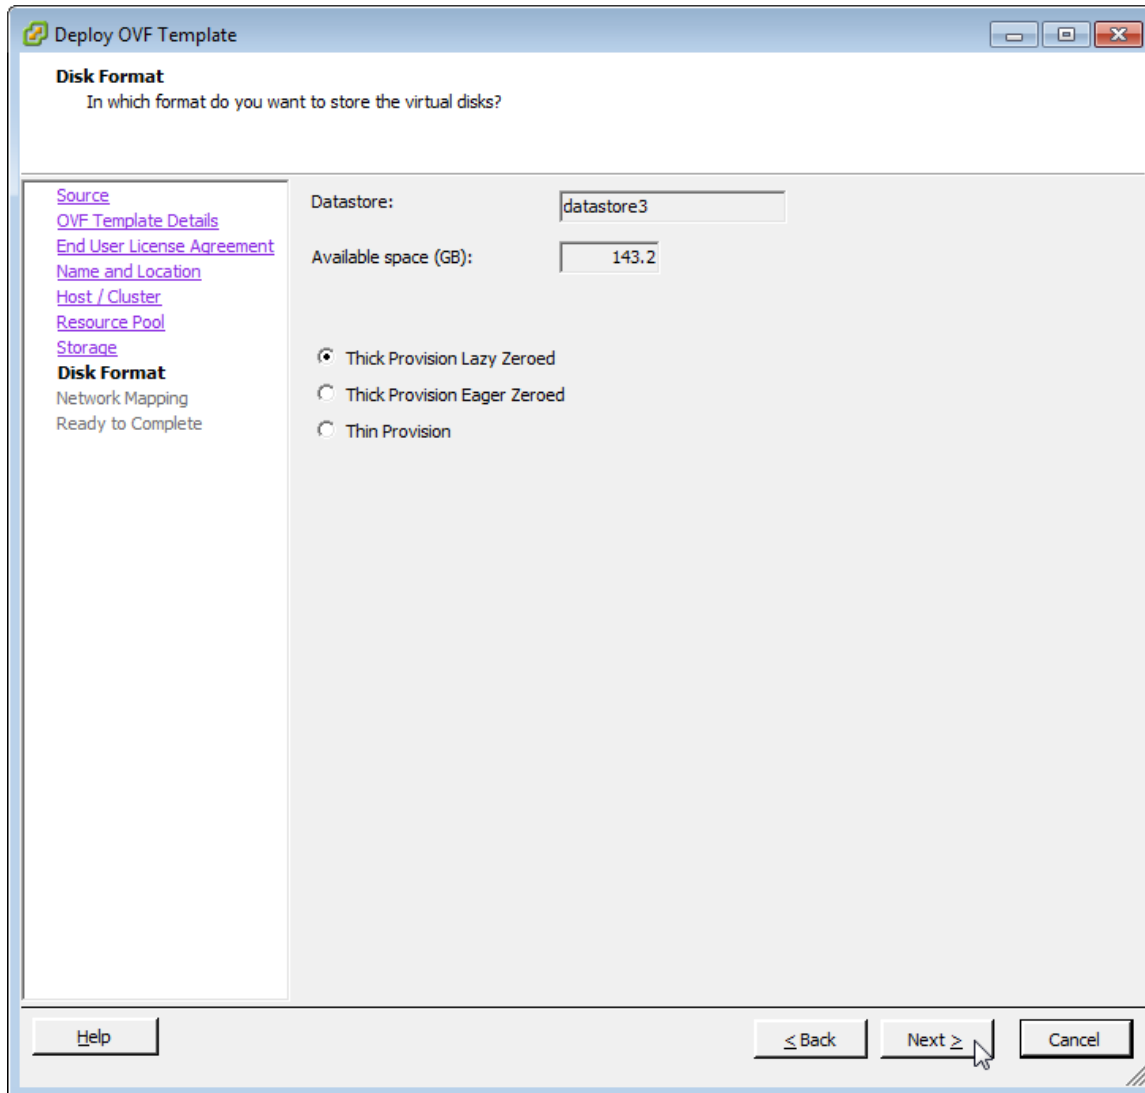**FIGURE 8** Select the disk format for your deployment scenario




11. Click **Next**. The **Network Mapping** screen appears.

12. Select the ESXi virtual network interface that you want to use for the control interface, and then click **Next**. The **Ready to Complete** screen appears.


The installation screen only allows you to select the virtual network interface for the control interface. After you complete the installation (and before you power on and set up the vSZ), you will need to adjust the cluster and management interfaces as appropriate.

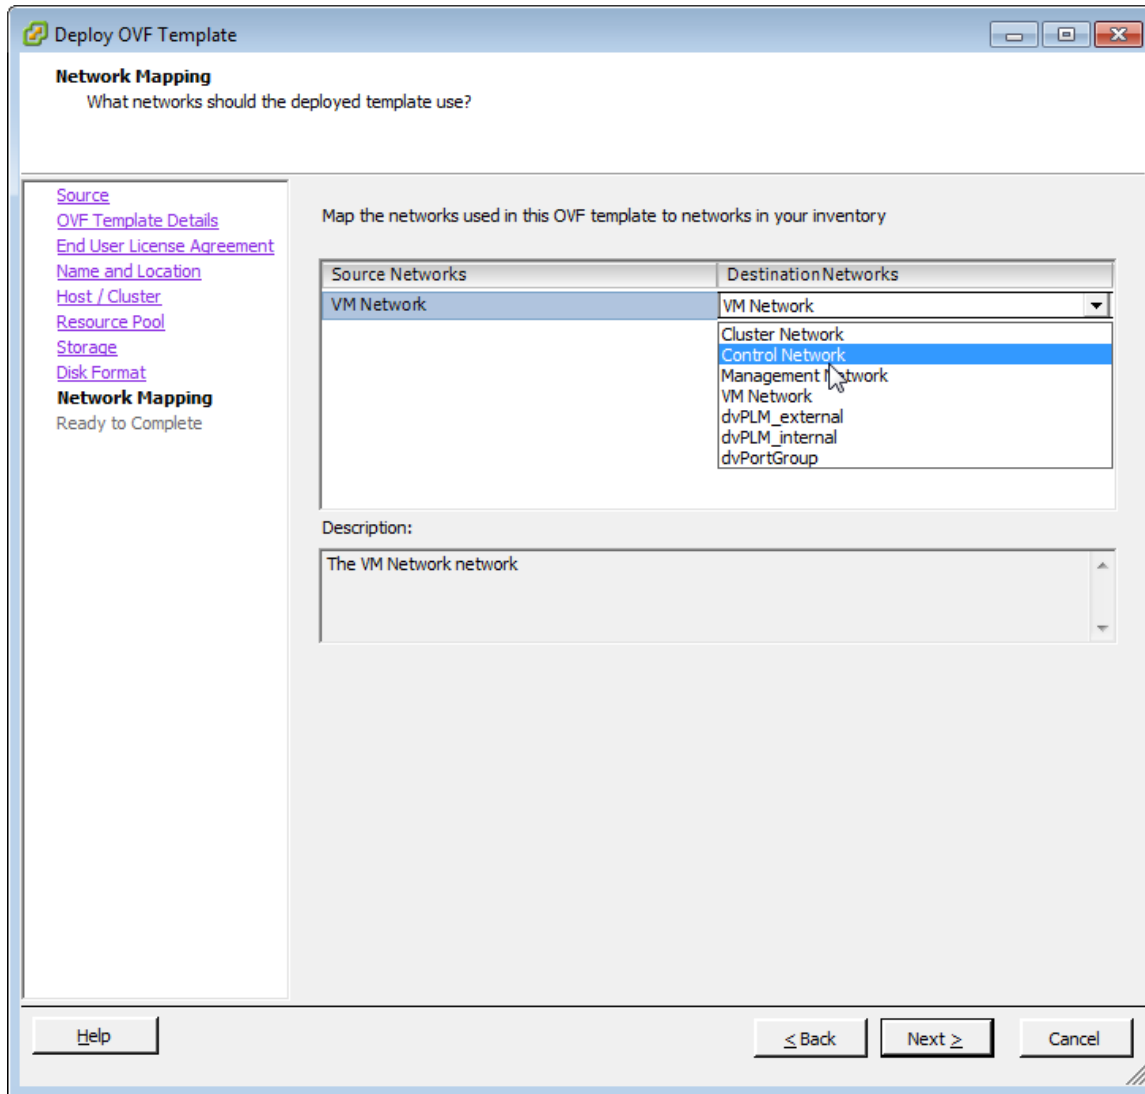**FIGURE 9** Select the virtual network interface that the template will use



- Review the settings that you have configured on the previous screens. If you find a setting that you want to change, click **Back** until you reach the screen where you can edit the setting. Update the setting, and then click **Next** until you reach the **Ready to Complete** screen again.

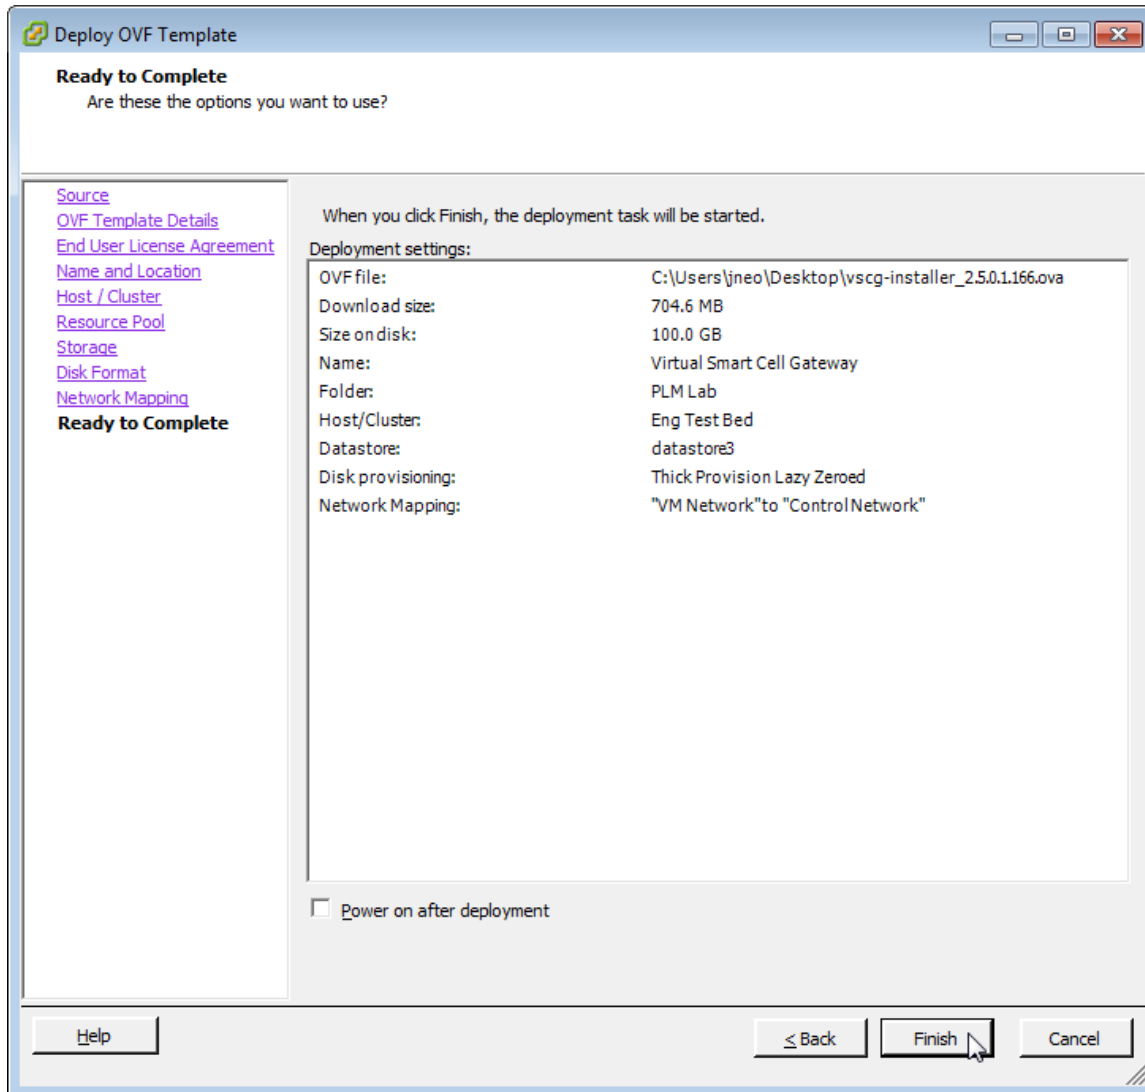
**FIGURE 10** Review the settings that you have configured



- Make sure that the **Power on after deployment** check box is clear so you can adjust the network settings before the vSZ setup. **Caution:** If you power on the vSZ after installation, you will no longer be able to adjust the network settings.
- Click **Finish**.

ESXi deploys the new vSZ instance. When ESXi completes the deployment, the new vSZ instance appears on the list of installed virtual machines on the target host.

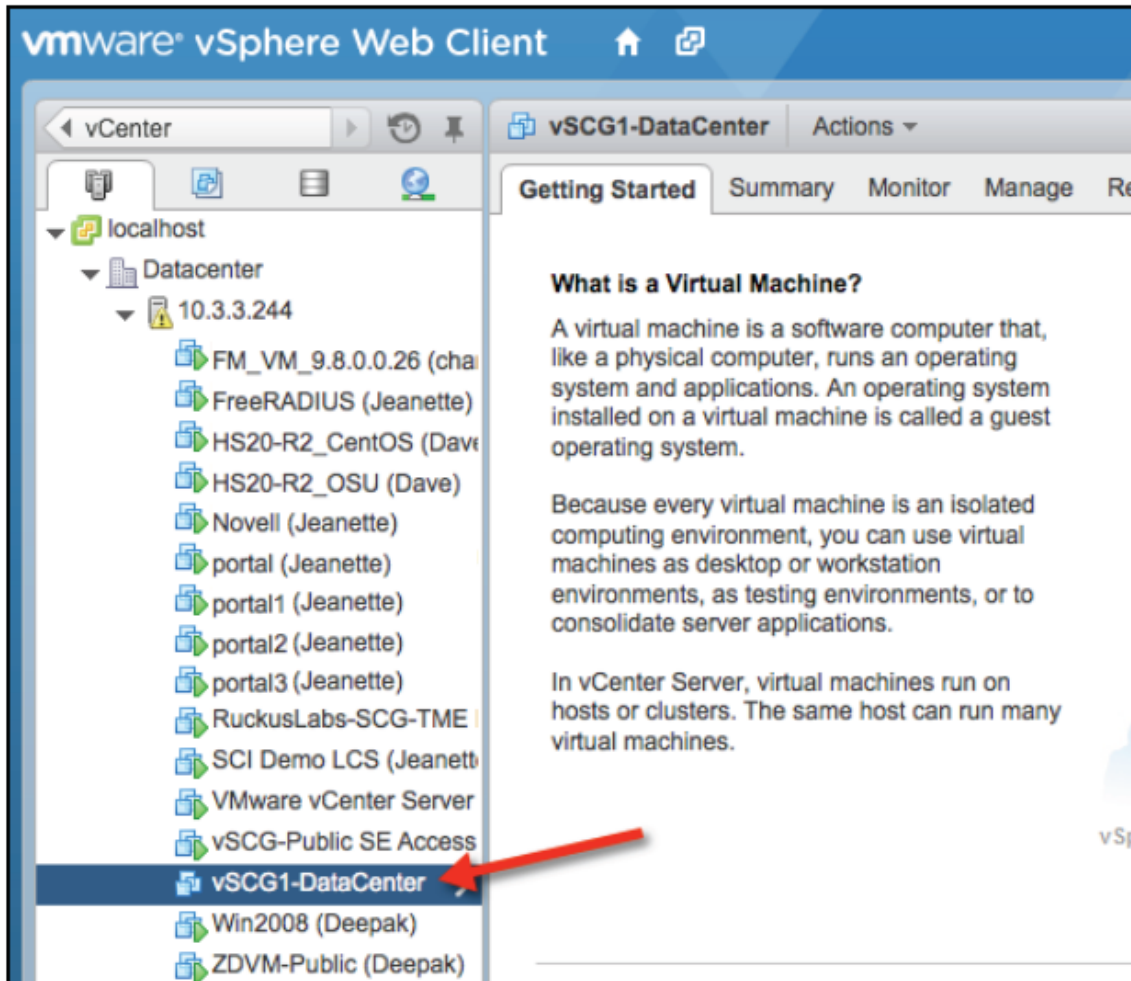FIGURE 11 The vSZ instance appears on the list of installed VMs



You have completed creating a vSZ instance from the OVA file.

## Allocating Resources and Assigning Network Interfaces

Before starting the vSZ instance for the first time, edit the virtual machine settings to allocate CPU and memory resources to the vSZ and to assign the ESXi network interfaces to the remaining vSZ interfaces (cluster and management).


Ensure that you read steps 1-7 before starting the application.

Follow these steps to allocate resources and assign network interfaces to the vSZ.

1. On the list of virtual machines, click the new vSZ instance.
2. Click **Actions** to display the additional options, and then click **Edit Settings**.
3. Set the number of CPUs and the amount of RAM to allocate to the vSZ instance. By default, the OVA template is set to 4 CPUs and 8GB of RAM.
4. Under **Network adapter 1**, verify that it is the same ESXi network interface that you selected for the control interface during the OVA import process. Ensure that the **Connect at Power On** check box is selected.

5. Under **Network adapter 2**, select the ESXi network interface for the cluster interface from the drop-down list. Ensure that the **Connect at Power On** option is selected.
6. Under **Network adapter 3**, select the ESXi network interface for the management interface from the drop-down list. Ensure that the **Connect at Power On** option is selected.

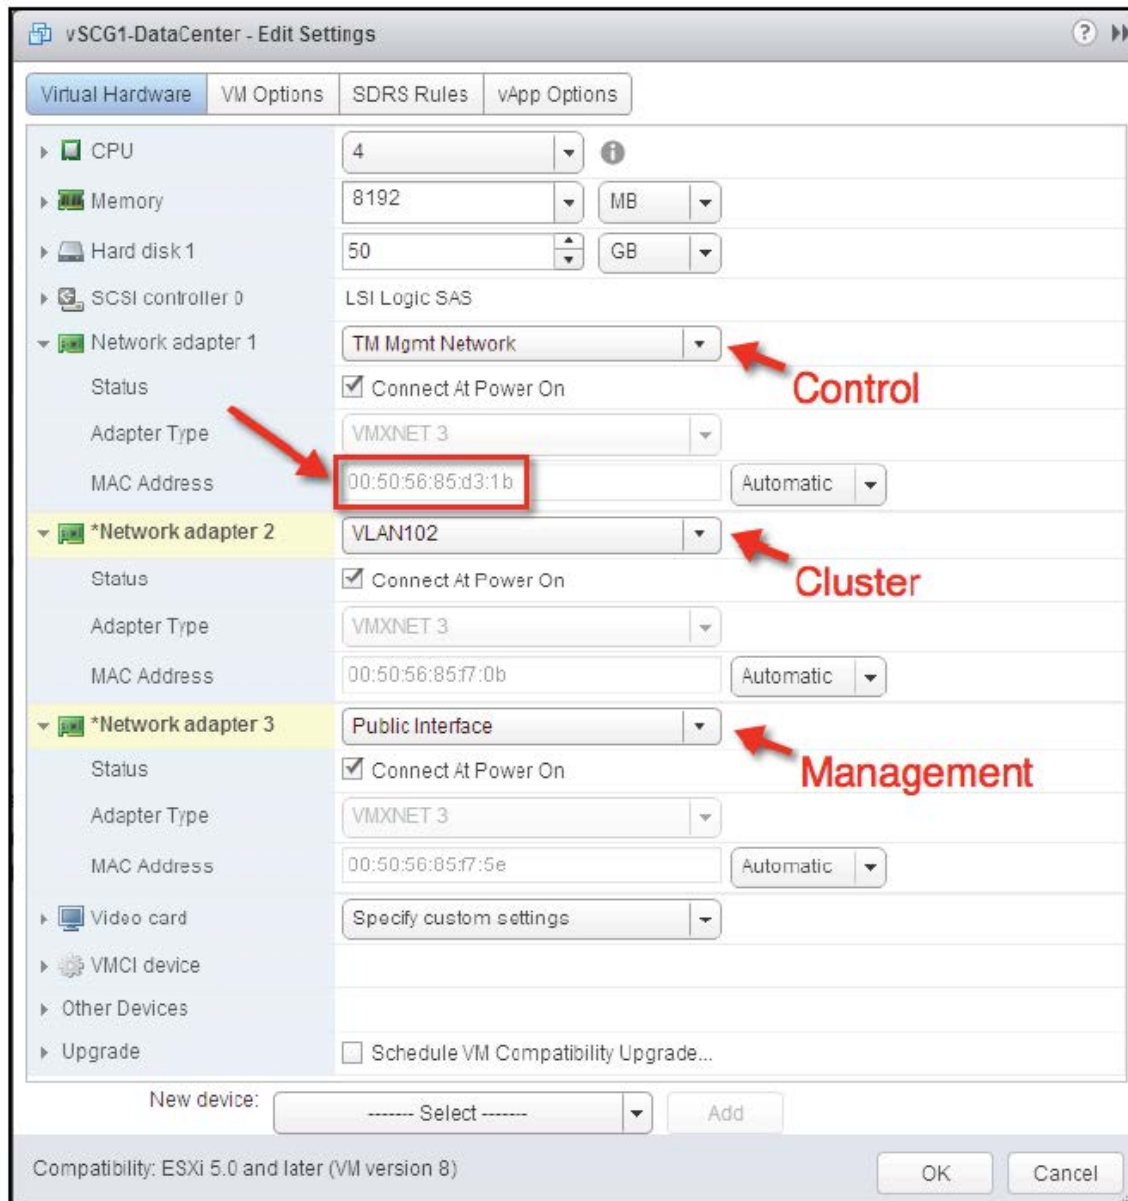**FIGURE 12** Select the interfaces to use




7. Click **OK**. You have completed allocating resources and assigning network interfaces to the vSZ.

## Powering on the vSZ virtual machine

The next step is to power on the vSZ virtual appliance.

1. From the list of virtual machines on the host, click the vSZ instance.
2. Under **Basic Tasks**, click **Power on the virtual machine**.

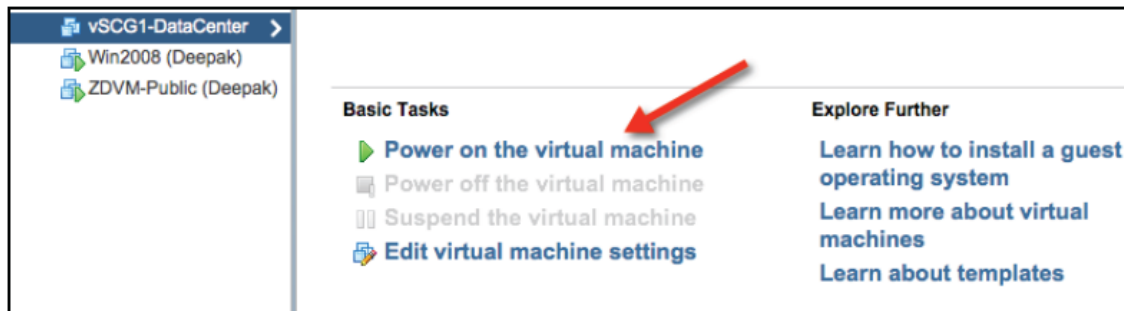**FIGURE 13** Click Power on the virtual machine



3. Open a console window to monitor the startup process. To do this, click the *Action* menu, and then click **Open Console**. After the vSZ completes its startup process, you are ready to perform the initial IP address setup of the vSZ. You will use the console connection to perform this task.


## Installing the vSZ on Windows Server Hyper V

Before you begin, verify that Hyper-V is enabled on Windows Server. Follow these steps to install the vSZ on Windows Server Hyper-V.

1. Obtain a copy of the vSZ image in VHD format.
2. Extract the vSZ image to the .vhd disk file.
3. Copy the image to the Windows Server on which you are running Hyper-V.
4. On the Windows Server, click **Start > Administrative Tools**, and then double-click **Hyper-V Manager**.


5. In the Hyper-V Manager, select the Hyper-V core for which you want to create a virtual machine and click **Virtual Machine > Action > New > New Virtual Machine Wizard**. The appears and displays the **Before You Begin** screen.

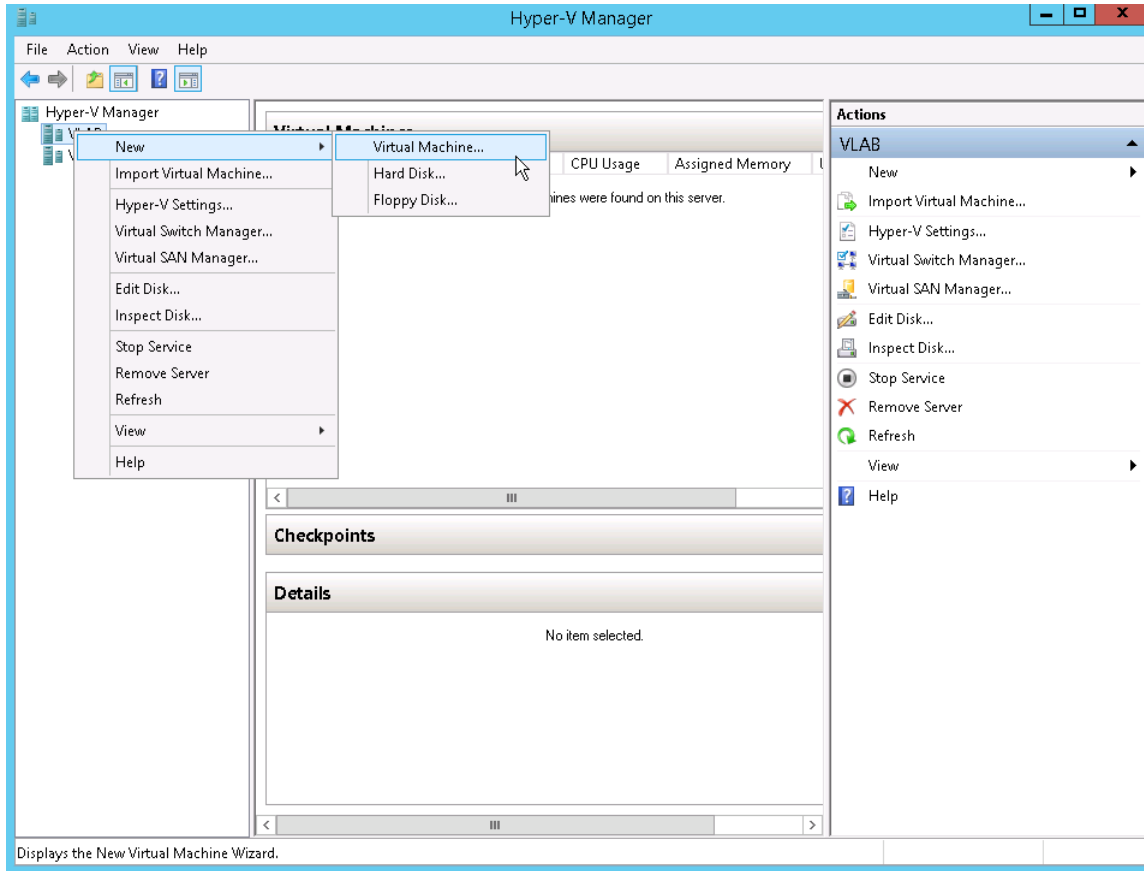**FIGURE 14** Click Action > New > Virtual Machine



6. Click **Next**. The **Specify Name and Location** screen appears.

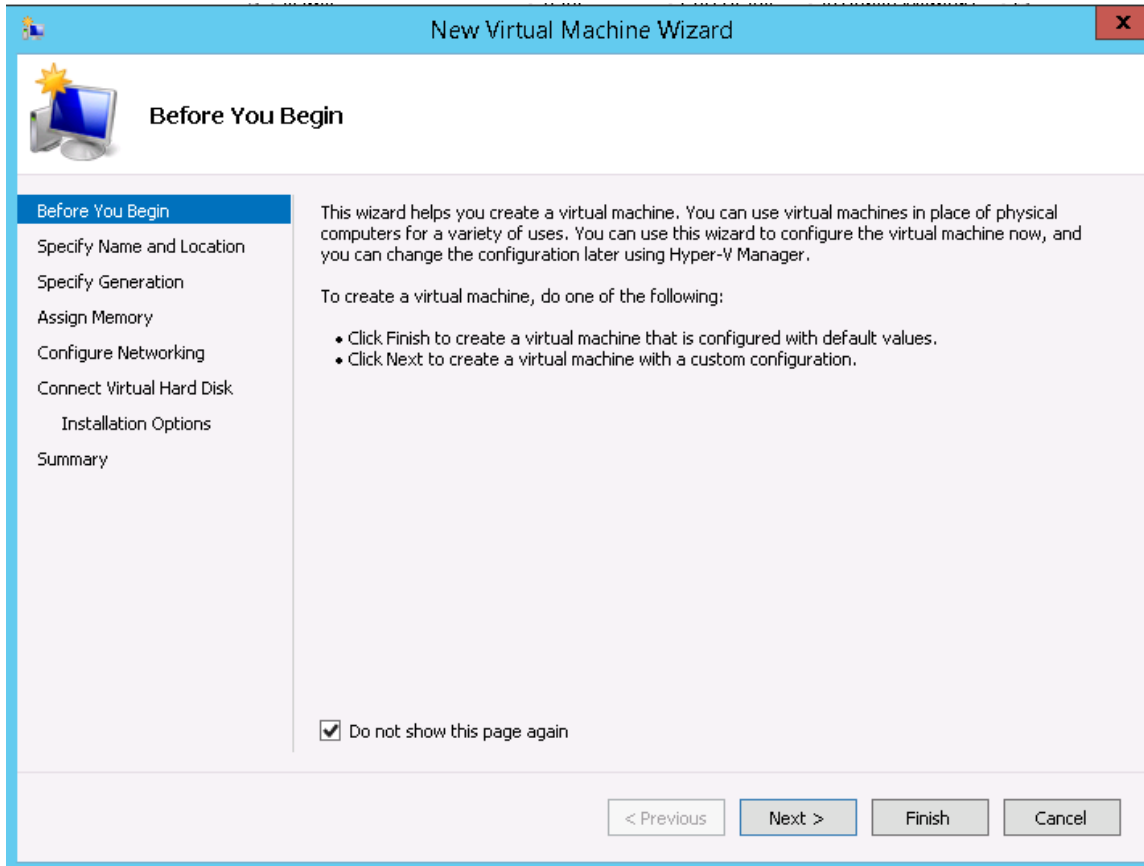
**FIGURE 15** The New Virtual Machine Wizard screen





7. In **Name**, type a name for the virtual machine that you are installing (for example, Virtual SmartZone).

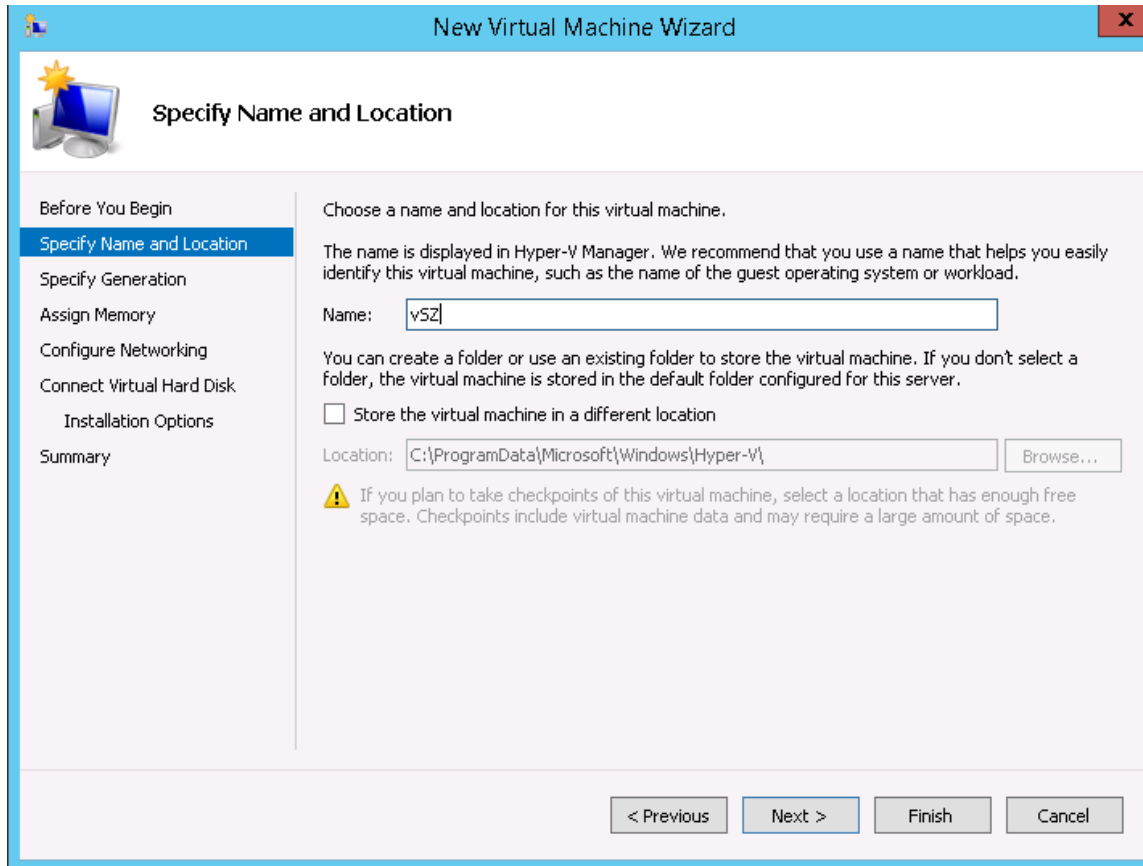
**FIGURE 16** Specify Name and Location



8. Specify the folder on the server where you want to install the virtual machine.
  - a) To install the virtual machine in the default location, make sure that the Store the virtual machine in a different location check box is clear.
  - b) To install the virtual machine in a location other than the default, select and Store the virtual machine in a different location check box, and then browse to or type the new location.

9. Click **Next**. The **Specify Generation** screen appears.

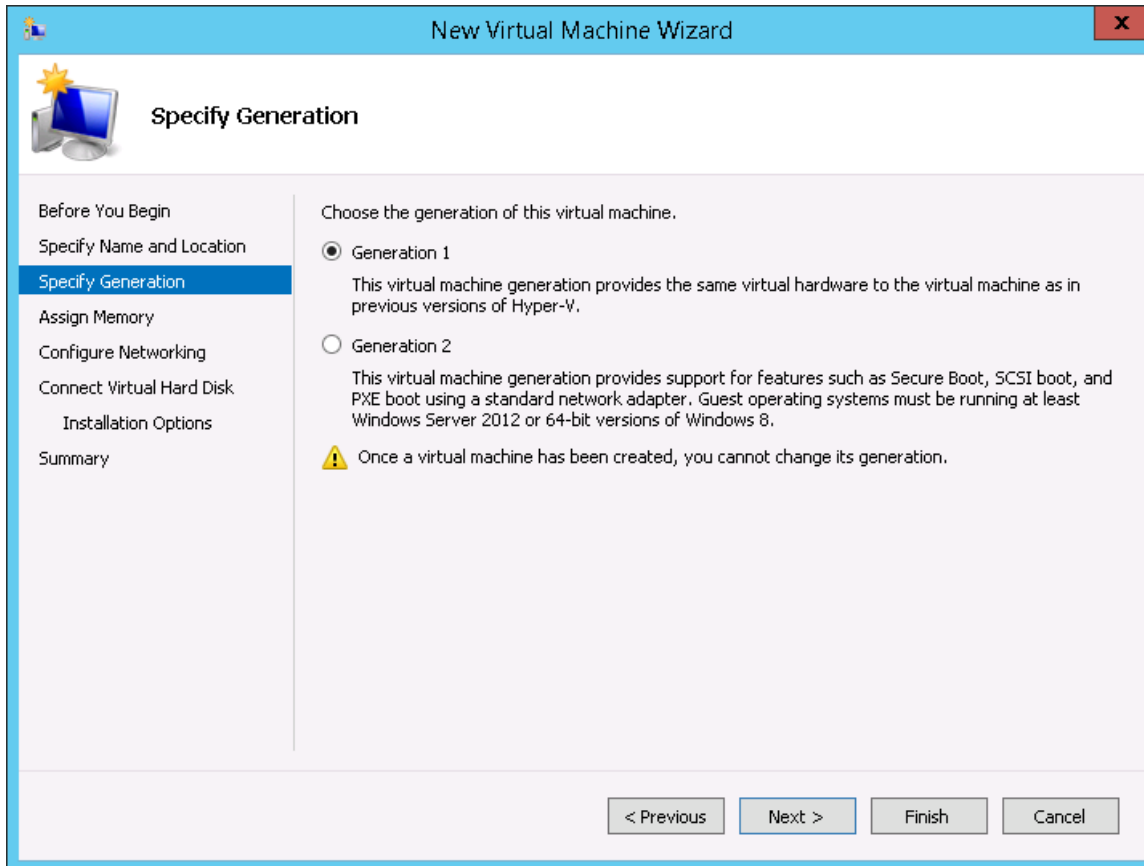
**FIGURE 17** Specify Generation



10. Select **Generation 1** for the virtual machine that you are installing. Hyper-V offers Generation 1 and Generation 2. See the Hyper-V documentation for more information about these two generations.

11. Click **Next**. The **Assign Memory** screen appears.

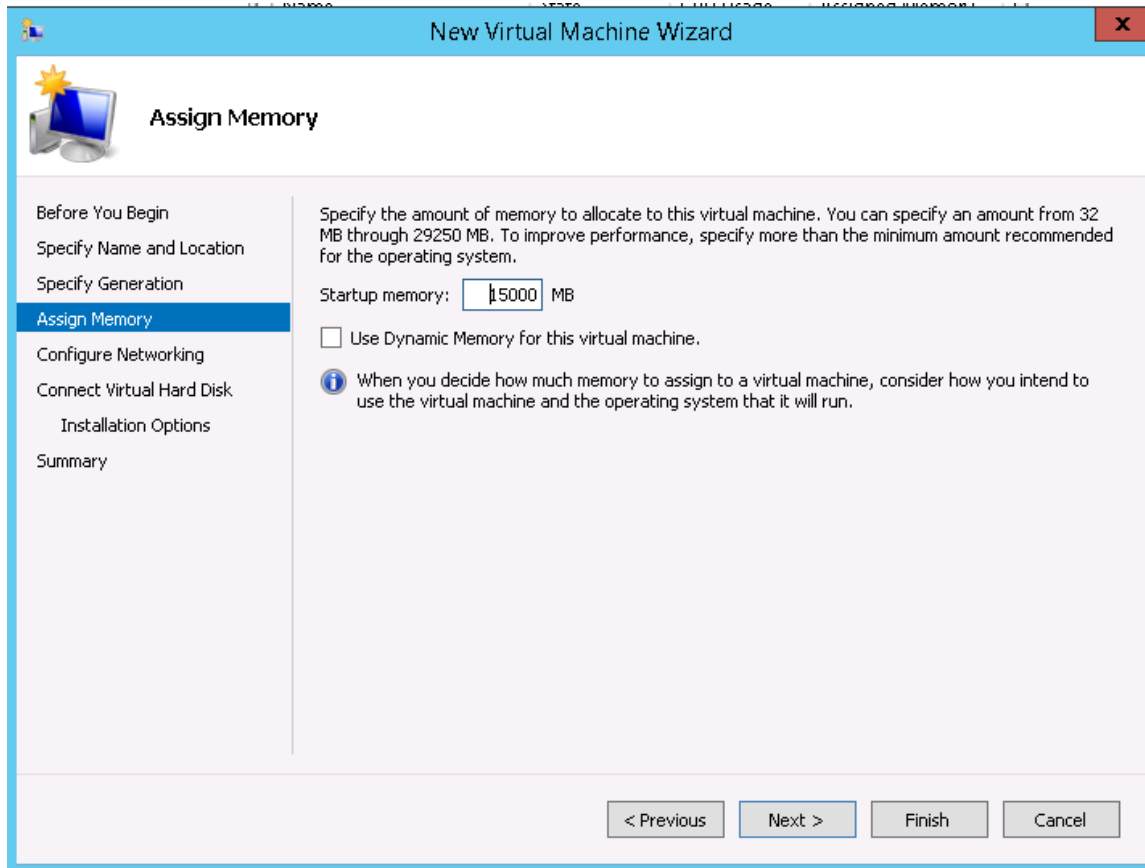
**FIGURE 18** Assign Memory



12. In **Startup memory**, type 13GB for vSZ High Scale or 15GB for vSZ Essentials (as relevant), which are the minimum memory that Ruckus Networks recommends for deploying vSZ. You can type a higher value if more memory is available on the server. For more information, see Table 4 and Table 5.

13. Click **Next**. The **Configure Networking**

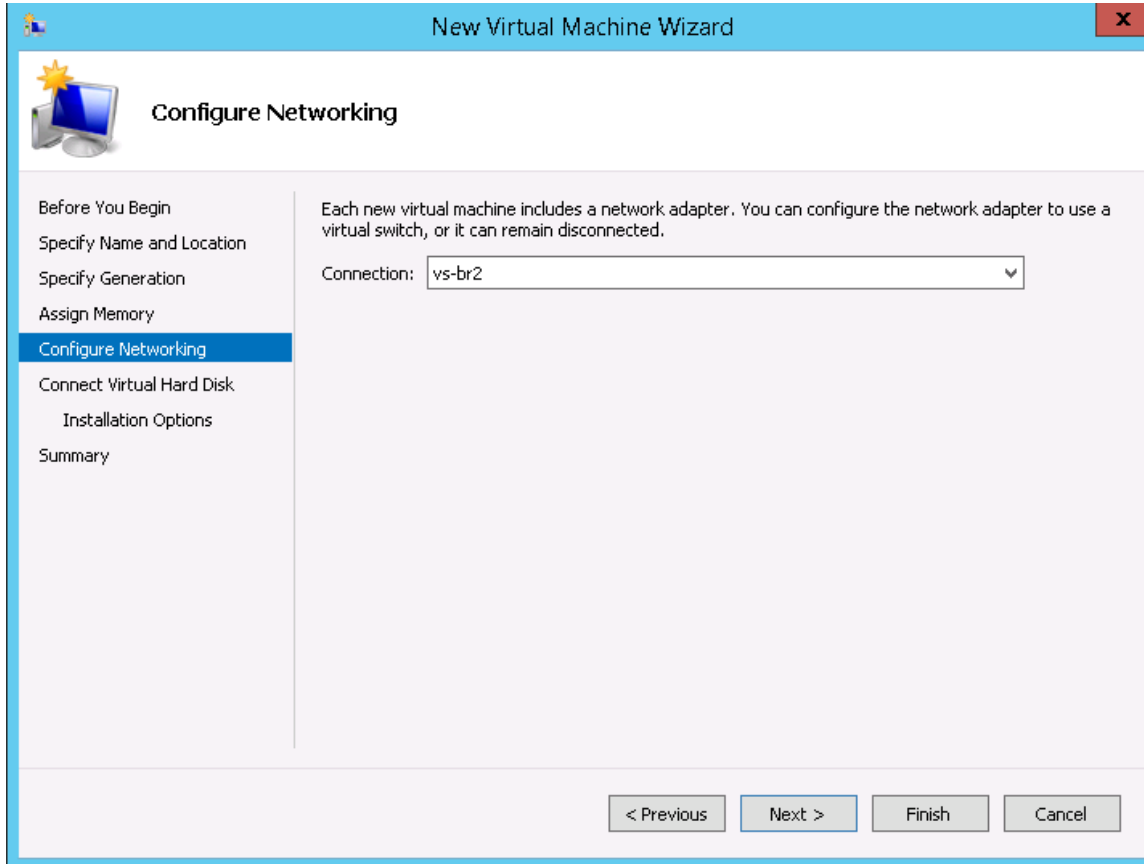
**FIGURE 19** Configuring Network



14. In **Connection**, select the network adapter that you want the virtual machine to use.

15. Click **Next**. The **Connect Virtual Hard Disk** screen appears.

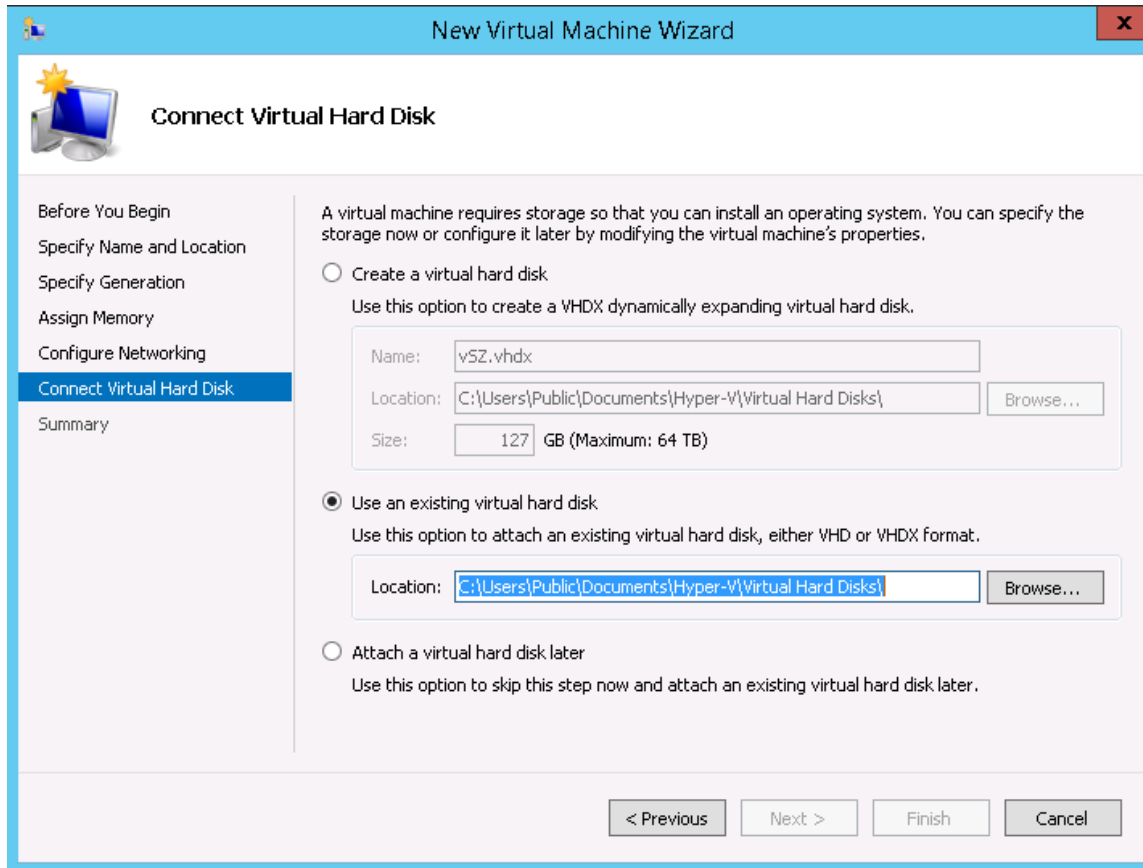
**FIGURE 20** Connect Virtual Hard Disk



16. Select **Use an existing virtual hard disk**.


17. Click **Browse** to specify the location of the existing virtual hard disk for the virtual machine to use.

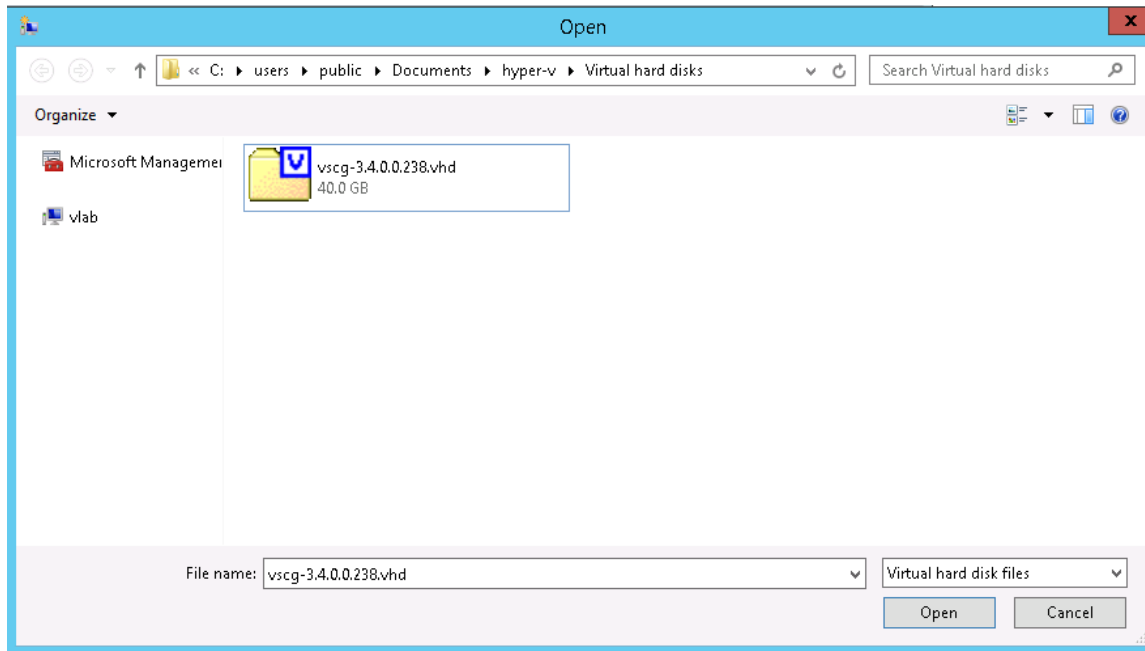**FIGURE 21** Selecting Virtual Hard Disk



18. Click **Next**. The **Completing New Virtual Machine Wizard** screen appears.

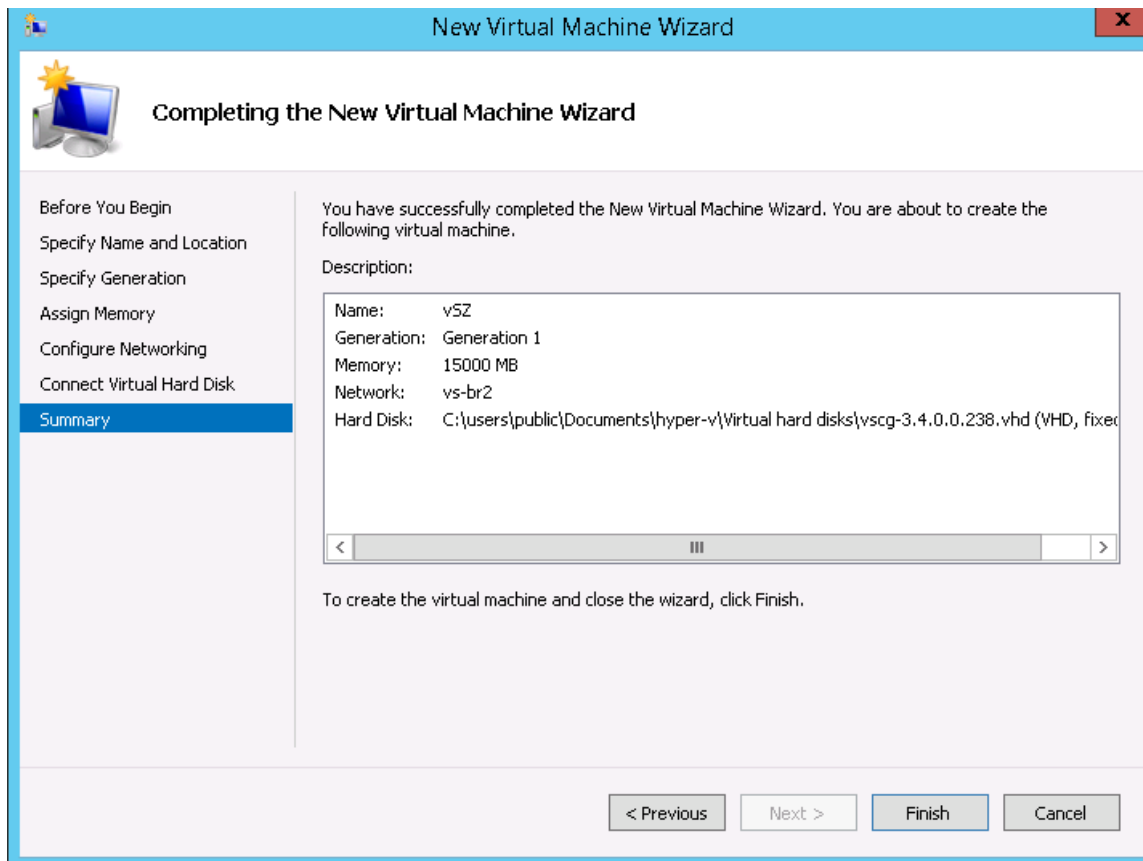
**FIGURE 22** Completing New Virtual Machine Wizard



19. Review the settings that you can configure for the virtual machine. If you find any setting that need to be changed, click **Previous** until you reach the screen where you can update the setting. Update the setting, and then click **Next** until the **Completing New Virtual Machine Wizard** screen appears again.

20. Click **Finish** to install the virtual machine. When Windows Server completes installing the virtual machine, the **New Virtual Machine Wizard** disappears and the virtual machine you installed appears on the list of virtual machines on Hyper-V Manager.

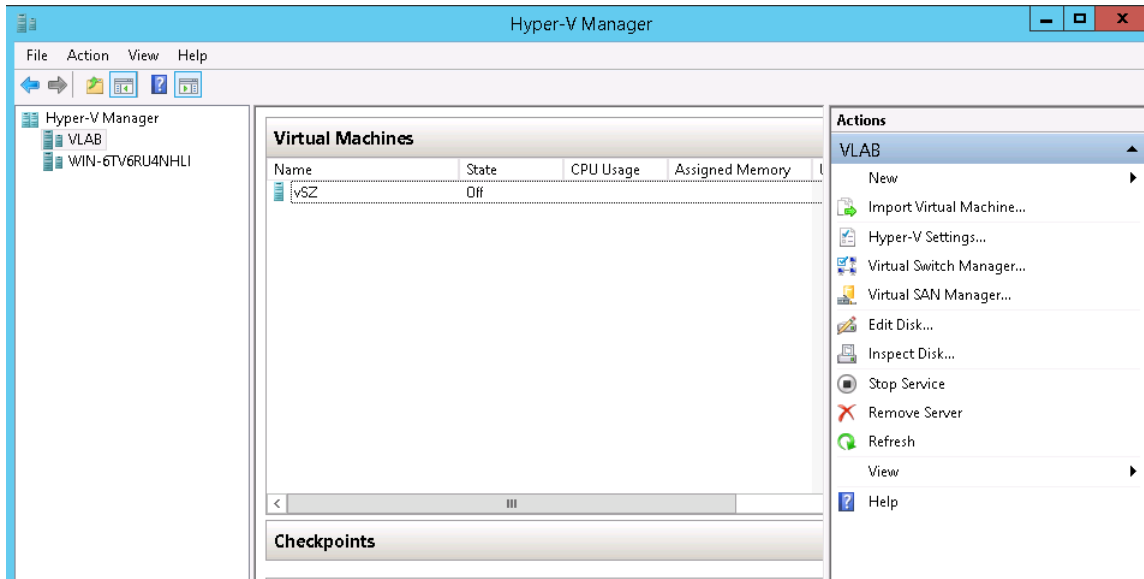
**FIGURE 23** The virtual machine you installed appears on the list of virtual machines on Hyper- V Manager






21. Right-click the virtual machine you installed, and then click **Start** to power on the virtual machine.

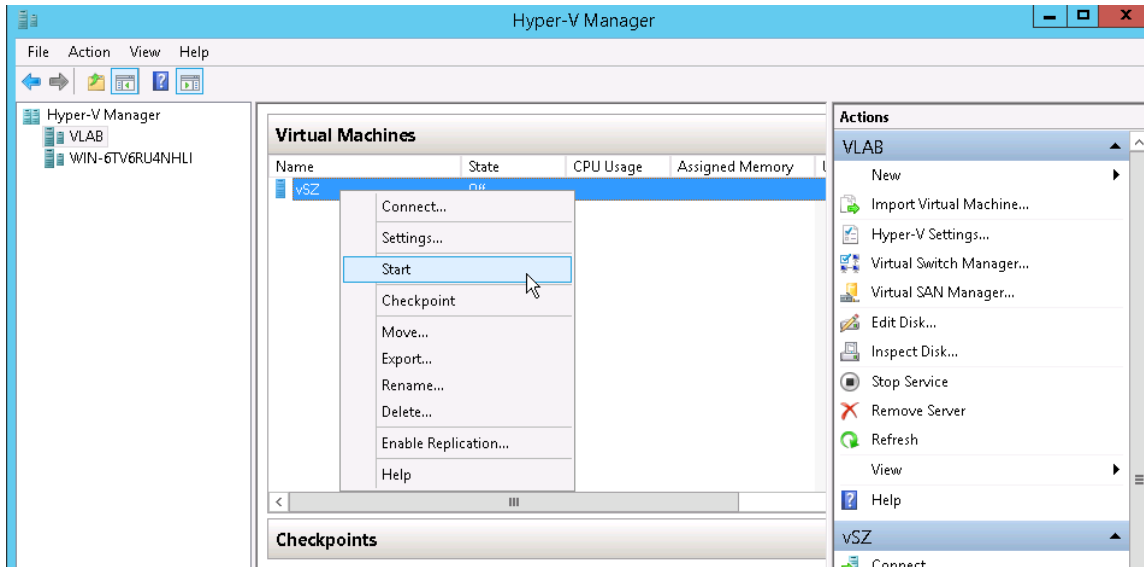**FIGURE 24** Right-click the virtual machine, and then click Start



The Virtual Machine Connection screen appears.

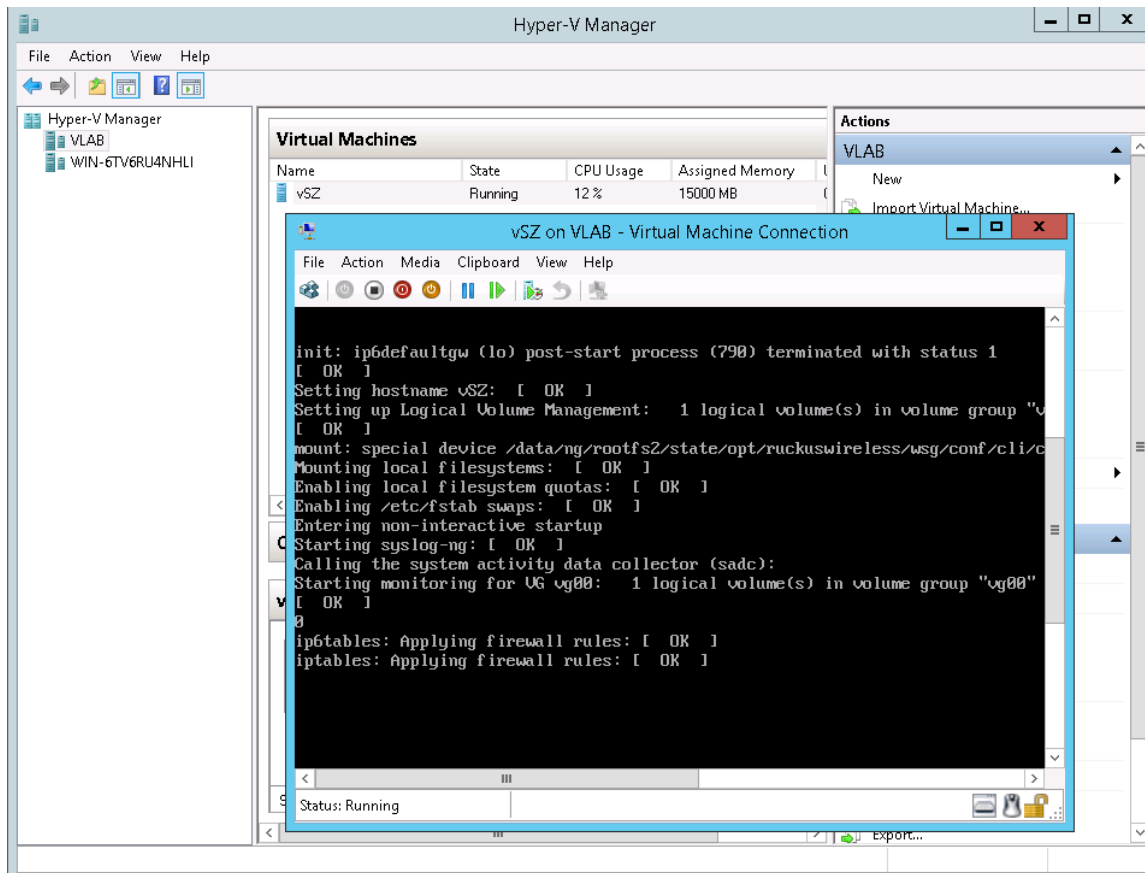**FIGURE 25** Virtual Machine Connection



22. Login to the virtual machine with your credentials.

You have now completed installing the vSZ on Windows Server Hyper-V.

## Installing the vSZ on a Kernel based Virtual Machine Hypervisor

This section describes how to install the vSZ on a KVM hypervisor.


### Extracting the vSZ Image

The vSZ image for a kernel-based virtual machine (KVM) is distributed in QCOW2 format.

1. Obtain the vSZ image in QCOW2 format.
2. Copy the image to the KVM.
3. Open the terminal window.

4. Make the image bin file executable by entering the following command: **chmod +x {file name of the controller QCOW bin}** See Figure for an example.

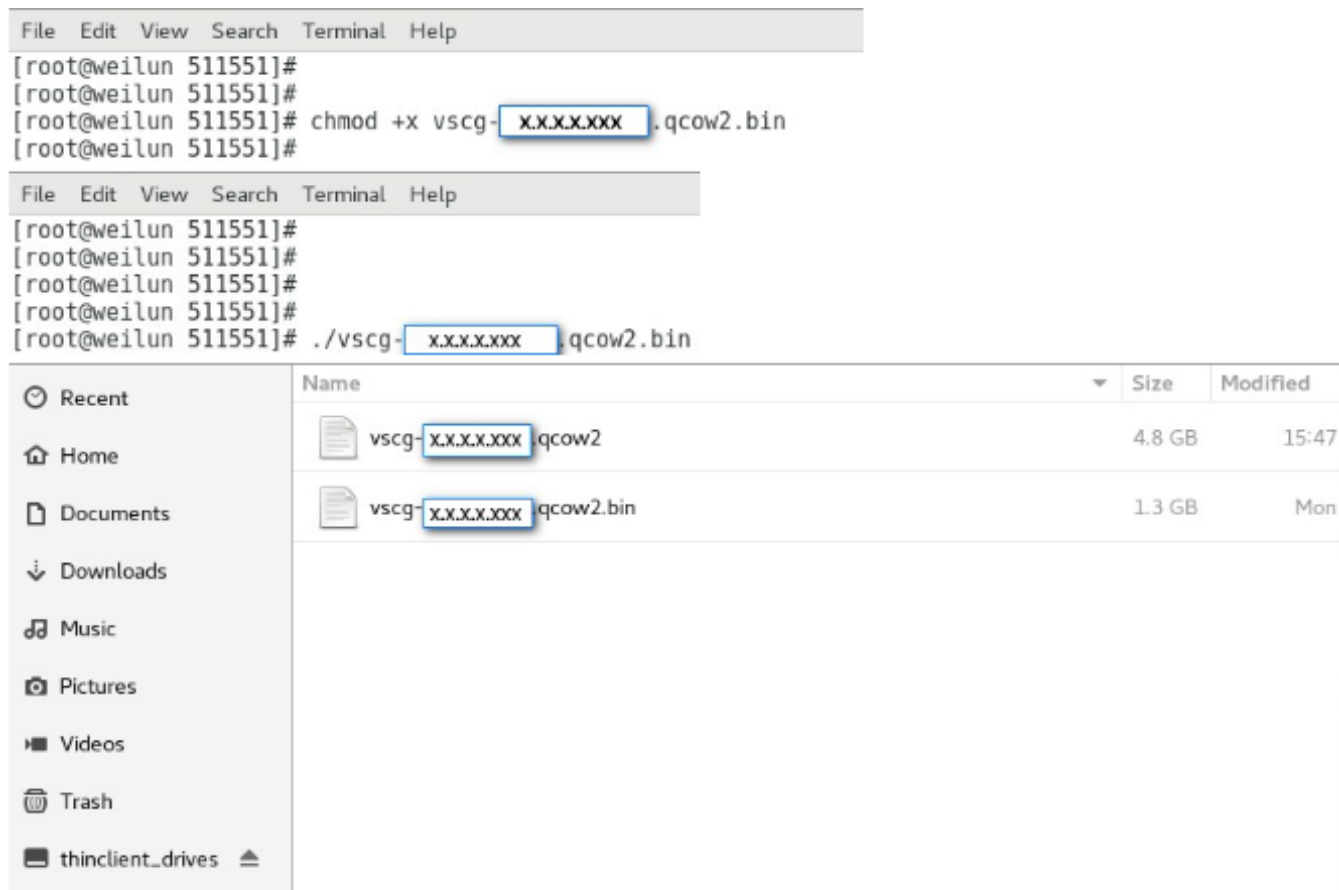**FIGURE 26** Make the bin file executable



The figure consists of two screenshots. The top screenshot shows a terminal window with the following commands and output:

```
[root@weilun 511551]#  
[root@weilun 511551]#  
[root@weilun 511551]# chmod +x vscg-x.x.x.x.qcow2.bin  
[root@weilun 511551]#
```


The bottom screenshot shows a file manager window with a sidebar on the left and a main pane on the right. The sidebar contains the following items: Recent, Home, Documents, Downloads, Music, Pictures, Videos, Trash, and thinclient\_drives. The main pane displays a table of files:

| Name                   | Size   | Modified |
|------------------------|--------|----------|
| vscg-x.x.x.x.qcow2     | 4.8 GB | 15:47    |
| vscg-x.x.x.x.qcow2.bin | 1.3 GB | Mon      |

5. Extract the contents of the QCOW2 bin file.


- At the **Accept this agreement? [yes/no]** prompt, enter **yes**.

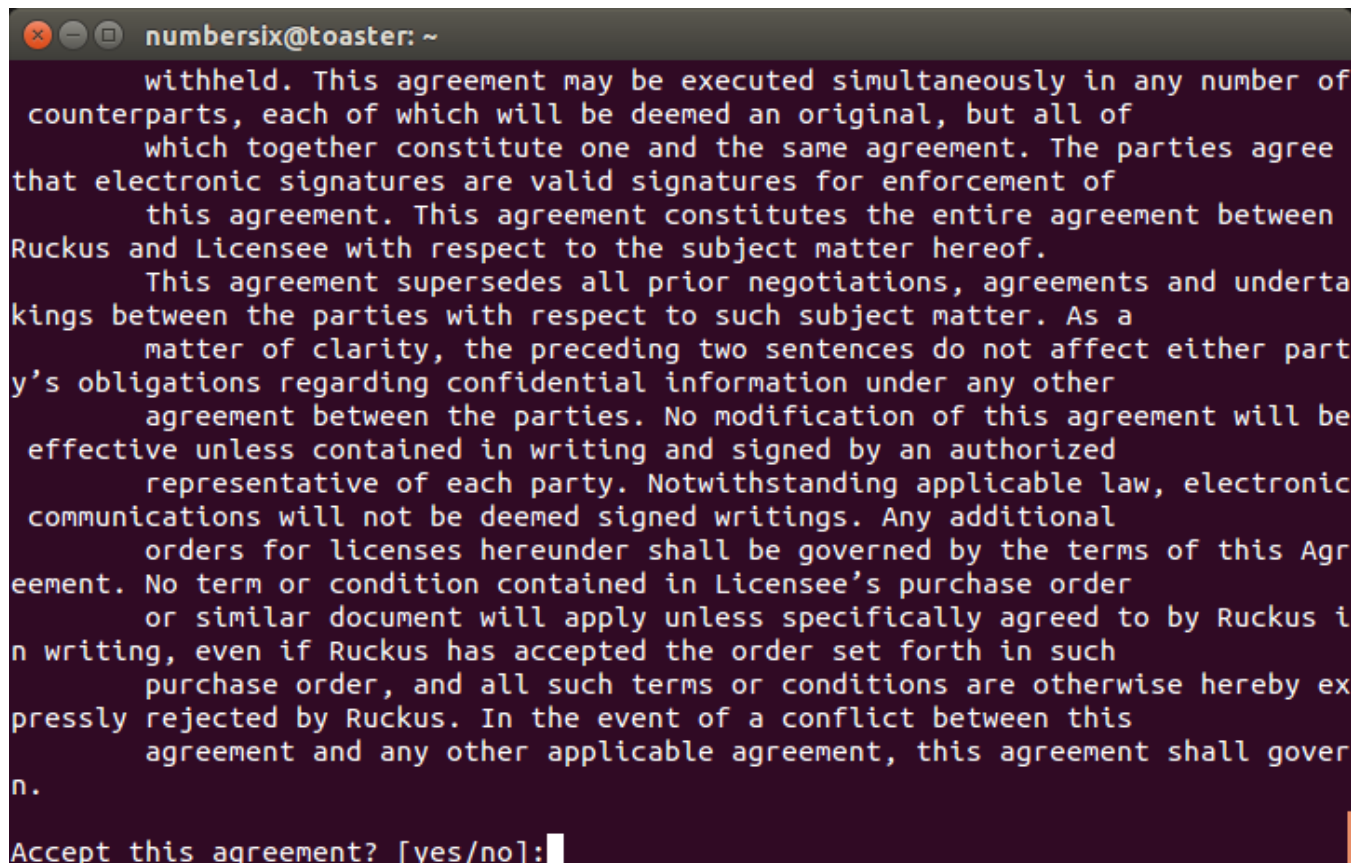**FIGURE 27** Accept the EULA terms



The KVM continues to extract the contents of the image. When the extraction process is complete, the QCOW2 file appears in the same directory as the .bin file.

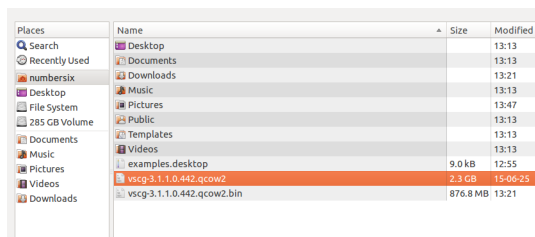**FIGURE 28** The QCOW2 file appears in the same directory as the .bin file



**NOTE**

If the “uudecode: command not found” error appears during the extraction process, install the “sharutils” package on the KVM, and then try extracting the image again.


7. Resize the vSZ disk image, if necessary. By default, the vSZ disk size is 50GB. If you want to allocate more disk space to the vSZ, run the `qemu-img` command. The complete syntax is as follows: **`qemu-img resize {file name of the controller QCOW bin} +size`**

## Setting Up the vSZ

You can set up the vSZ using the Red Hat Virtual Machine Manager (also known as “virt-manager”). If you are installing the vSZ on a different hypervisor or virtual machine monitor, the procedure may be slightly different. Refer to the hypervisor documentation for more information.


1. Start the Virtual Machine Manager by clicking Applications > System Tools > Virtual Machine Manager. Or double-click the Virtual Machine Manager icon if it appears on the desktop. The Virtual Machine Manager interface appears.

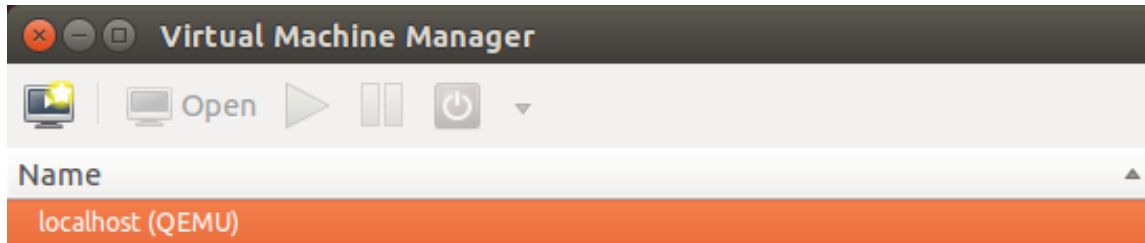**FIGURE 29** The Virtual Machine Manager interface



2. In **File**, click **Create New VM**. Or click the **New VM** icon. **The New VM** screen appears

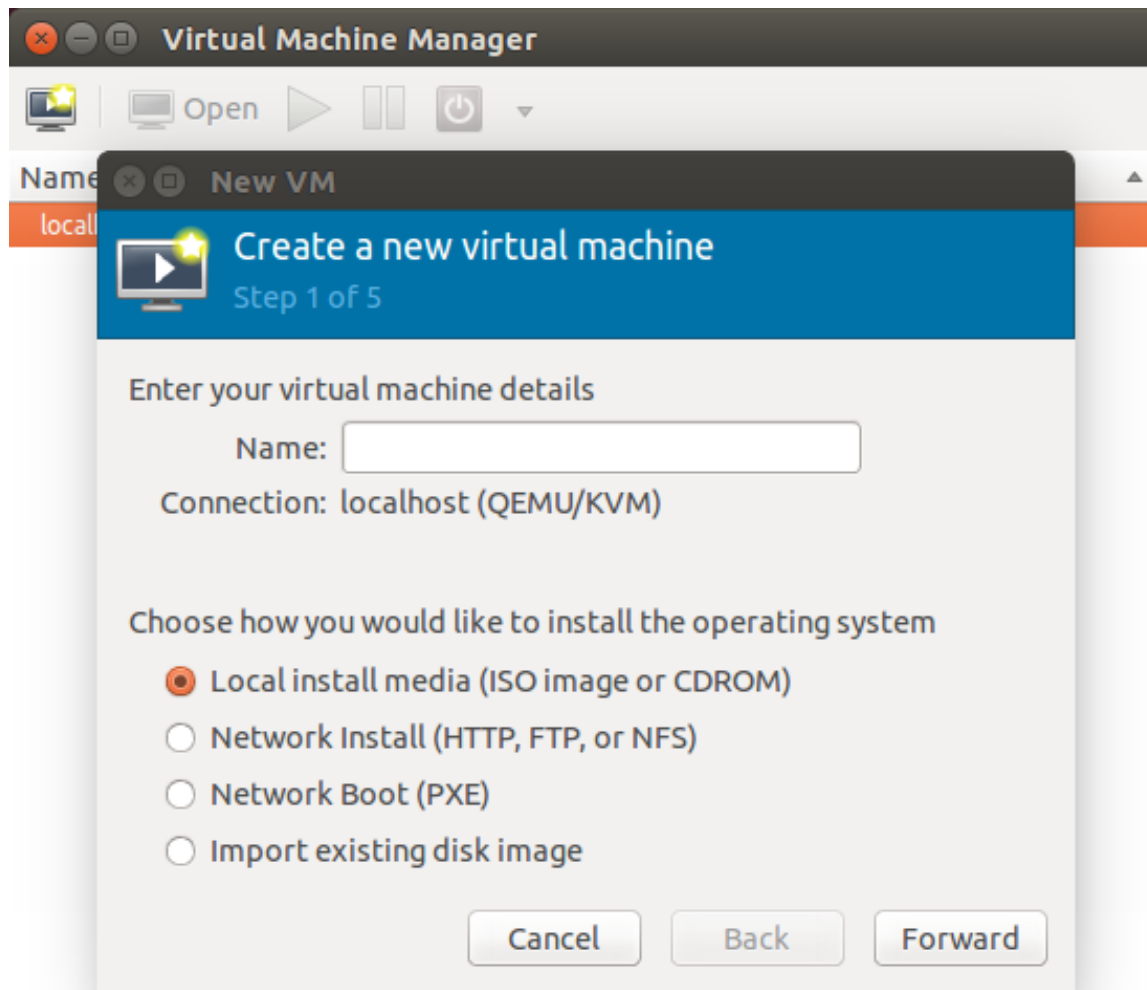**FIGURE 30** The New VM




## Installing the vSZ on a Hypervisor

### Installing the vSZ on a Kernel based Virtual Machine Hypervisor

3. Configure the options on the **New VM (Step 1 of 4)** screen.
  - a) In **Name**, type a name that you want to assign to the virtual machine.
  - b) In **Choose how you would like to install the operating system**, click **Import existing disk image**.

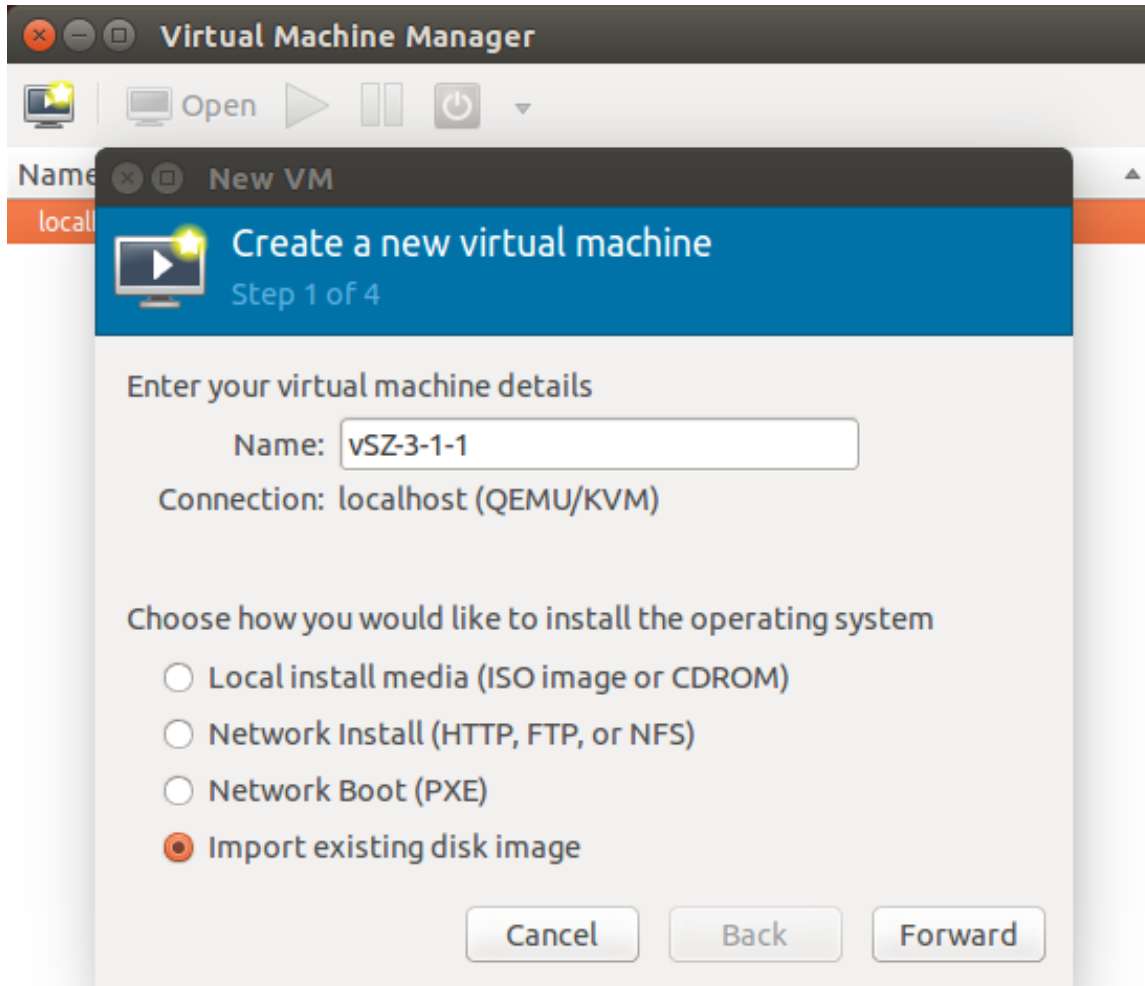**FIGURE 31** Type a name and select how you want to install the operating system




4. Click **Forward**. The **Locate Existing Storage** dialog box appears.



5. Browse to the location of the vSZ QCOW2 image, select the image file, and then click Open. The **New VM (Step 2 of 4)** screen reappears and displays the storage path to the QCOW2 image file that you selected.

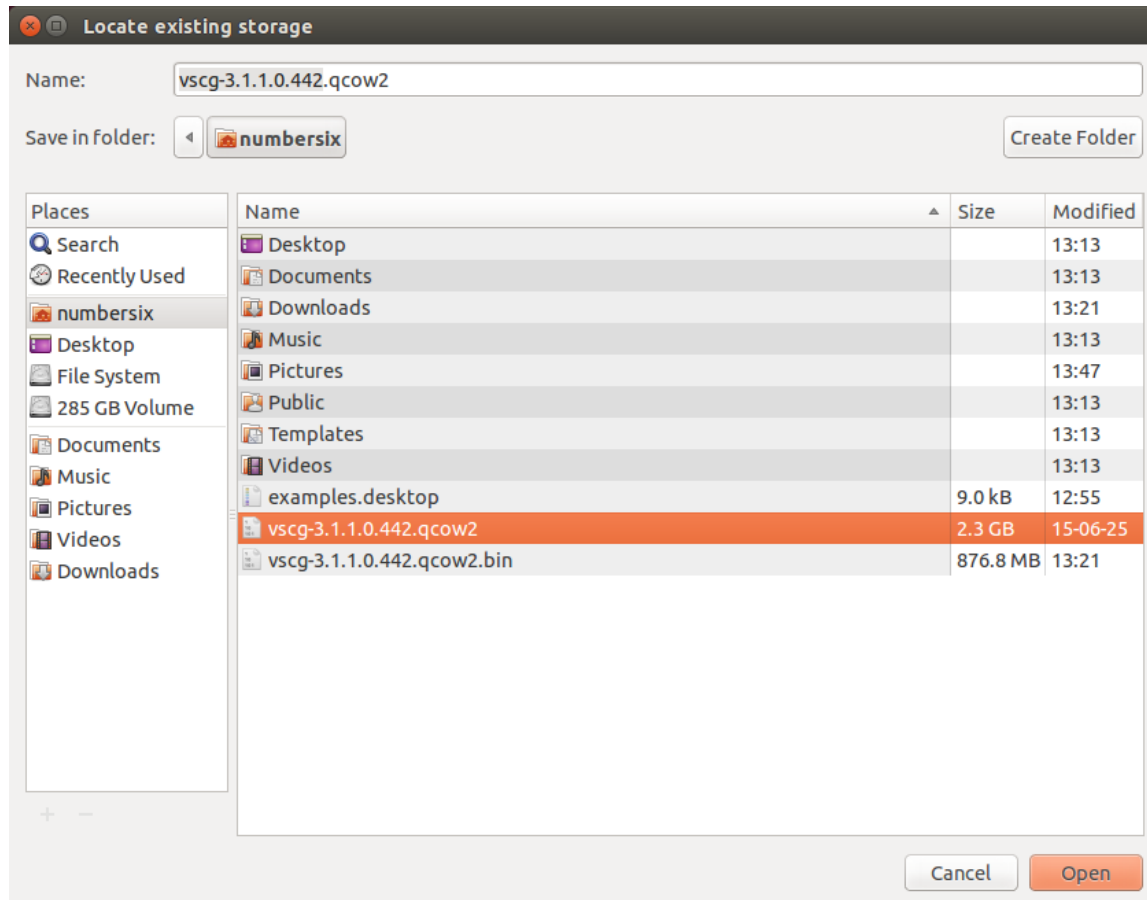**FIGURE 32** Browse to the vSZ QCOW2 image




## Installing the vSZ on a Hypervisor

### Installing the vSZ on a Kernel based Virtual Machine Hypervisor

6. In the lower portion of the **New VM (Step 2 of 4)** screen, select the operating system type and version.
  - a) In **OS type**, select **Linux**.
  - b) In **Version**, select **Generic 2.6.x kernel**.

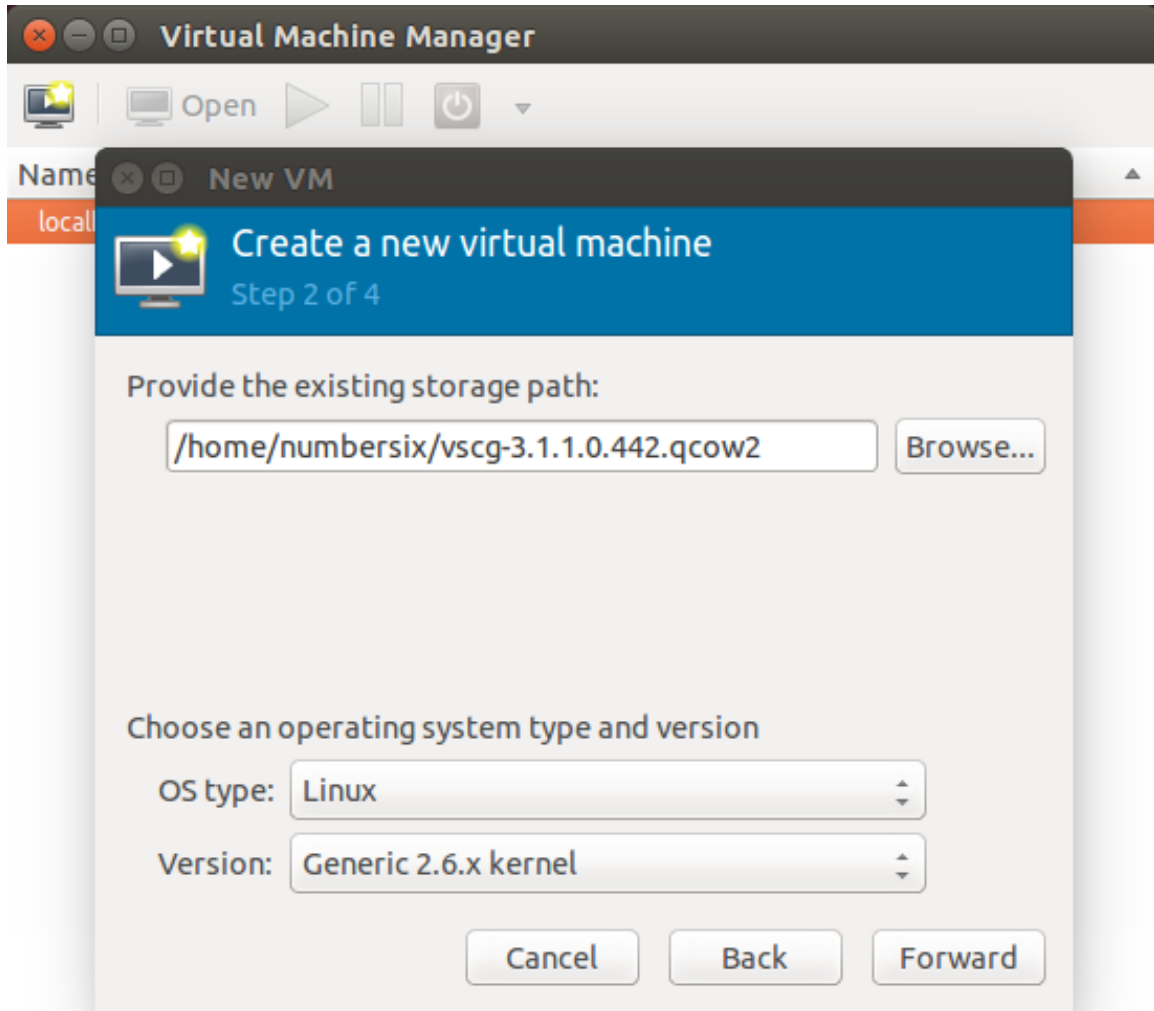
**FIGURE 33** Select the operating system and version



7. Click **Forward**. The **New VM (Step 3 of 4)** screen appears.


8. Configure the memory and CPU settings of the virtual machine.
  - a) In **Memory (RAM)**, set to memory (in MB) that you want to allocate to the vSZ.
  - b) In **CPU**, set the number of CPUs that you want to allocate to the vSZ.

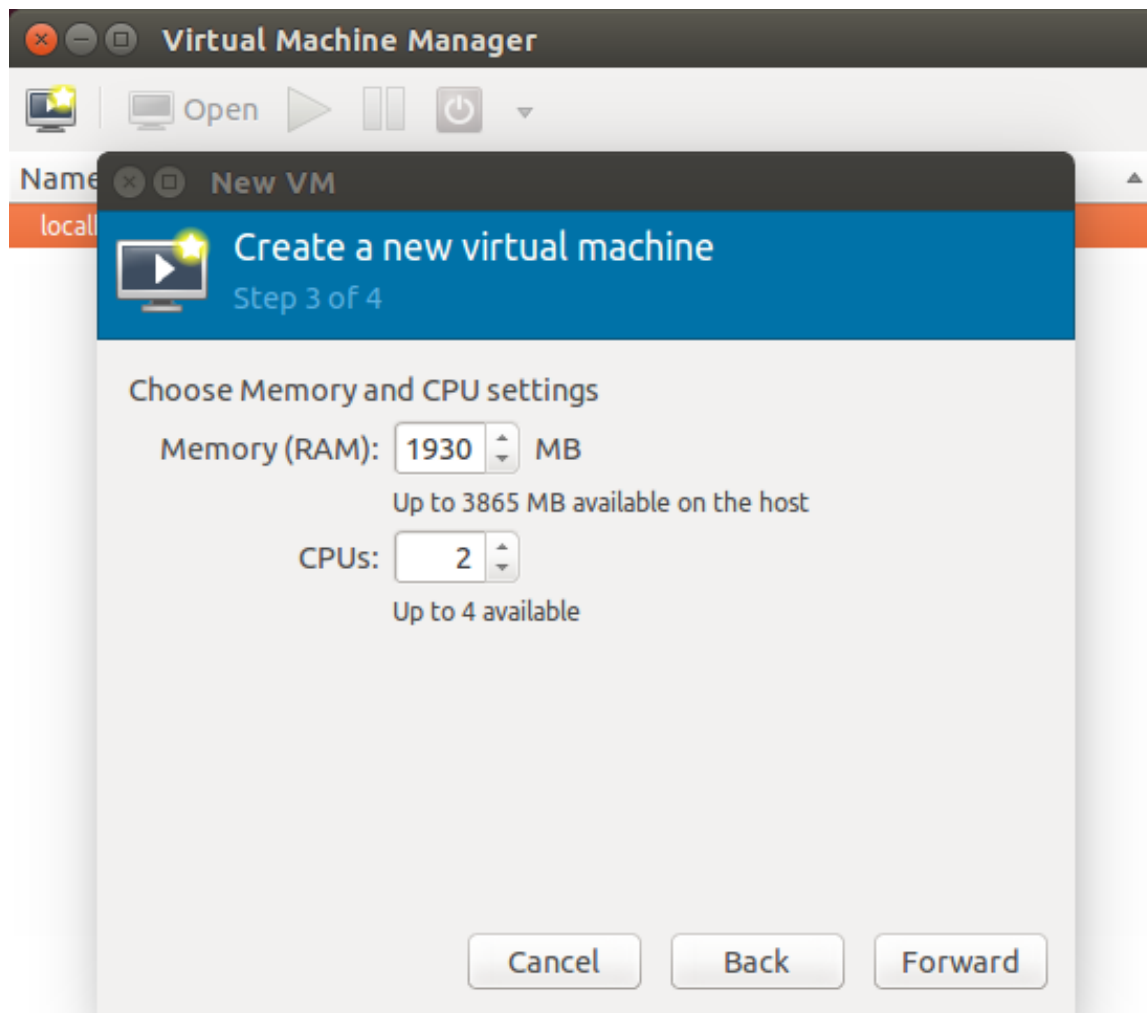**FIGURE 34** Configure the memory and CPU settings



9. Click **Forward**. The **New VM (Step 4 of 4)** screen appears and displays a summary of the settings you configured.

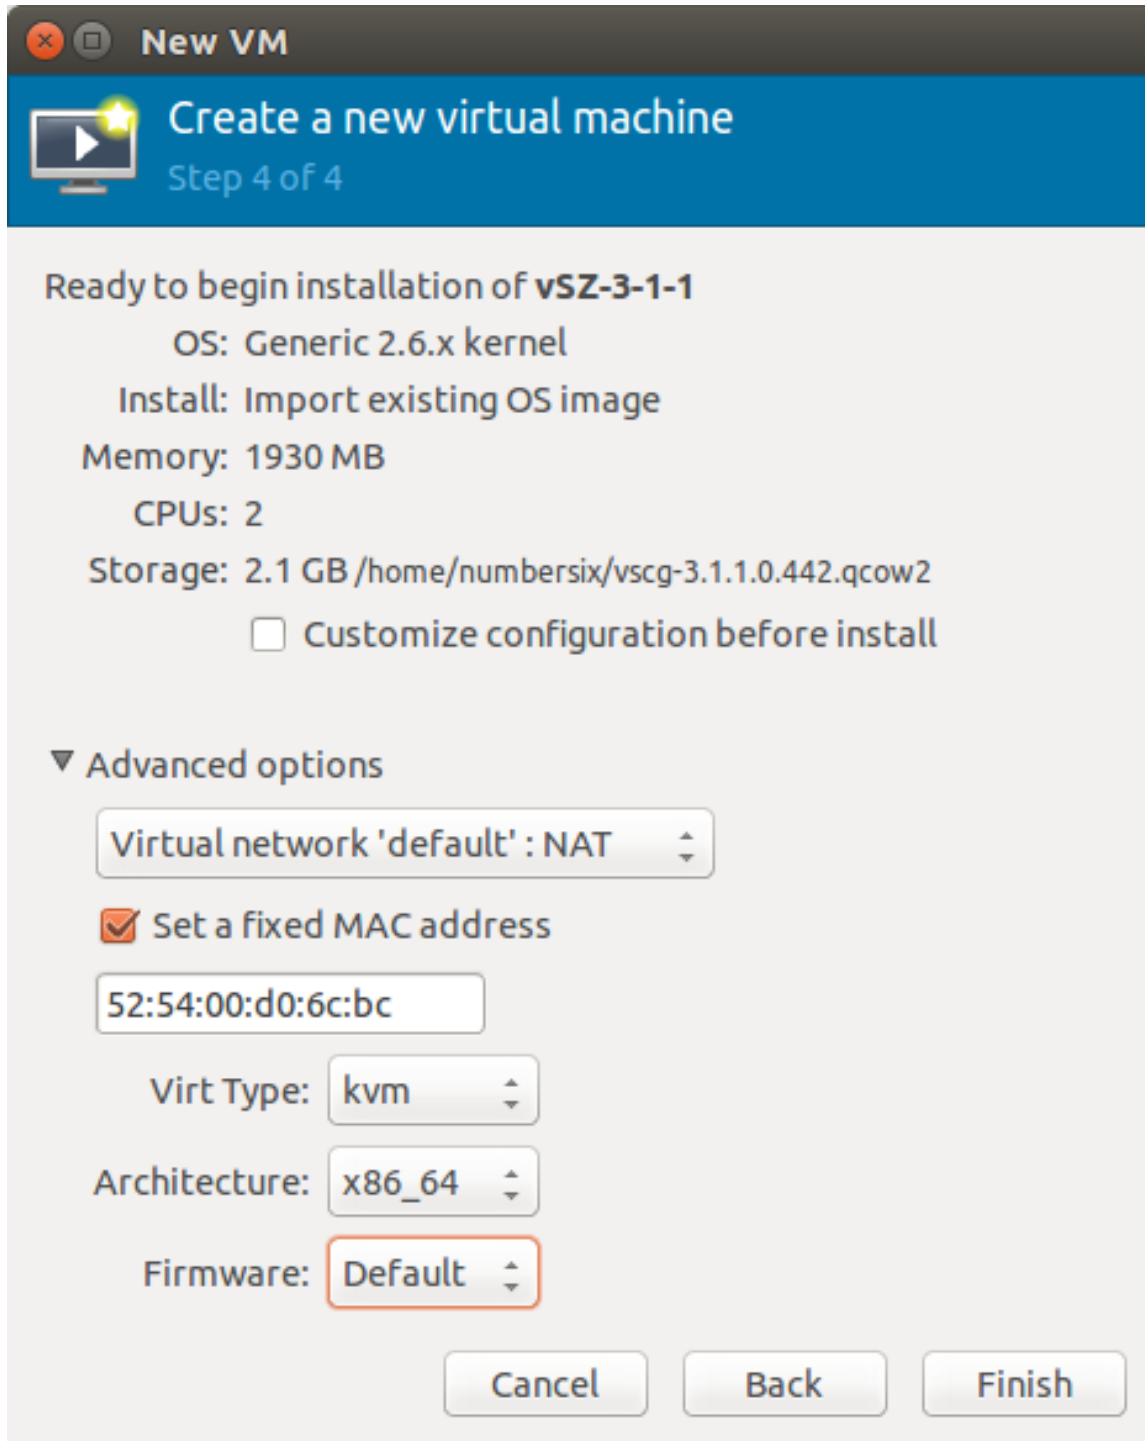
**FIGURE 35** A summary of the settings you configured appears



10. Verify that the settings you configured on the previous screens are correct. If you need to make changes to any of the settings, click **Back** until you reach the screen on which the setting appears, make the change, and then click Forward until you reach the **New VM (Step 4 of 4)** screen again.
11. Click **Finish** to install the vSZ on the virtual machine.
12. After you complete installing the vSZ on the virtual machine, decide how many interfaces you want the vSZ to use. The vSZ supports either a single interface or three interfaces. By default, a single interface exists after installation.
  - If you want the vSZ to use a single interface, you do not need to take action in this step. Continue to the next step.
  - If you want the vSZ to use three interfaces, you must create the two additional interfaces before the initial bootup of the vSZ. Once the vSZ has completed its initial bootup, you will no longer be able to change the number of interfaces.

If you want to add interfaces, you must do so before the initial bootup of the vSZ. After the initial bootup, you will no longer be able to change the number of interfaces.

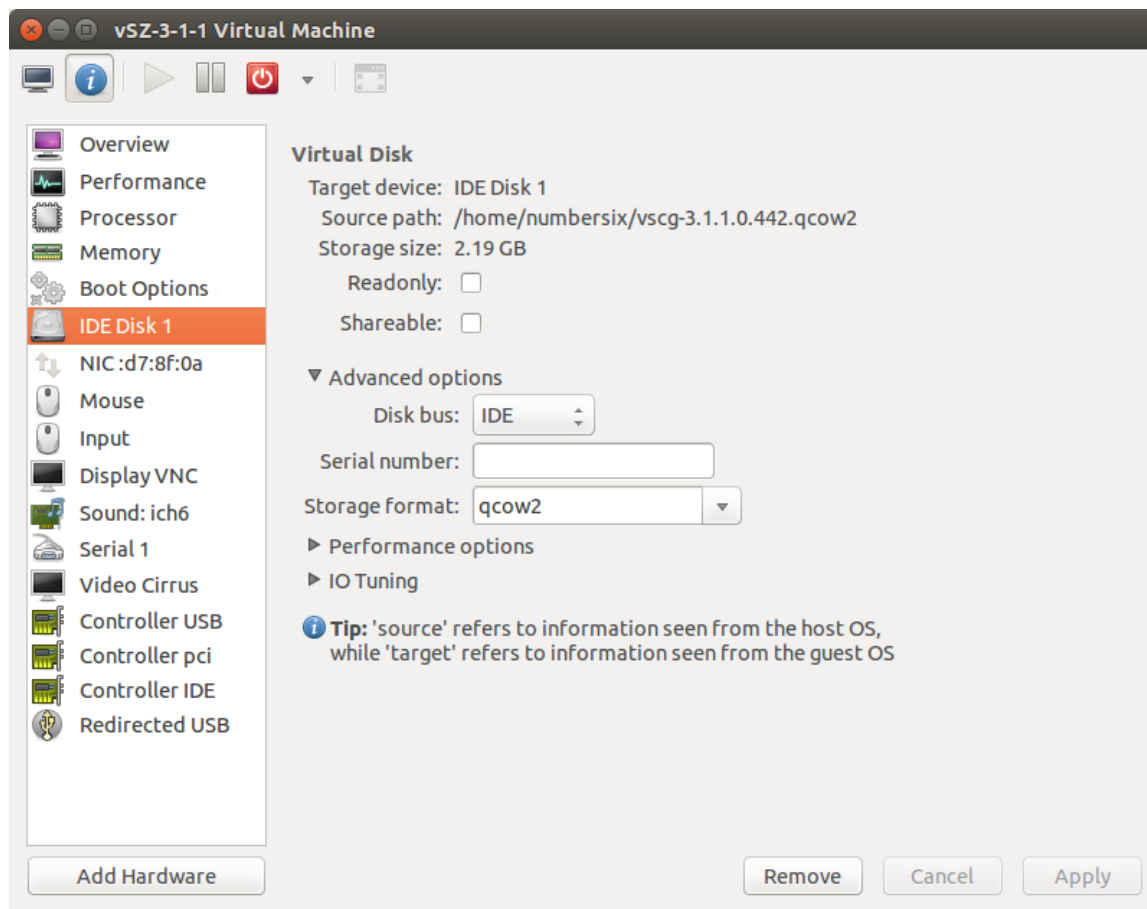**FIGURE 36** By default, a single interface exists



13. Power on the virtual machine. The vSZ performs its initial bootup.
14. When the **vSZ login** prompt appears, enter **admin**.

You have completed setting up the vSZ on a KVM hypervisor. You are now ready to start the vSZ Setup Wizard. See Using the Setup Wizard to Install vSZ for more information.

# Installing the vSZ on an OpenStack Hypervisor

You have to install the vSZ on an OpenStack hypervisor.

## Configuring System Settings

1. Login the system as a `rootuser`.
2. Stop and disable the Firewall since OpenStack uses iptables.

```
systemctl stop firewalld  
systemctl disable firewalld
```

3. Stop and disable NetworkManager.

```
systemctl stop NetworkManager  
systemctl disable NetworkManager
```

4. Assign static IP address to all the interfaces. Else, DHCP will cause network issue while deploying an instance.

**example: interface name is enp1s0**

```
TYPE=Ethernet
PROXY_METHOD=none
BROWSER_ONLY=no
BOOTPROTO=static
DEFROUTE=no
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=yes
IPV6_DEFROUTE=yes
IPV6_FAILURE_FATAL=no
IPV6_ADDR_GEN_MODE=stable-privacy
NAME=enp1s0
UUID=d320d308-f1e6-46cc-a5db-68848e9ab5d6
DEVICE=enp1s0
ONBOOT=yes
IPADDR=172.17.21.242
PREFIX=23
GATEWAY=172.17.20.1
IPV6_PRIVACY=no
```

**example: interface name is enp3s0**

```
TYPE=Ethernet
PROXY_METHOD=none
BROWSER_ONLY=no
BOOTPROTO=static
DEFROUTE=no
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=no
IPV6_DEFROUTE=yes
IPV6_FAILURE_FATAL=no
IPV6_ADDR_GEN_MODE=stable-privacy
NAME=enp3s0
UUID=b0dd6767-3ef5-4d63-9c12-aa3cc4771a31
DEVICE=enp3s0
ONBOOT=yes
IPADDR=192.168.66.2
PREFIX=24
GATEWAY=192.168.66.1
IPV6ADDR=2001:66::2/64
IPV6_DEFAULTGW=2001:66::1
IPV6_PRIVACY=no
```

**example: interface name is enp6s0**

```
TYPE=Ethernet
PROXY_METHOD=none
BROWSER_ONLY=no
BOOTPROTO=static
DEFROUTE=yes
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=no
IPV6_DEFROUTE=yes
IPV6_FAILURE_FATAL=no
IPV6_ADDR_GEN_MODE=stable-privacy
NAME=enp6s0
UUID=5d9762b5-2b43-47ce-83af-35cf741901cd
DEVICE=enp6s0
ONBOOT=yes
IPADDR=10.10.30.2
PREFIX=16
GATEWAY=10.10.0.1
DNS1=8.8.8.8
IPV6ADDR=2001:b030:2516:164::2/64
```

## Installing the vSZ on a Hypervisor

### Installing the vSZ on an OpenStack Hypervisor

```
IPV6_DEFAULTGW=2001:b030:2516:164::1
IPV6_PRIVACY=no
```

5. Update the system package.

```
yum -y update
```

6. Reboot the system using the CLI command.

```
Reboot
```

7. Verify if all the interfaces use the correct IP.

```
ip addr
ifconfig
```

8. Use the install net-tools package by command.

```
yum install net-tools
```

9. Change the hostname to the one that we use.

```
hostnamectl set-hostname "openstack.example.com"
```

10. Append hostname and IP mapping to **/etc/hosts** based on the network topology. The IP address could be any interface on the OpenStack Sever, and ensure you use the same hostname used in the previous step.

```
vi /etc/hosts

127.0.0.1 localhost localhost.localdomain localhost4 localhost4.localdomain4
::1 localhost localhost.localdomain localhost6 localhost6.localdomain6
10.10.30.2 openstack.example.com
```

11. Add repositories to the system for installing the OpenStack (refer to <https://www.rdoproject.org/>).

```
yum install -y centos-release-openstack-rocky
```

12. Login the system as a `root` user using SSH, modify `/etc/ssh/sshd_config`.

```
vi /etc/ssh/sshd_config
PermitRootLogin yes <-unmark this line.
systemctl restart sshd
```

13. Install the Packstack package.

```
yum install -y openstack-packstack
```

## Installing OpenStack

1. Generate the OpenStack answer file.

```
packstack --gen-answer-file=/root/answer.txt
```



2. Edit the `/root/answer.txt` file, and modify the content based on your environment,

**NOTE**

Plan how you want to map the OVS interfaces (extnet), bridge interfaces(br-ex) and physical interfaces(enp1s0). You will need these information while deploying a vSZ instace. In this case, extnet=br-ex=enp1s0

```
# Skip the provision of Demo project
CONFIG_PROVISION_DEMO=n

# Change Admin Password - Used to Login to OpenStack Dashboard
CONFIG_KEYSTONE_ADMIN_PW=xxx

# Config OpenStack Dashboard over SSL
CONFIG_HORIZON_SSL=y

# Map physical network bridge to the logical name. <Logical Name:Bridge Name>
CONFIG_NEUTRON_OVS_BRIDGE_MAPPINGS=extnet:br-ex,extnet1:br-ex1,extnet2:br-ex2

# Create bridge for external connectivity. <Bridge Name: NW card name>
CONFIG_NEUTRON_OVS_BRIDGE_IFACES=br-ex:enp1s0,br-ex1:enp3s0,br-ex2:enp6s0

# external-physnet="extnet"
CONFIG_NEUTRON_OVS_EXTERNAL_PHYSNET=extnet,extnet1,extnet2
```

3. Run the Packstack installer with the `answer.txt`. It will take about 30-60 minutes to complete installation.

```
packstack --answer-file=/root/answer.txt
```

4. Verify if the newly created bridge interfaces use the correct IP address; physical interface will not have IP address setting.

5. Check the network script. If the scripts are not modified automatically, edit them properly, and then restart the network by using the command **systemctl restart network**.

```
[root@localhost ~]# ifconfig
```

```
br-ex: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet 172.17.21.242 netmask 255.255.254.0 broadcast 172.17.21.255
  inet6 fe80::7cf0:cfff:fe87:f54b prefixlen 64 scopeid 0x20<link>
  ether 68:05:ca:20:92:be txqueuelen 1000 (Ethernet)
  RX packets 8053 bytes 529150 (516.7 KiB)
  RX errors 0 dropped 3370 overruns 0 frame 0
  TX packets 14 bytes 900 (900.0 B)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

br-ex1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet 192.168.66.2 netmask 255.255.255.0 broadcast 192.168.66.255
  inet6 fe80::f8db:3cff:fe23:4f48 prefixlen 64 scopeid 0x20<link>
  ether 74:d4:35:51:e6:46 txqueuelen 1000 (Ethernet)
  RX packets 0 bytes 0 (0.0 B)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 14 bytes 900 (900.0 B)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

br-ex2: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet 10.10.30.2 netmask 255.255.0.0 broadcast 10.10.255.255
  inet6 fe80::788c:5cff:fefd:e347 prefixlen 64 scopeid 0x20<link>
  inet6 2001:b030:2516:164:6a05:caff:fe20:9ec9 prefixlen 64 scopeid 0x0<global>
  ether 68:05:ca:20:9e:c9 txqueuelen 1000 (Ethernet)
  RX packets 26860 bytes 32501357 (30.9 MiB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 17037 bytes 2002913 (1.9 MiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enpls0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet6 fe80::6a05:caff:fe20:92be prefixlen 64 scopeid 0x20<link>
  ether 68:05:ca:20:92:be txqueuelen 1000 (Ethernet)
  RX packets 11772 bytes 965550 (942.9 KiB)
  RX errors 0 dropped 1732 overruns 0 frame 0
  TX packets 18 bytes 1498 (1.4 KiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
  device interrupt 16 memory 0xf7ec0000-f7ee0000

enp3s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet6 fe80::76d4:35ff:fe51:e646 prefixlen 64 scopeid 0x20<link>
  ether 74:d4:35:51:e6:46 txqueuelen 1000 (Ethernet)
  RX packets 6734 bytes 430976 (420.8 KiB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 246 bytes 21098 (20.6 KiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp6s0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet6 fe80::6a05:caff:fe20:9ec9 prefixlen 64 scopeid 0x20<link>
  ether 68:05:ca:20:9e:c9 txqueuelen 1000 (Ethernet)
  RX packets 236349 bytes 306637429 (292.4 MiB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 143142 bytes 12982731 (12.3 MiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
  device interrupt 16 memory 0xf7cc0000-f7ce0000

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
  inet 127.0.0.1 netmask 255.0.0.0
  inet6 ::1 prefixlen 128 scopeid 0x10<host>
  loop txqueuelen 1000 (Local Loopback)
  RX packets 3188295 bytes 411123149 (392.0 MiB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 3188295 bytes 411123149 (392.0 MiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-enp1s0
```

```
DEVICE=enp1s0  
NAME=enp1s0  
DEVICETYPE=ovs  
TYPE=OVSPort  
OVS_BRIDGE=br-ex  
ONBOOT=yes  
BOOTPROTO=none
```

**[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-enp3s0**

```
DEVICE=enp3s0  
NAME=enp3s0  
DEVICETYPE=ovs  
TYPE=OVSPort  
OVS_BRIDGE=br-ex1  
ONBOOT=yes  
BOOTPROTO=none
```

**[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-enp6s0**

```
DEVICE=enp6s0  
NAME=enp6s0  
DEVICETYPE=ovs  
TYPE=OVSPort  
OVS_BRIDGE=br-ex2  
ONBOOT=yes  
BOOTPROTO=none
```

**[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-br-ex**

```
PROXY_METHOD=none  
BROWSER_ONLY=no  
DEFROUTE=no  
UUID=d320d308-f1e6-46cc-a5db-68848e9ab5d6  
ONBOOT=yes  
IPADDR=172.17.21.242  
PREFIX=23  
GATEWAY=172.17.20.1  
DEVICE=br-ex  
NAME=br-ex  
DEVICETYPE=ovs  
OVSBOOTPROTO=static  
TYPE=OVSBridge  
OVS_EXTRA="set bridge br-ex fail_mode=standalone"
```

**[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-br-ex1**

```
PROXY_METHOD=none  
BROWSER_ONLY=no  
DEFROUTE=no  
UUID=b0dd6767-3ef5-4d63-9c12-aa3cc4771a31  
ONBOOT=yes  
IPADDR=192.168.66.2  
PREFIX=24  
GATEWAY=192.168.66.1  
DEVICE=br-ex1  
NAME=br-ex1  
DEVICETYPE=ovs  
OVSBOOTPROTO=static  
TYPE=OVSBridge  
OVS_EXTRA="set bridge br-ex1 fail_mode=standalone"
```

**[root@localhost ~]# cat /etc/sysconfig/network-scripts/ifcfg-br-ex2**

```
PROXY_METHOD=none  
BROWSER_ONLY=no  
DEFROUTE=yes  
UUID=5d9762b5-2b43-47ce-83af-35cf741901cd  
ONBOOT=yes  
IPADDR=10.10.30.2
```

Installing the vSZ on a Hypervisor  
 Installing the vSZ on an OpenStack Hypervisor

```
PREFIX=16
GATEWAY=10.10.0.1
DEVICE=br-ex2
NAME=br-ex2
DEVICETYPE=ovs
OVSBOTPROTO=static
TYPE=OVSBridge
OVS_EXTRA="set bridge br-ex2 fail_mode=standalone"
```

6. Check the OpenStack package version.

```
[root@localhost ~]# source ./keystone_admin
```

```
[root@openstack1 ~(keystone_admin)]# nova-manage --version
```

```
17.0.5
```

7. Check <https://releases.openstack.org/> and make sure you have installed the correct version with the supported service projects.

FIGURE 37 OpenStack Version

The screenshot shows the OpenStack Releases website. The main heading is "OpenStack Releases" and the sub-heading is "Release Series". Below the heading is a paragraph explaining that OpenStack is developed and released around 6-month cycles. A table lists various release series with columns for Series, Status, Initial Release Date, Next Phase, and EOL Date.

| Series                   | Status               | Initial Release Date                   | Next Phase                                       | EOL Date   |
|--------------------------|----------------------|----------------------------------------|--------------------------------------------------|------------|
| <a href="#">Train</a>    | Future               | 2019-10-16 <i>estimated (schedule)</i> | Development <i>estimated 2019-04-11</i>          |            |
| <a href="#">Stein</a>    | Development          | 2019-04-10 <i>estimated (schedule)</i> | Maintained <i>estimated 2019-04-10</i>           |            |
| <a href="#">Rocky</a>    | Maintained           | 2018-08-30                             | Extended Maintenance <i>estimated 2020-02-24</i> |            |
| <a href="#">Queens</a>   | Maintained           | 2018-02-28                             | Extended Maintenance <i>estimated 2019-08-25</i> |            |
| <a href="#">Pike</a>     | Maintained           | 2017-08-30                             | Extended Maintenance <i>estimated 2019-03-03</i> |            |
| <a href="#">Ocata</a>    | Extended Maintenance | 2017-02-22                             | Unmaintained <i>estimated TBD</i>                |            |
| <a href="#">Newton</a>   | End Of Life          | 2016-10-06                             |                                                  | 2017-10-25 |
| <a href="#">Mitaka</a>   | End Of Life          | 2016-04-07                             |                                                  | 2017-04-10 |
| <a href="#">Liberty</a>  | End Of Life          | 2015-10-15                             |                                                  | 2016-11-17 |
| <a href="#">Kilo</a>     | End Of Life          | 2015-04-30                             |                                                  | 2016-05-02 |
| <a href="#">Juno</a>     | End Of Life          | 2014-10-16                             |                                                  | 2015-12-07 |
| <a href="#">Icehouse</a> | End Of Life          | 2014-04-17                             |                                                  | 2015-07-02 |
| <a href="#">Havana</a>   | End Of Life          | 2013-10-17                             |                                                  | 2014-09-30 |


## Accessing the OpenStack Dashboard

1. Open [https://IP\\_Address/dashboard](https://IP_Address/dashboard) or <https://fqdn/dashboard> if the fqdn can be resolved.

**NOTE**

Use the Firefox browser to access the link.

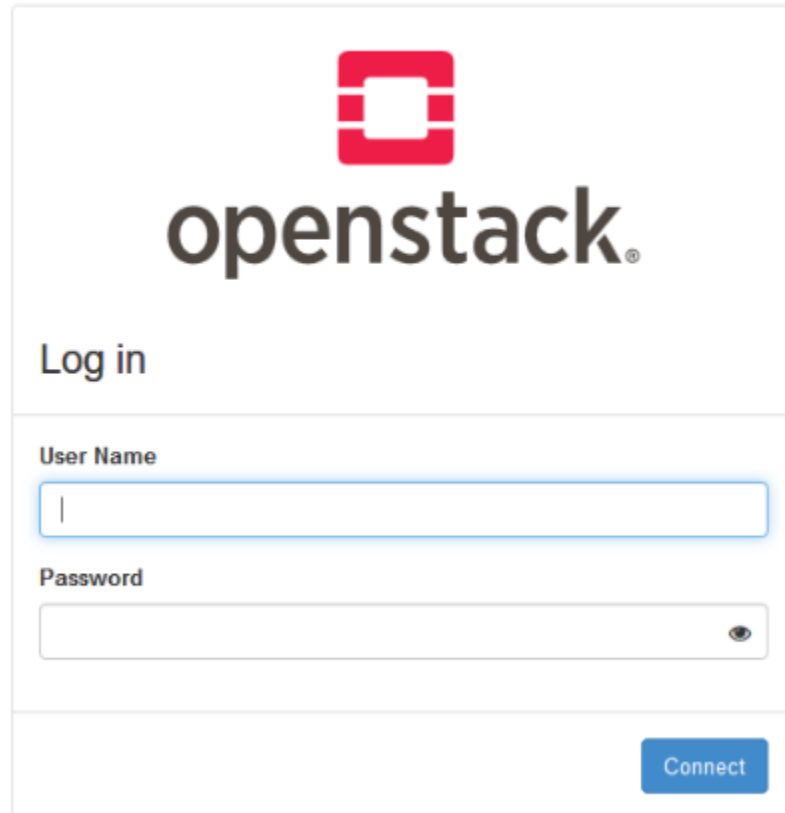**FIGURE 38** OpenStack Login



The image shows the OpenStack login interface. At the top center is the OpenStack logo, a red square with a white square inside, and the word "openstack" in a bold, lowercase, sans-serif font. Below the logo is the text "Log in". Underneath is a form with two input fields. The first field is labeled "User Name" and contains a single vertical bar character. The second field is labeled "Password" and is empty, with a small eye icon on the right side to toggle visibility. At the bottom right of the form is a blue button with the text "Connect".

2. Login OpenStack using the Administrator **User Name** and the **Password**.

**NOTE**

If you forget the password, you can get it from the file `/root/keystore_admin`.

```
[root@openstack ~]# cat keystone_admin
```

```
unset OS_SERVICE_TOKEN
export OS_USERNAME=admin
export OS_PASSWORD='admin'
export OS_AUTH_URL=http://10.10.30.2:5000/v3
export PS1='\u@\h \W(keystone_admin)\$ '


export OS_PROJECT_NAME=admin
export OS_USER_DOMAIN_NAME=Default
export OS_PROJECT_DOMAIN_NAME=Default
export OS_IDENTITY_API_VERSION=3
```

## Creating Global Items

### Creating a New User

1. From the OpenStack homepage, click **Identity > Users**.  
The Users page appears as shown in the following image.

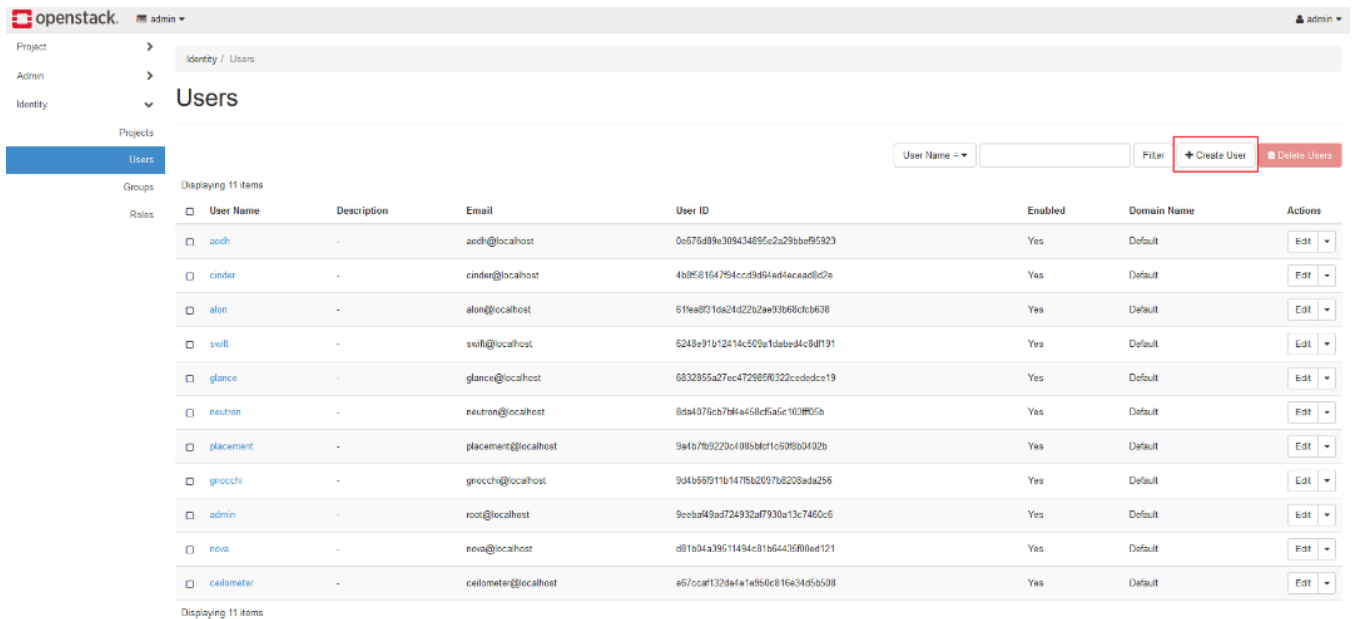**FIGURE 39** OpenStack Home Page



2. Click **Create User**.

The Create User page appears as shown in the following image.

**FIGURE 40** Creating a User

**Create User** ✕

**Domain ID**  
default

**Domain Name**  
Default

**User Name \***  
ruckus

**Description**

**Email**

**Password \***  
.....

**Confirm Password \***  
.....

**Primary Project**  
Select a project ▼

**Role**  
\_member\_ ▼

Enabled

**Description:**  
Create a new user and set related properties including the Primary Project and Role.

Cancel Create User


3. Enter the **User Name, Password, Confirm Password** and click **Create User**.

You have created a new user.

## Creating a New Project

1. From the OpenStack homepage, click **Identity > Projects**.  
The **Projects** page appear as shown in the following image.

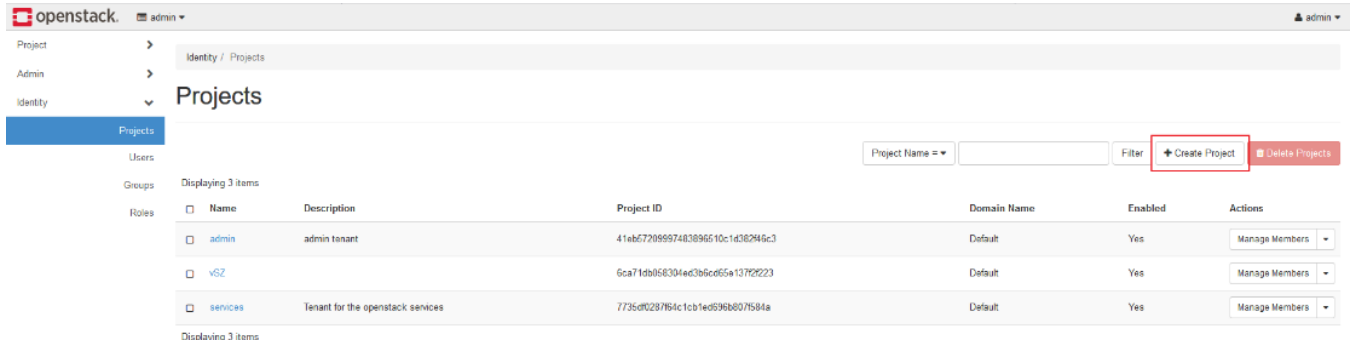**FIGURE 41** OpenStack Project Page





2. Click **Create Project**.

The **Create Project** page appear as shown in the following image.

**FIGURE 42** Creating a Project

**Create Project** ✕

**Project Information** \* | Project Members | Project Groups | Quotas \*

**Domain ID**

**Domain Name**

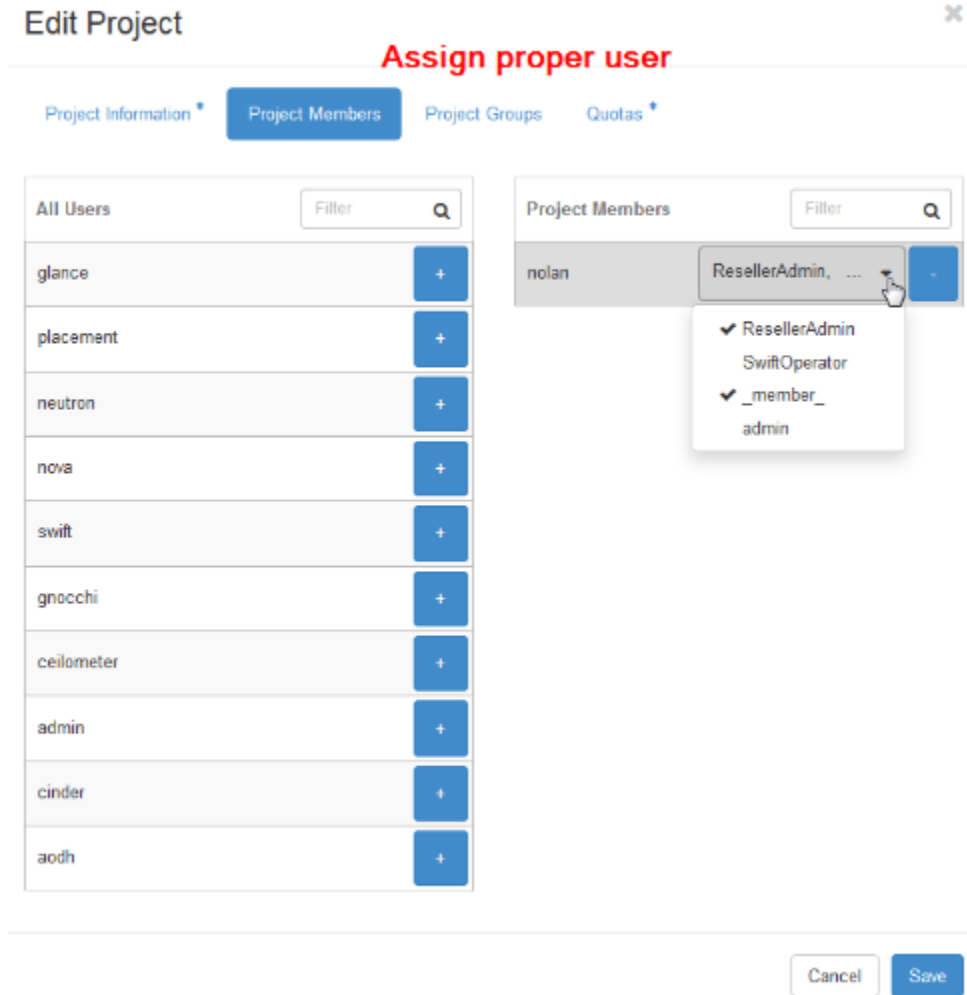
**Name** \*


**Description**

**Enabled**

3. From the **Project** Information tab, enter the **Name** for the project.

4. Select the **Project Members** tab.  
The **Edit Project** page appear as shown in the following image.




5. From the list of **All Users**, click the add  button to select the required user.  
The selected users are moved to the **Project Members** list.
6. From the drop-down select the rights to be assigned to each user.
7. Select the **Quotas** tab and assign the required resource pool for the project.
8. Click **Create Project**.  
You have created a new project.

## Creating an External Network

1. From the OpenStack homepage, click **Admin > Network > Networks**.  
The **Networks** page appears as shown in the following image.

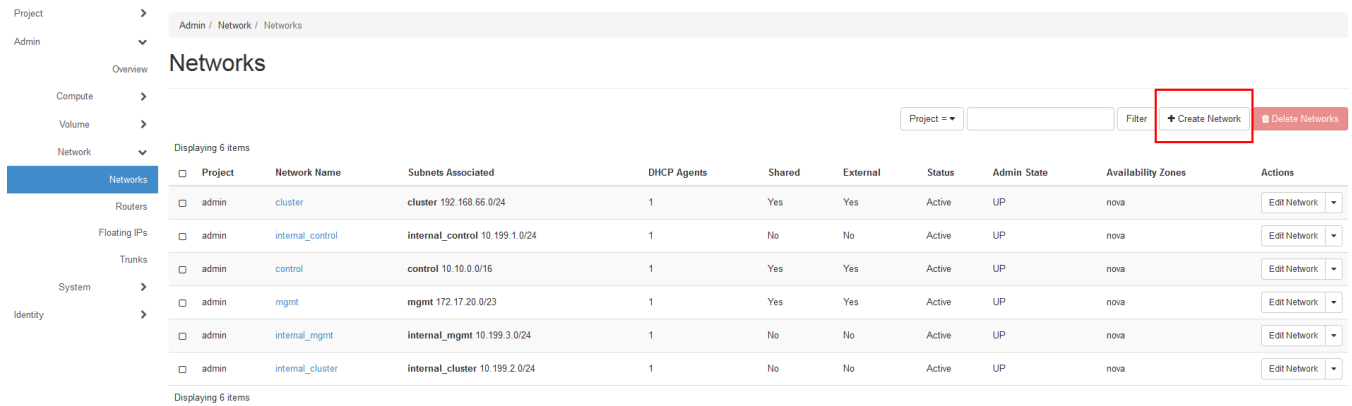FIGURE 43 Networks Page



The screenshot shows the OpenStack Networks page. On the left is a navigation sidebar with categories like Project, Admin, Overview, Compute, Volume, Network, Routers, Floating IPs, Trunks, System, and Identity. The main content area is titled 'Networks' and includes a breadcrumb 'Admin / Network / Networks'. Below the title are controls for 'Project =', a search 'Filter', and two buttons: '+ Create Network' (highlighted with a red box) and 'Delete Networks'. A table displays 6 items with columns: Project, Network Name, Subnets Associated, DHCP Agents, Shared, External, Status, Admin State, Availability Zones, and Actions. Each row has an 'Edit Network' dropdown button.

| Project | Network Name     | Subnets Associated             | DHCP Agents | Shared | External | Status | Admin State | Availability Zones | Actions      |
|---------|------------------|--------------------------------|-------------|--------|----------|--------|-------------|--------------------|--------------|
| admin   | cluster          | cluster 192.168.66.0/24        | 1           | Yes    | Yes      | Active | UP          | nova               | Edit Network |
| admin   | internal_control | internal_control 10.199.1.0/24 | 1           | No     | No       | Active | UP          | nova               | Edit Network |
| admin   | control          | control 10.10.0.0/16           | 1           | Yes    | Yes      | Active | UP          | nova               | Edit Network |
| admin   | mgmt             | mgmt 172.17.20.0/23            | 1           | Yes    | Yes      | Active | UP          | nova               | Edit Network |
| admin   | internal_mgmt    | internal_mgmt 10.199.3.0/24    | 1           | No     | No       | Active | UP          | nova               | Edit Network |
| admin   | internal_cluster | internal_cluster 10.199.2.0/24 | 1           | No     | No       | Active | UP          | nova               | Edit Network |

2. Click **Create Networks**.

The **Create Networks** page appears as shown in the following image.

**FIGURE 44** Network tab page

Create Network X

Network <sup>\*</sup> Subnet Subnet Details

**Name**

control

**Project <sup>\*</sup>**

admin

**Provider Network Type <sup>\*</sup> ⓘ**

Flat

**Physical Network <sup>\*</sup> ⓘ**

extnet2

Enable Admin State

Shared

External Network

Create Subnet

**Availability Zone Hints ⓘ**

nova

Create a new network. In addition, a subnet associated with the network can be created in the following steps of this wizard.

Cancel « Back Next »

3. Update the following information:
  - **Name:** Enter the interface name.
  - **Project:** From the drop-down menu, first select admin and then select other projects.
  - **Provider Network Type:** From the drop-down menu select **Flat**.
  - **Physical Network:** Enter the OVS physical interface name.
  - Select the following check boxes :
    - a. **Enable Admin State**
    - b. **Shared**
    - c. **External Network**
    - d. **Create Subnet**
4. Click **Next**.

The **Subnet** page appear as shown in the following image.

**FIGURE 45** Subnet tab page

**Create Network** ✕

Network \* **Subnet** Subnet Details

**Subnet Name**

**Network Address** ⓘ

**IP Version**

**Gateway IP** ⓘ

**Disable Gateway**

Creates a subnet associated with the network. You need to enter a valid "Network Address" and "Gateway IP". If you did not enter the "Gateway IP", the first value of a network will be assigned by default. If you do not want gateway please check the "Disable Gateway" checkbox. Advanced configuration is available by clicking on the "Subnet Details" tab.

5. Update the following information:
  - **Subnet Name:** Enter the subnet name.
  - **Network Address:** Enter the static IP of your OVS bridge.
  - **IP Version:** Select the IP Version
  - **Gateway IP:** Enter the gateway IP of this OVS bridge.
6. Click **Next**.

The **Subnet Details** tab page appear as shown in the following image.

**FIGURE 46** Subnet Details tab page

**Create Network** ✕

Network \*   Subnet   **Subnet Details**

**Enable DHCP** Specify additional attributes for the subnet.

**Allocation Pools** ⓘ

10.10.30.120,10.10.30.130

**DNS Name Servers** ⓘ

8.8.8.8  
168.95.1.1

**Host Routes** ⓘ

Cancel   « Back   **Create**

7. Select the **Enable DHCP** check box.
8. For **Allocation Pools**, enter the DHCP pool range. Separate the range with a comma.
9. For **DNS Name Servers**, enter the DNS server address, one address per line.
10. Click **Create**.

**NOTE**

Repeat the procedure until you create an external interface for Control, Cluster and Management interface.

## Creating Flavors

1. From the OpenStack homepage, click **Admin > Compute > Flavors**.

The **Flavors** page appears.

**FIGURE 47** Flavors Page

The screenshot shows the OpenStack Admin interface for the 'Flavors' page. The breadcrumb trail is 'Admin / Compute / Flavors'. The page title is 'Flavors'. There is a search filter and two buttons: 'Create Flavor' (highlighted with a red box) and 'Delete Flavors'. Below the buttons, it says 'Displaying 6 items'. The table lists the following flavors:

| Flavor Name | VCPUs | RAM   | Root Disk | Ephemeral Disk | Swap Disk | RX/TX factor | ID                                   | Public | Metadata | Actions       |
|-------------|-------|-------|-----------|----------------|-----------|--------------|--------------------------------------|--------|----------|---------------|
| m1.large    | 4     | 8GB   | 80GB      | 0GB            | 0MB       | 1.0          | 4                                    | Yes    | No       | Modify Access |
| m1.medium   | 2     | 4GB   | 40GB      | 0GB            | 0MB       | 1.0          | 3                                    | Yes    | No       | Modify Access |
| m1.small    | 1     | 2GB   | 20GB      | 0GB            | 0MB       | 1.0          | 2                                    | Yes    | No       | Modify Access |
| m1.tiny     | 1     | 512MB | 1GB       | 0GB            | 0MB       | 1.0          | 1                                    | Yes    | No       | Modify Access |
| m1.xlarge   | 8     | 16GB  | 160GB     | 0GB            | 0MB       | 1.0          | 5                                    | Yes    | No       | Modify Access |
| vSZ         | 4     | 16GB  | 100GB     | 0GB            | 0MB       | 1.0          | 034789b9-3185-46d3-ae72-5c97b14b1553 | Yes    | No       | Modify Access |

At the bottom of the table, it says 'Displaying 6 items'.

2. Click **Create Flavor**.

The **Create Flavor** page appears.

**FIGURE 48** Flavor Settings page

## Create Flavor ✕

Flavor Information \* Flavor Access

**Name \***  
vSZ\_resource\_plan

**ID ?**  
auto

**VCPUs \***  
4

**RAM (MB) \***  
16384

**Root Disk (GB) \***  
100

**Ephemeral Disk (GB)**  
0

**Swap Disk (MB)**  
0

**RX/TX Factor**  
1

Flavors define the sizes for RAM, disk, number of cores, and other resources and can be selected when users deploy instances.

Cancel Create Flavor




3. Enter a **Name** for the flavor you create.
4. Assign the hardware resource that you are going to deploy.
5. Click **Create Flavor**.

## Creating an Image

1. From the OpenStack homepage, click **Admin > Compute > Images**.  
The **Images** page appears.

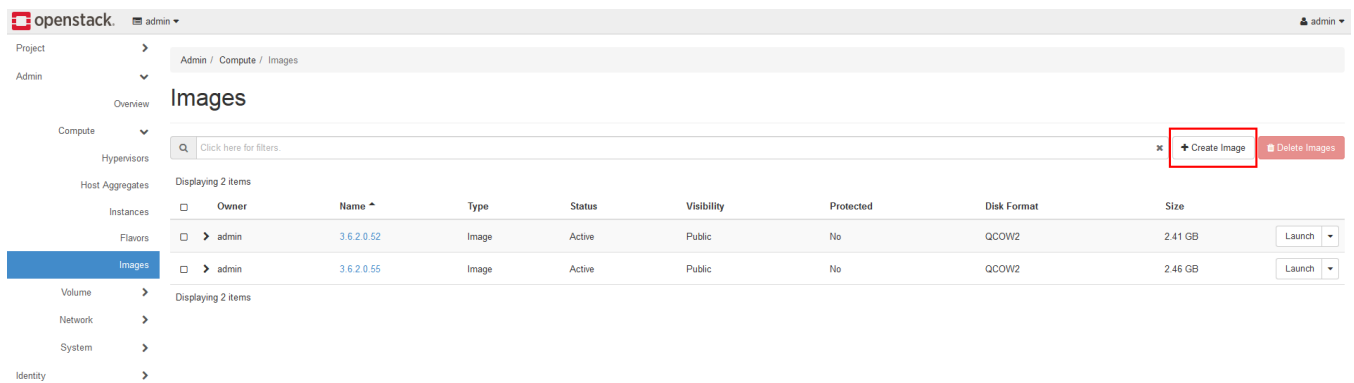**FIGURE 49** Images Page



2. Click **Create Image**.

The **Create Image** page appears.

**FIGURE 50** Image Settings page

Create Image

Image Details

Specify an image to upload to the Image Service.

Image Name\*

3.6.2.0.52

Image Description

Image Source

Source Type

File

File\*

Browse... vscg-3.6.2.0.55.qcow2

Format\*

QCOW2 - QEMU Emulator

Image Requirements

Kernel

Choose an image

Ramdisk

Choose an image

Architecture

Minimum Disk (GB)

0

Minimum RAM (MB)

0

Image Sharing

Visibility

Public Private

Protected

Yes No

Cancel

< Back Next > Create Image

3. **Image Name:** Enter a name.
4. Click **Browse** and select the vSZ `qcow2` file
5. **Format:** Select **QCOW2-QEMU Emulator**.

6. Click **Create Image**.

**NOTE**


Logout openstack.

## Creating Project Items

### Creating Security Groups


1. Login OpenStack with the user credential created in [Creating a New User](#) on page 62.
2. From the homepage, click **Project > Network > Security Groups**.  
The **Security Groups** page is displayed.

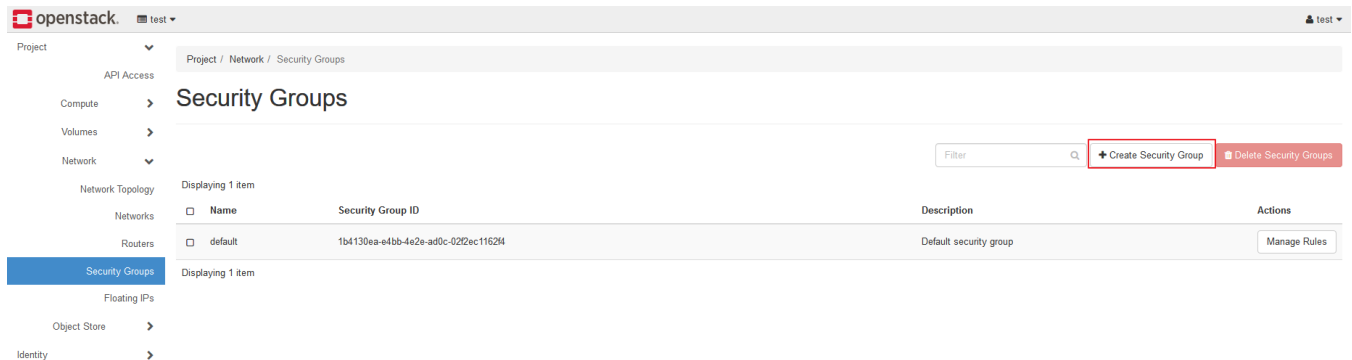**FIGURE 51** Security Group Page




3. Click **Create Security Group**.  
The **Create Security Group** page is displayed.

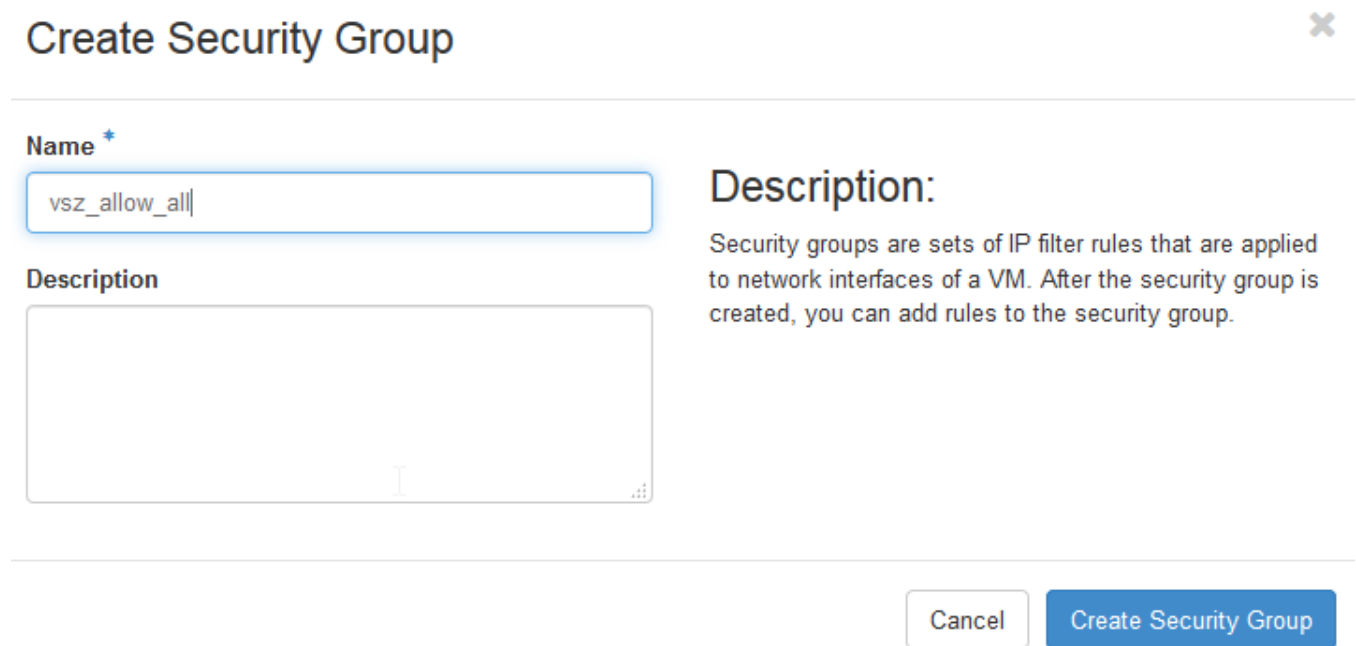**FIGURE 52** Creating a Security Group



4. Enter a **Name** for the security group and click **Create Security Group**.  
The new group is listed in the **Security Groups** page.
5. Select the group from the list and click **Manage Rules**.  
The **Manage Security Group Rules** page is displayed.

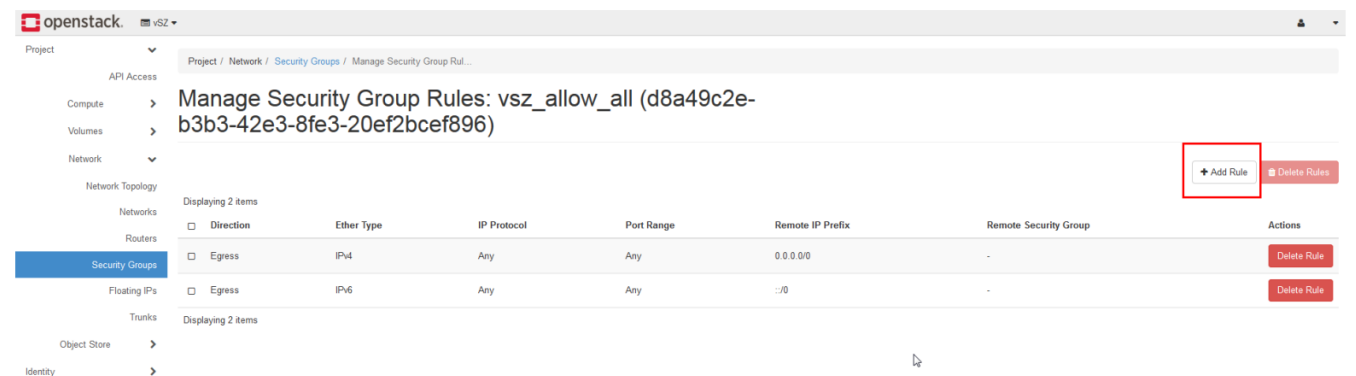**FIGURE 53** Managing Rules



6. Click **Add Rule**.

The **Add Rule** page is displayed.

**FIGURE 54** Adding Rules

**Add Rule**

**Rule \***  
ALL ICMP

**Direction**  
Ingress

**Remote \* ?**  
CIDR

**CIDR ?**  
0.0.0.0/0

**Description:**  
Rules define which traffic is allowed to instances assigned to the security group. A security group rule consists of three main parts:  
**Rule:** You can specify the desired rule template or use custom rules, the options are Custom TCP Rule, Custom UDP Rule, or Custom ICMP Rule.  
**Open Port/Port Range:** For TCP and UDP rules you may choose to open either a single port or a range of ports. Selecting the "Port Range" option will provide you with space to provide both the starting and ending ports for the range. For ICMP rules you instead specify an ICMP type and code in the spaces provided.  
**Remote:** You must specify the source of the traffic to be allowed via this rule. You may do so either in the form of an IP address block (CIDR) or via a source group (Security Group). Selecting a security group as the source will allow any other instance in that security group access to any other instance via this rule.

Cancel Add


7. **Rule:** Select the rule for this security group.
8. **Direction:** Select the traffic direction.

**NOTE**

Refer the *Administrator Guide* for port configuration.

9. Click **Add**, the system takes a few seconds to complete the action..  
The new rules are listed in the **Manage Security Group Rules** page .

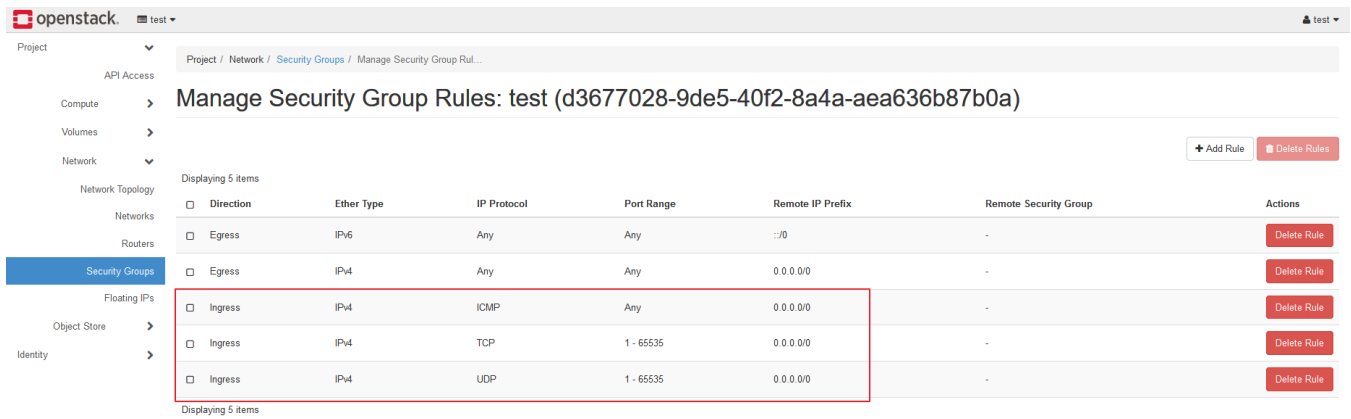
**FIGURE 55** New Rules



## Creating Key Pairs

1. From the homepage, click **Project > Compute > Key Pairs**.  
The **Key Pairs** page is displayed.

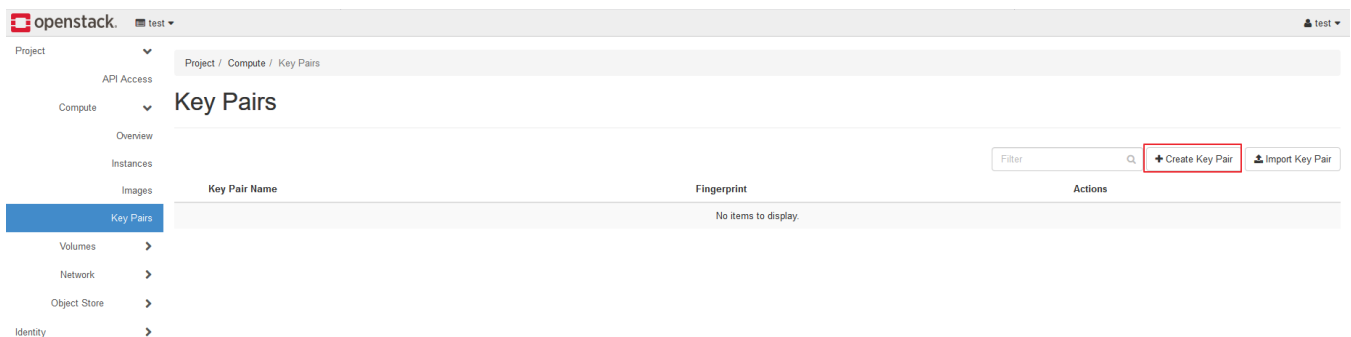
**FIGURE 56** Key Pairs Page



2. Click **Create Key Pairs**.

The **Create Key Pair** page is displayed.

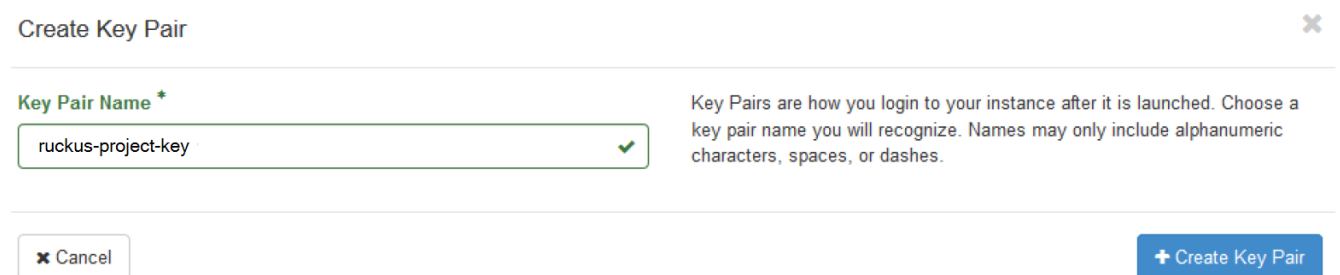
**FIGURE 57** Creating Key Pairs



3. Enter the **Key Pair Name** and click **Create Key Pair**.

The `key.pem` file download window should appear automatically.

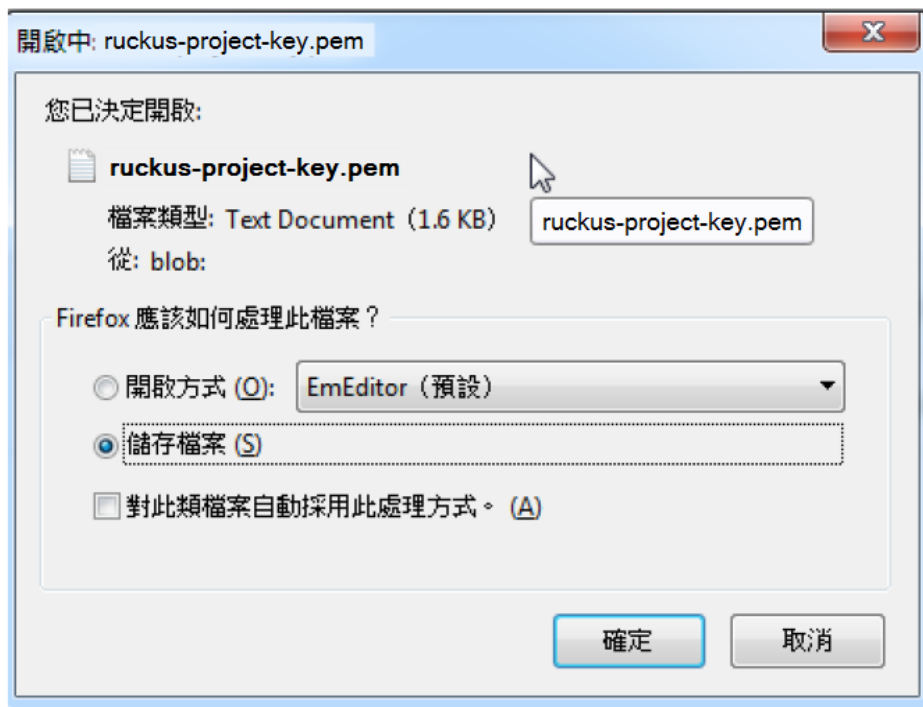**FIGURE 58** Key.pem File Download



4. Save the file to the Linux PC and change permission using command **chmod 600 test.pem**.

It is used to establish ssh vSZ connection with floating IP address. Other terminal tools also can use this key file to establish ssh connection with vSZ.

## Deploying three-interface vSZ without built-in SNAT

### Launching an Instance for three-interface vSZ


#### NOTE

Login OpenStack with user account that we just created.

1. From the homepage, click **Project > Compute > Instances**.

The **Instances** page is displayed.

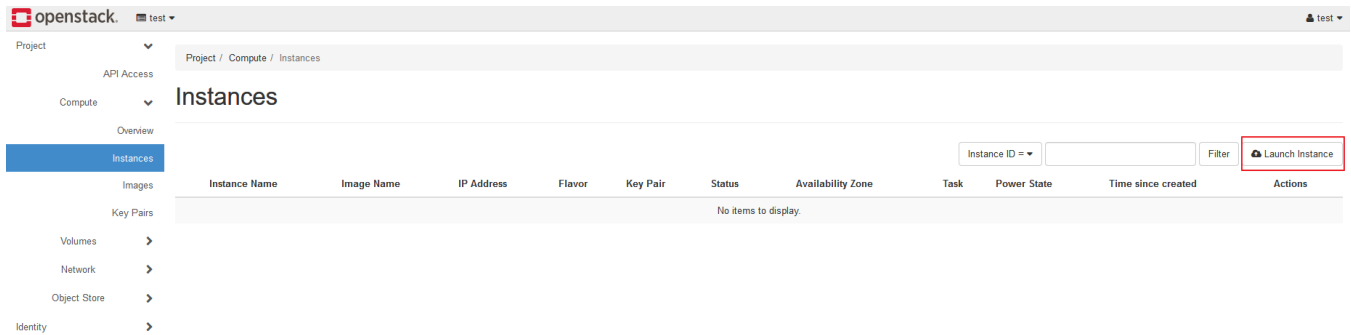**FIGURE 59** Instances Page





2. Click **Launch Instance**.

The **Launch Instance** page is displayed.

**FIGURE 60** Launch Instance Page

Launch Instance

Details

Source \*

Flavor \*

Networks \*

Network Ports

Security Groups

Key Pair

Configuration

Server Groups

Scheduler Hints

Metadata

Please provide the initial hostname for the instance, the availability zone where it will be deployed, and the instance count. Increase the Count to create multiple instances with the same settings.

Instance Name \*

vSZ\_node1

Description

Availability Zone

nova

Count \*

1

Total Instances (10 Max)

10%

0 Current Usage

1 Added

9 Remaining

Cancel

< Back

Next > Launch Instance

- From the **Details**, enter the **Instance Name** and click **Next**.  
The **Source** tab is displayed.

**FIGURE 61** Source Tab Page

Launch Instance ✕

Instance source is the template used to create an instance. You can use an image, a snapshot of an instance (image snapshot), a volume or a volume snapshot (if enabled). You can also choose to use persistent storage by creating a new volume. ?

**Source \***

Select Boot Source: Image

Create New Volume: Yes No **2**

**Allocated**


| Name                                      | Updated | Size | Type | Visibility |
|-------------------------------------------|---------|------|------|------------|
| Select an item from Available items below |         |      |      |            |

▼ **Available** **2** Select one

Click here for filters. ✕

| Name       | Updated          | Size    | Type  | Visibility |            |
|------------|------------------|---------|-------|------------|------------|
| 3.6.2.0.55 | 7/27/18 10:54 AM | 2.46 GB | qcow2 | Public     | <b>1</b> ↑ |
| 3.6.2.0.52 | 7/20/18 5:02 PM  | 2.41 GB | qcow2 | Public     | ↑          |

✕ Cancel < Back Next > Launch Instance

- From the **Available** list, click **Move**  to move the image to the **Allocated** list.
- For **Create New Volume**, select **No**.

6. Click **Next**.

The **Flavor** tab is displayed.

**FIGURE 62** Flavor Tab Page

Launch Instance

Details

Source

**Flavor \***

Networks \*

Network Ports

Security Groups

Key Pair

Configuration

Server Groups

Scheduler Hints

Metadata

Flavors manage the sizing for the compute, memory and storage capacity of the instance.

**Allocated**

Name VCPUS RAM Total Disk Root Disk Ephemeral Disk Public


Select an item from Available items below

**Available 7** Select one

Click here for filters.

| Name              | VCPUS | RAM    | Total Disk | Root Disk | Ephemeral Disk | Public |   |
|-------------------|-------|--------|------------|-----------|----------------|--------|---|
| m1.tiny           | 1     | 512 MB | 1 GB       | 1 GB      | 0 GB           | Yes    | ↑ |
| vSZ_resource_plan | 4     | 16 GB  | 100 GB     | 100 GB    | 0 GB           | Yes    | ↑ |
| m1.small          | 1     | 2 GB   | 20 GB      | 20 GB     | 0 GB           | Yes    | ↑ |
| m1.medium         | 2     | 4 GB   | 40 GB      | 40 GB     | 0 GB           | Yes    | ↑ |
| m1.large          | 4     | 8 GB   | 80 GB      | 80 GB     | 0 GB           | Yes    | ↑ |
| vSZ_minimum       | 4     | 16 GB  | 100 GB     | 100 GB    | 0 GB           | Yes    | ↑ |
| m1.xlarge         | 8     | 16 GB  | 160 GB     | 160 GB    | 0 GB           | Yes    | ↑ |

Cancel < Back Next > Launch Instance

7. From the **Available** list, click **Move**  to move the resource plan to the **Allocated** list.

8. Click **Next**.

The **Networks** tab is displayed.

**FIGURE 63** Networks Tab Page

Launch Instance

Details

Source

Flavor

**Networks**

Network Ports

Security Groups

Key Pair

Configuration

Server Groups

Scheduler Hints

Metadata

Networks provide the communication channels for instances in the cloud.

▼ Allocated Select networks from those listed below.


| Network                                   | Subnets Associated | Shared | Admin State | Status |
|-------------------------------------------|--------------------|--------|-------------|--------|
| Select an item from Available items below |                    |        |             |        |

▼ Available 3 Select at least one network

Click here for filters.

| Network   | Subnets Associated | Shared | Admin State | Status |     |
|-----------|--------------------|--------|-------------|--------|-----|
| > cluster | cluster            | Yes    | Up          | Active | ↑ 2 |
| > control | control            | Yes    | Up          | Active | ↑ 1 |
| > mgmt    | mgmt               | Yes    | Up          | Active | ↑ 3 |

Cancel < Back Next > Launch Instance

9. From the **Available** list, click **Move**  to move the network interfaces to the **Allocated** list.

Interfaces must be selected in the following order:

- a. Control interface
- b. Cluster interface
- c. Management interface


10. Click **Next**.

The **Network Ports** tab is displayed.

11. Click **Next**.

The **Security Groups** tab is displayed.

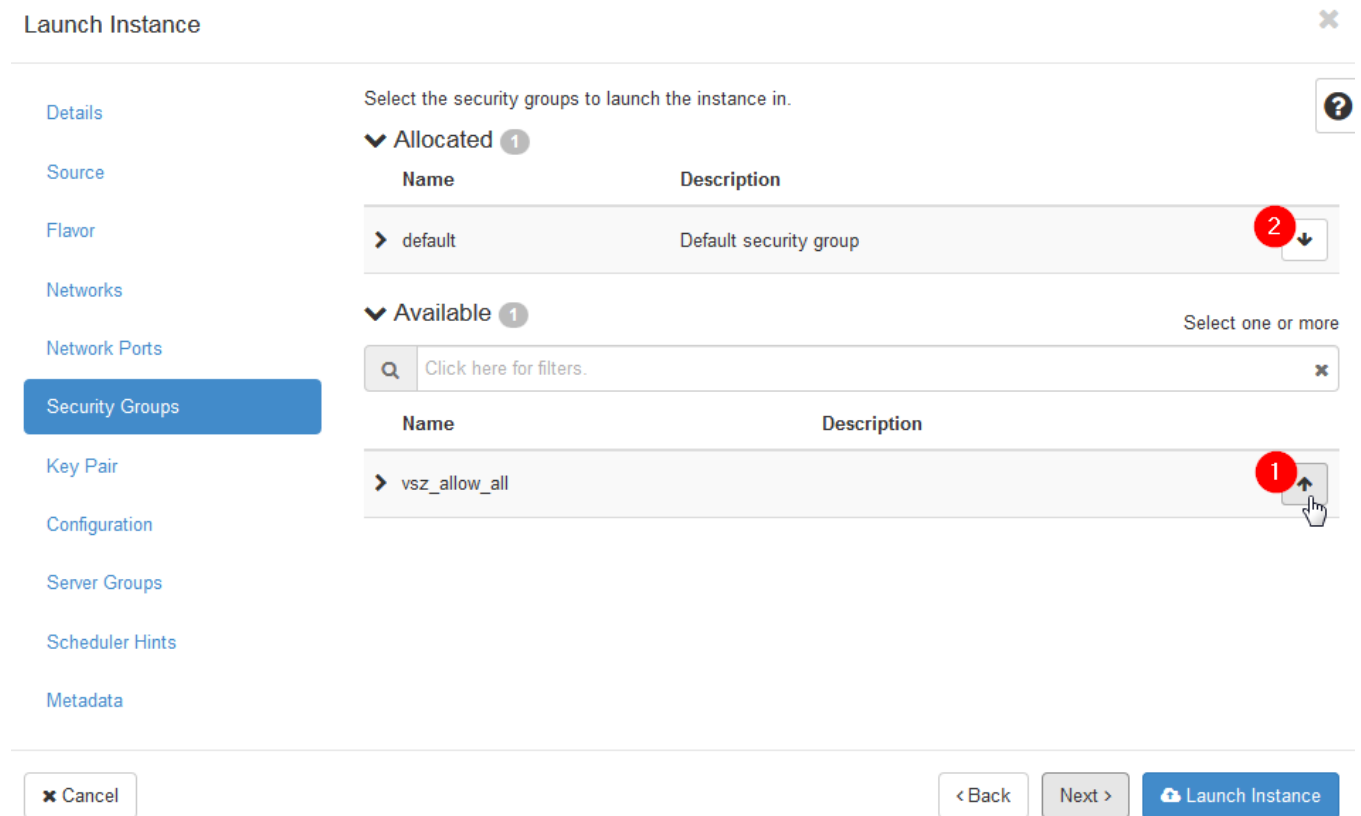**FIGURE 64** Security Groups Tab Page



12. From the **Available** list, click **Move**  to move the rule to the **Allocated** list.

13. From the **Allocated** list, click the **Remove**  to delete the default rule.

14. Click **Next**.

The **Key Pair** tab is displayed.

**FIGURE 65** Key Pair Tab Page

**Launch Instance** ✕

**Details**

A key pair allows you to SSH into your newly created instance. You may select an existing key pair, import a key pair, or generate a new key pair. ?

**Source** + Create Key Pair ⬇ Import Key Pair

**Flavor**

**Networks**

**Network Ports**

**Security Groups**

**Key Pair**

**Configuration**

**Server Groups**

**Scheduler Hints**

**Metadata**

**Allocated**

Displaying 1 item

| Name                 | Fingerprint                                     |   |
|----------------------|-------------------------------------------------|---|
| > ruckus-project-key | 00:62:d9:4b:1c:e0:6a:e9:cf:0f:60:31:29:89:42:77 | ⬇ |

Displaying 1 item

**Available** 0 Select one


✕

Displaying 0 items

| Name                 | Fingerprint |
|----------------------|-------------|
| No items to display. |             |

Displaying 0 items


✕ Cancel < Back Next > ☁ Launch Instance

15. From the **Available** list, click **Move**  to move the key pair to the **Allocated** list. If there is only one key pair, the system will automatically move it to the **Allocated** list.

16. Click **Launch Instance** to configure.

The system will take a few minutes to complete the process. Once it is done, you can see the **Power State** change to **Running**.

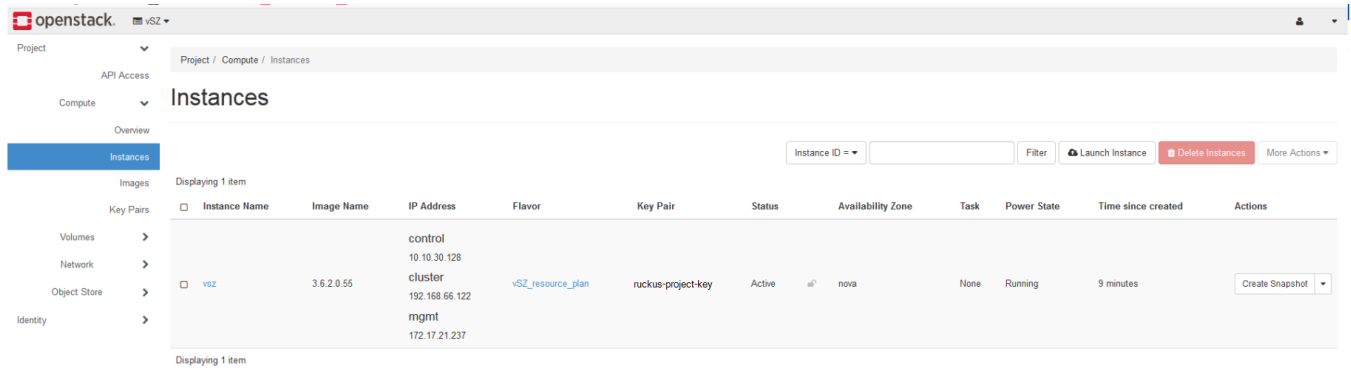**FIGURE 66** Instances Page



## Deploying One-interface vSZ with built-in SNAT

### Creating an Internal Network

#### NOTE


Login OpenStack with user account that we just created.

1. From the homepage, click **Project > Network > Networks**.  
The **Networks** page is displayed.

2. Click **Create Network**.

The **Create Network** page is displayed.

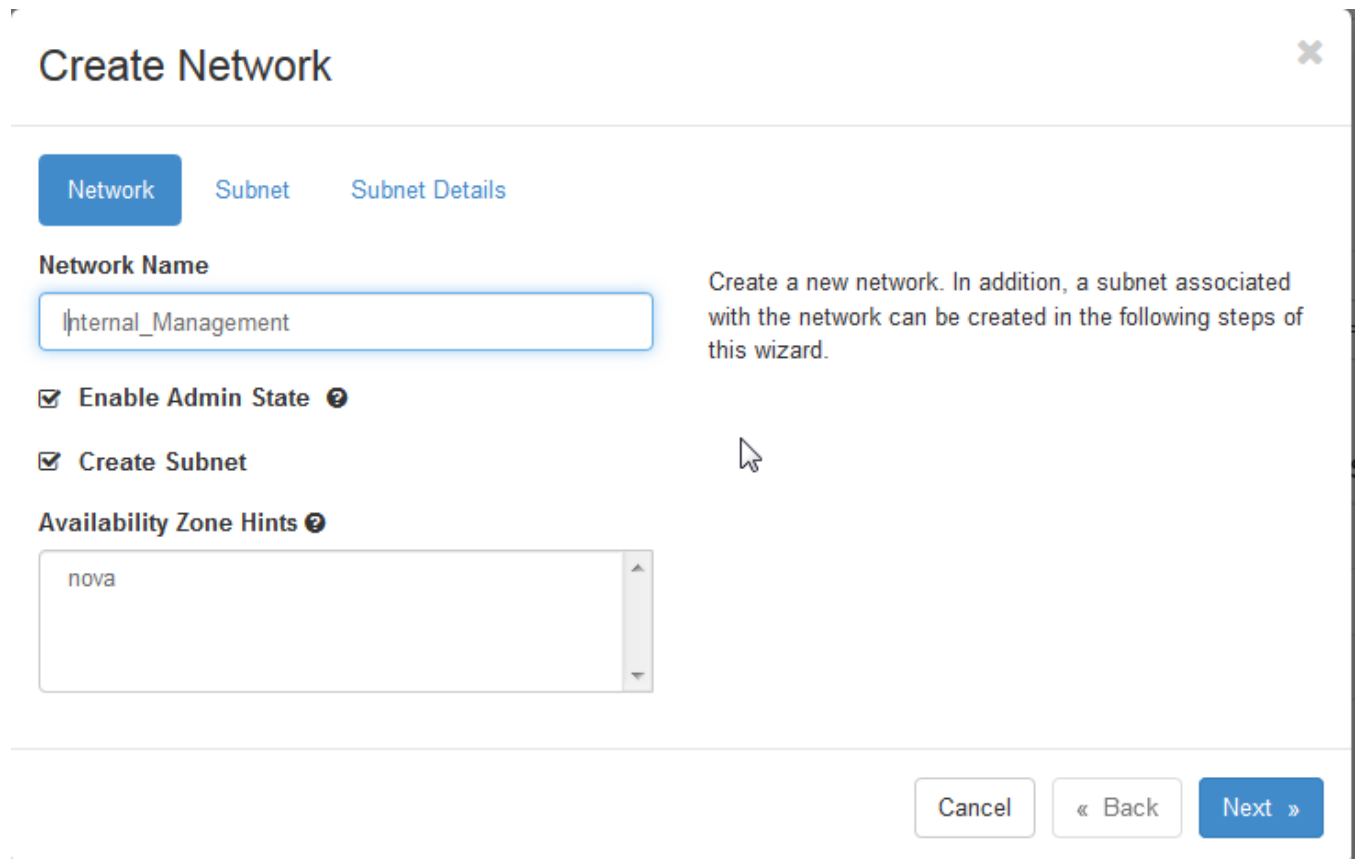**FIGURE 67** Creating an Internal Network




3. Enter the **Network Name** and click **Next**.  
The **Subnet** tab is displayed.
4. Enter the **Subnet Name**.
5. Enter the **Network Address** for the internal network and click **Next**.  
The **Subnet Details** tab is displayed.
6. In **DNS Name Server**: enter the DNS address.



7. Click **Create**.

The system will take few seconds to complete the action.

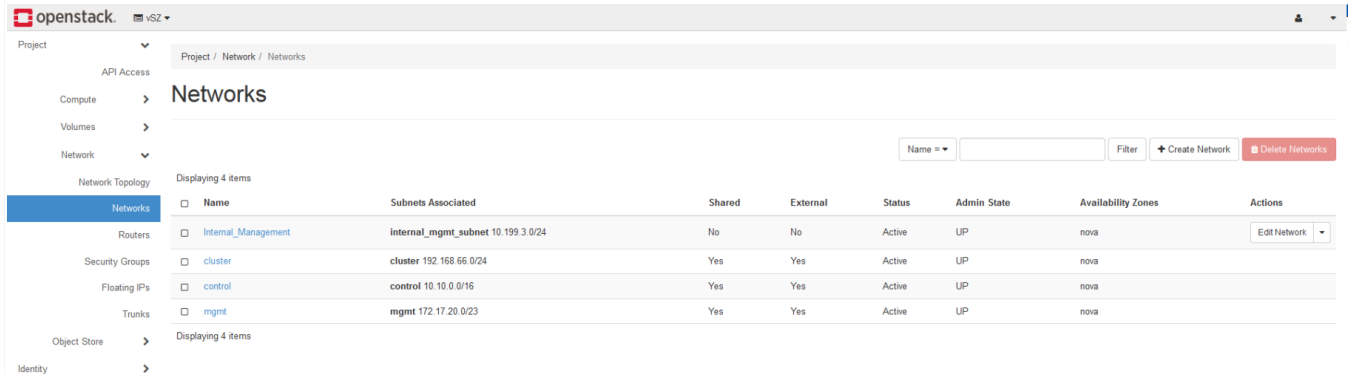**FIGURE 68** Internal Network




## Creating Router Settings

1. From the homepage, click **Project > Network > Routers**.

The **Routers** page is displayed.

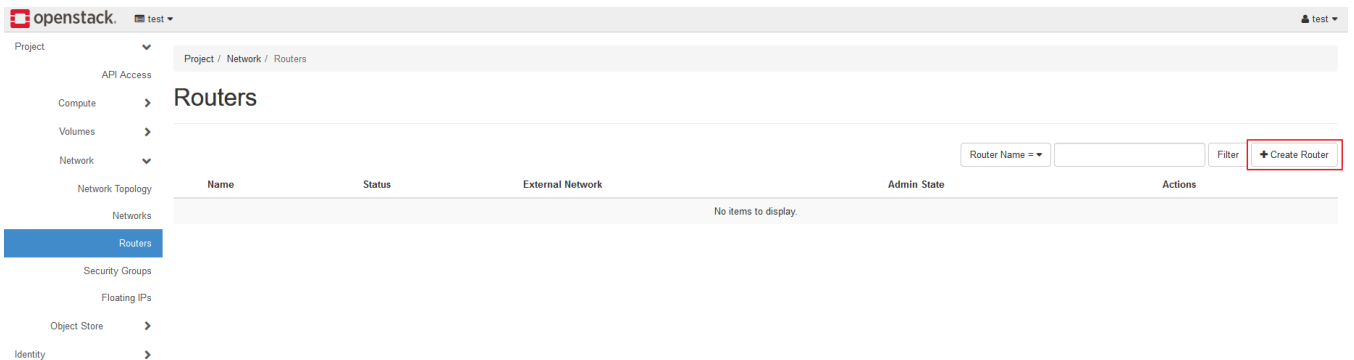**FIGURE 69** Routers Page



2. Click **Create Router**.

The **Create Router** page is displayed.

**FIGURE 70** Create Router Page

**Create Router** ✕

**Router Name**  
R\_mgmt

**Enable Admin State**

**External Network**  
mgmt ▼

**Availability Zone Hints** ⓘ  
nova ▲▼


**Description:**  
Creates a router with specified parameters.

3. **Router Name:** Enter the router name.
4. **External Network:** Select the external network which must be the NAT interface.

5. Click **Create Router**.

The newly created router is listed in the **Routers** page.

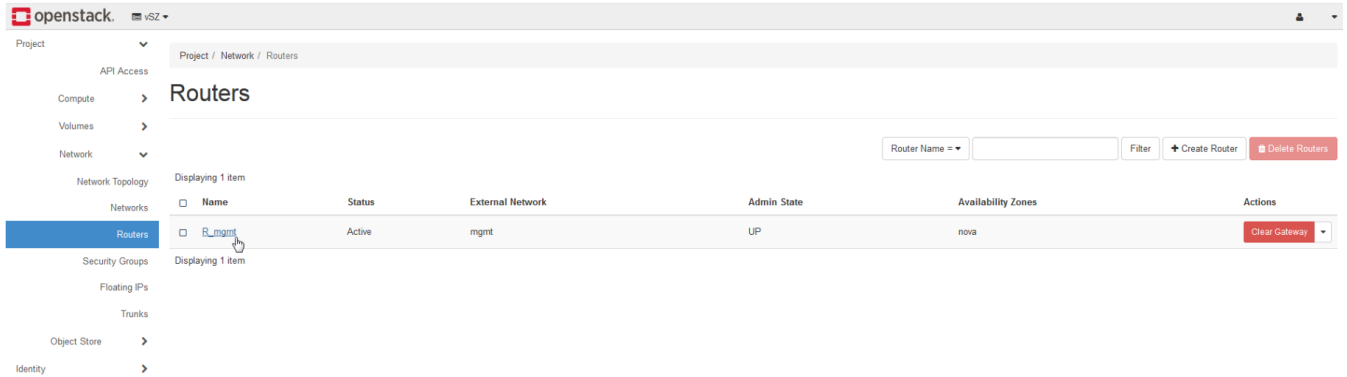
**FIGURE 71** New Router in the Routers Page



6. Select the router and click the **Interfaces** tab.

The **Interfaces** tab page is displayed.

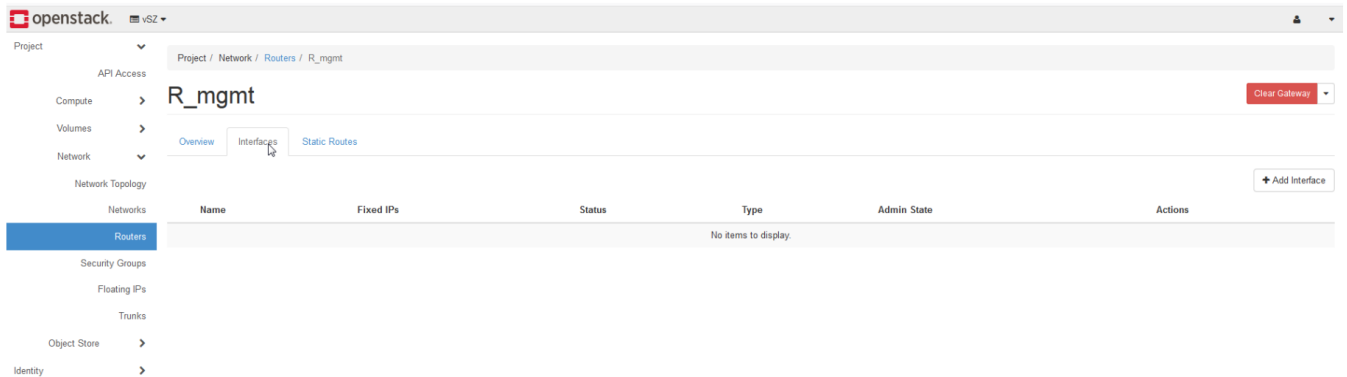**FIGURE 72** Interface Tab Page



7. Click **Add Interface**.

The **Add Interface** page is displayed.

**FIGURE 73** Add Interface Page

**Add Interface**

**Subnet \***

Internal\_Management: 10.199.3.0/24 (internal\_... ▼

**IP Address (optional) ⓘ**

**Description:**

You can connect a specified subnet to the router.


If you don't specify an IP address here, the gateway's IP address of the selected subnet will be used as the IP address of the newly created interface of the router. If the gateway's IP address is in use, you must use a different address which belongs to the selected subnet.

Cancel Submit

8. **Subnet:** Select the interface that you created.
9. Click **Submit**.
10. Click **Project > Network > Network Topology**.

11. Click **Normal** mode and ensure that the router is created correctly.

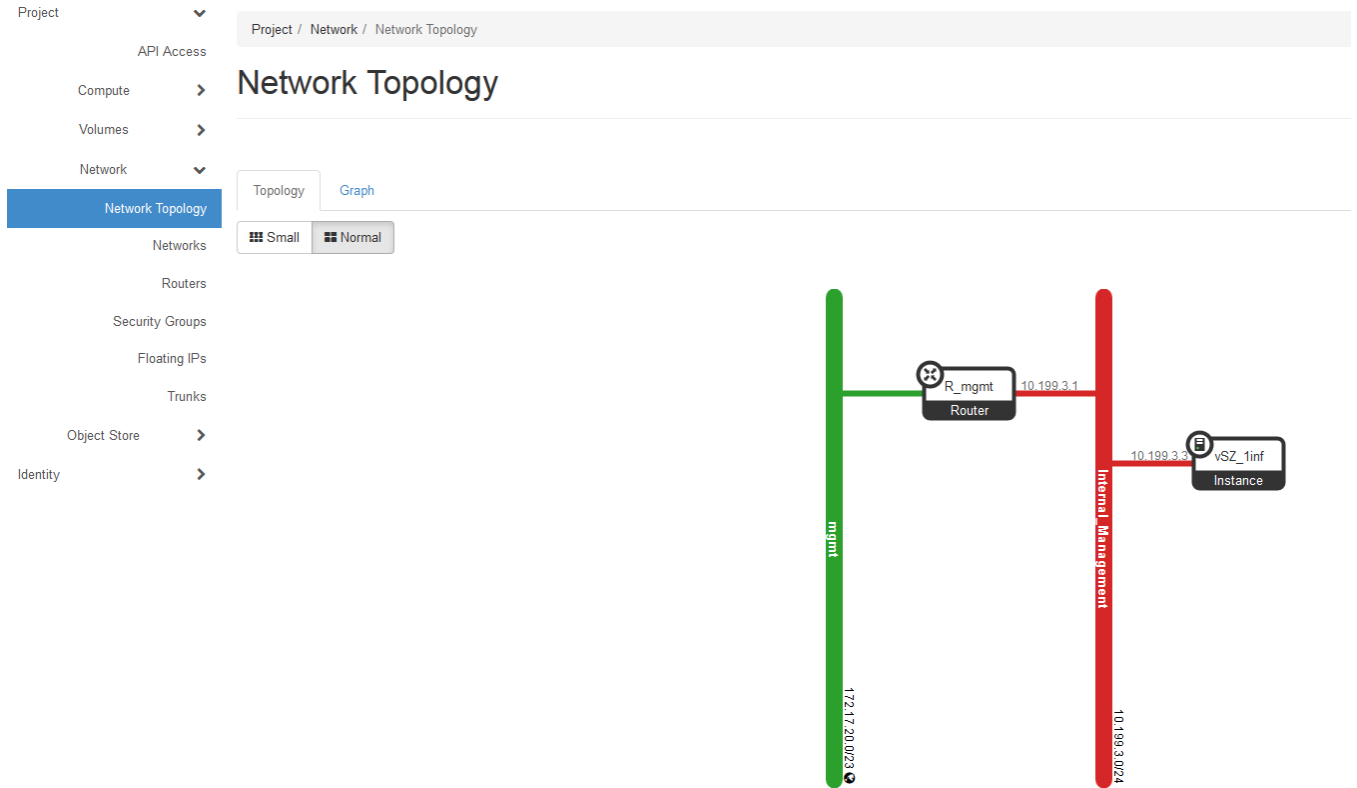**FIGURE 74 Network Topology**




## Allocating Floating IPs

1. From the homepage, click **Project > Network > Floating IPs**.

The **Floating IPs** page is displayed.

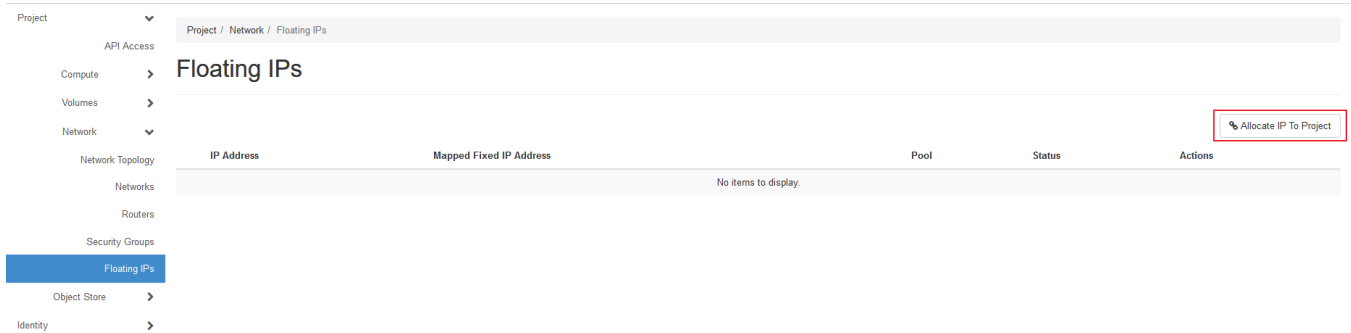
**FIGURE 75** Floating IPs Page



2. Click **Allocate IP to Project**.

The **Allocate Floating IP** page is displayed.

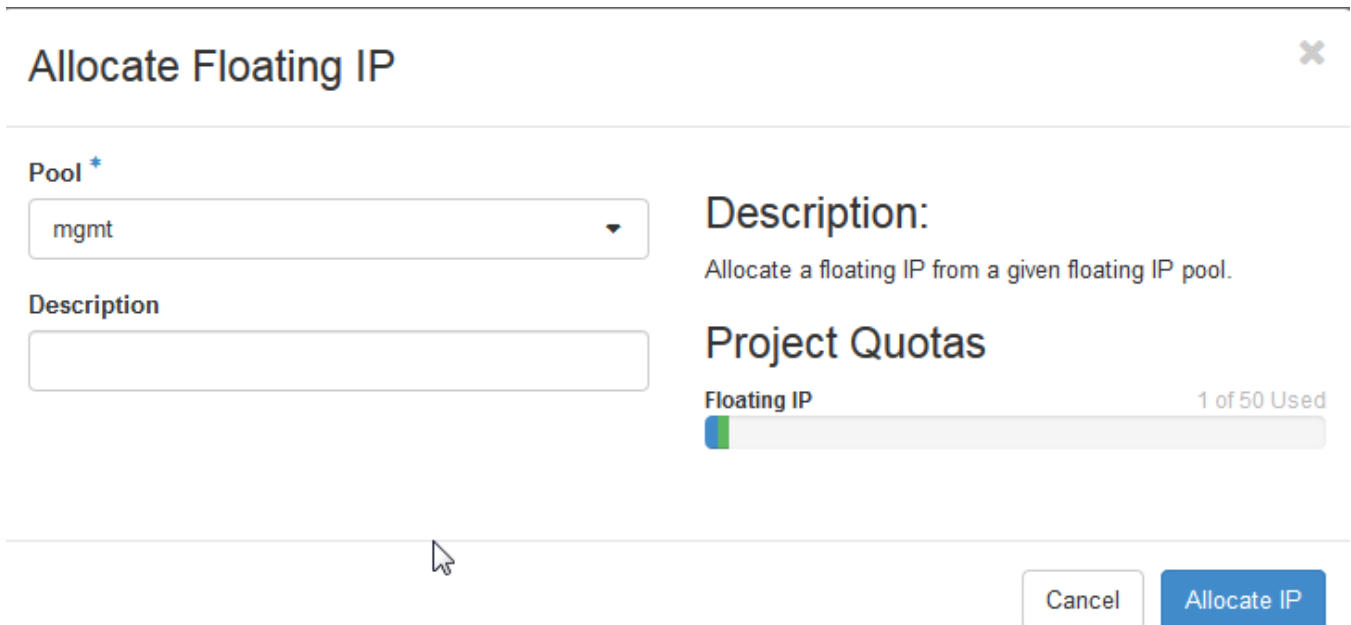**FIGURE 76** Allocate Floating IP Page




3. From the **Pool**, select the external interface.

4. Click **Allocate IP**.

The system takes a few seconds to allocate the IP.

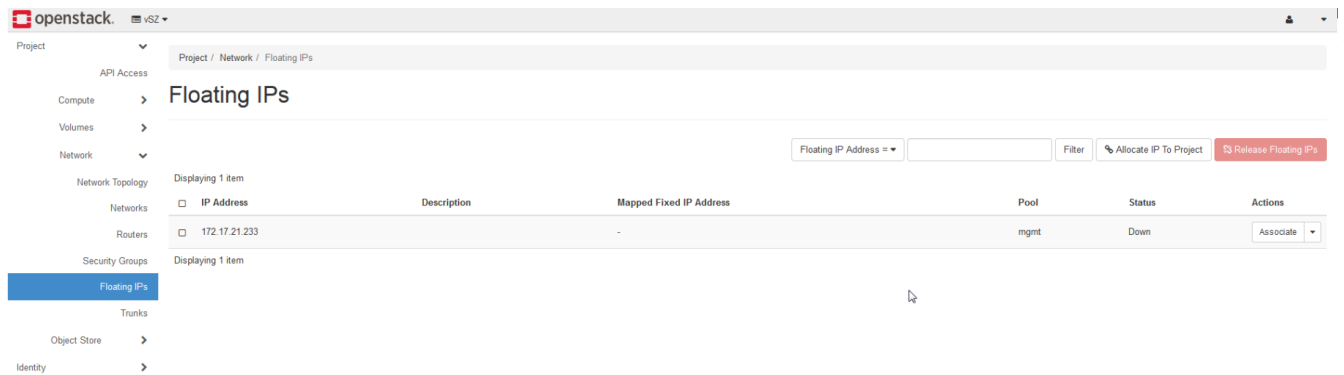**FIGURE 77** Allocated Floating IP



## Launching an Instance for One-interface vSZ


### NOTE

Login OpenStack with user account that we just created.

1. From the homepage, click **Project > Compute > Instances**.

The **Instances** page is displayed.

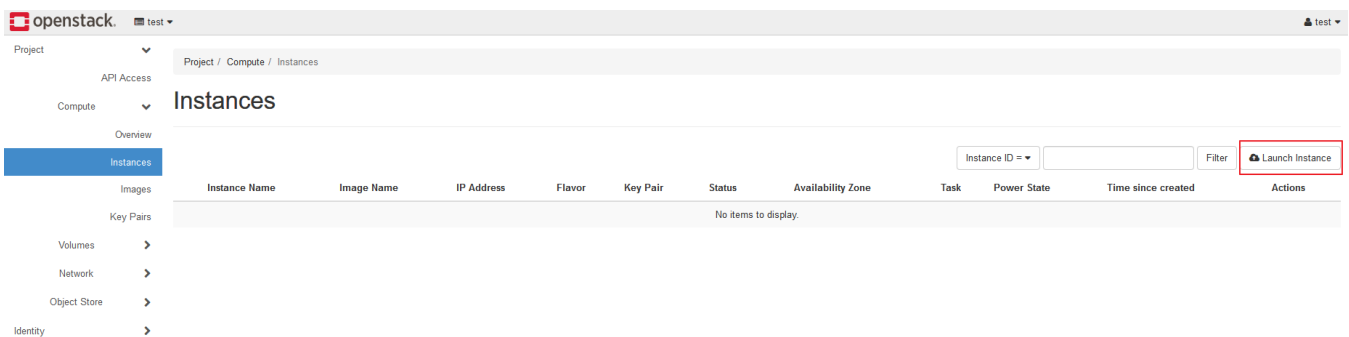**FIGURE 78** Instances Page



2. Click **Launch Instance**.

The **Launch Instance** page is displayed.

**FIGURE 79** Launch Instance Page

Launch Instance

Please provide the initial hostname for the instance, the availability zone where it will be deployed, and the instance count. Increase the Count to create multiple instances with the same settings.

**Instance Name \***  
vSZ\_1inf

**Description**  
[Empty text box]

**Availability Zone**  
nova

**Count \***  
1

Total Instances (10 Max)  
20%

1 Current Usage  
1 Added  
8 Remaining

Cancel < Back Next > Launch Instance



- From the **Details**, enter the **Instance Name** and click **Next**.  
The **Source** tab is displayed.

**FIGURE 80** Source Tab Page

Launch Instance

Instance source is the template used to create an instance. You can use an image, a snapshot of an instance (image snapshot), a volume or a volume snapshot (if enabled). You can also choose to use persistent storage by creating a new volume.

Select Boot Source: Image

Create New Volume: Yes No **2**

Allocated

| Name                                      | Updated | Size | Type | Visibility |
|-------------------------------------------|---------|------|------|------------|
| Select an item from Available items below |         |      |      |            |

Available **2** Select one

Click here for filters.

| Name         | Updated          | Size    | Type  | Visibility | Move     |
|--------------|------------------|---------|-------|------------|----------|
| > 3.6.2.0.55 | 7/27/18 10:54 AM | 2.46 GB | qcow2 | Public     | <b>1</b> |
| > 3.6.2.0.52 | 7/20/18 5:02 PM  | 2.41 GB | qcow2 | Public     | ↑        |

Cancel < Back Next > Launch Instance

- From the **Available** list, click **Move**  to move the image to the **Allocated** list.
- For **Create New Volume**, select **No**.

6. Click **Next**.

The **Flavor** tab is displayed.

**FIGURE 81** Flavor Tab Page

Launch Instance

Details

Source

**Flavor \***

Networks \*

Network Ports

Security Groups

Key Pair

Configuration

Server Groups

Scheduler Hints

Metadata

Flavors manage the sizing for the compute, memory and storage capacity of the instance.

**Allocated**

Name VCPUS RAM Total Disk Root Disk Ephemeral Disk Public


Select an item from Available items below

**Available 7** Select one

Click here for filters.

| Name                | VCPUS | RAM    | Total Disk | Root Disk | Ephemeral Disk | Public |   |
|---------------------|-------|--------|------------|-----------|----------------|--------|---|
| > m1.tiny           | 1     | 512 MB | 1 GB       | 1 GB      | 0 GB           | Yes    | ↑ |
| > vSZ_resource_plan | 4     | 16 GB  | 100 GB     | 100 GB    | 0 GB           | Yes    | ↑ |
| > m1.small          | 1     | 2 GB   | 20 GB      | 20 GB     | 0 GB           | Yes    | ↑ |
| > m1.medium         | 2     | 4 GB   | 40 GB      | 40 GB     | 0 GB           | Yes    | ↑ |
| > m1.large          | 4     | 8 GB   | 80 GB      | 80 GB     | 0 GB           | Yes    | ↑ |
| > vSZ_minimum       | 4     | 16 GB  | 100 GB     | 100 GB    | 0 GB           | Yes    | ↑ |
| > m1.xlarge         | 8     | 16 GB  | 160 GB     | 160 GB    | 0 GB           | Yes    | ↑ |

Cancel < Back Next > Launch Instance

7. From the **Available** list, click **Move**  to move the resource plan to the **Allocated** list.

8. Click **Next**.

The **Networks** tab is displayed.

**FIGURE 82** Networks Tab Page

Launch Instance

Details

Source

Flavor

**Networks \***

Network Ports

Security Groups

Key Pair

Configuration

Server Groups

Scheduler Hints

Metadata

Networks provide the communication channels for instances in the cloud.

▼ **Allocated** Select networks from those listed below.


| Network                                   | Subnets Associated | Shared | Admin State | Status |
|-------------------------------------------|--------------------|--------|-------------|--------|
| Select an item from Available items below |                    |        |             |        |

▼ **Available 4** Select at least one network

Click here for filters.

| Network             | Subnets Associated   | Shared | Admin State | Status |   |
|---------------------|----------------------|--------|-------------|--------|---|
| Internal_Management | internal_mgmt_subnet | No     | Up          | Active | ↑ |
| cluster             | cluster              | Yes    | Up          | Active | ↑ |
| control             | control              | Yes    | Up          | Active | ↑ |
| mgmt                | mgmt                 | Yes    | Up          | Active | ↑ |

Cancel < Back Next > Launch Instance

9. From the **Available** list, click **Move**  to move the network interfaces to the **Allocated** list.


10. Click **Next**.

The **Network Ports** tab is displayed.

11. Click **Next**.

The **Security Groups** tab is displayed.

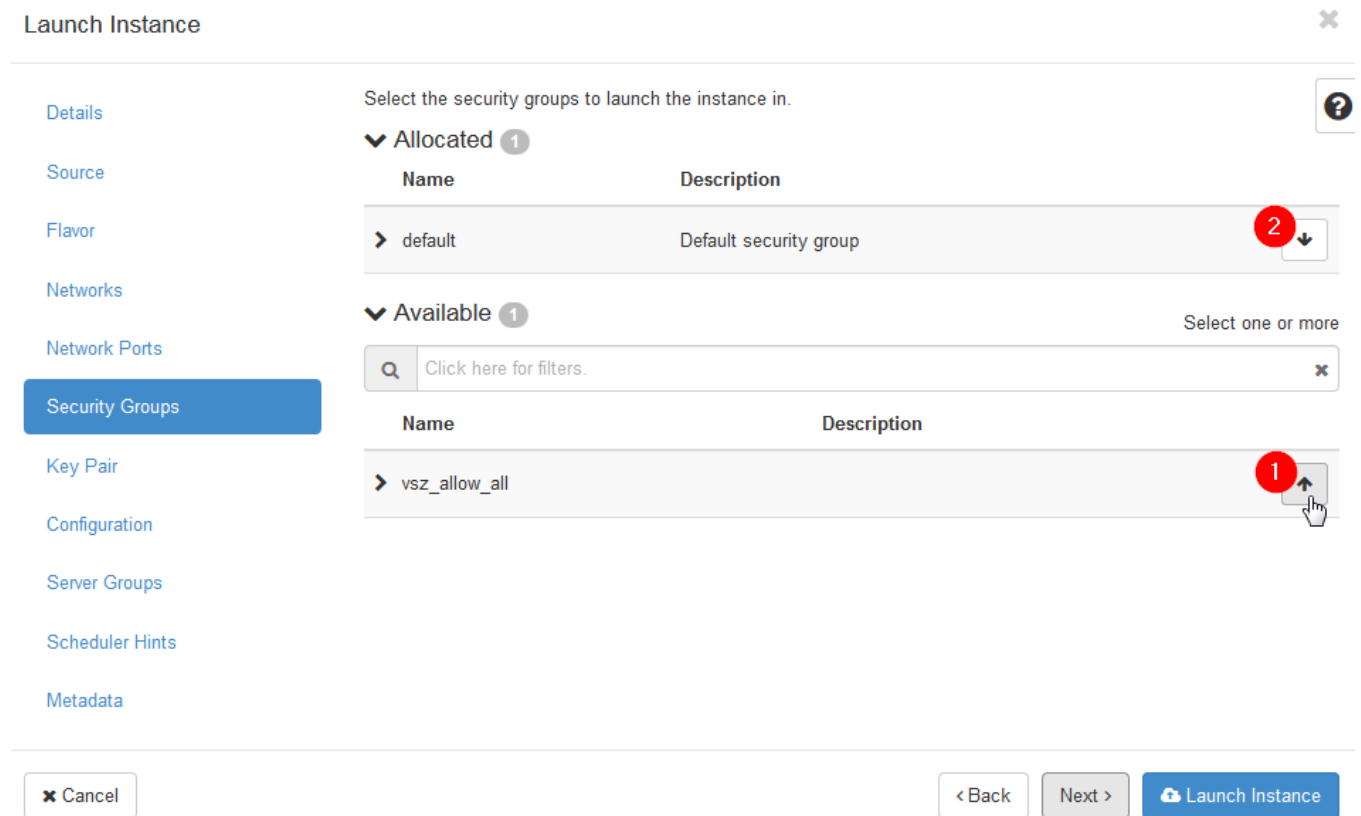**FIGURE 83** Security Groups Tab Page



12. From the **Available** list, click **Move**  to move the rule to the **Allocated** list.

13. From the **Allocated** list, click the **Remove**  to delete the default rule.

14. Click **Next**.

The **Key Pair** tab is displayed.

**FIGURE 84** Key Pair Tab Page

**Launch Instance** [Close]

Details

Source

Flavor

Networks

Network Ports

Security Groups

**Key Pair**

Configuration

Server Groups

Scheduler Hints

Metadata

A key pair allows you to SSH into your newly created instance. You may select an existing key pair, import a key pair, or generate a new key pair. [Help]

+ Create Key Pair    Import Key Pair

**Allocated**

Displaying 1 item

| Name               | Fingerprint                                     |              |
|--------------------|-------------------------------------------------|--------------|
| ruckus-project-key | 00:62:d9:4b:1c:e0:6a:e9:cf:0f:60:31:29:89:42:77 | [Down Arrow] |

Displaying 1 item

▼ **Available** 0 Select one


Click here for filters. [Close]

Displaying 0 items

| Name                 | Fingerprint |
|----------------------|-------------|
| No items to display. |             |

Displaying 0 items


[Cancel]    < Back    Next >    Launch Instance

15. From the **Available** list, click **Move**  to move the key pair to the **Allocated** list. If there is only one key pair, the system will automatically move it to the **Allocated** list.

16. Click **Launch Instance** to configure.

The system will take a few minutes to complete the process. Once it is done, you can see the **Power State** change to **Running**.

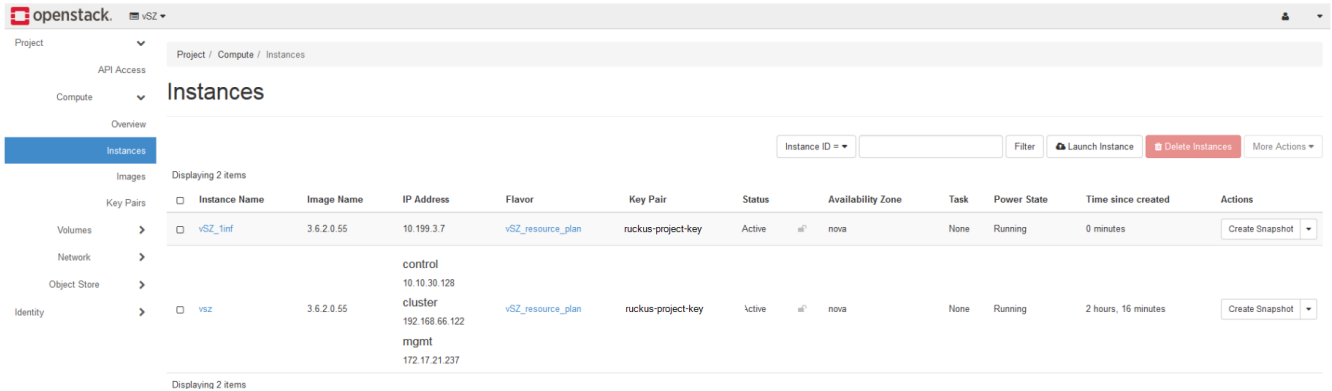**FIGURE 85** Instances Page




### Associating Floating IPs

1. From the homepage, click **Project > Compute > Instances**.


The **Instances** page is displayed.

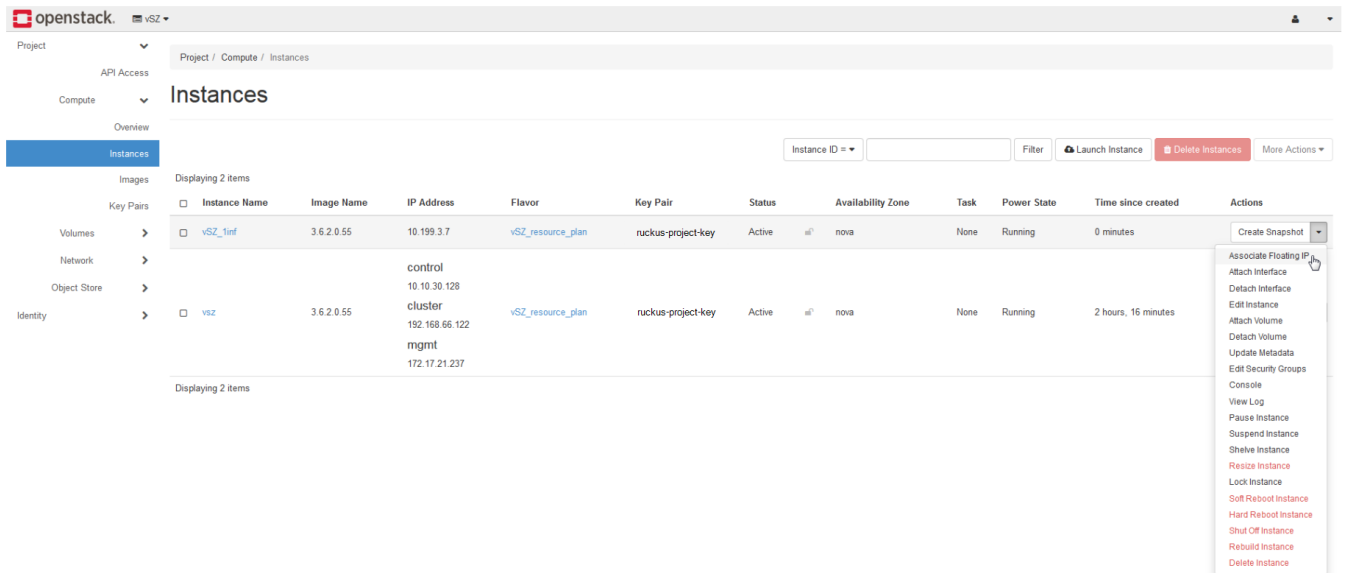**FIGURE 86** Associating Floating IP




2. Select the drop-down by the vSZ that you want to associate the floating IP and select **Associate Floating IP**.  
The **Manage Floating IP Associations** page is displayed.

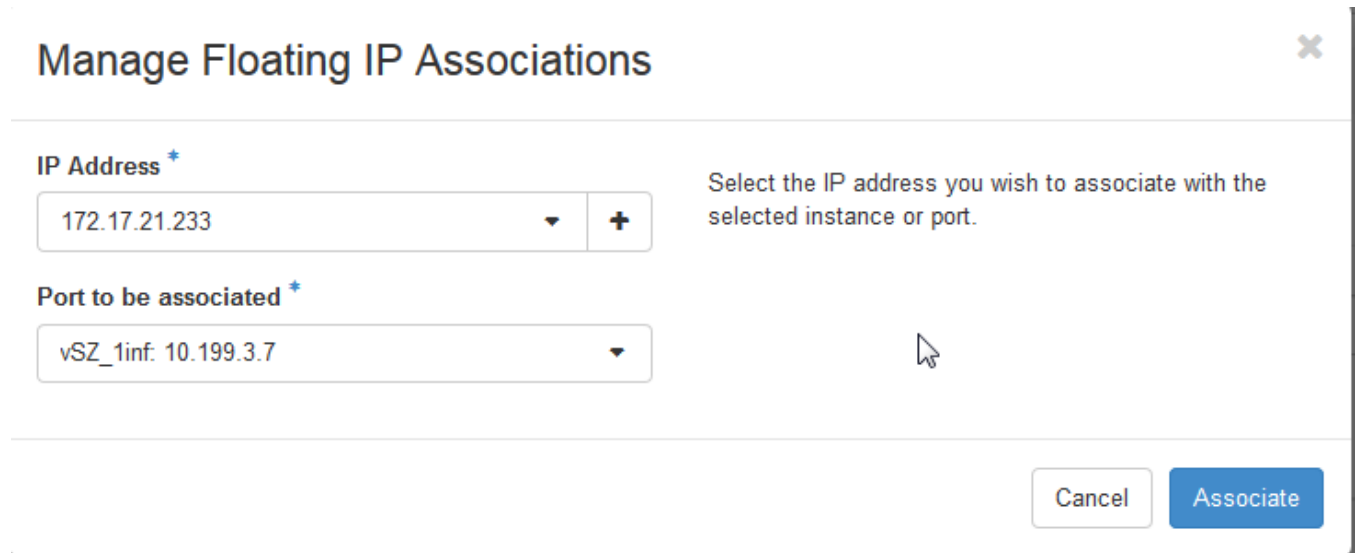**FIGURE 87** Manage Floating IP Associations



3. From **IP Address**, select the floating IP that was reserved.
4. Click **Associate**.  
The system will take few seconds to associate the IP to the instance.

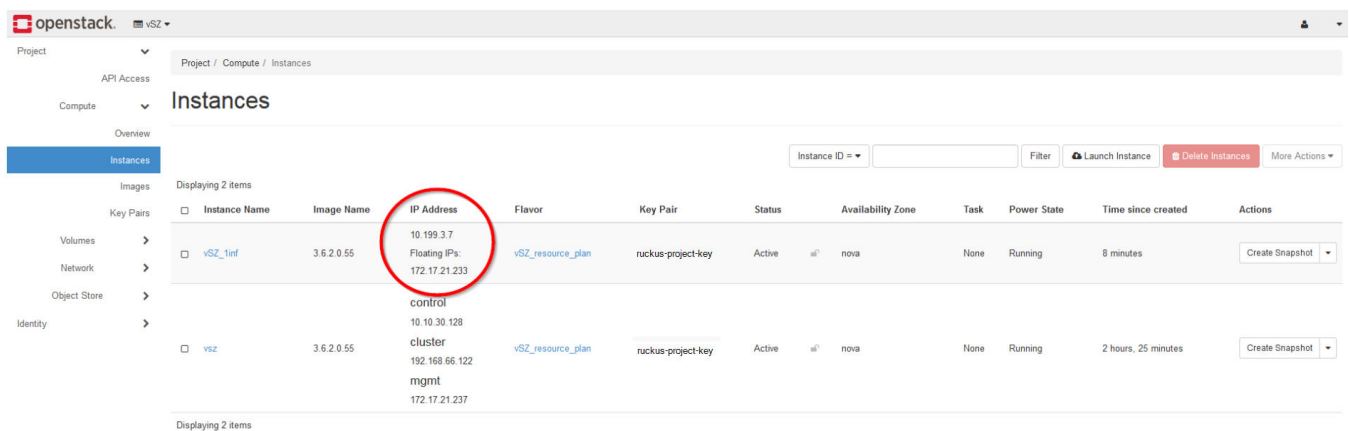**FIGURE 88** Associated Floating IP




## Setting up a vSZ Cluster

To setup a vSZ Cluster:

1. From the homepage, click **Project > Compute > Instances**.  
The **Instances** page is displayed.
2. Click the **Console** tab.  
The Console page is displayed.

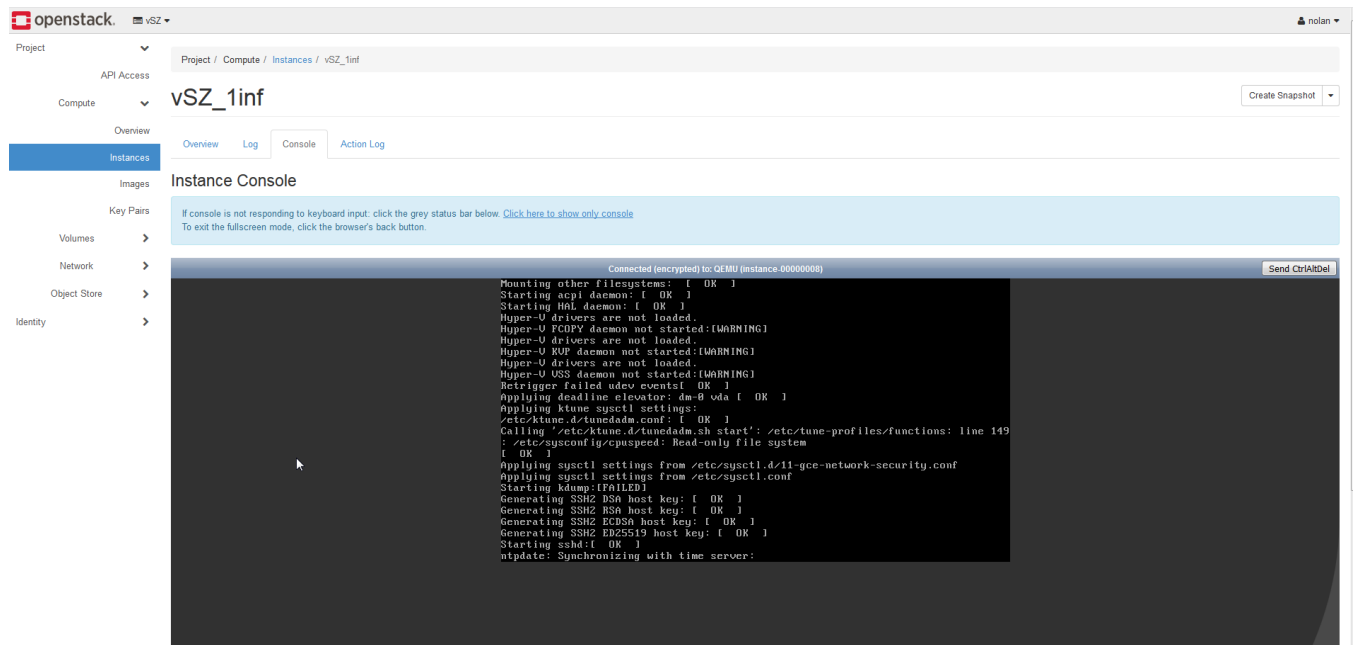**FIGURE 89** Console Tab Page



3. Follow the vSZ setup as explained in [#unique\\_50](#).

### NOTE

Always use DHCP in the vSZ system to avoid network issues.

Linux PC uses the private key to connect to the vSZ console.

```
ssh -i test.pem admin@192.168.66.203
The authenticity of host '192.168.66.203 (192.168.66.203)' can't be established.
ECDSA key fingerprint is SHA256:B7d90MnrTEU6xD9OpGuZ4qHWDZpqGJNQ61xt7citmkU.
ECDSA key fingerprint is MD5:85:c2:44:34:52:af:83:e1:8f:6f:af:46:6f:a8:20:97.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '192.168.66.203' (ECDSA) to the list of known hosts.
#####
#           Welcome to vSZ           #
#####
admin@192.168.66.203's password:
```



# Installing the vSZ on Microsoft Azure

---

- Introduction..... 105
- Logging into Microsoft Azure..... 105
- Creating a Resource Group..... 107
- Creating a Storage Account and Container..... 110
- Uploading the vSZ Image to Microsoft Azure..... 115
- Creating a Virtual Network..... 116
- Creating Network Security Groups..... 119
- Creating a vSZ Image on Microsoft Azure..... 126
- Updating the Disk Size According to Resource Plan..... 137

## Introduction

You can install vSZ on Microsoft Azure using the procedure outlined.

### NOTE

The minimum memory and CPU requirements have changed in this release. You may need to upgrade your infrastructure before upgrading. Please read carefully. This is the minimum requirement recommended. Refer to the tables in [Virtual SmartZone Required Resources](#) on page 14 in the Installation Preparation chapter.

## Logging into Microsoft Azure

As the first step of installing vSZ on Microsoft Azure, you have to log into Microsoft Azure.


Click <https://portal.azure.com> to access the **Microsoft Azure** site.

# Installing the vSZ on Microsoft Azure

## Logging into Microsoft Azure

The Azure portal appears as shown in the following image.

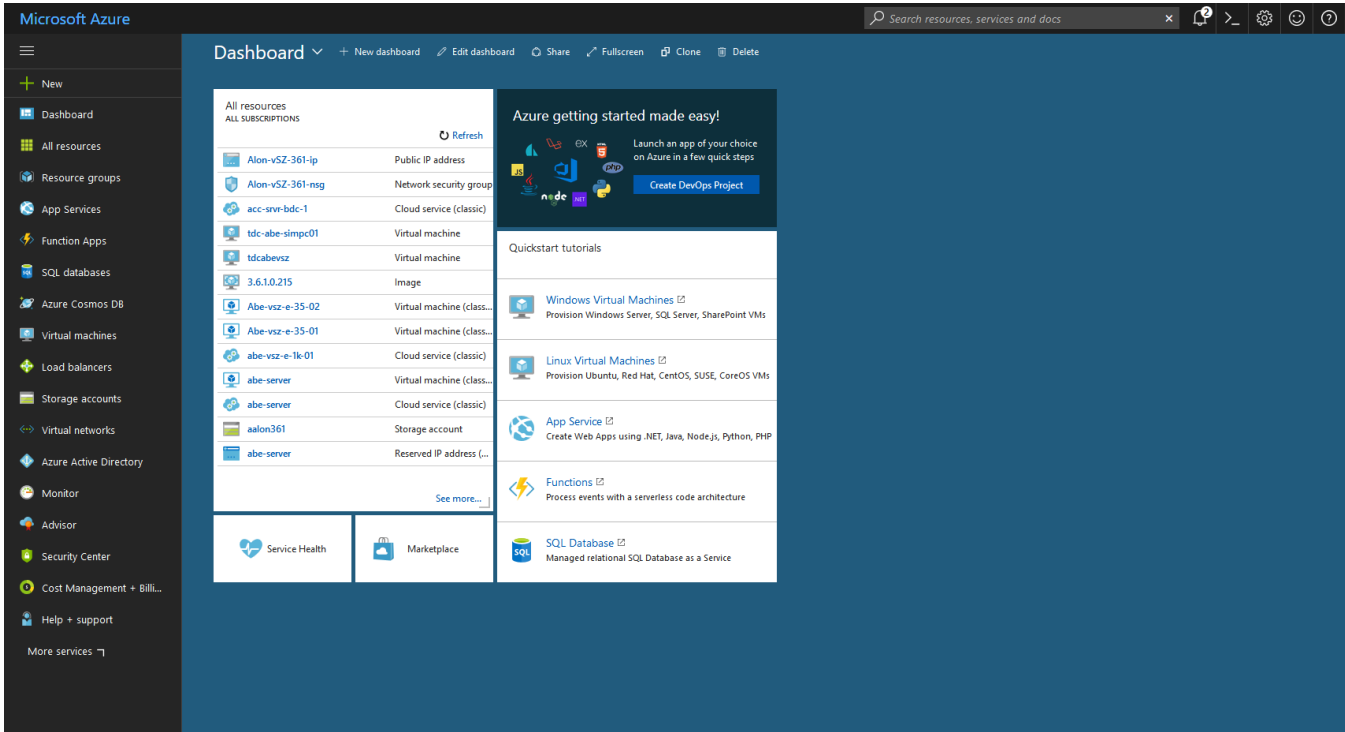**FIGURE 90** Portal Tab




# Creating a Resource Group

To create a resource group:


1. From the left pane of the **Microsoft Azure** page, click **Resource groups**. The **Resource groups** page appears with the list of existing resource groups as shown in the following image.

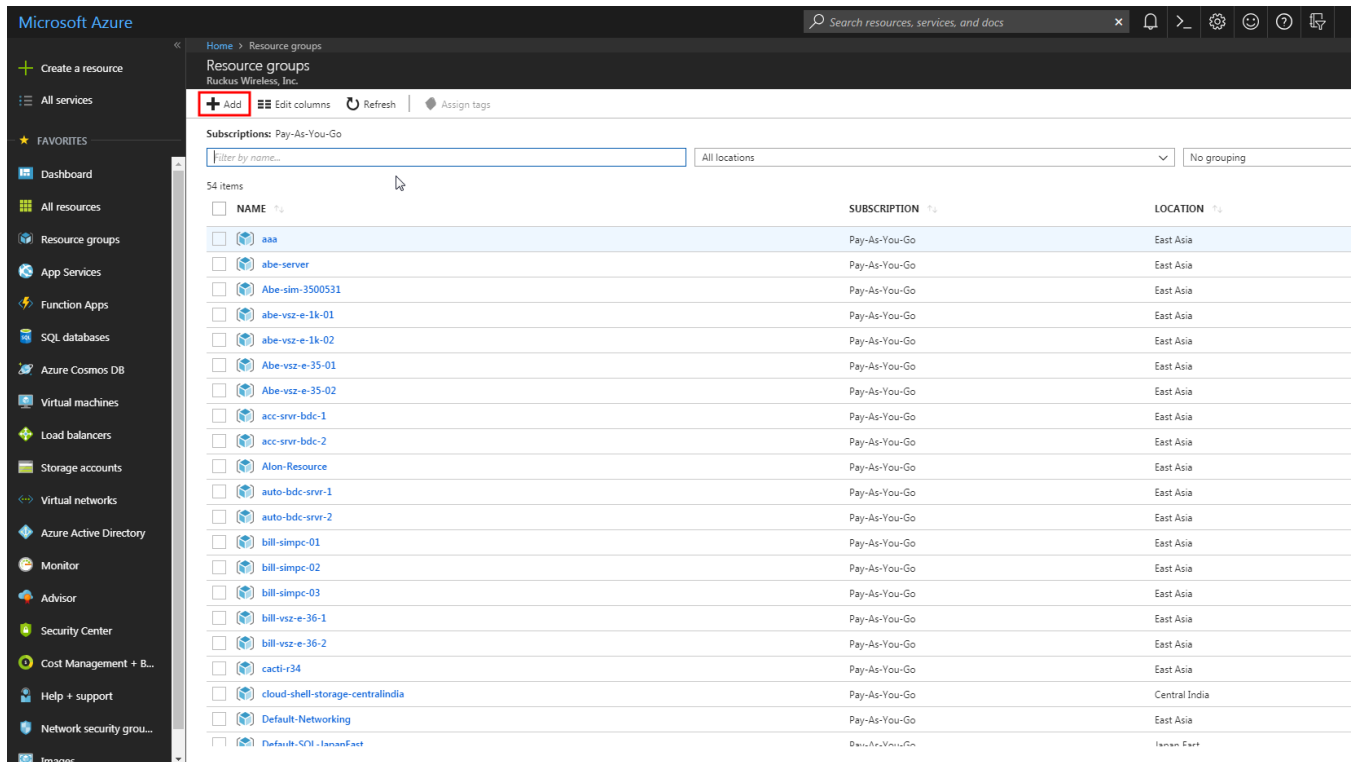**FIGURE 91** Resource Groups




2. Click the **Add +** button and enter the **Resource group name** as shown in the following image.

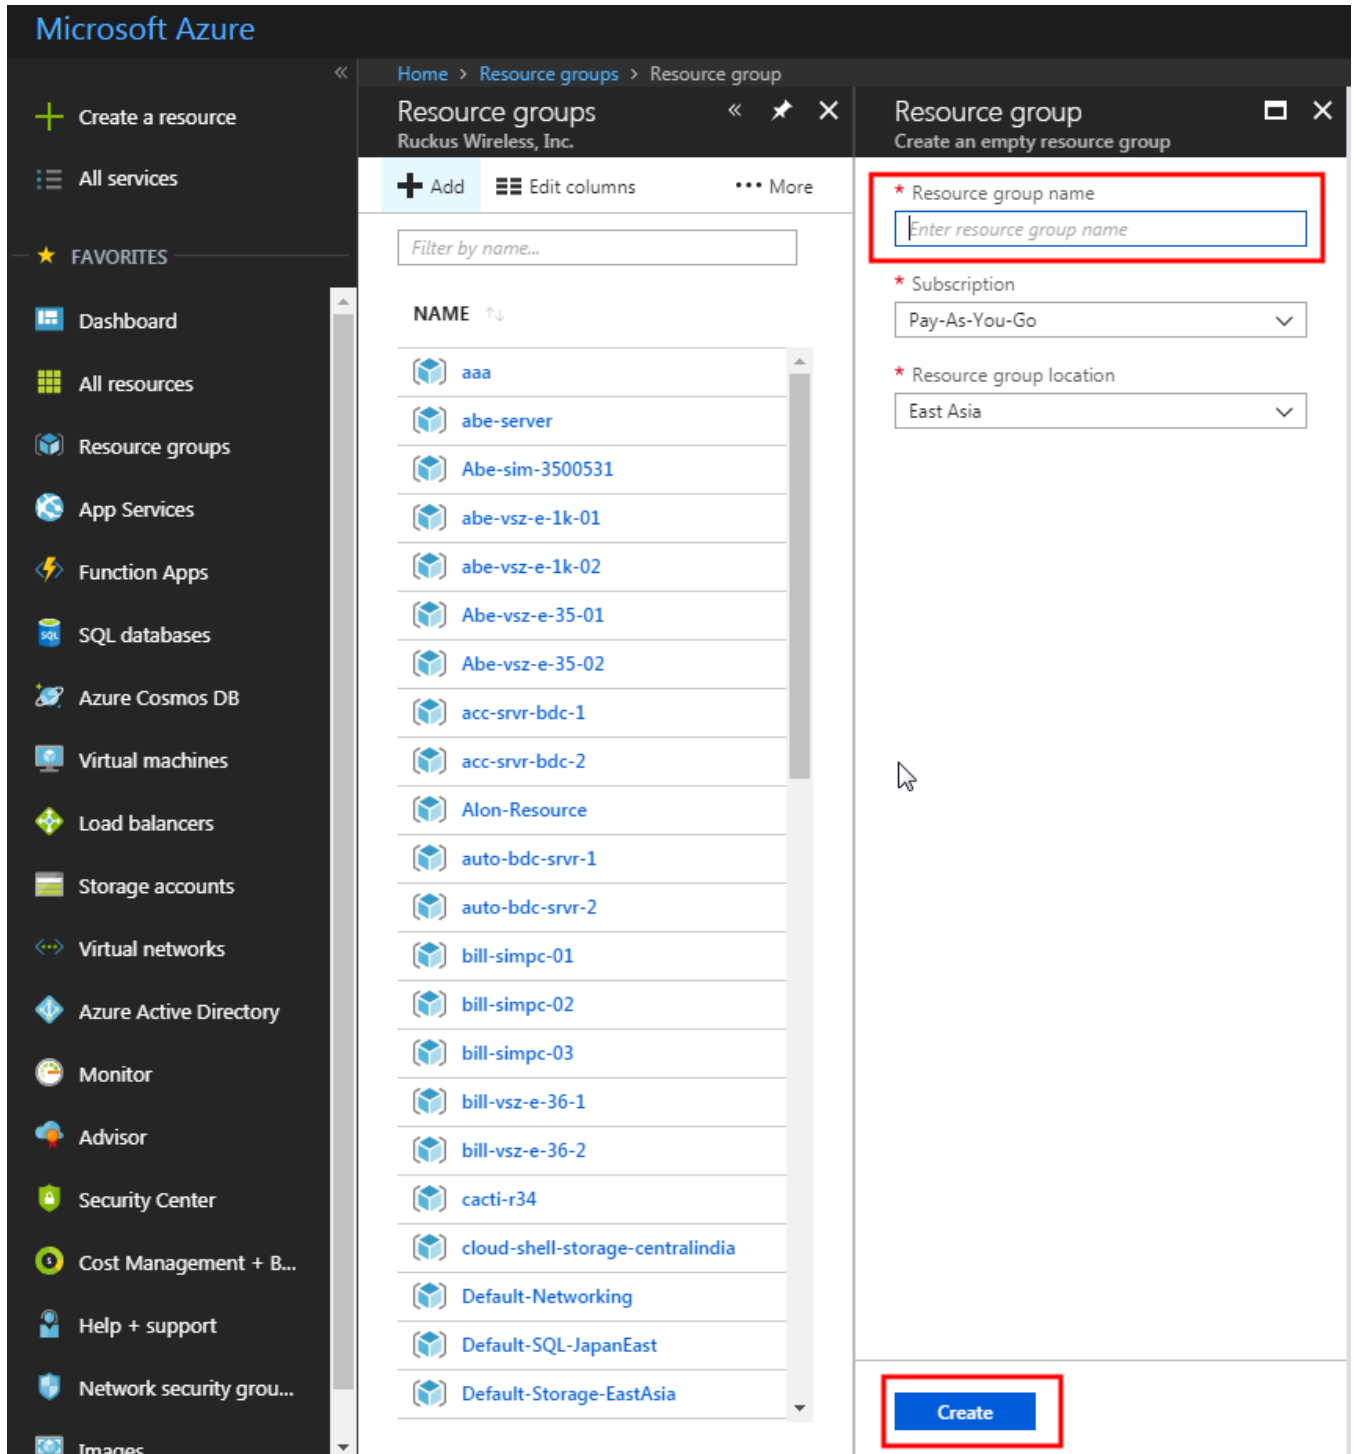**FIGURE 92** Adding Resource Group Name



3. Click **Create** and select the resource group from the list as shown in the following image.  
You can view the list of related components of the selected resource group.

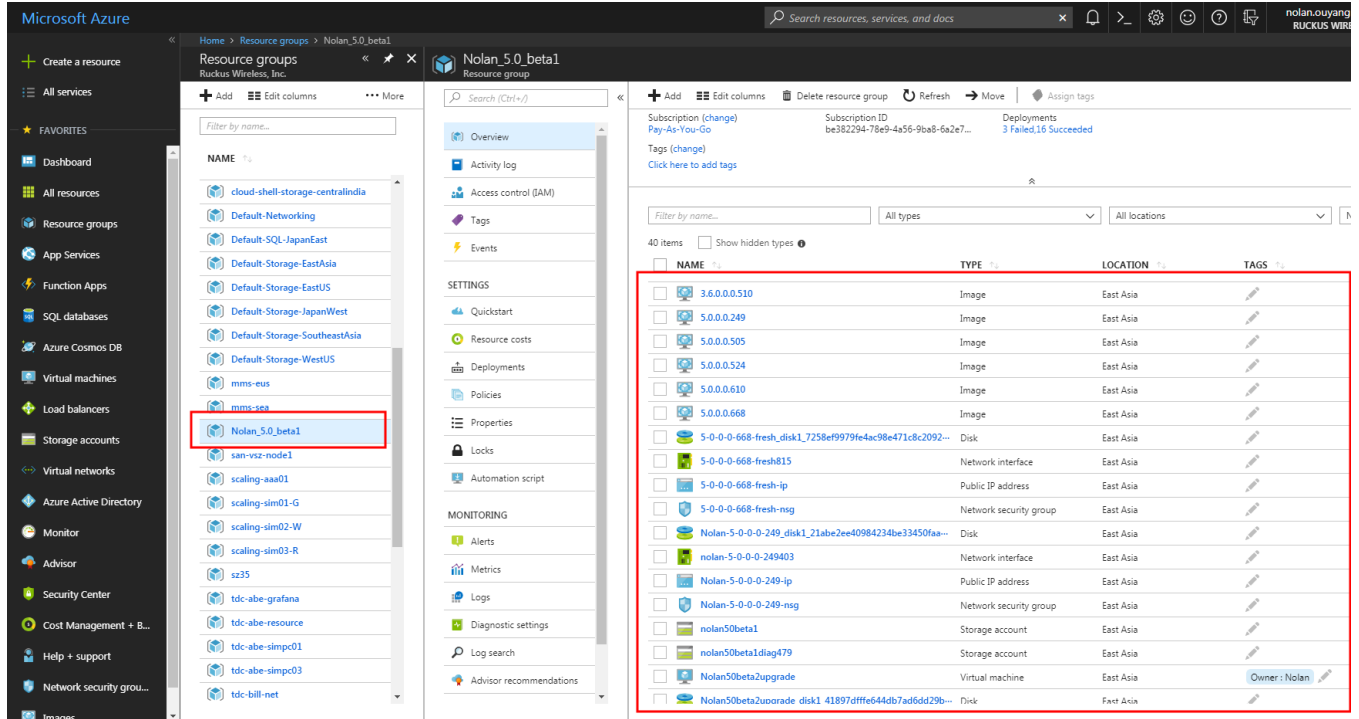**FIGURE 93** Resource Group Components




# Creating a Storage Account and Container

To create a Microsoft Azure storage account, perform the steps outlined in this section.


1. From the left pane of the **Microsoft Azure** page, click **Storage accounts**. The **Storage accounts** screen appears.

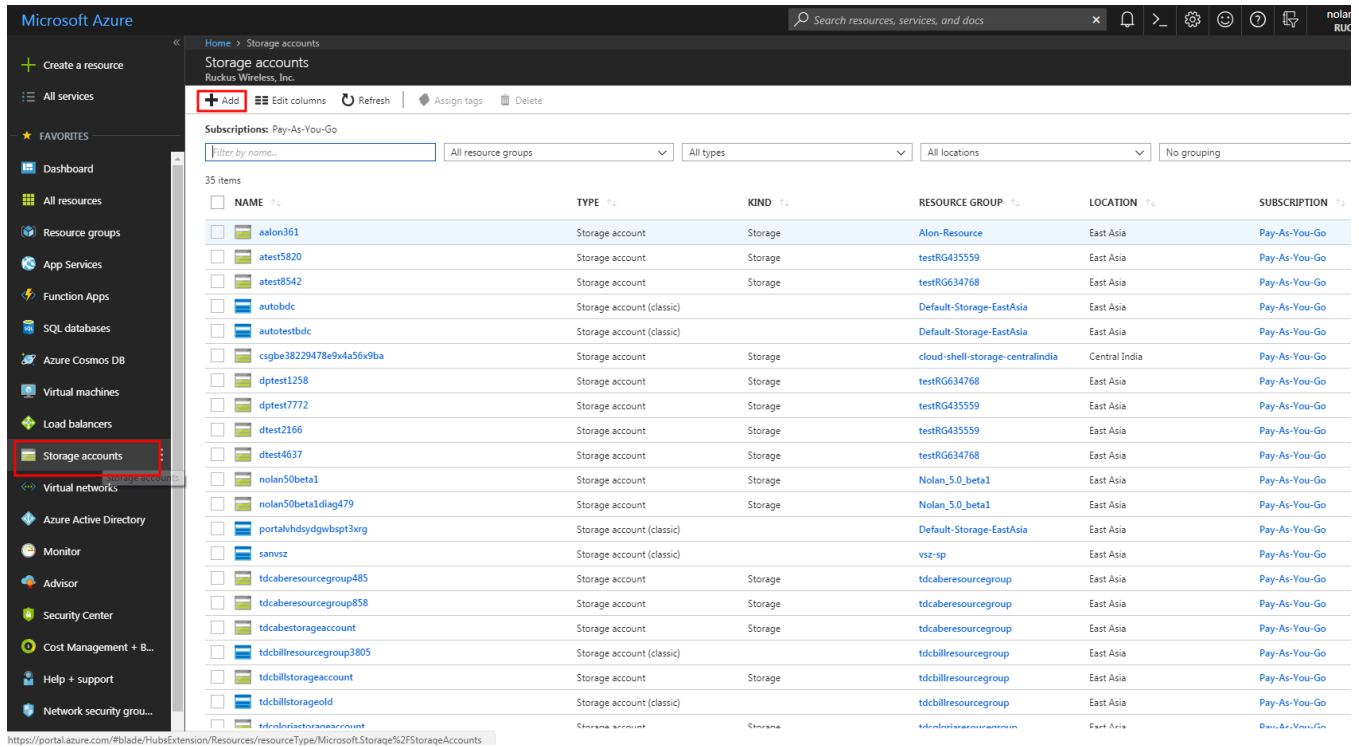**FIGURE 94** Creating a storage account



2. Click **Add** and perform the following:
  - Enter a **Name** using lowercase alphanumeric characters.
  - In **Deployment model**, select Resource manager; it is new method to manage storage. If you select **Classic** mode, the vhd file allows to use only powershell to do upload.
  - In **Replication**, select Locally-redundant storage (LRS)
  - In **Resource** group, choose **Use Existing** and select the resource group from the drop-down.

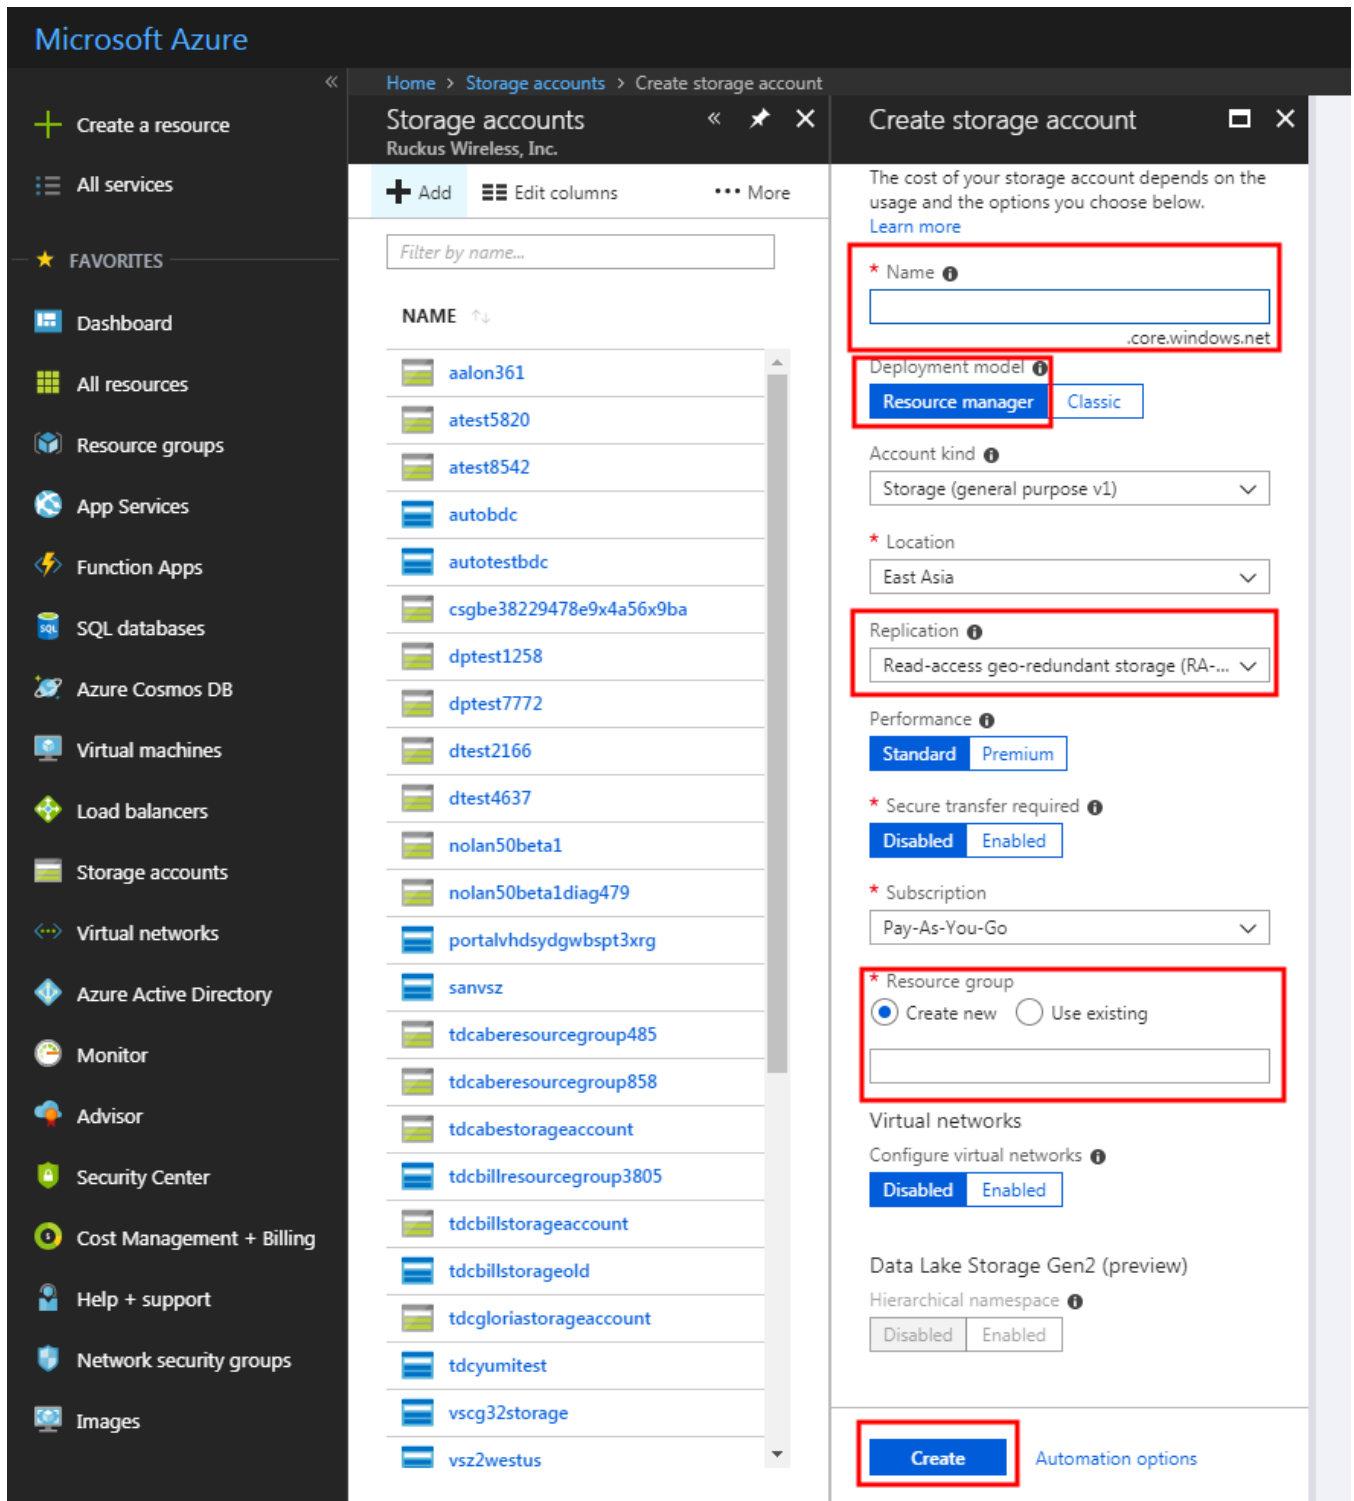FIGURE 95 Storage Account




3. Click **Create**.




4. Select the storage account from the list and select **Blobs** for uploading the vhd file as shown in the following image.

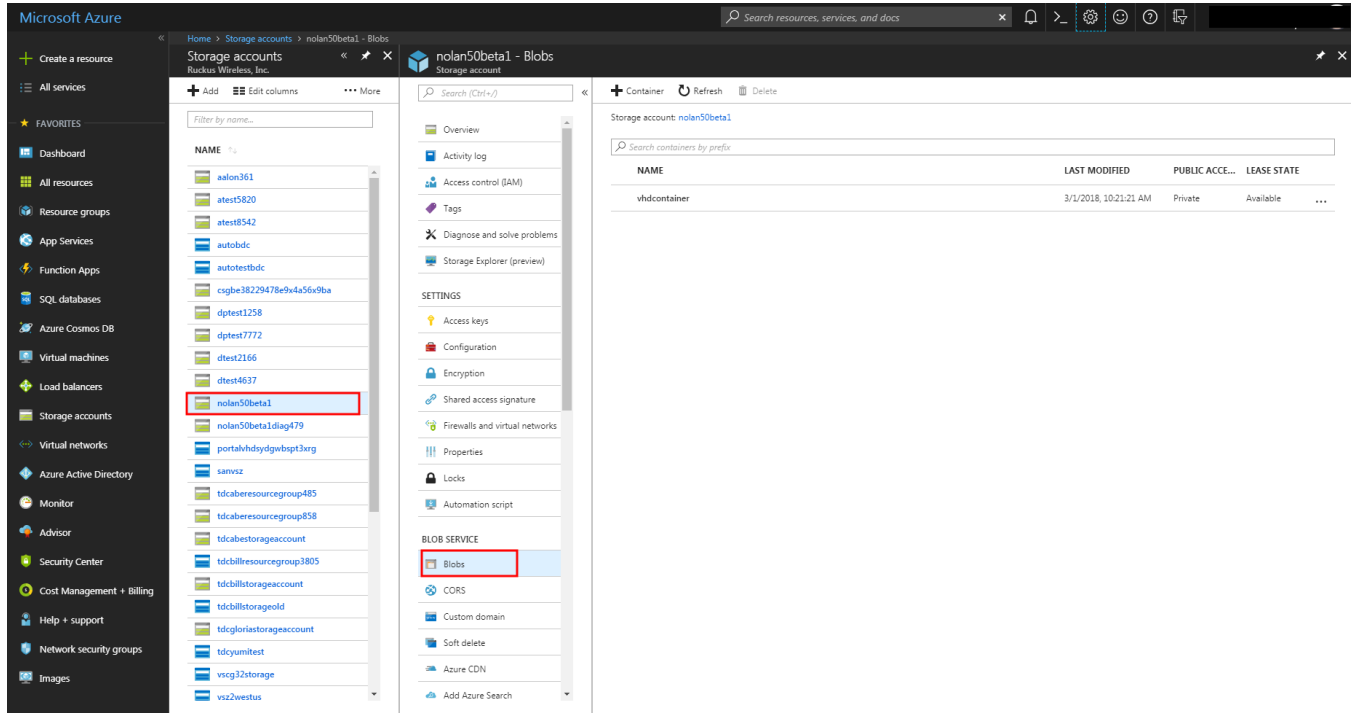**FIGURE 96** Blobs for Uploading



5. Click **+ Container**, enter a **Name** and click **OK** as shown in the following image.

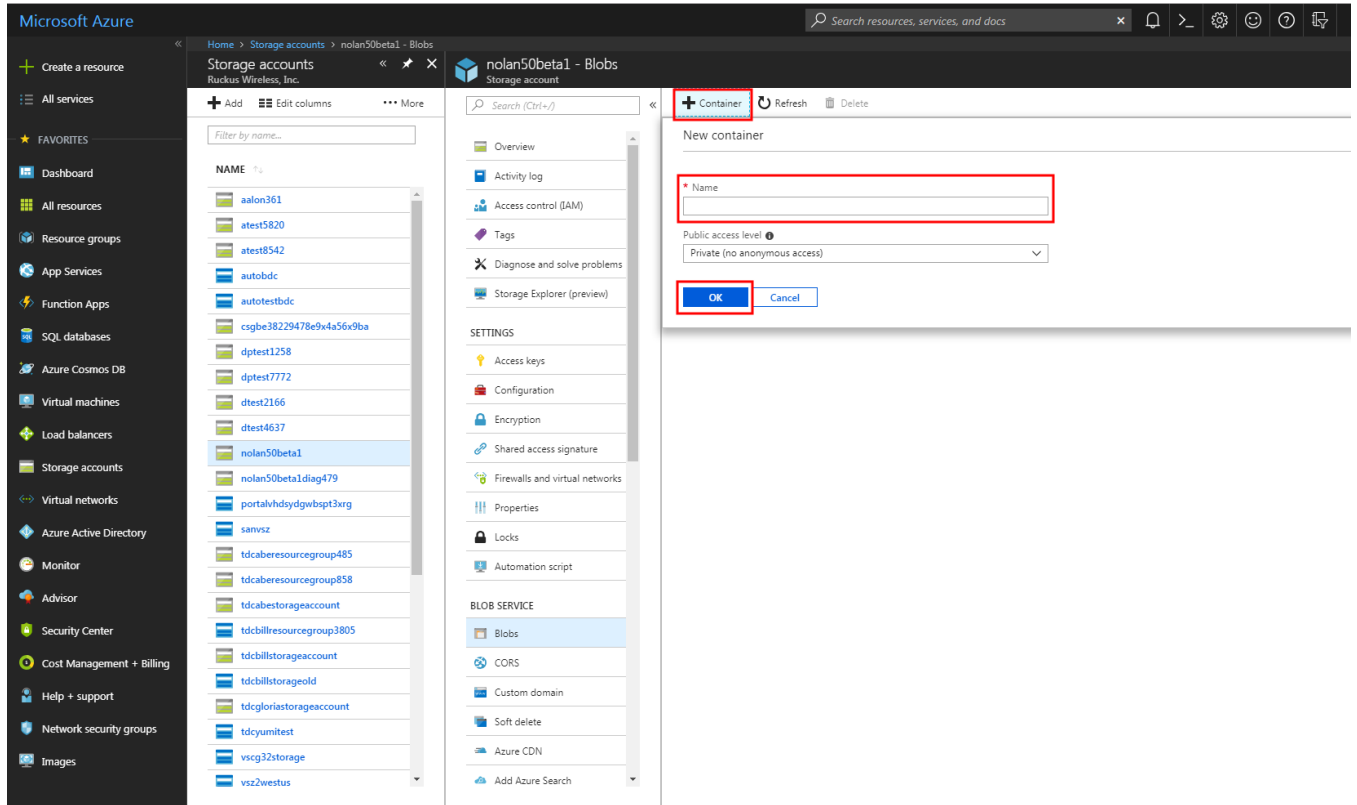**FIGURE 97** Adding Container




The new container is listed.

# Uploading the vSZ Image to Microsoft Azure

You have to upload the vSZ image to Microsoft Azure. Follow these steps outlined in this section to upload the vSZ image to Microsoft Azure.

1. Select the newly created container from the list and click **Upload** as shown in the following image.

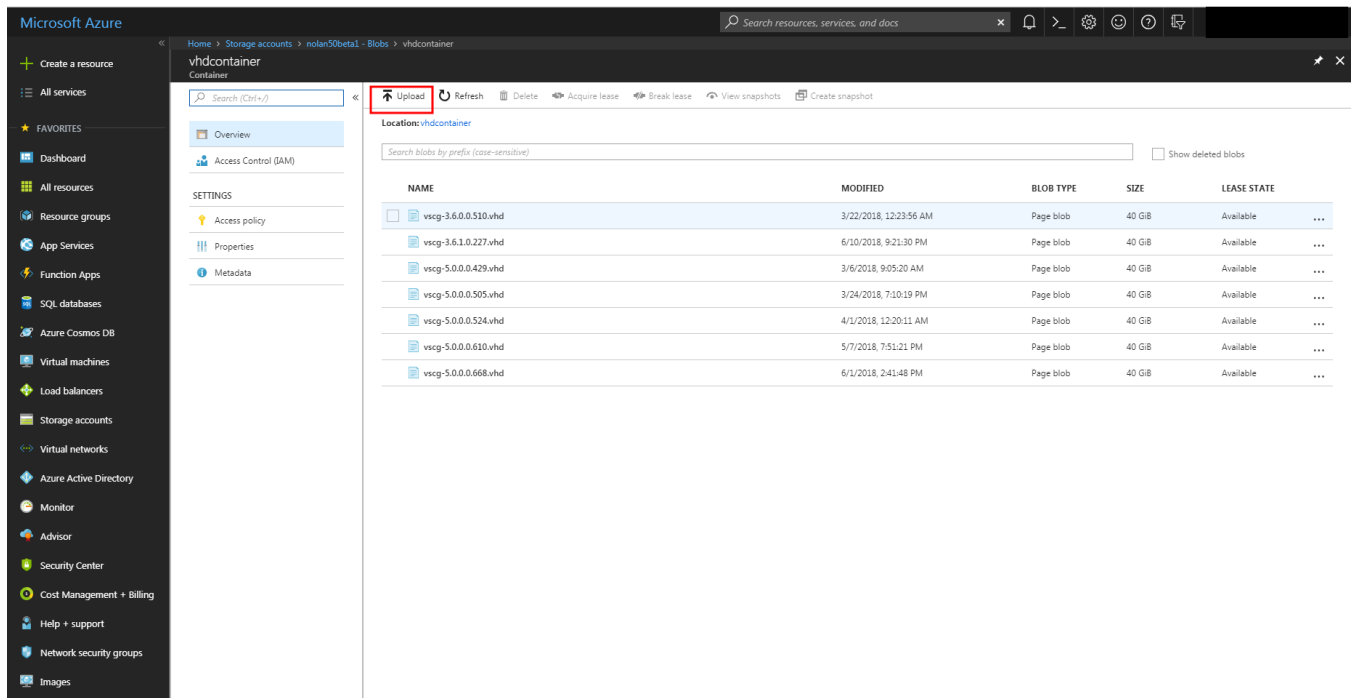**FIGURE 98** Uploading the vSZ image




2. From the right pane, click the folder to choose the .vhd file from the local PC and click **Upload**.

# Creating a Virtual Network

Follow these steps to create a virtual network.


1. From the left pane of the **Microsoft Azure** page, click **Virtual Networks** as shown in the following image.

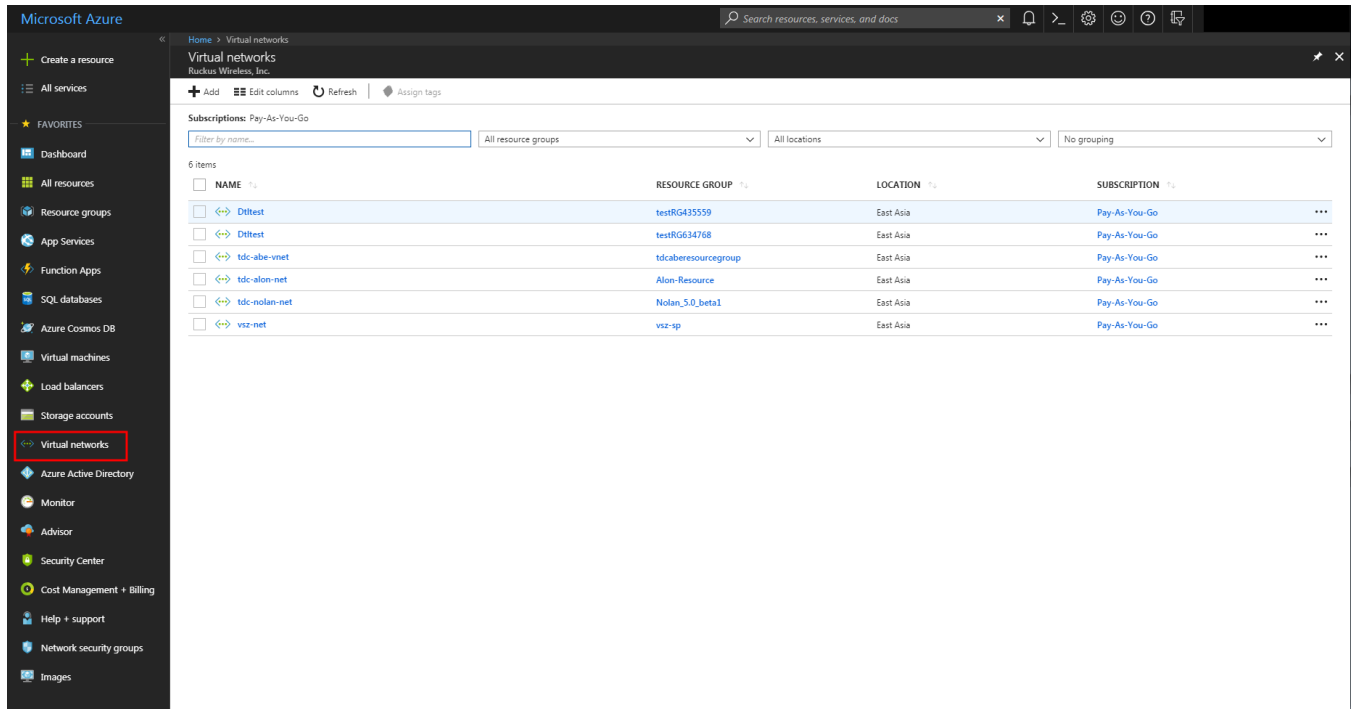**FIGURE 99** Creating a virtual network



2. Click **Add** and update the following:
  - **Name:** enter a name for the network
  - **Address space:** enter the network address
  - **Resource group:** choose the Use existing option and select the existing resource group from the drop-down.
  - **Address range:** enter the address range.

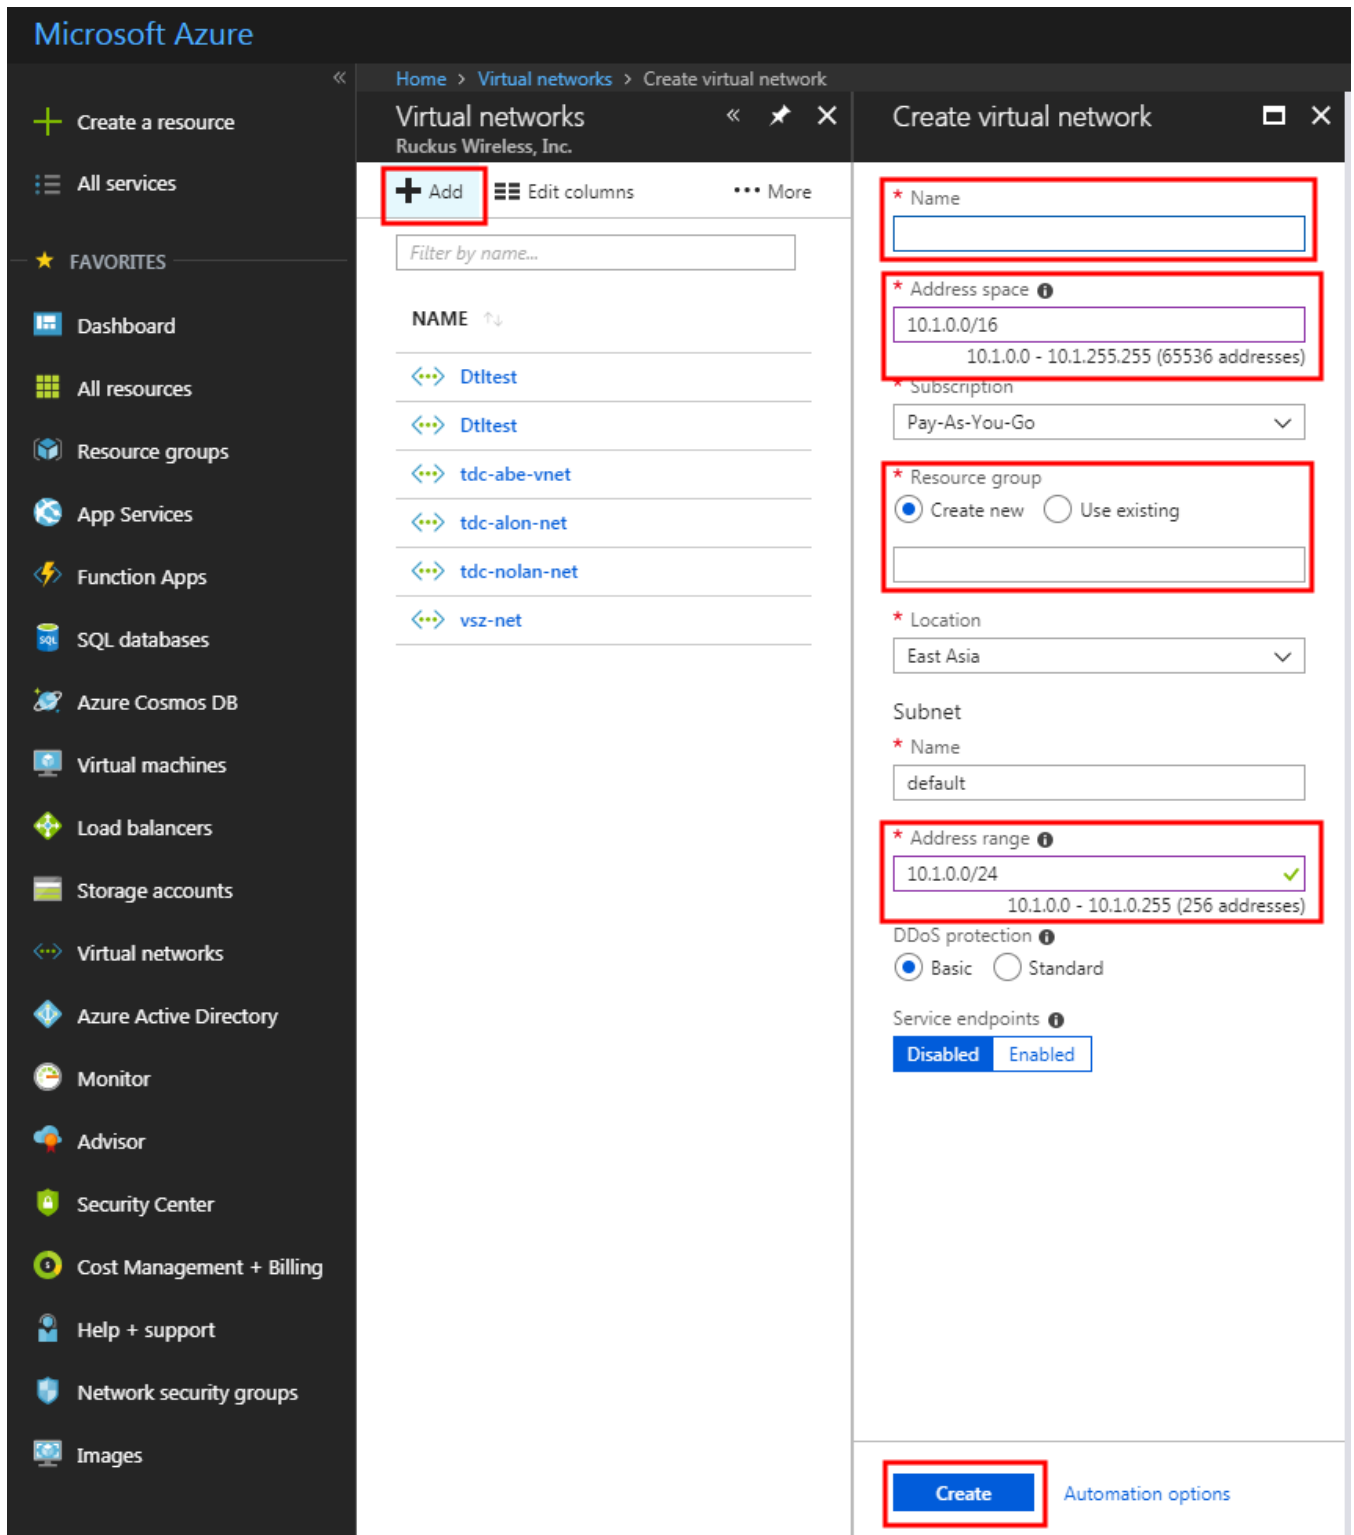FIGURE 100 Virtual Network Details screen



3. Click **Create**, you have created a network.


# Creating Network Security Groups

Network security group is the Azure firewall rule. You can have different firewall rules for each vSZ instance.

To create a network security group:

1. From the left pane of the **Microsoft Azure** page, click **Network security groups**. The **Network security groups** page appears with the list of existing resource groups as shown in the following image.

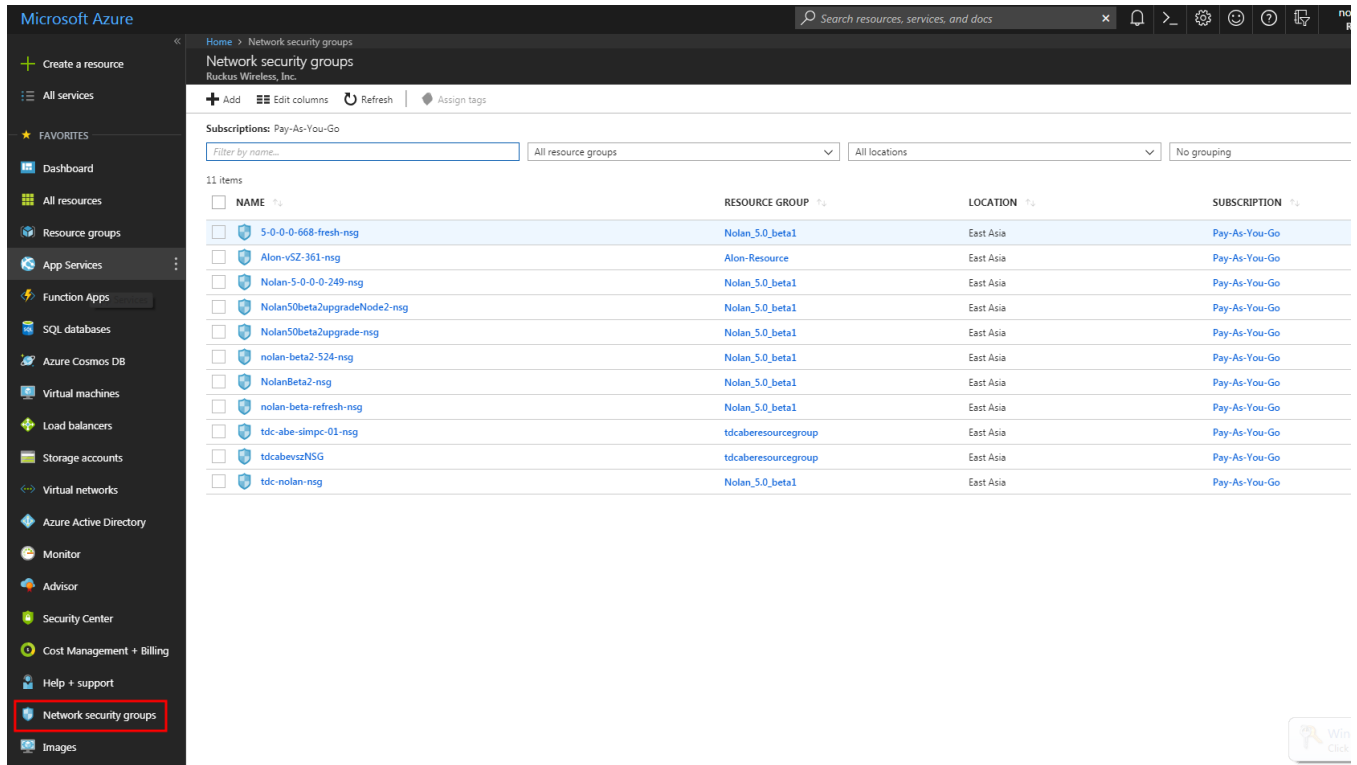
**FIGURE 101** Network security Groups



2. Click **Add** and update the following:
  - **Name:** enter a name for the network
  - **Resource group:** choose the Use existing option and select the existing resource group from the drop-down.



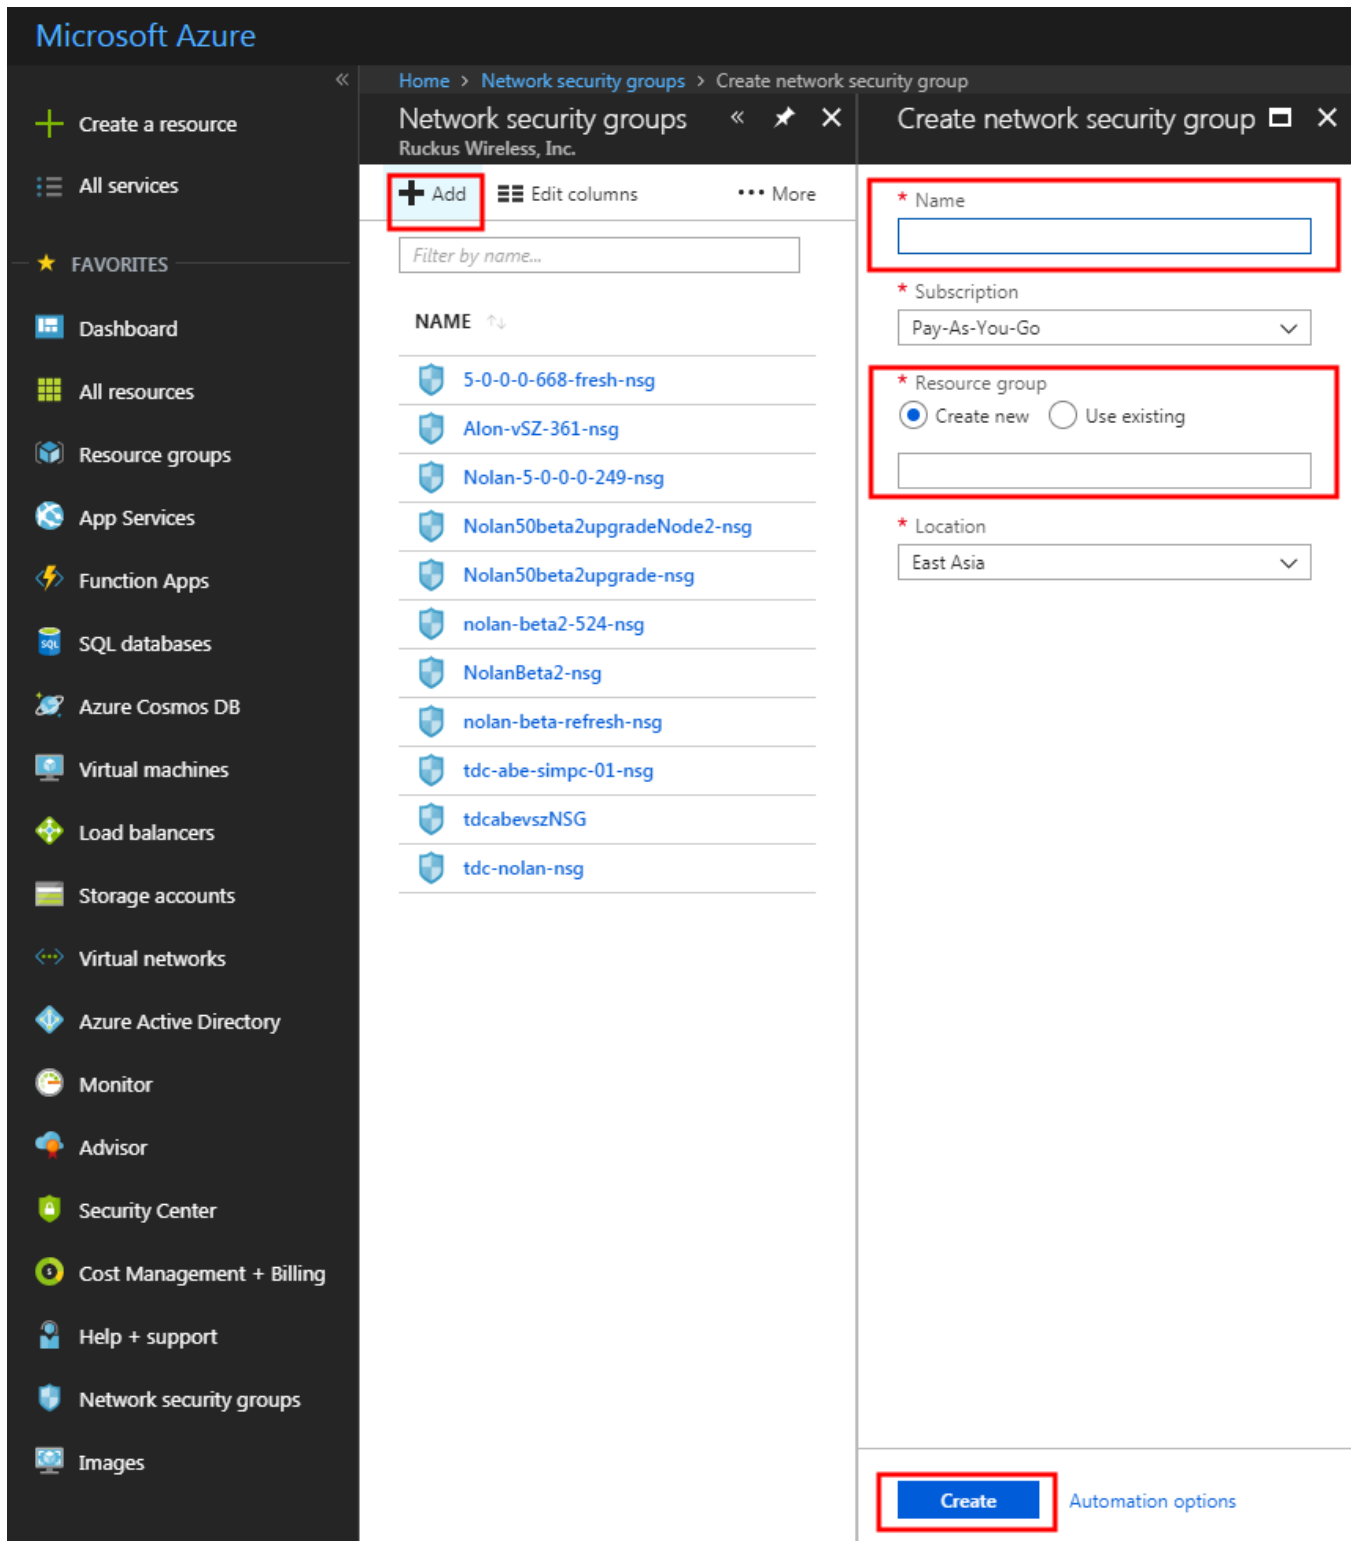FIGURE 102 Adding Resource Group Name



3. Click **Create** the **Network security groups** page appears.

4. Select the network security group from the list and click **Inbound security rules** as shown in the following image. The existing rules are listed.

**FIGURE 103** Inbound security rules

The screenshot shows the Microsoft Azure portal interface. On the left, the 'Network security groups' list is visible, with 'Nolan50betaZupgradeNode2-nsg' selected. The main pane shows the 'Inbound security rules' configuration for this group. The 'Inbound security rules' tab is highlighted in the left-hand navigation pane. The main area displays a table of rules with columns for Priority, Name, Port, Protocol, Source, Destination, and Action. The table lists several rules, including 'default-allow-ssh', 'Port\_21\_8443\_443', 'Port\_8080', 'TDC\_all', 'AllowVnetInBound', 'AllowAzureLoadBalancerInBound', and 'DenyAllInBound'.


| PRIORITY | NAME                          | PORT        | PROTOCOL | SOURCE            | DESTINATION    | ACTION |
|----------|-------------------------------|-------------|----------|-------------------|----------------|--------|
| 1000     | default-allow-ssh             | 22          | TCP      | Any               | Any            | Allow  |
| 1010     | Port_21_8443_443              | 21,8443,443 | Any      | Any               | Any            | Allow  |
| 1020     | Port_8080                     | 8080        | Any      | 59.124.228.54/32  | Any            | Allow  |
| 1030     | TDC_all                       | 1024-65535  | Any      | 59.124.251.135/32 | Any            | Allow  |
| 65000    | AllowVnetInBound              | Any         | Any      | VirtualNetwork    | VirtualNetwork | Allow  |
| 65001    | AllowAzureLoadBalancerInBound | Any         | Any      | AzureLoadBalancer | Any            | Allow  |
| 65500    | DenyAllInBound                | Any         | Any      | Any               | Any            | Deny   |

| PRIORITY | NAME                  | PORT | PROTOCOL | SOURCE         | DESTINATION    | ACTION |
|----------|-----------------------|------|----------|----------------|----------------|--------|
| 65000    | AllowVnetOutBound     | Any  | Any      | VirtualNetwork | VirtualNetwork | Allow  |
| 65001    | AllowInternetOutBound | Any  | Any      | Any            | Internet       | Allow  |
| 65500    | DenyAllOutBound       | Any  | Any      | Any            | Any            | Deny   |

- Click **Add +** to create a new rule as shown in the following image.  
 The existing rules are listed.

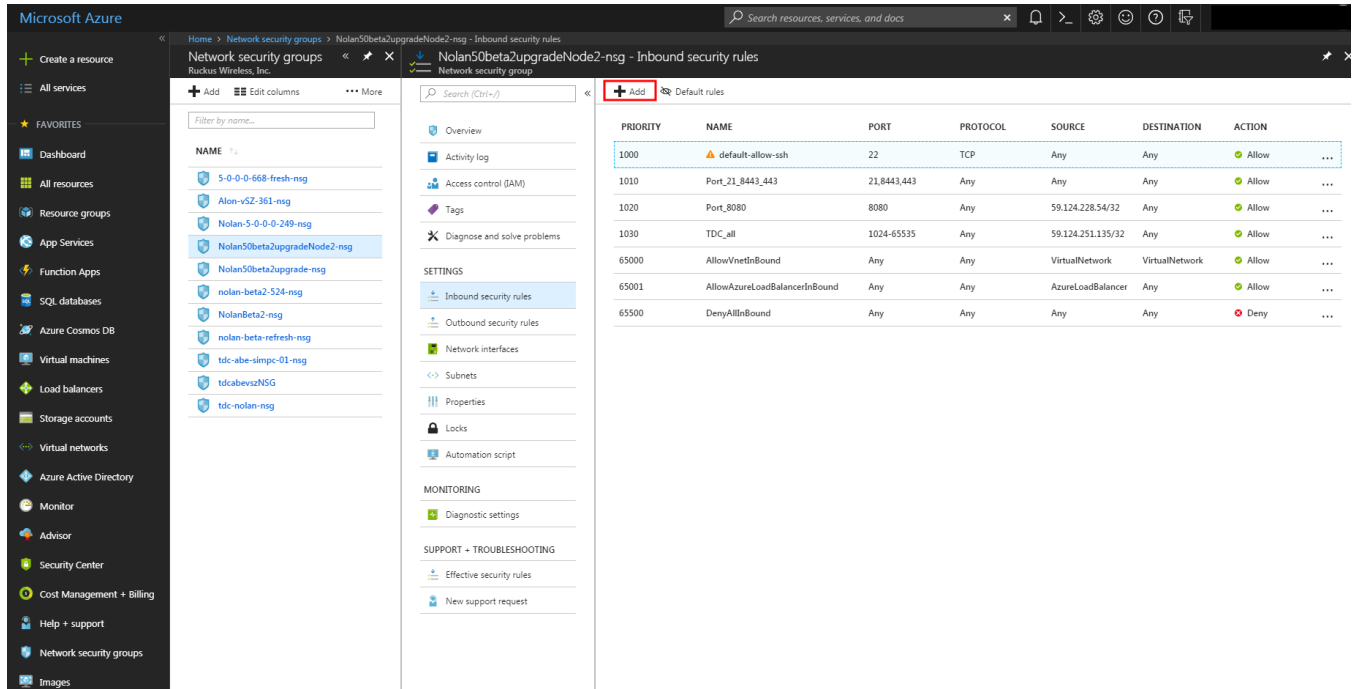
**FIGURE 104** Creating security rules



6. From the **Add inbound security rule** page update the following fields:


- **Source:** select the source port.
- Source port ranges: enter the source port range.
- Destination: select the destination port.
- Destination port ranges: select the destination port ranges.
- Protocol: select one of the options—Any, TCP or UDP.
- Action: select Allow or Deny.
- Priority: enter the rule priority number.
- Name: enter a name for the rule.
- Description: enter a short description about the rule.

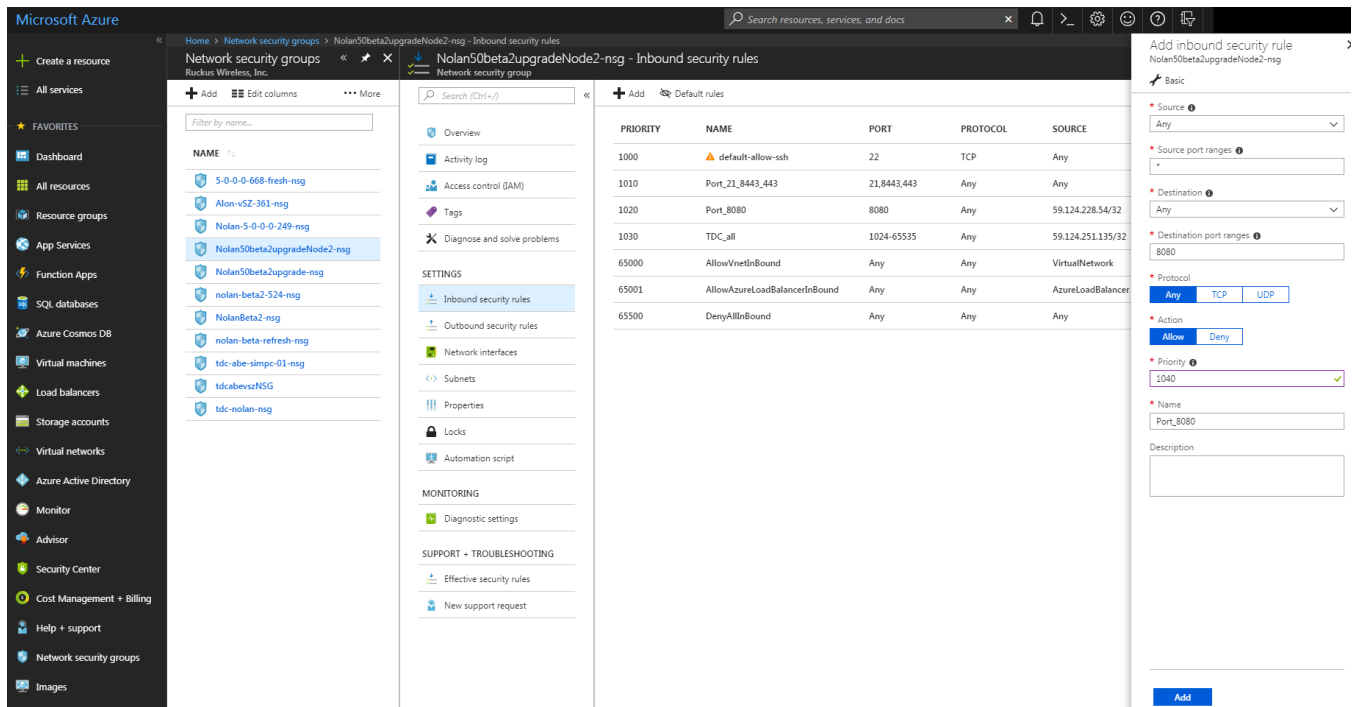**FIGURE 105** Adding Inbound Security Rule



- Click **Add**, the new rule is added to the existing rule list as shown in the following image. The existing rules are listed.

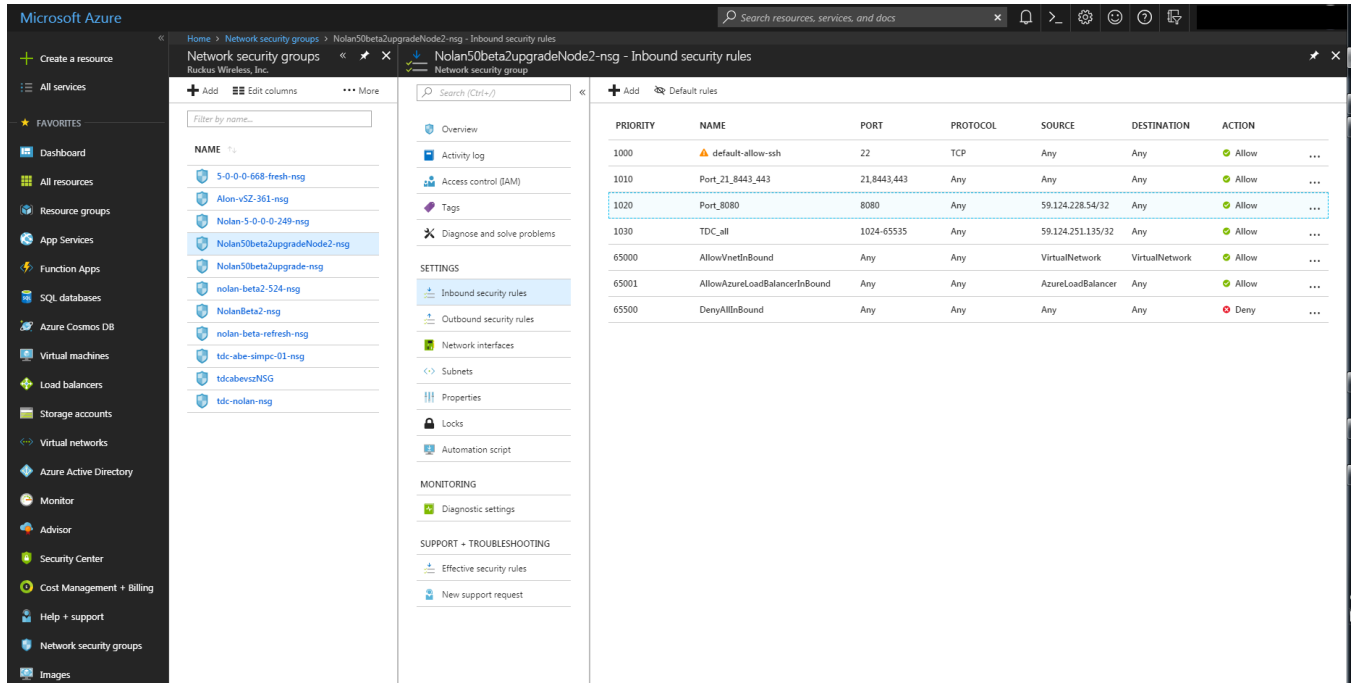**FIGURE 106** Inbound Security Rule List




# Creating a vSZ Image on Microsoft Azure

Follow these steps to create a vSZ image on Microsoft Azure:

1. **NOTE**  
ssh is allowed by default, so add port 443 and 8443 for AP connection and Web access.


From the **Microsoft Azure** page, click **Images**.

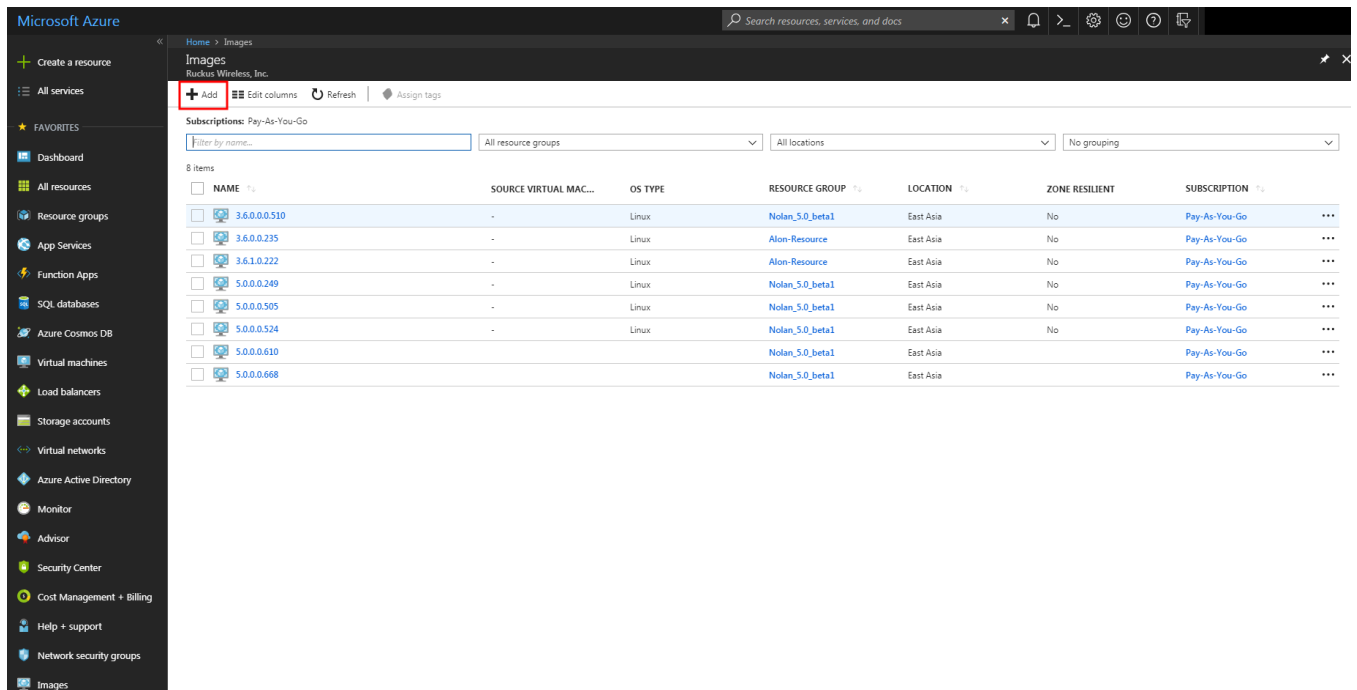**FIGURE 107** Creating an image



2. Click **Add**, the Create image page appears as shown in the following image.

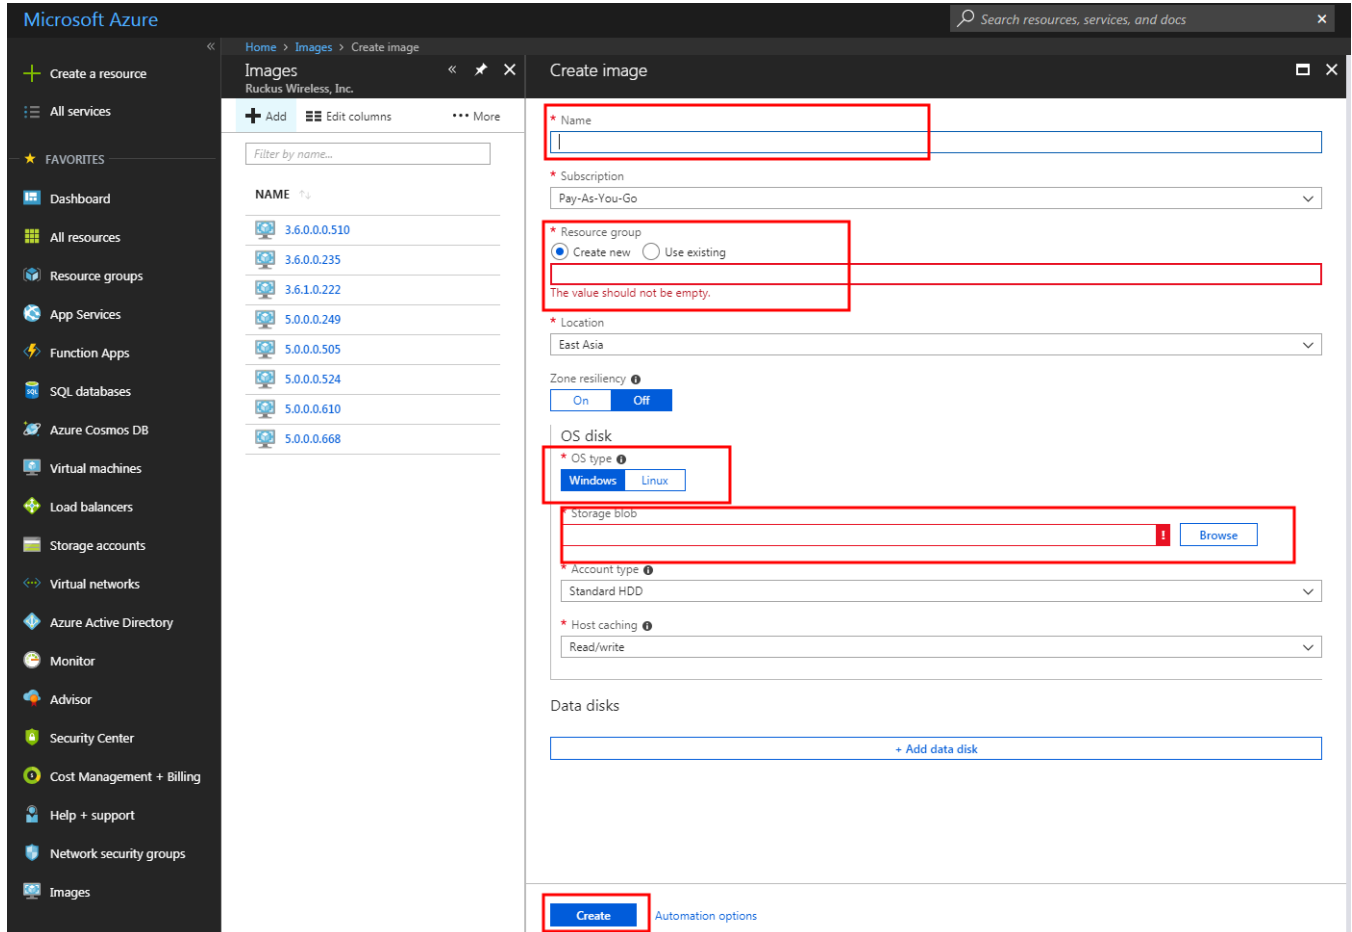**FIGURE 108** Create an Image from VHD




3. Update the following fields:

- **Name:** enter a name for the image.
- **Resource group:** choose Use existing and select the option from the drop-down.
- **OS type:** choose Linux.
- **Storage blob:** click **Browse** and select the file.

4. Click **Create**, the **Storage accounts** page appears as shown in the following image.

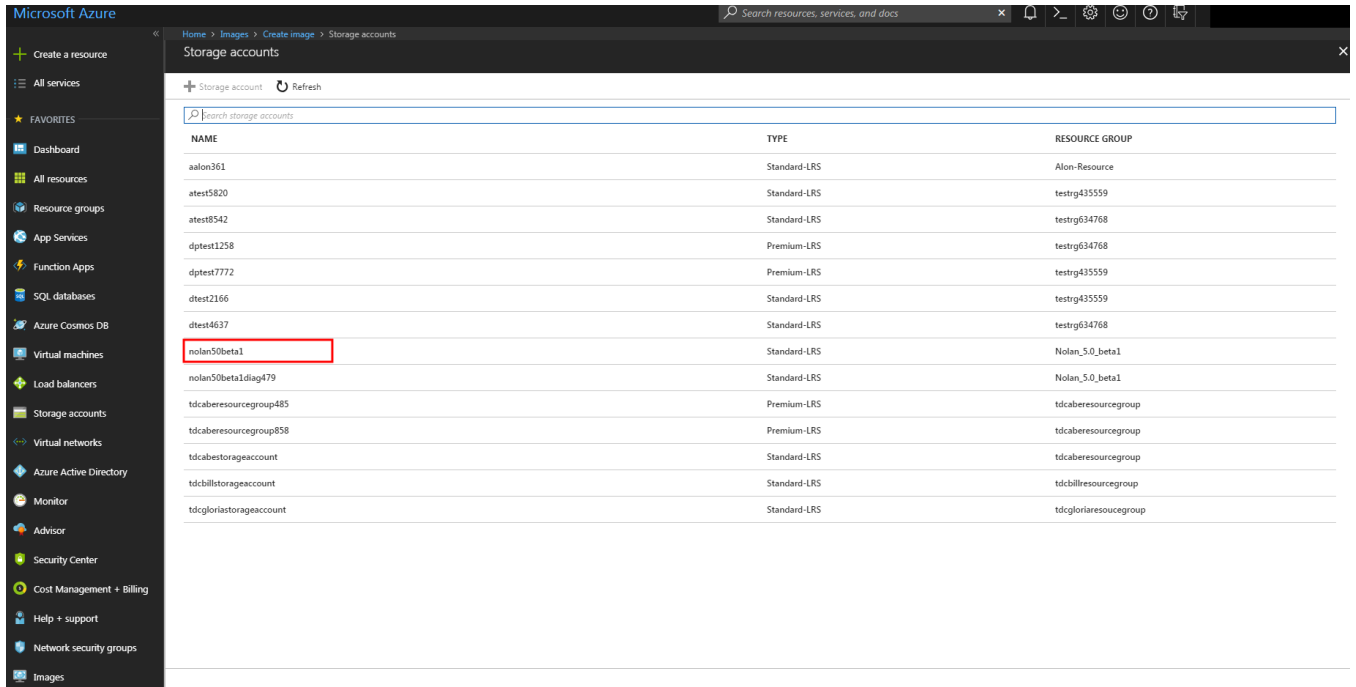**FIGURE 109** Storage Account List




The screenshot shows the Microsoft Azure portal interface. The left sidebar contains navigation options such as 'Create a resource', 'All services', and 'FAVORITES'. The main area displays the 'Storage accounts' page with a search bar and a table of storage accounts. The table has three columns: NAME, TYPE, and RESOURCE GROUP. The account 'nolan50beta1' is highlighted with a red box.

| NAME                    | TYPE         | RESOURCE GROUP       |
|-------------------------|--------------|----------------------|
| aalon361                | Standard-LRS | Alon-Resource        |
| atest5820               | Standard-LRS | testrg435559         |
| atest8542               | Standard-LRS | testrg634768         |
| dptest11258             | Premium-LRS  | testrg634768         |
| dptest7772              | Premium-LRS  | testrg435559         |
| dtest2166               | Standard-LRS | testrg435559         |
| dtest4637               | Standard-LRS | testrg634768         |
| nolan50beta1            | Standard-LRS | Nolan_5.0_beta1      |
| nolan50beta1diag479     | Standard-LRS | Nolan_5.0_beta1      |
| tdcaberesourcegroup485  | Premium-LRS  | tdcaberesourcegroup  |
| tdcaberesourcegroup858  | Premium-LRS  | tdcaberesourcegroup  |
| tdcabestorageaccount    | Standard-LRS | tdcaberesourcegroup  |
| tdcbillstorageaccount   | Standard-LRS | tdcbillresourcegroup |
| tdcgloriastorageaccount | Standard-LRS | tdcgloriareoucegroup |




5. Select the Storage account from the list, the Containers page appears as shown in the following image.

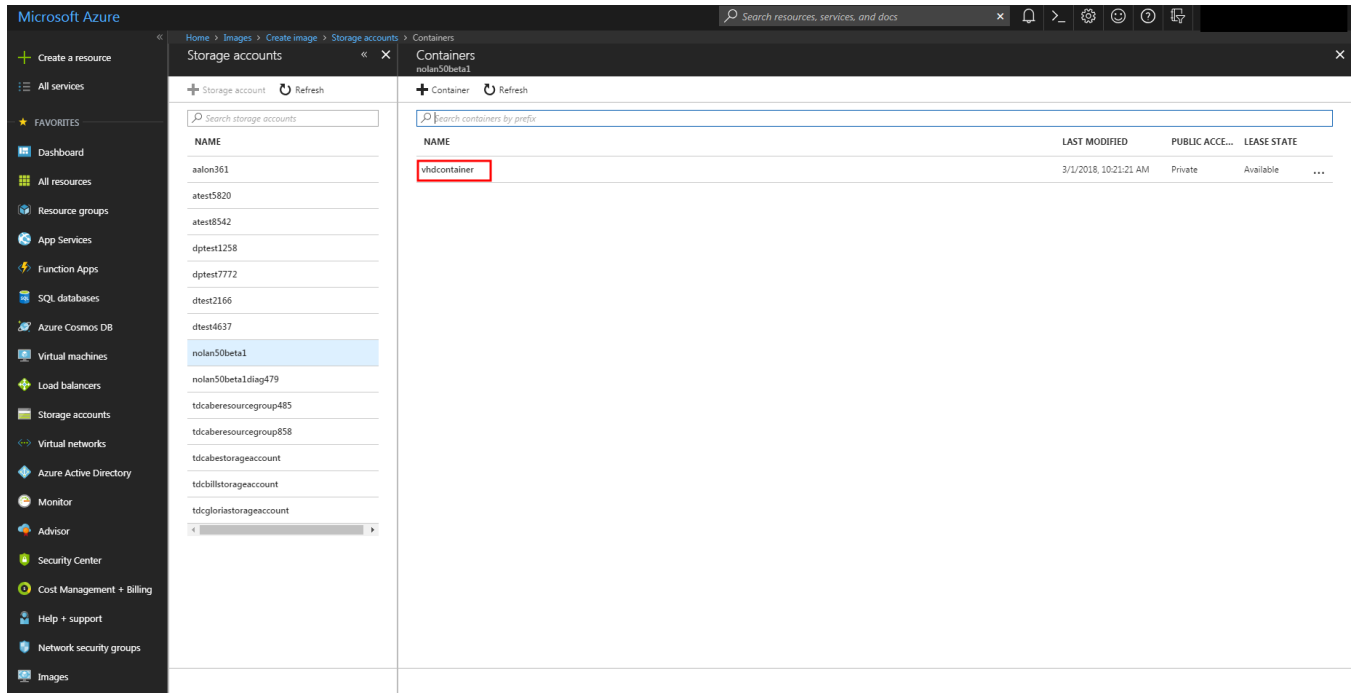**FIGURE 110** Select the Container




6. Select the Container from the list, the images in the container are listed as shown in the following image.

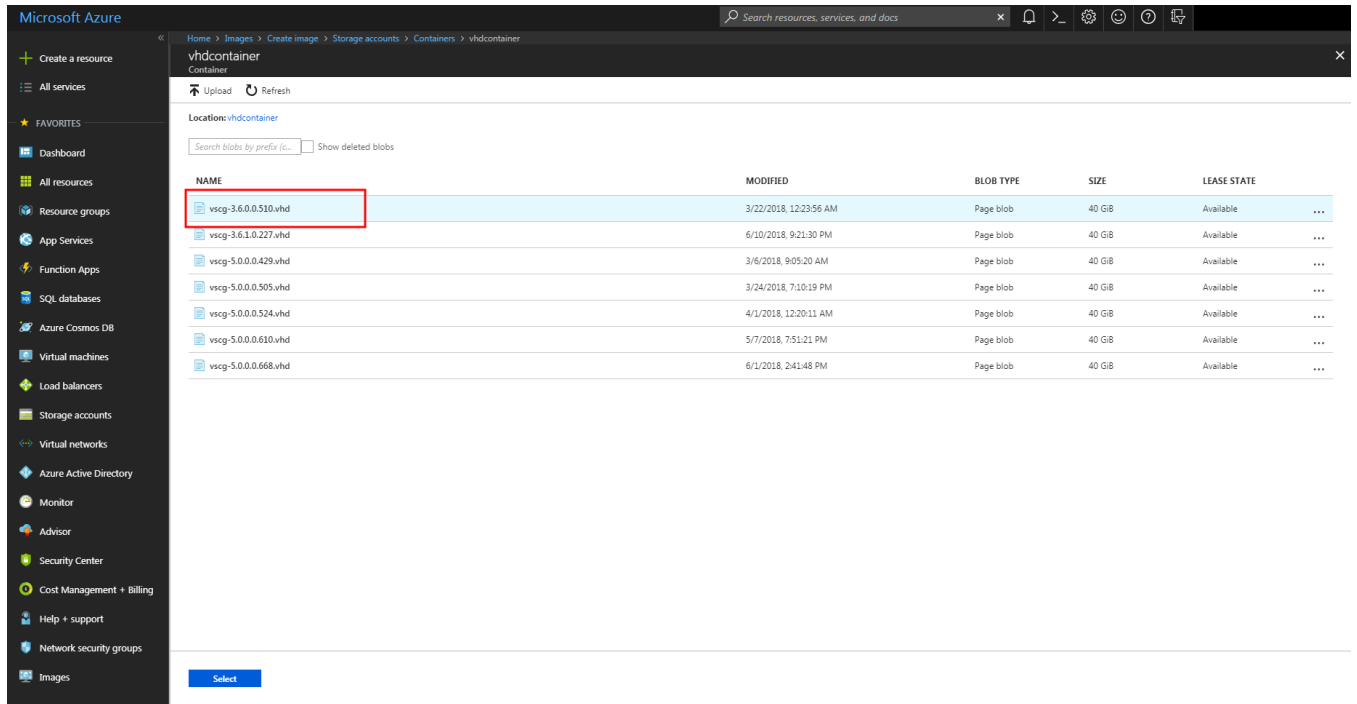**FIGURE 111** Images in the Container




7. Select the image file from the list and click **Select**. The selected image is listed in the Images page as shown in the following image.

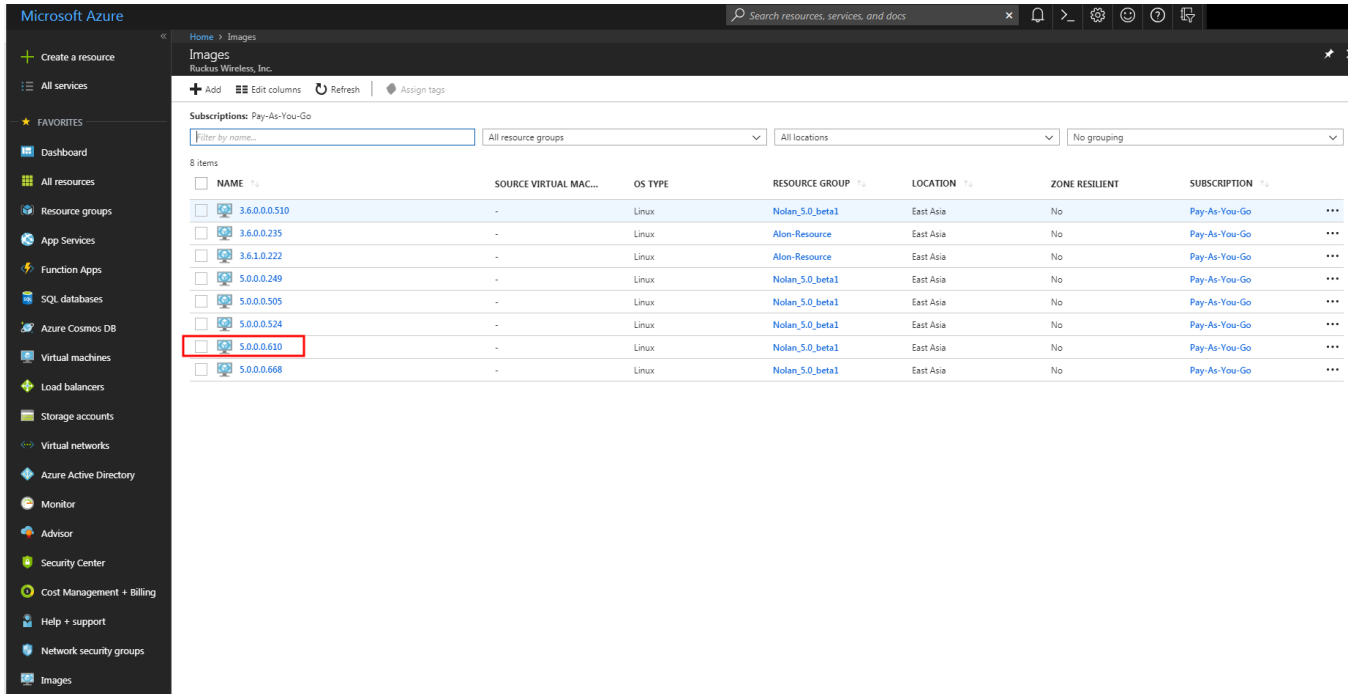FIGURE 112 Images Page




8. Select the image and click **Create VM** as shown in the following image

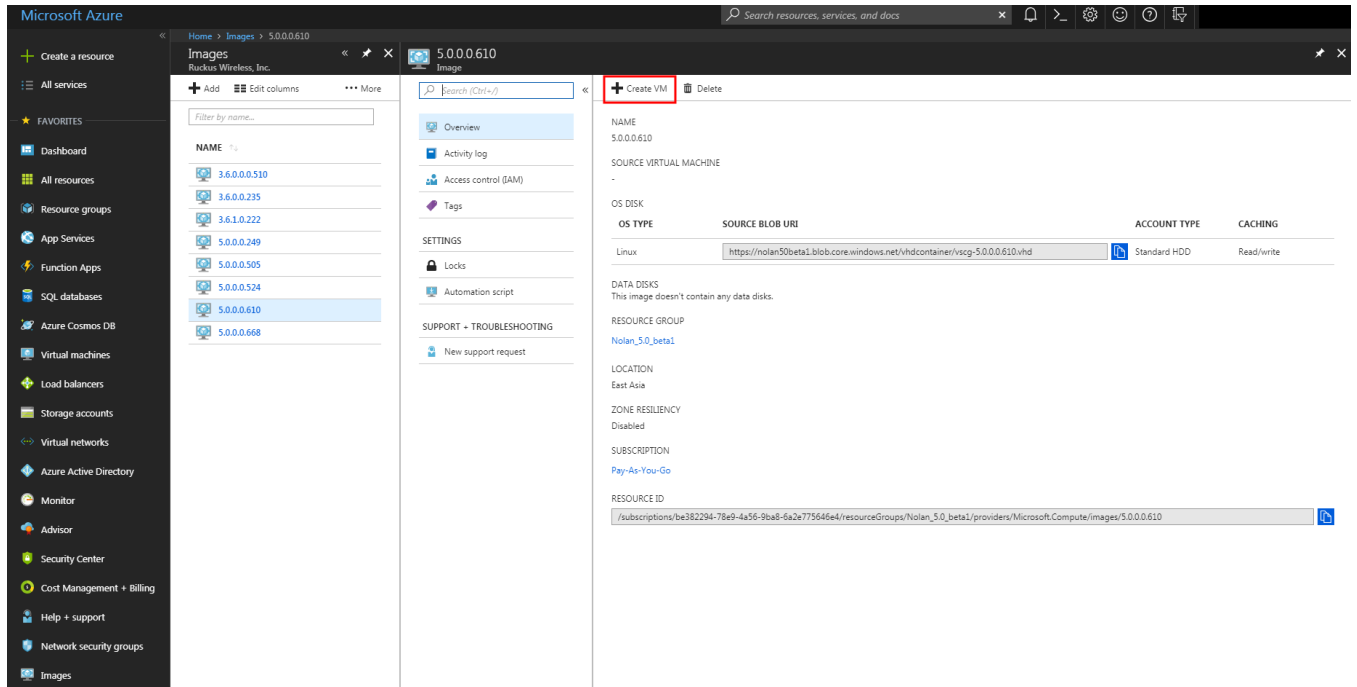**FIGURE 113** Create VM




9. From the **Create virtual machine** page select the **Basics** tab and update the following:
  - **Name:** enter a name for the virtual machine.
  - **VM disk type:** select HDD from the drop-down as disk type.
  - **User name:** enter a username for the virtual machine.
  - **Authentication type:** choose the preferred authentication type.
  - **Password:** enter the password.
  - **Confirm password:** re-enter the password.
  - **Resource group:** choose Use existing and select the resource group from the drop-down.

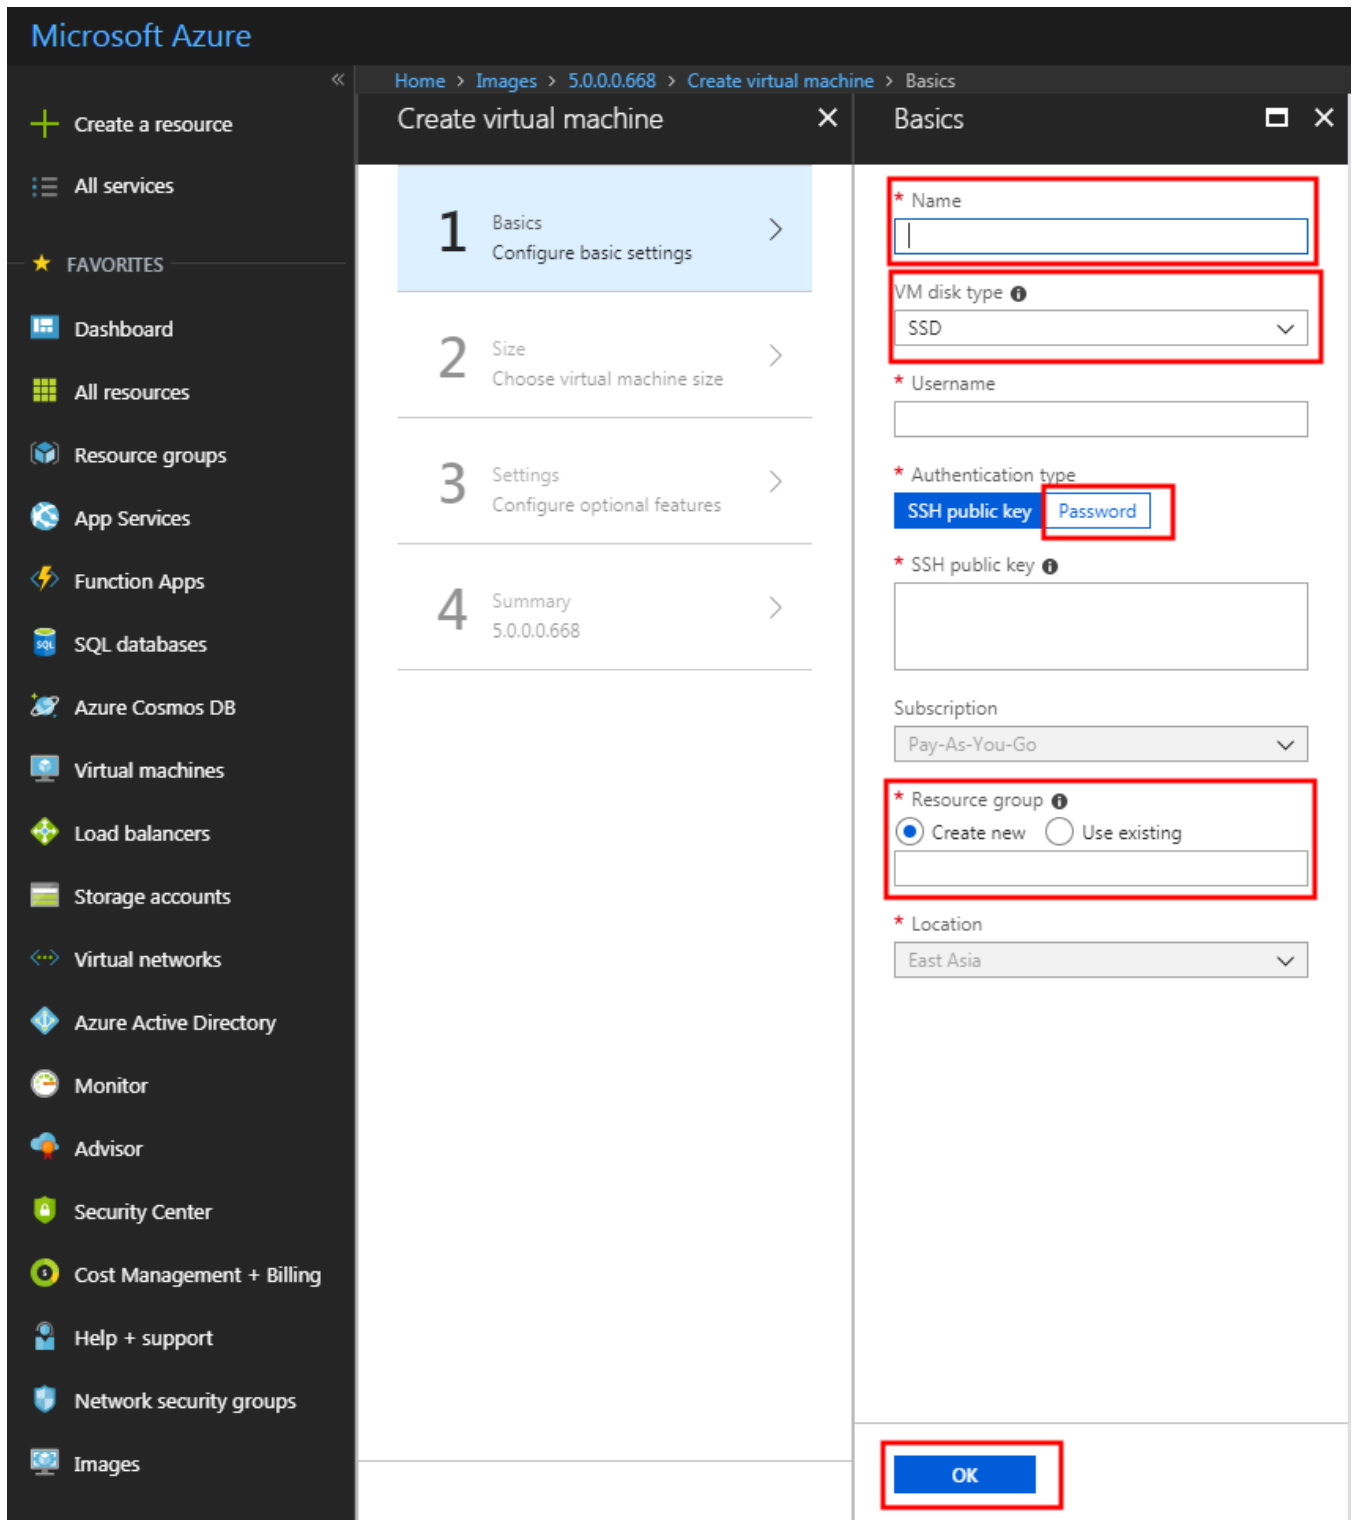FIGURE 114 Basics Information




10. Click **OK**, the Settings tab page appears as shown in the following image.

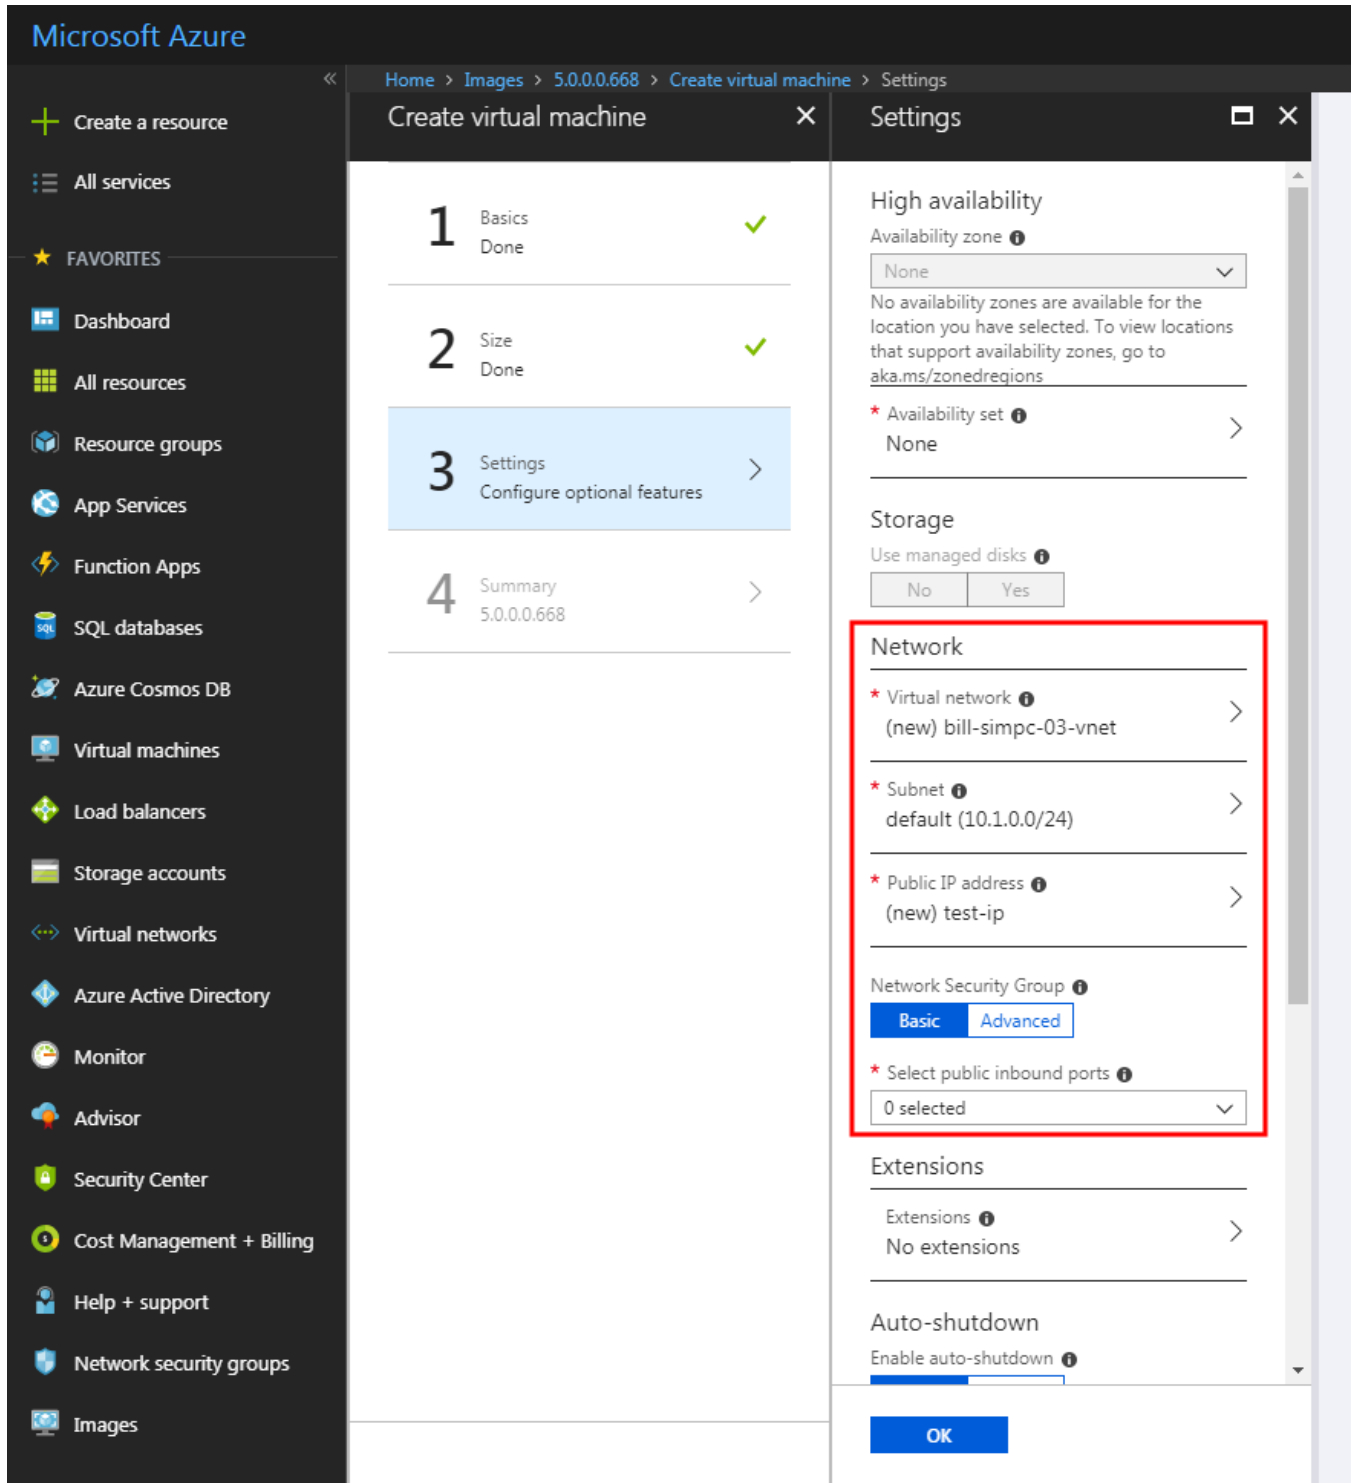**FIGURE 115** Settings Tab



11. Select the Network and security group information and click **OK**. The Summary page appears as shown in the following image.

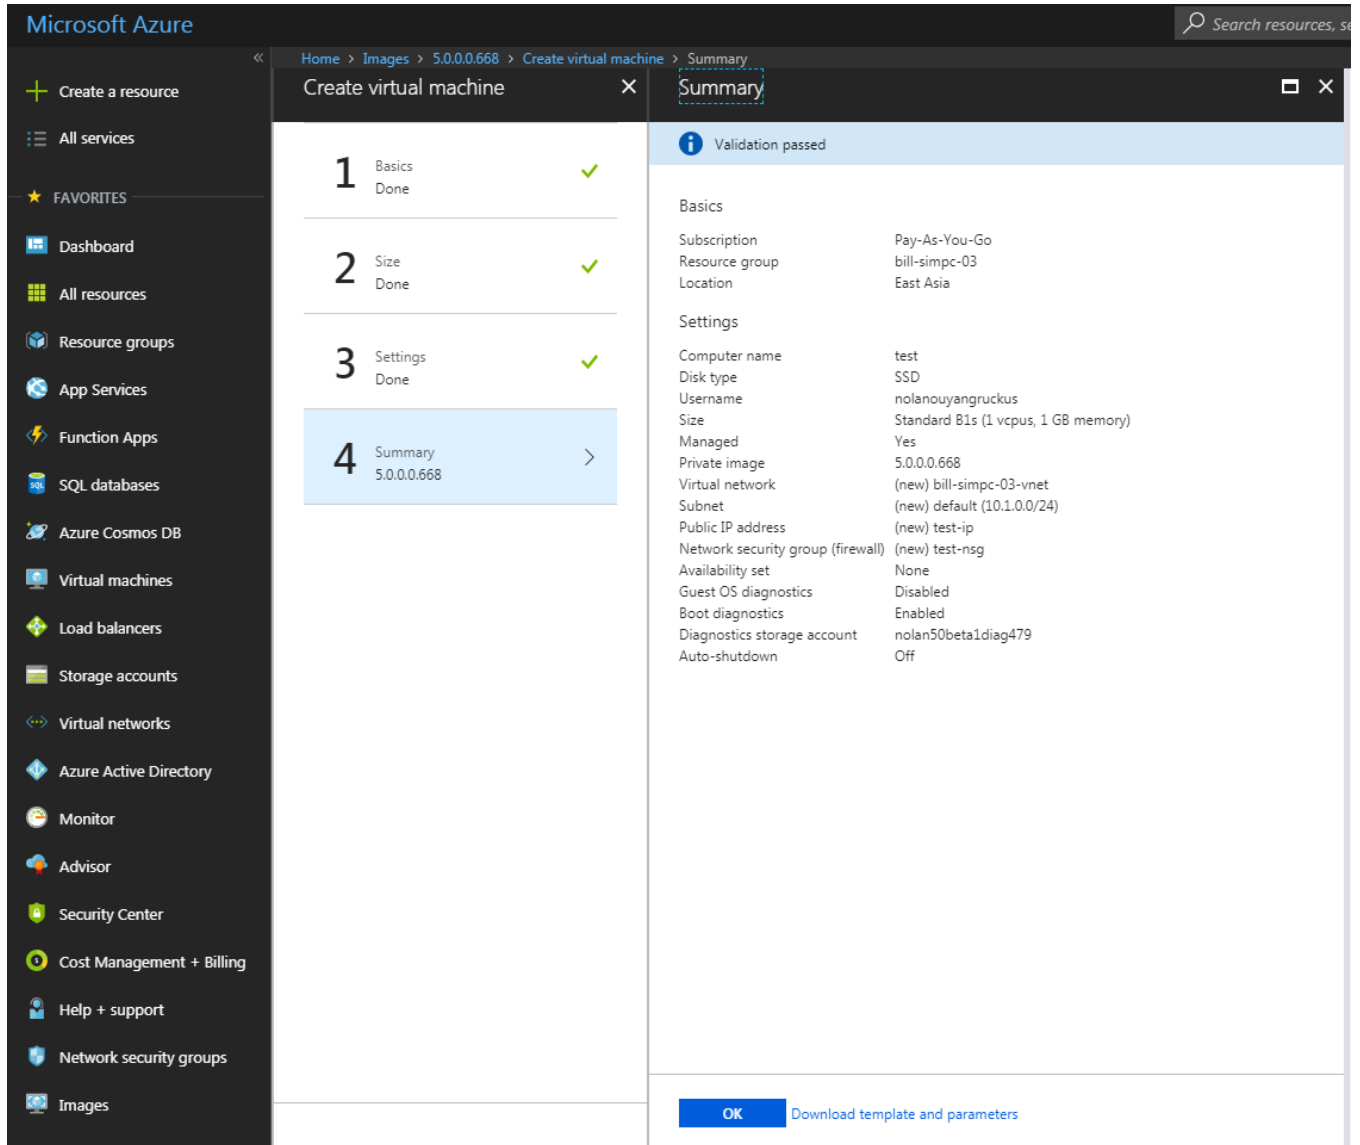**FIGURE 116** Summary






# Updating the Disk Size According to Resource Plan

Follow these steps to update the disk size according to the resource plan:


1. From the **Virtual Machines** page, select the Virtual Machine and click **Stop** as shown in the following image.

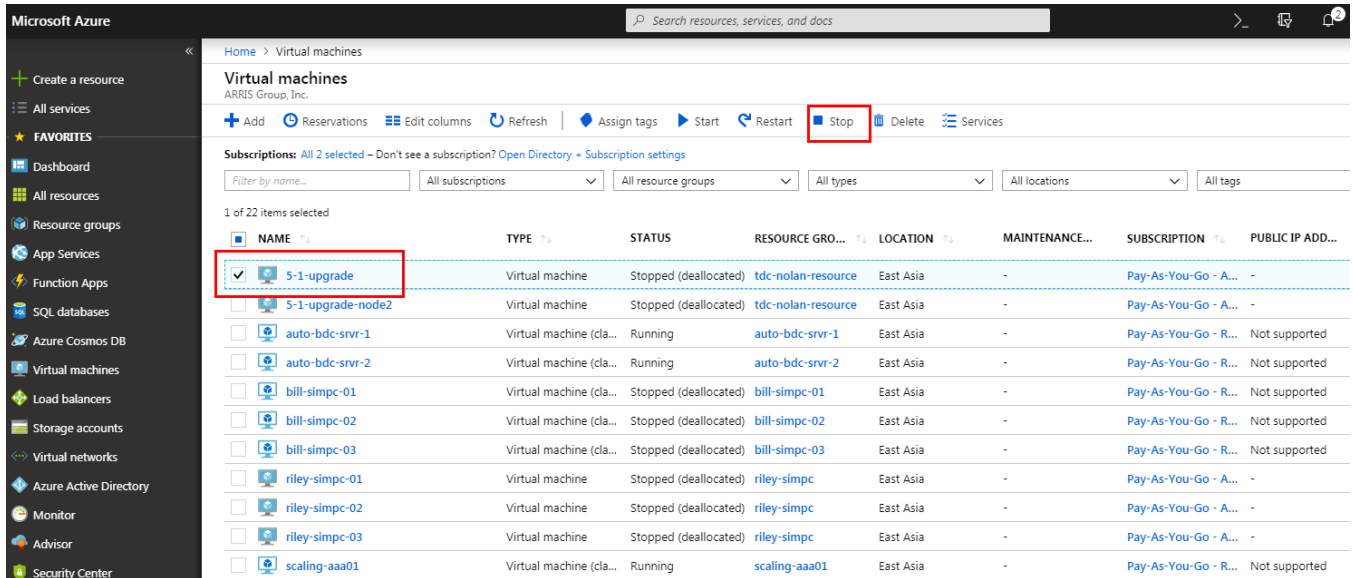**FIGURE 117** Stopping the Virtual Machine




- From the **Settings** area, select **Disks** and select the Virtual Machine as shown in the following image.

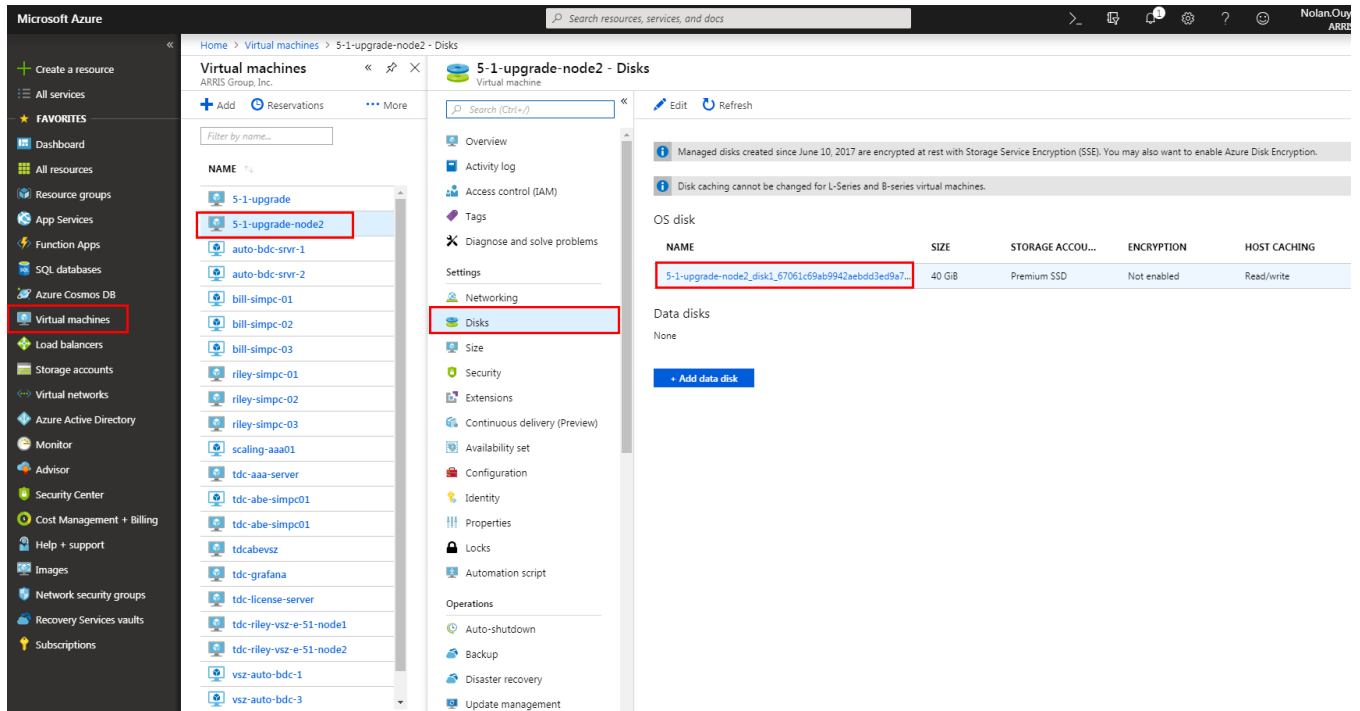**FIGURE 118** Disk Settings




3. From the left pane select **Configuration**, enter the disk **Size (GB)** and click **Save** as shown in the following image.

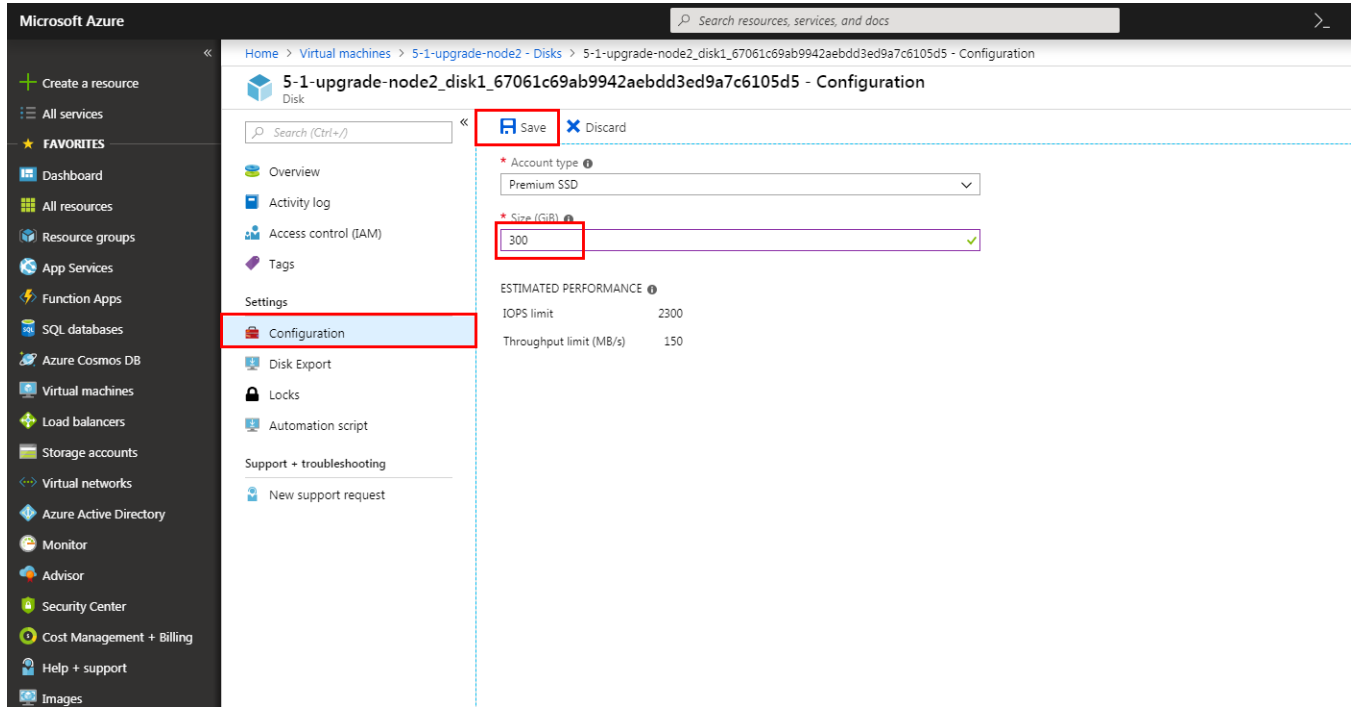**FIGURE 119** Disk Size




- From the Virtual Machines page, select the Virtual Machine and click **Start**.

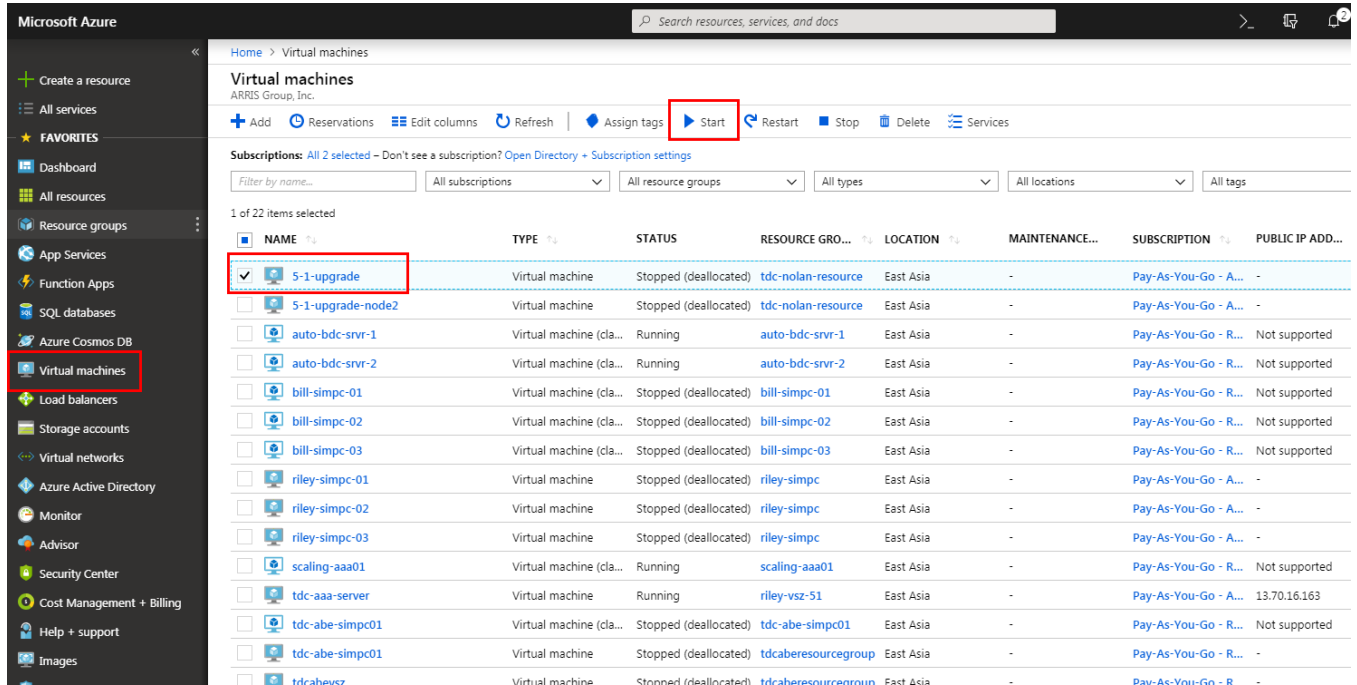**FIGURE 120** Starting the Virtual Machine




- Verify the details and click **OK**. The new Virtual Machine is created and listed in the Virtual Machine page as shown in the following image.

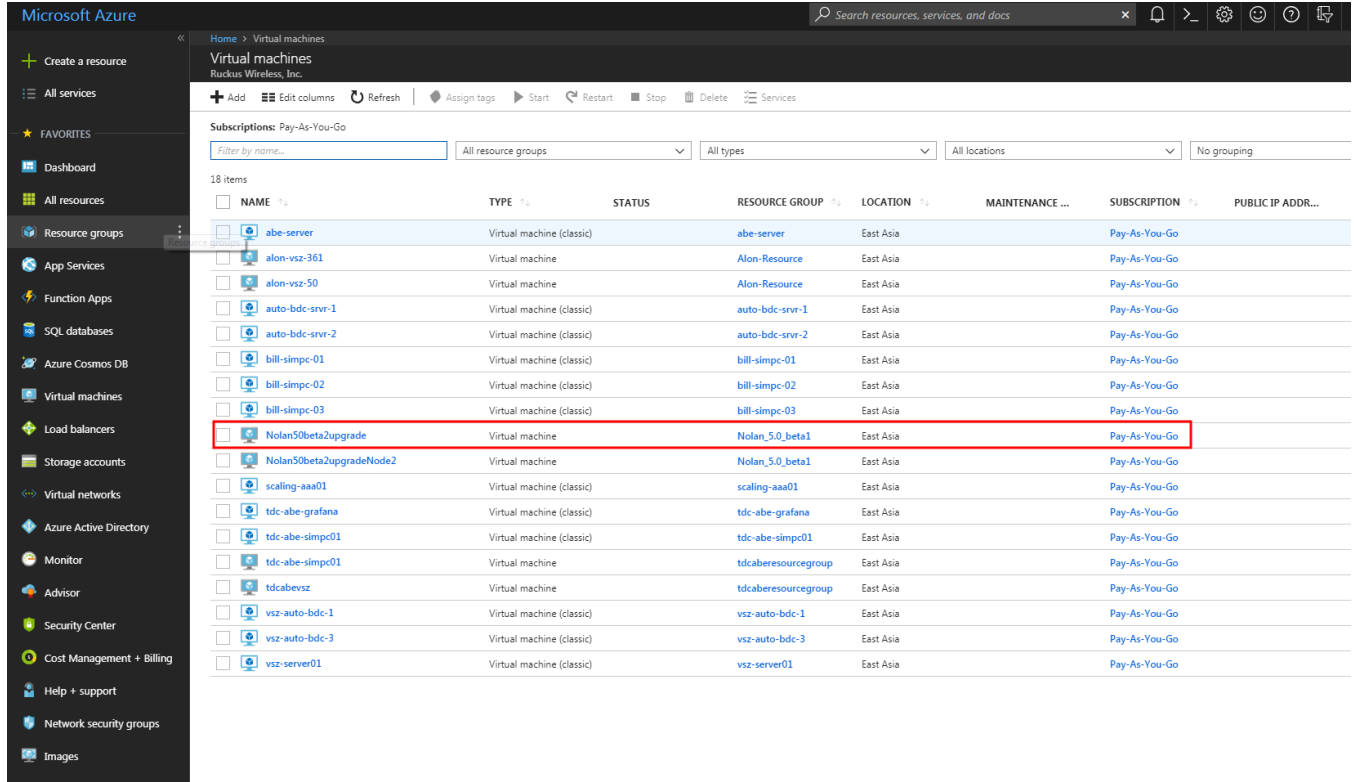**FIGURE 121** Virtual Machines




6. Select the Virtual Machine, and get the Public IP address as shown in the following image.

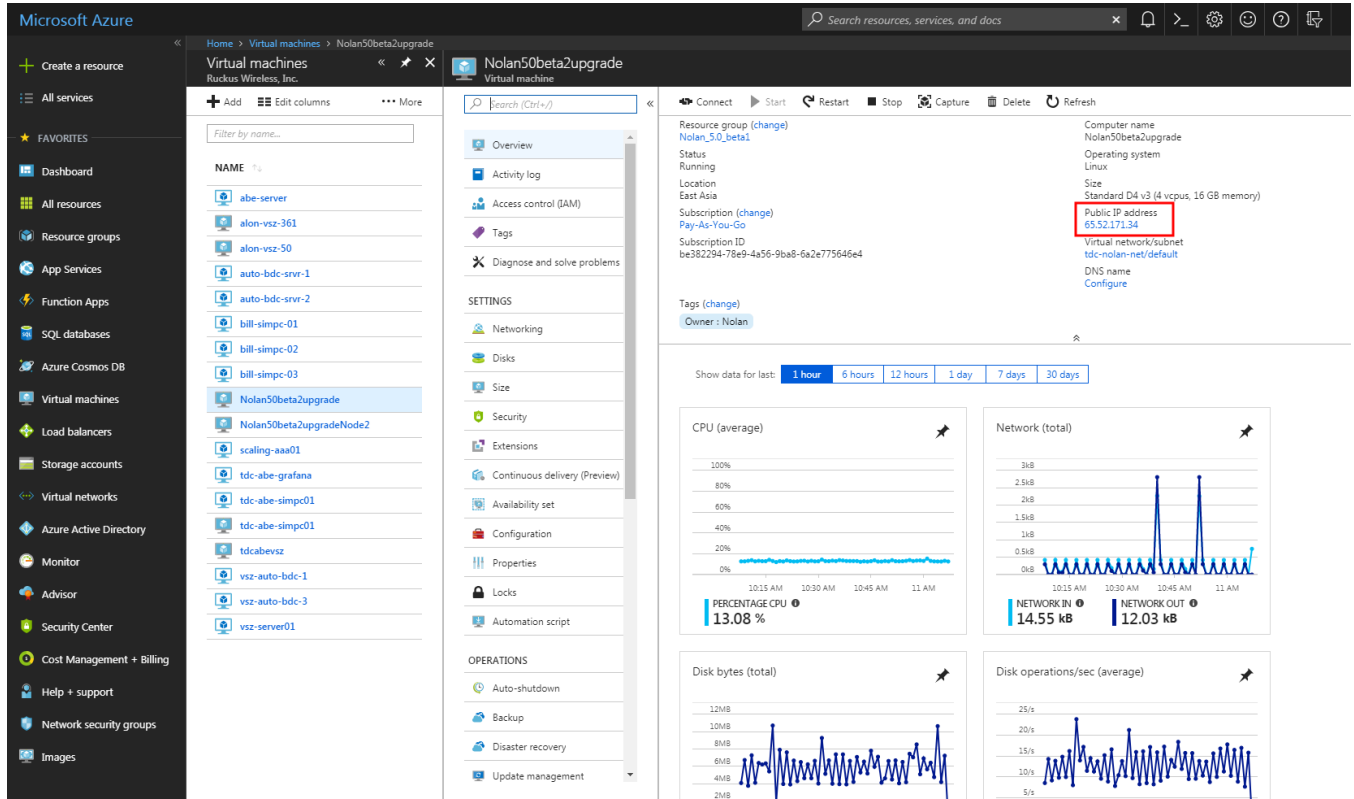**FIGURE 122** Public IP Address



7. From the Linux PC or terminal use the Public IP address to run the ssh connection as shown in the following image.

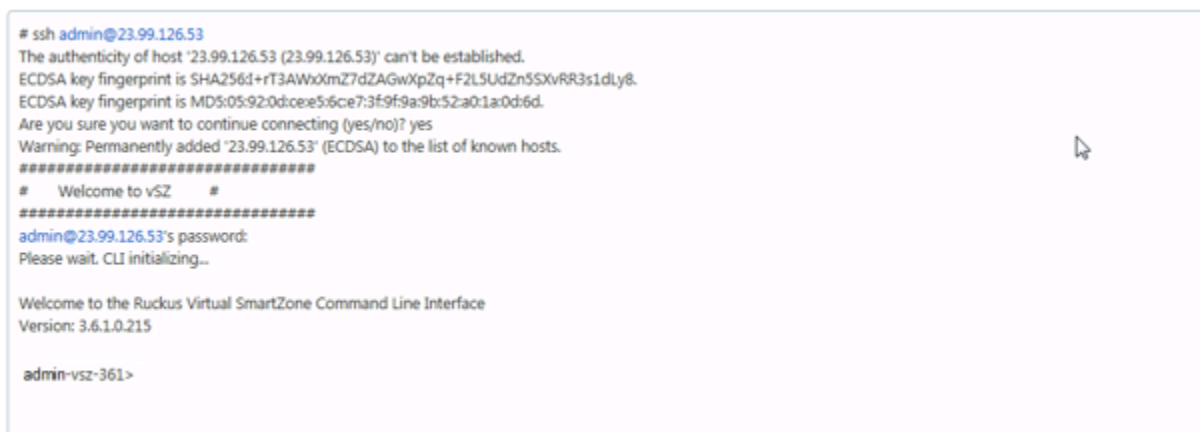**FIGURE 123** SSH Connection



# Installing vSZ on the Google Computing Engine

---

- Introduction..... 143
- Logging into GCE and Selecting a Project..... 143
- Creating a Storage Bucket..... 147
- Uploading the vSZ Image to a Storage Bucket..... 151
- Creating a vSZ Image for Virtual Machines..... 153
- Creating a Network and Configuring Firewall Rules..... 156
- Creating a Virtual Machine Instance..... 160

## Introduction

You can install vSZ on the Google Computing Engine using the steps mentioned in this section.

### NOTE

The minimum memory and CPU requirements have changed in this release. You may need to upgrade your infrastructure before upgrading. Please read carefully. This is the minimum requirement recommended. Refer to the tables in [Virtual SmartZone Required Resources](#) on page 14 in the Installation Preparation chapter.

## Logging into GCE and Selecting a Project


This section describes how to log into the GCE and select a project.

Ensure that you have created an account with GCE and have the login details for the same.

1. Click <http://cloud.google.com> to access the **Google Cloud Platform** website.


2. Log in using your user name and password.

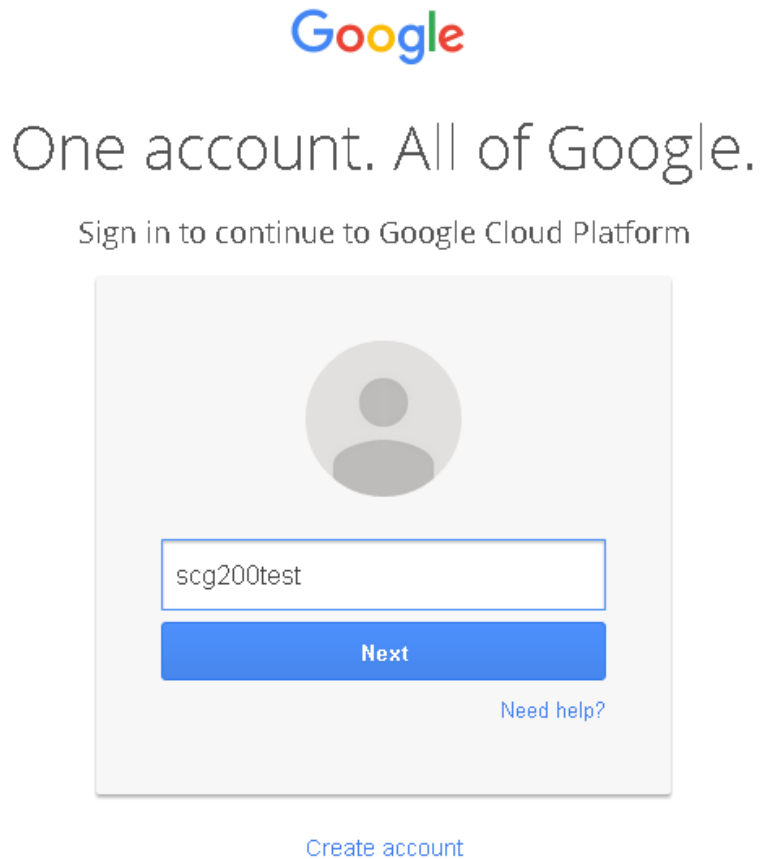**FIGURE 124** Login with user credentials



3. Select **My console** as shown.

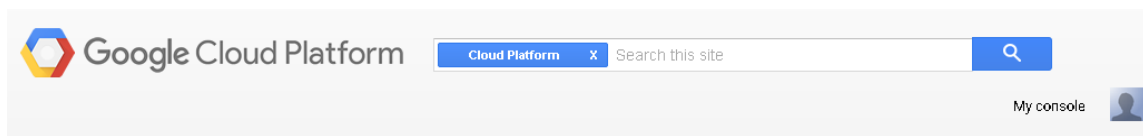
**FIGURE 125** GCE Page - My console





4. A list of projects you created is displayed. Click to choose a project.

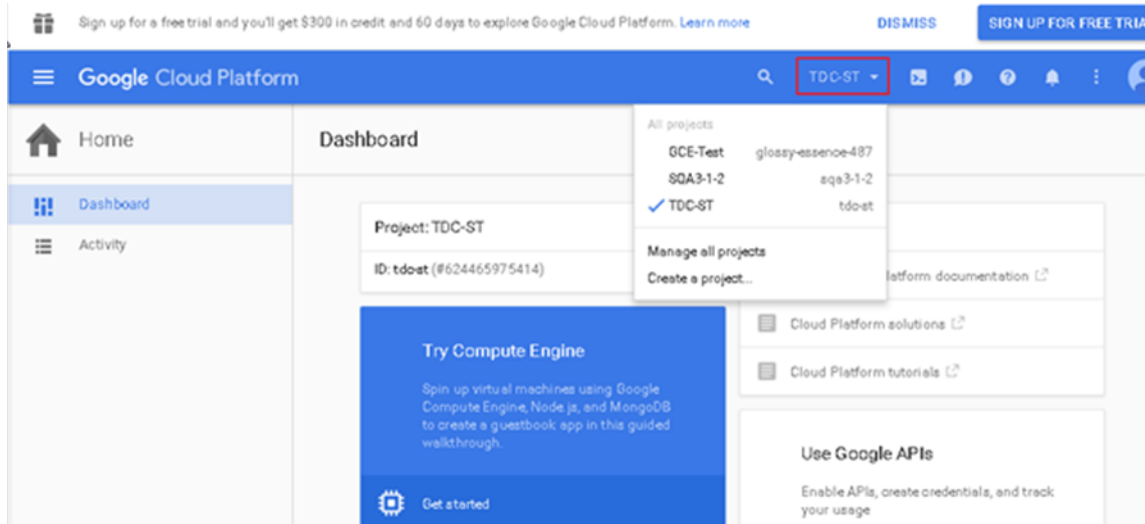**FIGURE 126** Choose the project




**NOTE**

You can create projects by clicking **Create a project** in the drop-down.

5. Click **Product and Services** icon to view the list of GCE services.

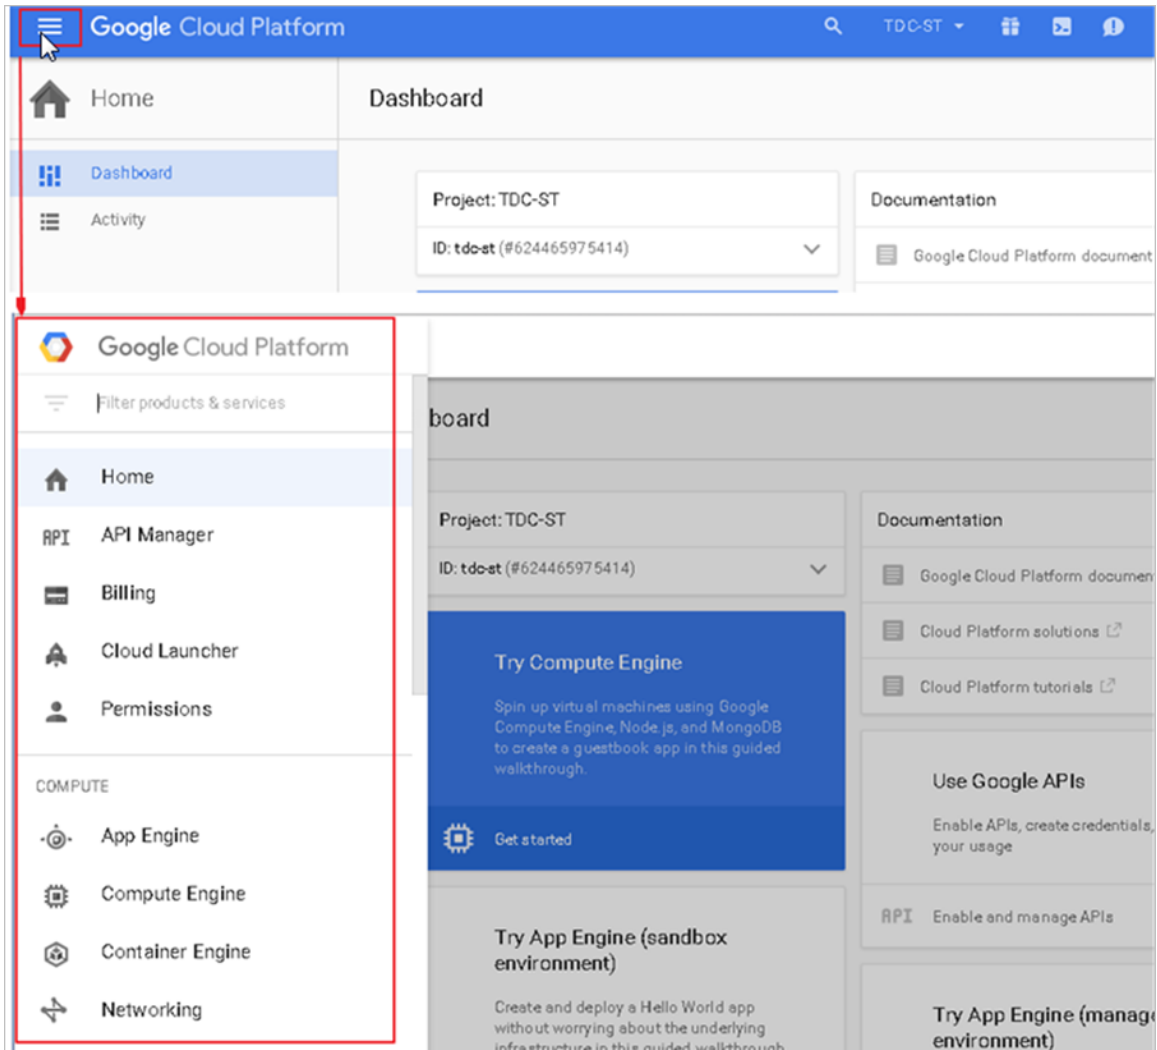**FIGURE 127** Selecting a Project




# Creating a Storage Bucket

You can create storage for the objects you create. Follow these steps to create storage.


1. From **Google Developers Console**, click **Product and Services** icon > **Storage**. The **Cloud Storage Buckets** screen appears.

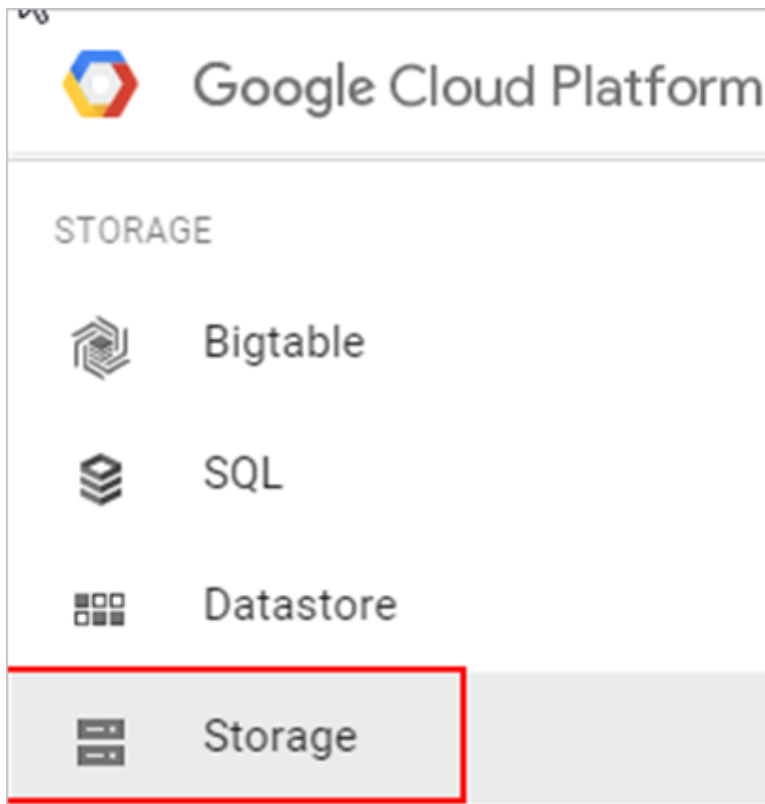**FIGURE 128** Storage Bucket Browser



2. Click **Create Bucket**. The New bucket screen appears.

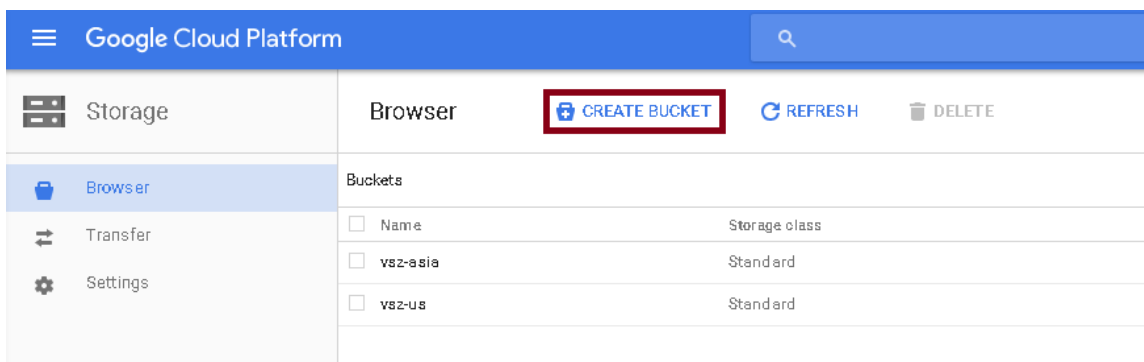**FIGURE 129** Creating a Storage Bucket



3. Complete the following fields,
  - a) In **Name**, type the name of the storage bucket
  - b) In **Storage class**, select the storage class you want. You can choose from **Standard**, **Durable Reduced Availability (DRA)** or **Cloud Storage Nearline** in the drop-down list. Use the below table to compare the storage classes.
  - c) In **Location**, select the location from the drop-down list.

**TABLE 9** Bucket Storage Location

| Storage Class                      | Characteristics                                                                                                                                      | Use Cases                                                                                                                                                                                                                            | Bucket Location                    |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Standard Storage                   | High availability, low latency (time to first byte is typically tens of milliseconds).                                                               | Storing data that requires low latency access or data that is frequently accessed ("hot" objects), such as serving website content, interactive workloads, or gaming and mobile applications                                         | Continental locations              |
| Durable Reduced Availability (DRA) | Lower availability than Standard Storage and lower cost per GB stored.                                                                               | Applications that are particularly cost-sensitive, or for which some unavailability is acceptable such as batch jobs and some types of data backup.                                                                                  | Continental and regional locations |
| Cloud Storage Nearline             | Slightly lower availability and slightly higher latency (time to first byte is typically 2 - 5 seconds) than Standard Storage but with a lower cost. | Data you do not expect to access frequently (i.e., no more than once per month). Typically this is backup data for disaster recovery, or so called "cold" storage that is archived and may or may not be needed at some future time. | Continental locations              |

**FIGURE 130** New Bucket Information

**Create a bucket**

**Name** ?  
The bucket name must be unique across Cloud Storage.

vsz-test

**Storage class** ?  
Standard

**Location** ?  
United States


Privacy: Do not include sensitive information in the bucket name. Users cannot access your data without permission, but they can still try to access or create buckets to find out if the name exists.

Create Cancel

4. Click **Create**. The storage bucket you created is listed in the browser.


- To create another storage, click **Create bucket** as shown.

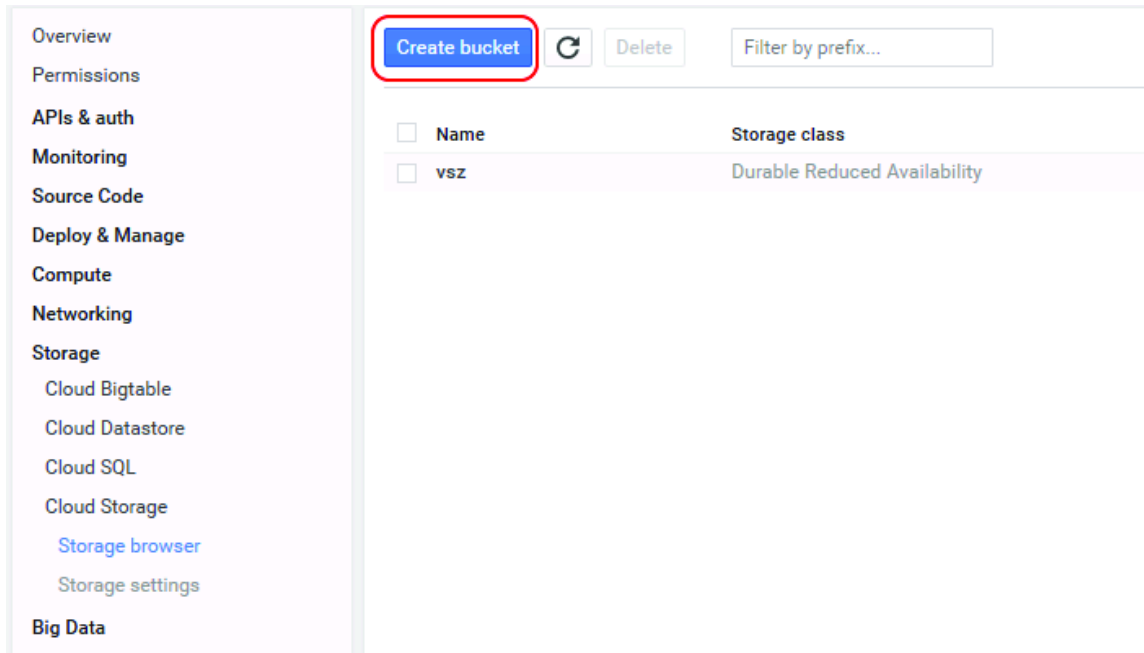**FIGURE 131** Creating Another Storage Bucket



- Verify that the storage bucket has been created.

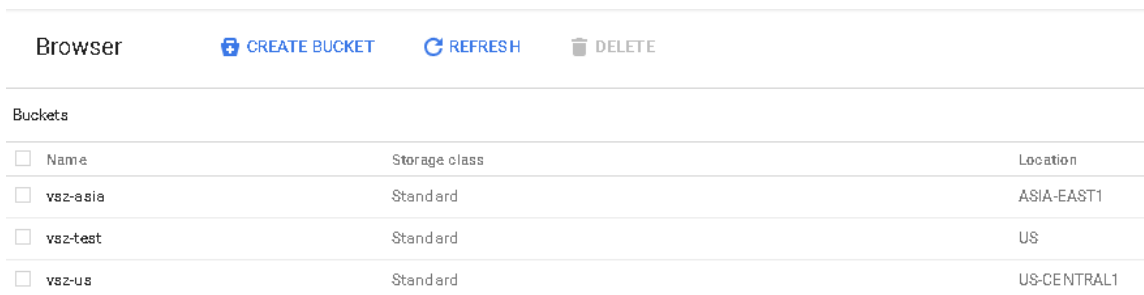**FIGURE 132** Selecting the Storage Bucket



# Uploading the vSZ Image to a Storage Bucket

Follow these steps to upload a controller image to the storage bucket you created.

1. Extract the vSZ raw.bin file that you obtained from Ruckus Networks.

**NOTE**


- If the "Permission denied" error appears, execute the command "chmod +x vszg-3.5.0.0.808.raw.bin" before extracting the file.
- If the "uudecode: command not found" error appears during the extraction process, install the "sharutils" package, and then try extracting the image again.

2. Read the Virtual SmartZone (vSZ) Software License agreement that appears when you extract the raw.bin file.
3. When the Accept this agreement? prompt appears, enter **yes** to accept the license agreement.

When the extraction process is complete, a raw.tar.gz file appears.

4. On the GCE web interface, browse to the storage bucket where you want to upload the vSZ image file.

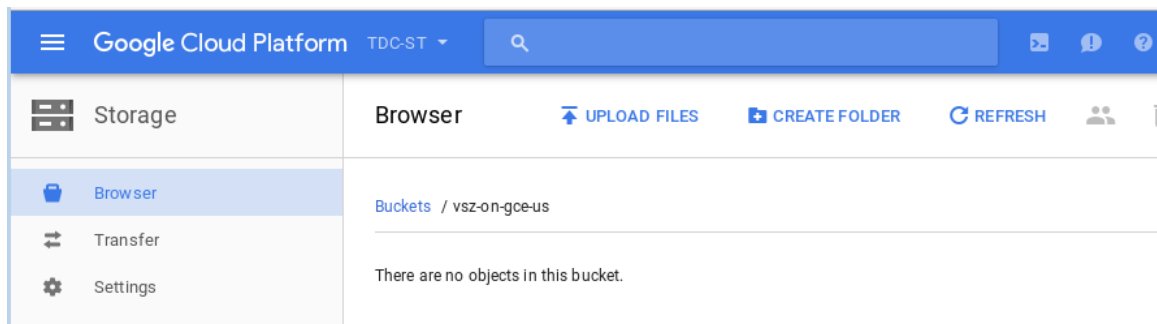**FIGURE 133** Browse to the storage bucket




5. Click **Upload files**.

- Browse to the location of the .raw.tar.gz image file that you extracted, and then select it.

**NOTE**

You can only select .raw.tar.gz files.

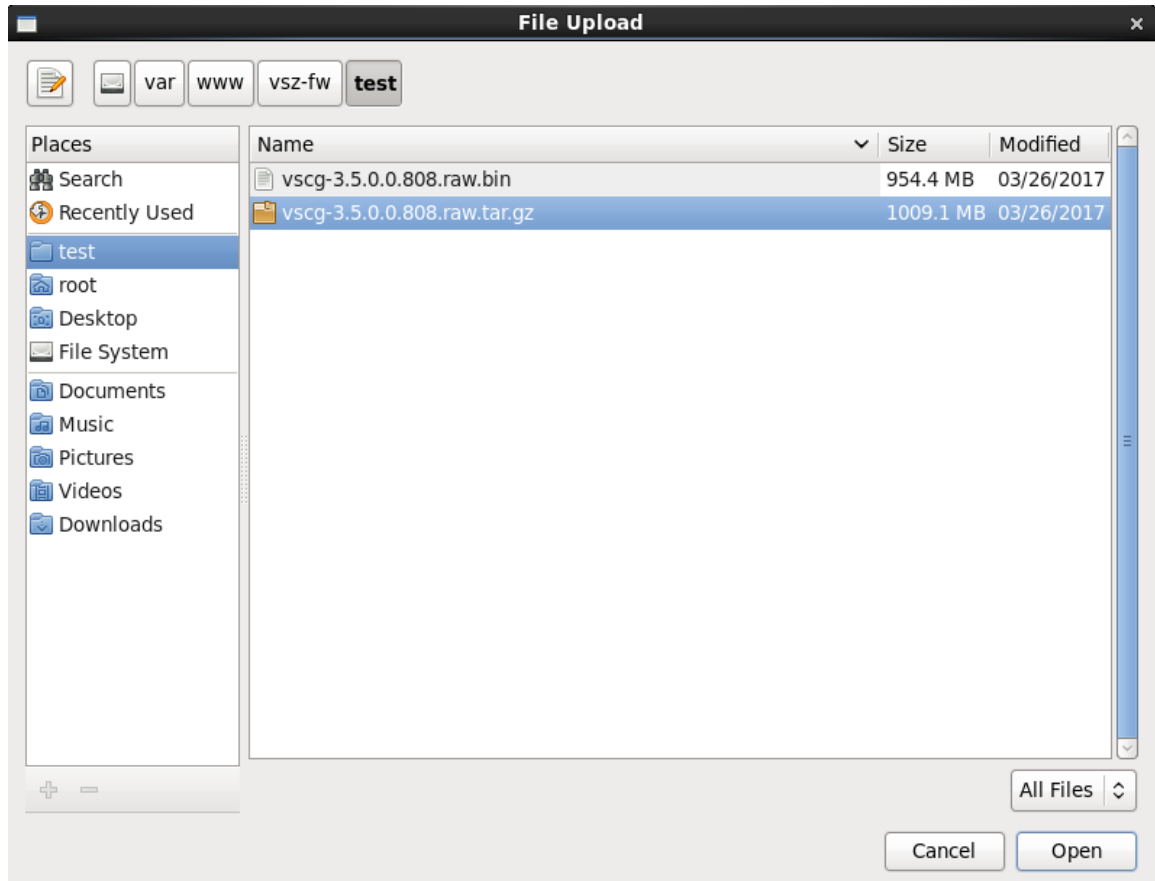
**FIGURE 134** Select the .raw.tar.gz image file that you extracted



- Click **Open** to upload the image file.

Your browser displays the progress of the file upload process. After the upload process is complete, the image file appears in the storage bucket.

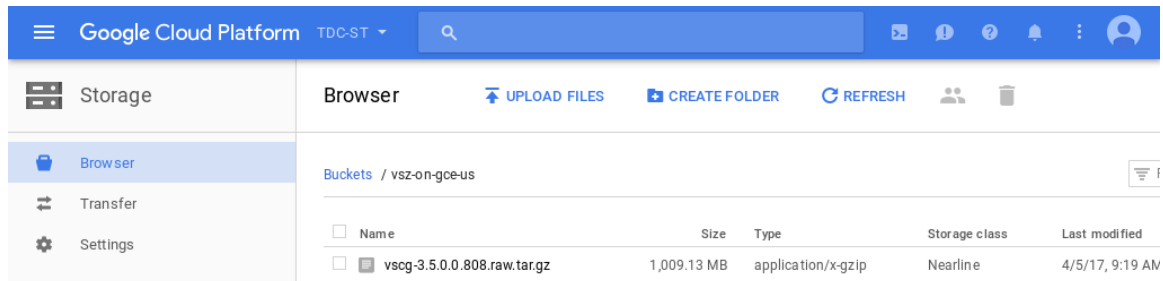**FIGURE 135** The image file appears in the storage bucket






## Creating a vSZ Image for Virtual Machines

Follow these steps to create a vSZ image for virtual machines.


1. From **Google Developers Console**, click **Compute** > **Compute Engine**.

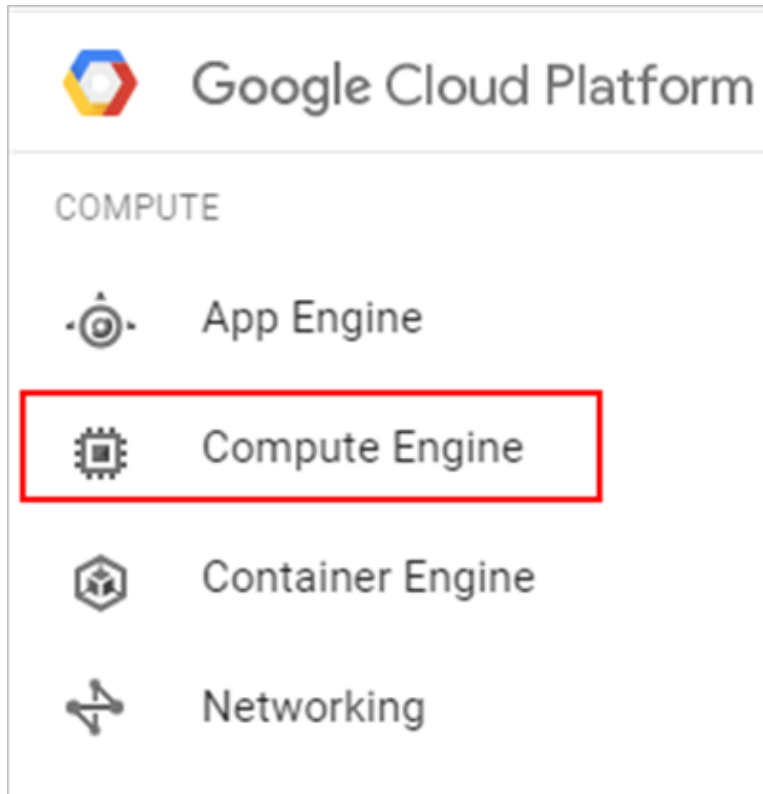**FIGURE 136** Select Compute Engine



- On the menu, click **Images**, and then click **Create Image**.

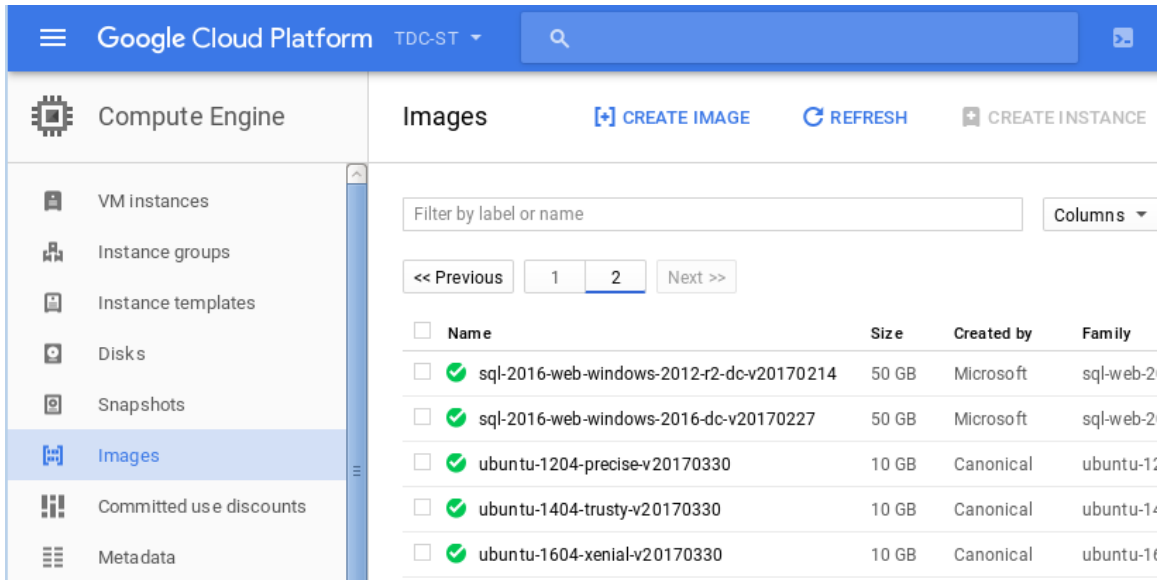
**FIGURE 137** Click Create Image



The **Create an image** page appears.

3. Configure the properties of the new image by filling out the boxes below.
  - a) In **Name**, type the name of the image.
  - b) In **Description**, provide a brief description about the image.
  - c) In **Encryption**, select an option from the drop-down list containing Automatic (recommended) and Customer supplied.
  - d) In **Source**, select **Cloud storage file**.
  - e) In **Cloud Storage file**, click **Browse**, and then select the .raw.tar.gz image file that you extracted previously.

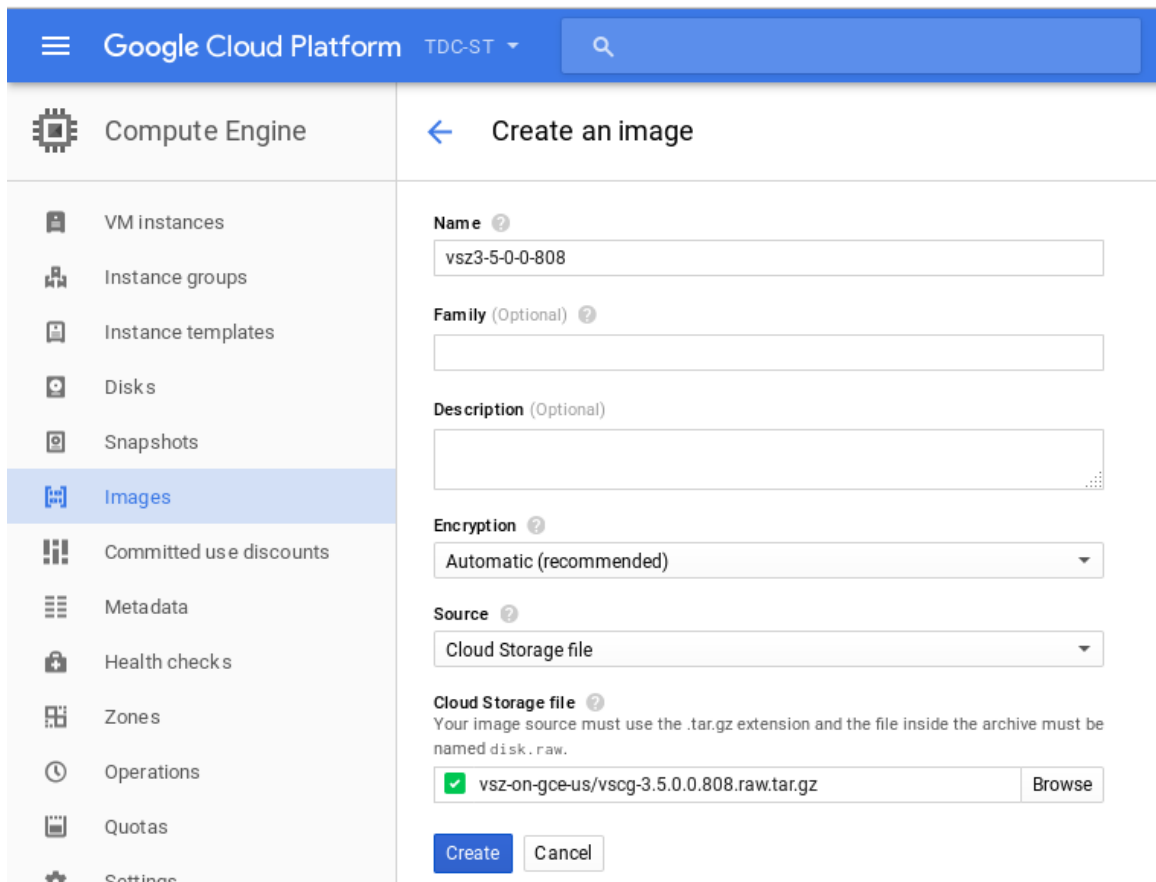
**FIGURE 138** Creating an image



4. Click **Create**. The new image is listed.

GCE creates the new image. When the process is complete, the image you created from the .raw.tar.gz image file appears on the **Images** page.

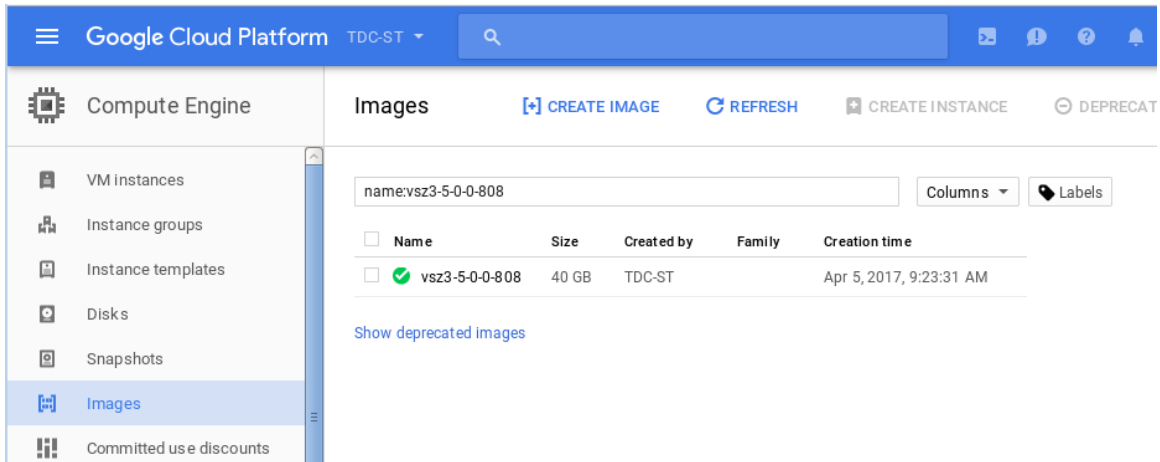**FIGURE 139** The new image you created appears on the Images page




You have completed creating an image.

## Creating a Network and Configuring Firewall Rules

Follow these steps to create a network and configure firewall rules for your network.


1. From **Google Developers Console**, click **Networking** > **Networks**. A page displaying a list of networks appears. Select the default network.

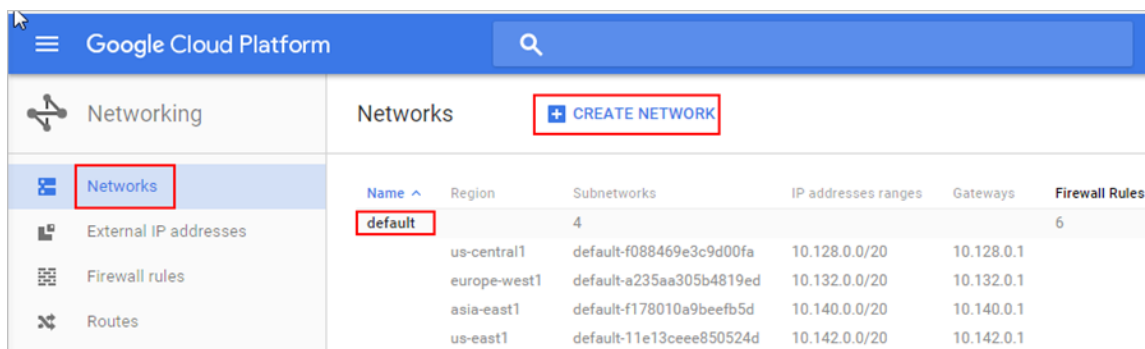**FIGURE 140** List of networks



2. To create a firewall rule, click **Add a firewall rule**.

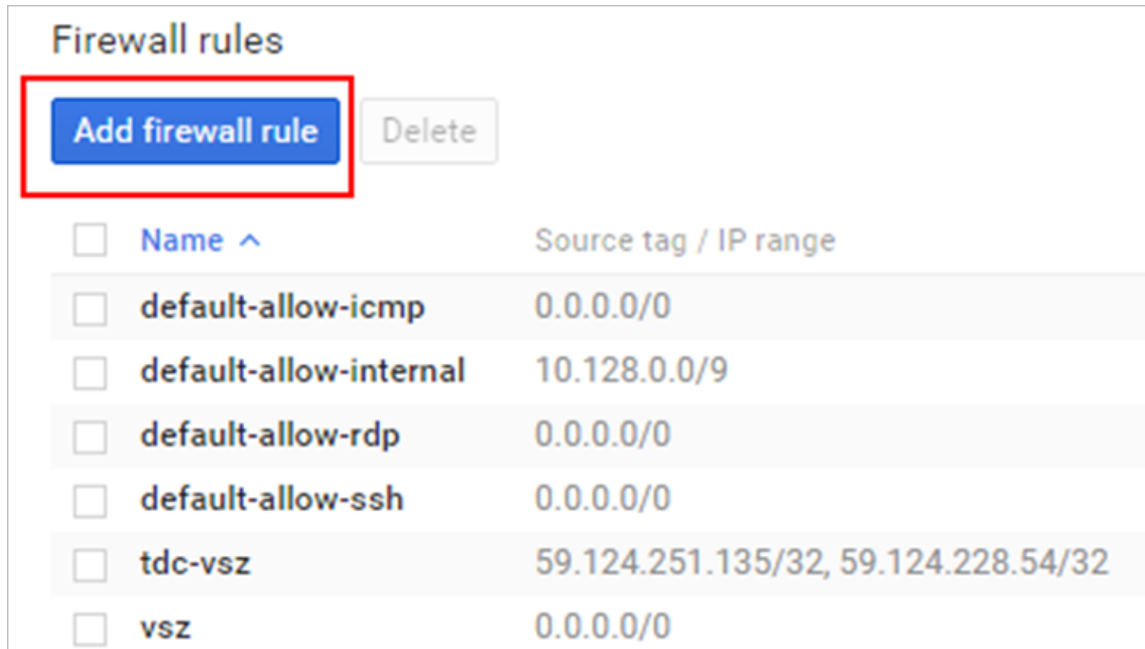**FIGURE 141** Add a Firewall Rule



3. The **Create a firewall rule** screen appears.
  - a) In **Name**, type the name of the rule
  - b) In **Description**, provide a brief description about the rule.
  - c) In **Network**, type the network address.
  - d) In **Source filter**, select **Allow from any source**.
  - e) In **Source IP ranges**, type the range.
  - f) In **Allowed protocols and ports**, type the protocols and ports that will be allowed
  - g) In **Target tags**, specify a tag name. It is recommended that you provide a tag as all network instances with this tag will adhere to the firewall rule.

**FIGURE 142** Creating a Firewall Rule

## ← Create a firewall rule

By default, incoming traffic from outside your network is blocked. To allow incoming traffic, set up a firewall rule. Firewall rules regulate only incoming traffic to an instance. When a connection is established with an instance, traffic is permitted in both directions over that connection. [Learn more](#)

**Name** ?

**Description** (Optional)

**Network** ?

**Source filter** ?

**Allowed protocols and ports** ?

**Target tags** (Optional) ?

Equivalent [REST](#) or [command line](#)

4. Click **Create**. A page displaying the new firewall rule appears.

**FIGURE 143** Adding Firewall Rules

Firewall rules

[Add firewall rule](#) [Delete](#)

| Name                                            | Source tag / IP range               | Allowed protocols / ports                                                             | Target tags          |
|-------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------|
| <input type="checkbox"/> default-allow-icmp     | 0.0.0.0/0                           | icmp                                                                                  | Apply to all targets |
| <input type="checkbox"/> default-allow-internal | 10.128.0.0/9                        | tcp:0-65535; udp:0-65535; icmp                                                        | Apply to all targets |
| <input type="checkbox"/> default-allow-rdp      | 0.0.0.0/0                           | tcp:3389                                                                              | Apply to all targets |
| <input type="checkbox"/> default-allow-ssh      | 0.0.0.0/0                           | tcp:22                                                                                | Apply to all targets |
| <input type="checkbox"/> tdc-vs2                | 59.124.251.135/32, 59.124.228.54/32 | tcp:91,443,7443,8022,8443,8090,8099,8100,8111,9080,9443,9446,9996-9999; udp:161,12223 | tdc-vs2              |
| <input checked="" type="checkbox"/> vs2         | 0.0.0.0/0                           | tcp:91,443,7443,8022,8443,8090,8099,8100,8111,9080,9443,9446,9996-9999; udp:161,12223 | vs2                  |


## Creating a Virtual Machine Instance

Follow these steps to create a new virtual machine (VM) instance.

1. From **Google Developers Console**, click **Compute > Compute Engine > VM instances**.

The **VM instances** page appears.

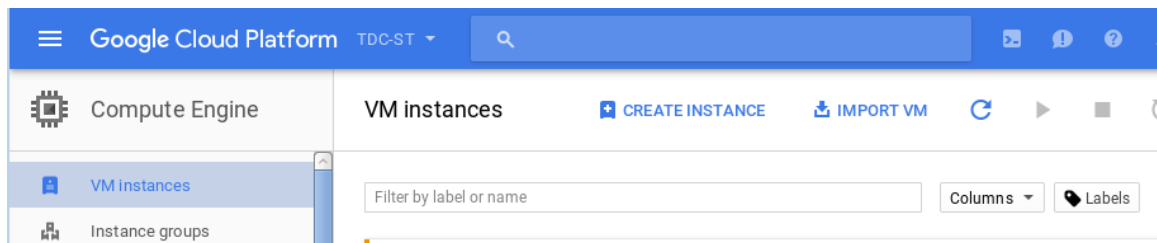
**FIGURE 144** The VM instances page





2. Click **Create Instance**.  
The **Create an instance** page appears.

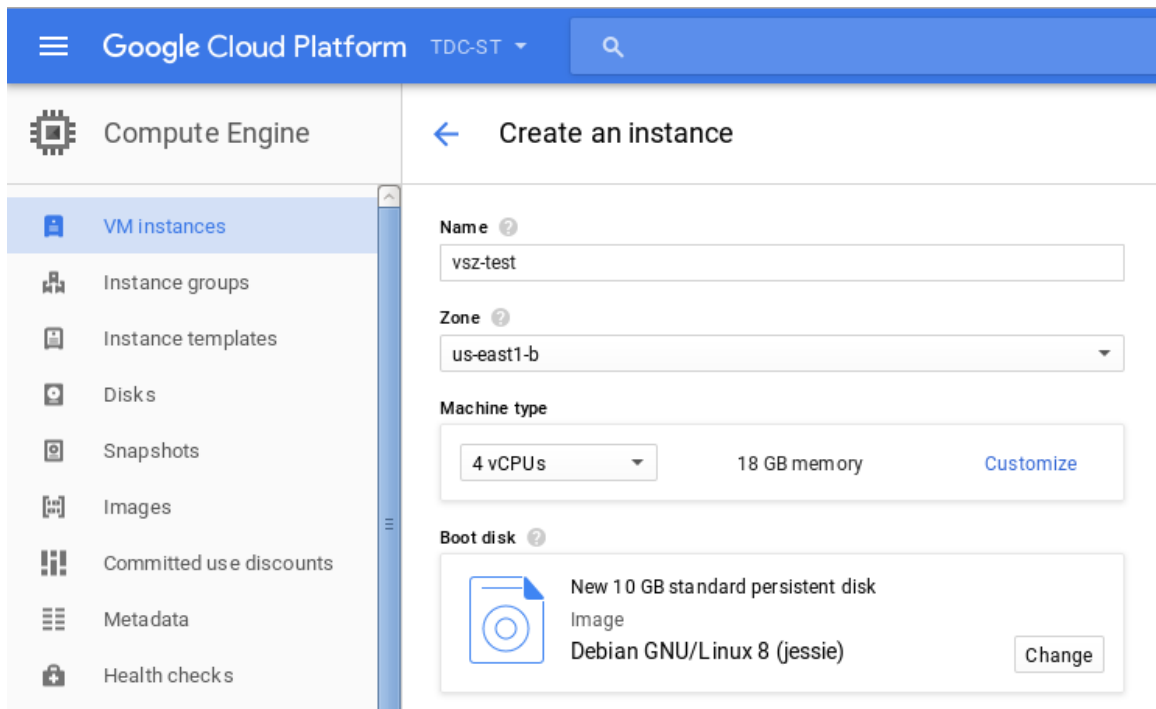**FIGURE 145** The Create an instance page



3. Configure the new VM instance that you are creating by filling out the boxes below.
  - a) In **Name**, type the name of the VM instance.
  - b) In **Zone**, select a zone from the drop-down list.
  - c) In **Machine type**, accept or modify the default values for **vCPUs** and **Memory**.
  - d) Under **Boot disk**, click **Change**. The **Boot disk** page appears. Click **Custom images**. In **Show images from**, select the storage bucket where you uploaded the controller image, and then select the image. Click **Select**.
  - e) In **Project access**, allow API access as appropriate.

**FIGURE 146** Creating a new VM instance

---

### Boot disk

Select an image or snapshot to create a boot disk; or attach an existing disk.

OS images   Application images   **Custom images**   Snapshots   Existing disks

Show images from  
TDC-ST ▼

- cacti-34  
Created from TDC-ST on Mar 21, 2016, 2:20:19 AM
- vsz3-4-0-0-976  
Created from TDC-ST on Jul 14, 2016, 7:41:37 AM
- vsz3-5-0-0-490  
Created from TDC-ST on Jan 3, 2017, 8:27:06 AM
- vsz3-5-0-0-704  
Created from TDC-ST on Mar 3, 2017, 7:50:46 AM
- vsz3-5-0-0-741  
Created from TDC-ST on Mar 9, 2017, 1:55:15 AM
- vsz3-5-0-0-762  
Created from TDC-ST on Mar 15, 2017, 9:21:38 AM
- vsz3-5-0-0-777  
Created from TDC-ST on Mar 19, 2017, 8:03:58 AM
- vsz3-5-0-0-808  
Created from TDC-ST on Apr 5, 2017, 9:23:31 AM

Boot disk type ⓘ   Size (GB) ⓘ

Standard persistent disk ▼   100

---

Select   Cancel

- f) In **Firewall**, select the options as appropriate.
- g) In **Project access**, allow API access as appropriate.
- h) In **Management**, ensure that the tag provided is the same as the one provided while creating a firewall rule. This ensures port mapping happens correctly.

**FIGURE 147** Management Tab

The screenshot shows the 'Management' tab selected in a navigation bar. Below the navigation bar, there is a 'Description (Optional)' text area. Underneath, there is a 'Labels (Optional)' section with a table. The table has two columns: 'Key' and 'Value'. The 'Key' column contains the text 'vsz' and the 'Value' column contains the text 'empty'. To the right of the table is a close button (X). Below the table is a button labeled '+ Add label'.

| Key | Value |
|-----|-------|
| vsz | empty |

- i) In **Disk**, select the options as appropriate.

**FIGURE 148** VM Disk Configuration

The screenshot shows the 'Disks' tab selected in a navigation bar. Below the navigation bar, there is a 'Deletion rule' section with a checked checkbox and the text 'Delete boot disk when instance is deleted'. Below that is an 'Encryption' section with a dropdown menu set to 'Automatic (recommended)'. Underneath is an 'Additional disks (Optional)' section with a button labeled '+ Add item'. Below the 'Additional disks' section is a link labeled 'Less'. At the bottom of the form, there is a text line: 'You will be billed for this instance. [Learn more](#)'. Below this text are two buttons: 'Create' and 'Cancel'. At the very bottom, there is a text line: 'Equivalent [REST](#) or [command line](#)'.

- j) In **Networking**, select the external options as per the following table.

**FIGURE 149** Networking

Management   Disks   **Networking**   Access & security

---

**Subnetwork** ?

default-f178010a9beefb5d ▼

**External IP** ?

Ephemeral ▼

**IP forwarding** ?

On ▼

[^ Less](#)

---


You will be billed for this instance. [Learn more](#)

Equivalent [REST](#) or [command line](#)

| External IP Options   | Description                                            |
|-----------------------|--------------------------------------------------------|
| Ephemeral             | The VM is assigned a dynamic public IP address         |
| None                  | The VM instance is not assigned an external IP address |
| New static IP address | The VM is assigned a static public IP address          |


- k) In **SSH Keys**, select the options as appropriate.

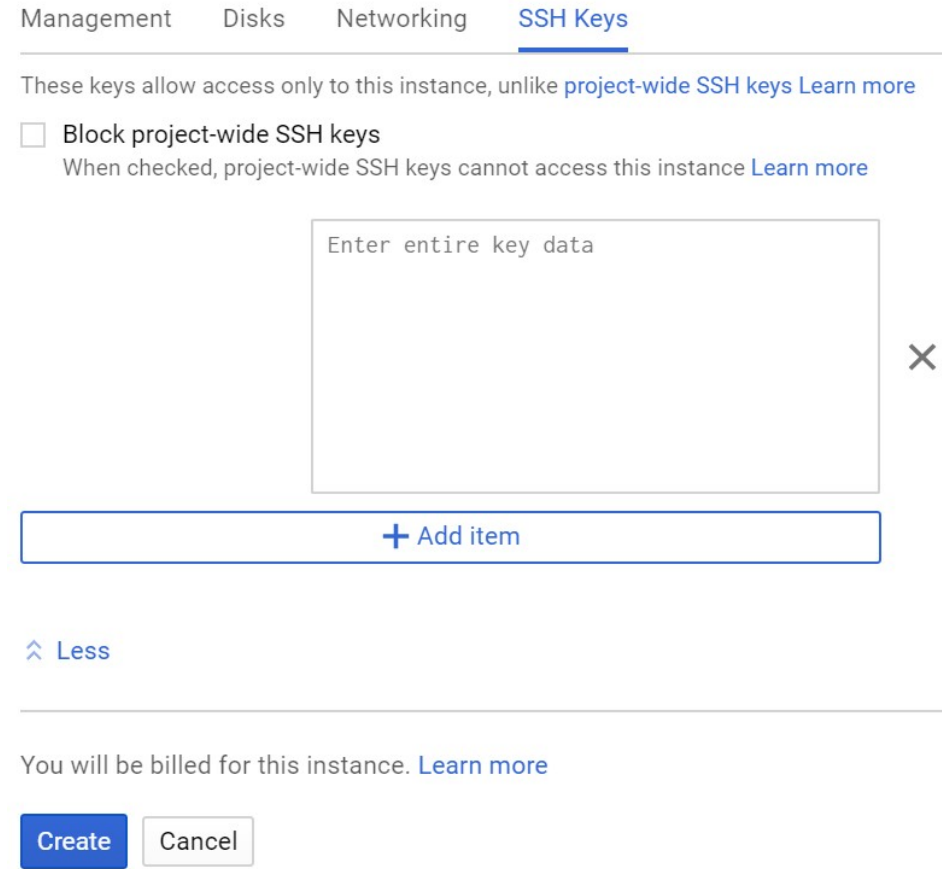**FIGURE 150** SSH Keys



- l) Click **Create**. The **VM instances** page appears listing the new VM that is created.

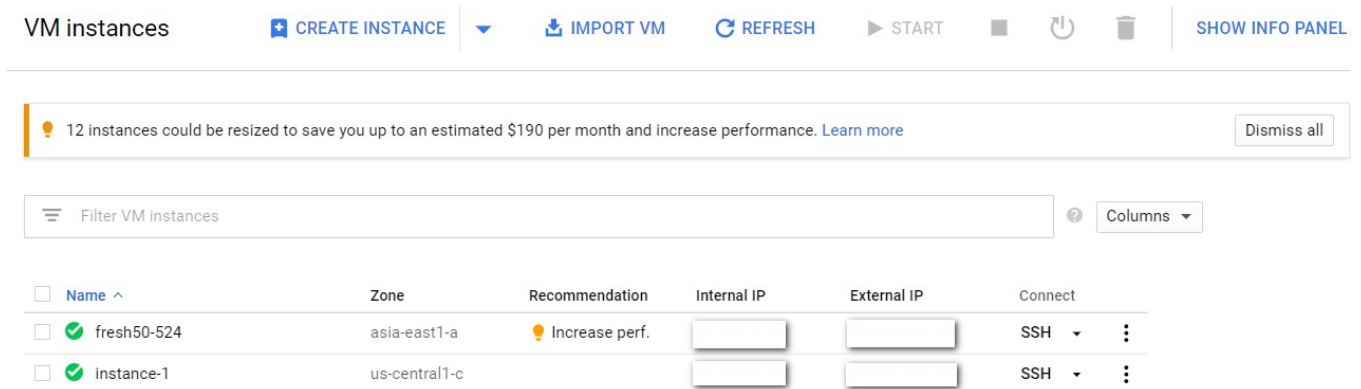**FIGURE 151** The new VM appears on the list of VMs



You have completed creating a virtual machine instance.



# Installing vSZ on Amazon Web Services

- Installing AWS CLI..... 167
- Creating a VM Import Service Role.....168
- Installing vSZ on AWS..... 169
- Creating the vSZ Instance.....176
- Configuring AWS for a vSZ Instance..... 183
- Deleting a vSZ Instance.....187

## Installing AWS CLI

Ensure that you have created an account with AWS and have the login details for the same.

1. Install pip by running the command

```
# curl-O https://bootstrap.pypa.io/get-pip.py
# sudo python27 get-pip.py
```

2. Install AWS CLI using pip:**# pip install**
3. Test the installation by using the command: **# aws help**
4. To set up AWS CLI you need to get your access and secret key identifier. Follow the instructions and find your identifier keys.
5. Use the following command to configure CLI:

```
# aws configure
AWS Access Key ID [None]: xxx
AWS Secret Access Key [None]: xxx
Default region name [None]: us-west-2
Default output format [None]: json
```


6. The default region should be the same as the bucket region. Refer to Table for the mapping details. In addition refer to you can also refer to latest version.

| Region Name    | Region                    |
|----------------|---------------------------|
| us-east-1      | US East (N. Virginia)     |
| us-west-2      | US West (Oregon)          |
| us-west-1      | US West (N. California)   |
| eu-west-1      | EU (Ireland)              |
| eu-central-1   | EU (Frankfurt)            |
| ap-southeast-1 | Asia Pacific (Singapore)  |
| ap-northeast-1 | Asia Pacific (Tokyo)      |
| ap-southeast-2 | Asia Pacific (Sydney)     |
| ap-northeast-2 | Asia Pacific (Seoul)      |
| sa-east-1      | South America (Sao Paulo) |

## Creating a VM Import Service Role

1. In the AWS web interface navigate to **AWS dashboard > Identity & Access Management**.
2. Check your account permission by navigating to **Users > select your Username > Permissions**. Your account should have the permission - *IAMFullAccess*.

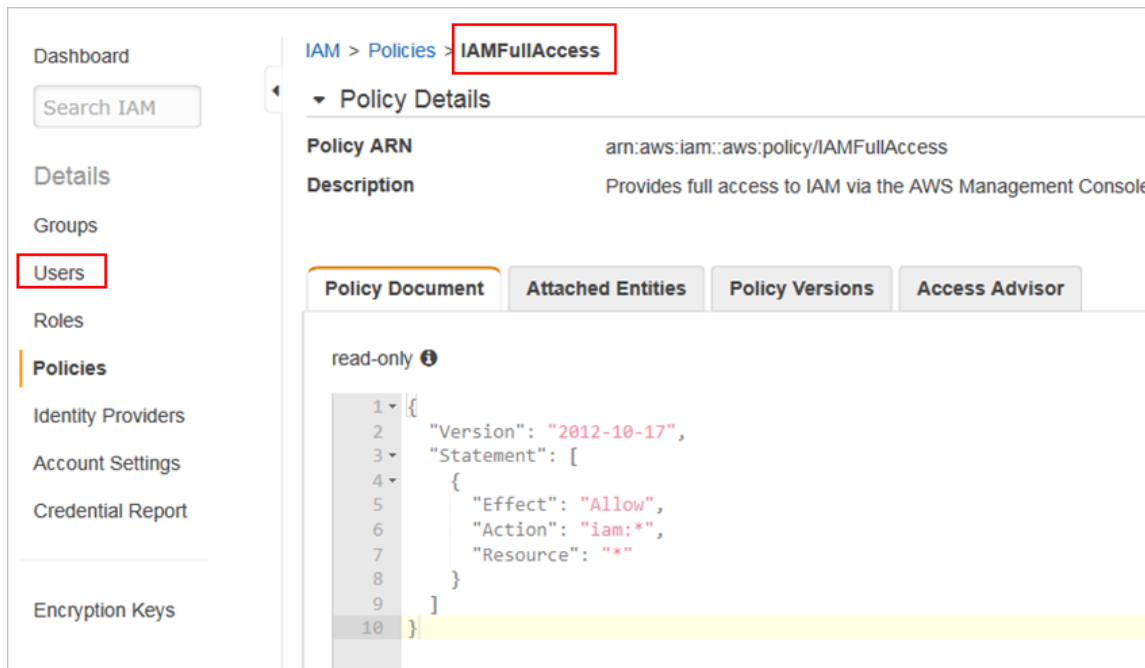**FIGURE 152** Account Permission



3. Create a JSON file called trust-policy.json using the following commands:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "",
      "Effect": "Allow",
      "Principal": {
        "Service": "vmie.amazonaws.com"
      },
      "Action": "sts:AssumeRole",
      "Condition": {
        "StringEquals": {
          "sts:ExternalId": "vmimport"
        }
      }
    }
  ]
}
```

4. Use the following command to create a role. Specify the name as vmimport and give the option VM Import/Export access.

```
# aws iam create-role --role-name vmimport --assume-role-policy-document file://trust-policy.json
```



5. Create a policy for the service role by creating a JSON file called `role-policy.json` using the following commands. Replace the bucket name with the storage bucket name that you created.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "s3:ListBucket",
        "s3:GetBucketLocation"
      ],
      "Resource": [
        "arn:aws:s3:::<bucket-name>"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetObject"
      ],
      "Resource": [
        "arn:aws:s3:::<bucket-name>/*"
      ]
    }
  ]
}
```

6. Run the following command to attach the policy to the service role created. `# aws iam put-role-policy --role-name vmimport --policy-name vmimport --policy-document file://role-policy.json`

## Installing vSZ on AWS

Follow the steps to install vSZ using the AWS web user interface.


### Logging into AWS

Follow these steps to login to the AWS site.

1. Click <https://aws.amazon.com>, to access the **Amazon Web Services** website.

2. Login with your user credentials of user name and password.

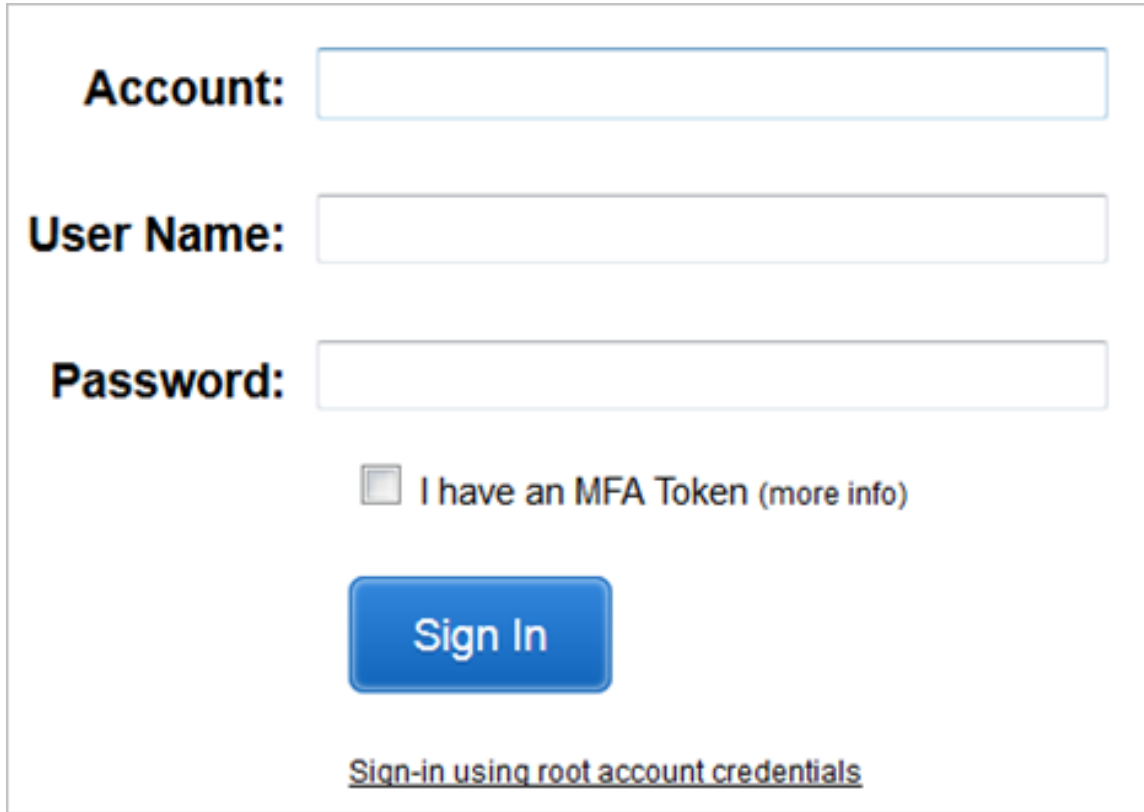
**FIGURE 153** Login with user credentials



The screenshot shows the AWS login interface. It features three input fields: "Account:", "User Name:", and "Password:". Below the "Password:" field is a checkbox labeled "I have an MFA Token (more info)". A prominent blue "Sign In" button is centered below the fields. At the bottom, there is a link that reads "Sign-in using root account credentials".

3. Select **My Account** > **AWS Management Console** as shown.

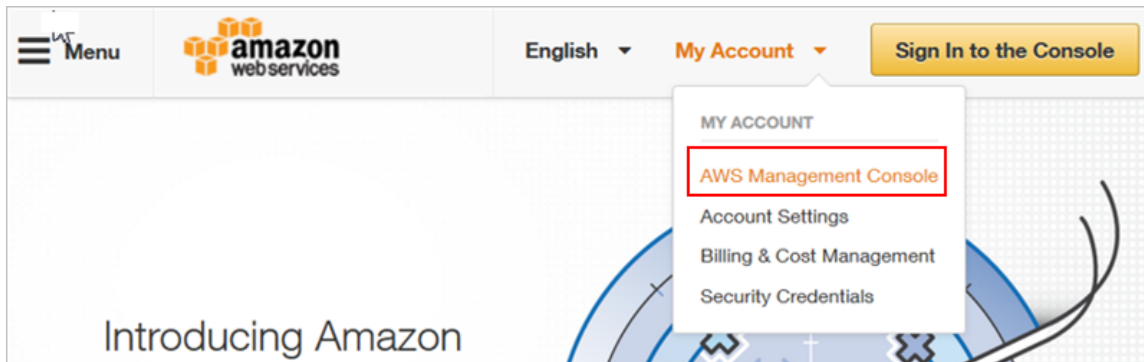**FIGURE 154** AWS management console




## Creating a Storage Bucket

Create storage for the objects you create. Follow these steps to create storage.


1. Navigate to **Amazon Web Services > Storage and Content Delivery > S3**, click **Create Bucket** as shown.

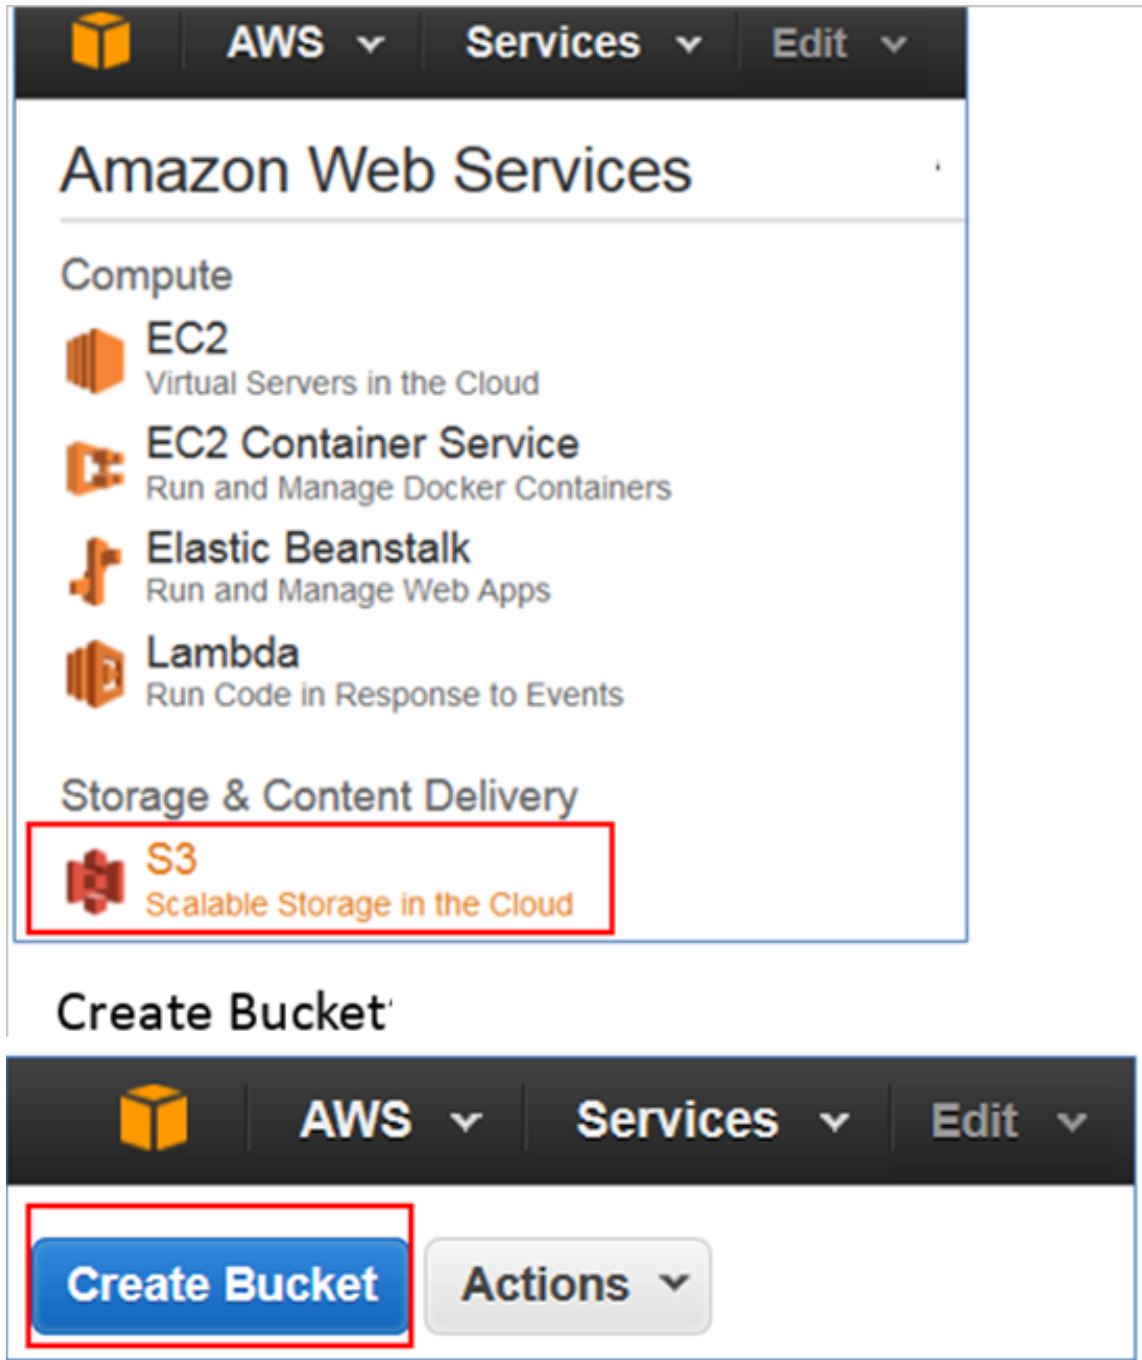FIGURE 155 Create Bucket



2. Type the name of the storage bucket and select a suitable regional endpoint to reduce data latency.

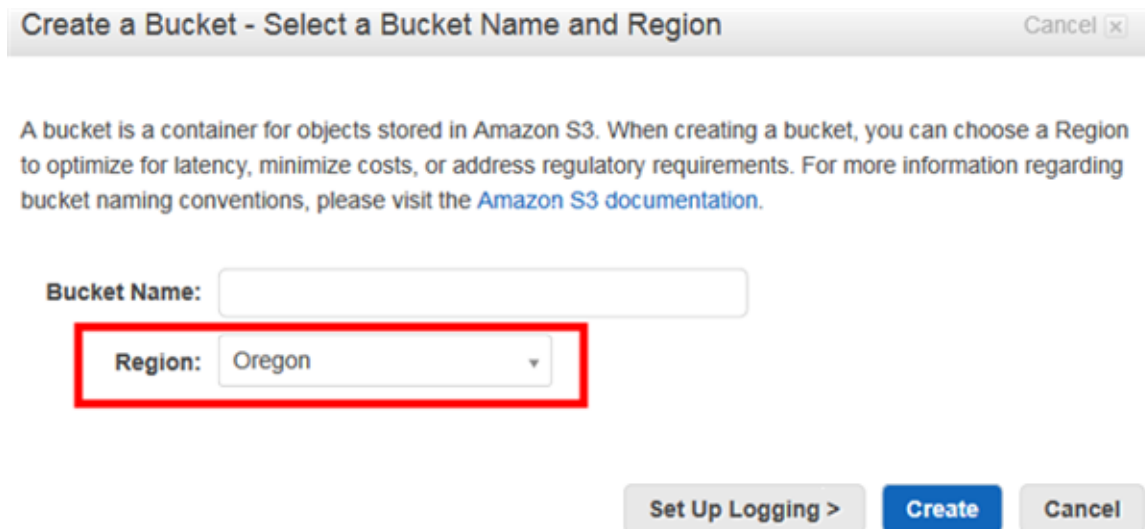**FIGURE 156** Selecting regional endpoint




3. Click **Create**. The storage bucket you created is listed in the browser.
4. Check the storage bucket has been created.

## Uploading vSZ Image to a Storage

Follow these steps to upload a vSZ image to the storage bucket you created.

1. Select the storage bucket to upload the vSZ image.
2. Click **Upload** as shown.

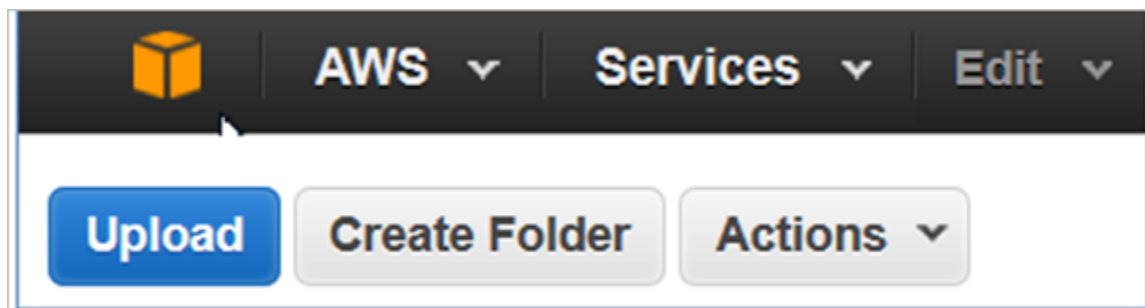**FIGURE 157** Selecting the Storage



3. Browse to the location of the vSZ image and select vSZ image file.  
Only images with file-type \*.raw or .ova or vmdk can be selected.
4. Click **Start Upload** to upload the file. The upload process is displayed.

- The image is listed in the storage bucket after the image is uploaded.

**FIGURE 158** vSZ Image Uploaded to Storage Bucket

| Name                 | Storage Class | Size     | Last Modified                    |
|----------------------|---------------|----------|----------------------------------|
| vscg-3.4.0.0.230.ova | Standard      | 906.8 MB | Mon Nov 09 10:29:04 GMT+800 2015 |
| vscg-3.4.0.0.310.ova | Standard      | 993.3 MB | Mon Dec 28 10:59:17 GMT+800 2015 |
| vscg-3.4.0.0.610.ova | Standard      | 983.2 MB | Fri Mar 25 12:36:59 GMT+800 2016 |
| vscg-3.4.0.0.618.ova | Standard      | 1 GB     | Thu Mar 31 14:14:00 GMT+800 2016 |

**NOTE**

The vSZ image should be in the Bucket, which has Region information. Example: **Test\_bucket**

## AWS Service Policy

VM Import uses a role in your AWS account to perform certain operations (for example, downloading disk images from an Amazon S3 bucket). You must create a role with the name `vmimport` with the following policy and trusted entities.

- Install the AWS CLI by following the instructions at <http://docs.aws.amazon.com/cli/latest/userguide/installing.html>
- Enter the following command in the AWS CLI **#sudo pip install awscli**.
- Get the access key for the AWS CLI by following the instructions on the [AWS website](#).
- Add the access key details to the AWS CLI using the following commands

```
# aws
configureAWS Access Key ID [None]:
AWS Secret Access Key
[None]: Default region name [None]:
us-west-2Default output format
[None]: json
```

5. Create a file named `role-policy.json` with the following policy:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "s3:ListBucket",
        "s3:GetBucketLocation"
      ],
      "Resource": [
        "arn:aws:s3:::<disk-image-file-bucket>"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:GetObject"
      ],
      "Resource": [
        "arn:aws:s3:::<disk-image-file-bucket>/*"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:ModifySnapshotAttribute",
        "ec2:CopySnapshot",
        "ec2:RegisterImage",
        "ec2:Describe*"
      ],
      "Resource": "*"
    }
  ]
}
```

6. Replace `<disk-image-file-bucket>` with the appropriate Amazon S3 bucket where the disk files are stored. Run the following command to attach the policy to the role created above:
7. Replace `<disk-image-file-bucket>` with the appropriate Amazon S3 bucket where the disk files are stored. Run the following command to attach the policy to the role created above **`aws iam put-role-policy --role-name vmimport --policy-name vsz34-policy --policy-document file://role-policy.json`**

## Importing the vSZ Image

Follow these steps to import the vSZ image into AWS shared AMI.

1. Create a JSON file called `import.json` using the following commands. Replace the bucket name with the storage bucket name that you created. In this example, the vSZ image file name is **`vscg-3.4.0.0.750.ova`**.

```
{
  "Description": "Import vSZ",
  "DiskContainers": [
    {
      "Description": "vSZ 3.4.0.0.750",
      "UserBucket": {
        "S3Bucket": "<bucket-name>",
        "S3Key": "vscg-3.4.0.0.750.ova"
      }
    }
  ]
}
```

- Run the following command to attach the policy to the role created. **# aws ec2 import-image --cli-input-json file://import.json**
- The system displays the below response.

```
{
  "Status": "active",
  "Description": "Import vSZ",
  "Progress": "2",
  "SnapshotDetails": [
    {
      "UserBucket": {
        "S3Bucket": "<bucket-name>",
        "S3Key": "vscg-3.4.0.0.750.ova"
      },
      "DiskImageSize": 0.0
    }
  ],
  "StatusMessage": "pending",
  "ImportTaskId": "import-ami-ffgof9w1"
}
```

- Check the status of the import vSZ image by running the following command. Ensure to enter the correct import task identifier. **# aws ec2 describe-import-image-tasks --import-task-ids "import-ami-ffgof9w1"**
- You will see the following converting status response. Check the status until the converting is complete. The estimated time for conversion is 30 minutes.


```
{
  "ImportImageTasks": [
    {
      "Status": "active",
      "Description": "vSZ test",
      "Progress": "28",
      "SnapshotDetails": [
        {
          "UserBucket": {
            "S3Bucket": "<bucket-name>",
            "S3Key": "vscg-3.4.0.0.750.ova"
          },
          "DiskImageSize": 964430848.0,
          "Format": "VMDK"
        }
      ],
      "StatusMessage": "converting",
      "ImportTaskId": "import-ami-ffgof9w1"
    }
  ]
}
```

## Creating the vSZ Instance

Follow these steps to create a vSZ instance on AWS.


1. From **Amazon Web Service**, click **Compute** > **EC2**.

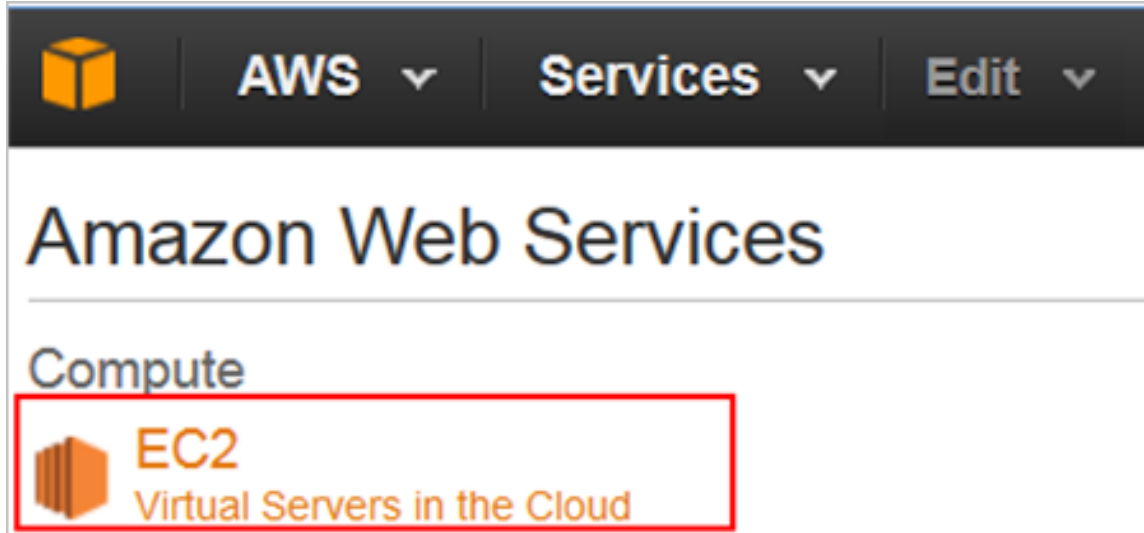FIGURE 159 Select EC2



2. Navigate to **Images** > **AMIs** to ensure that the imported **Amazon Machine Image (AMI)** exists. In this example the AMI file is **import-ami-ffgof9w1**.

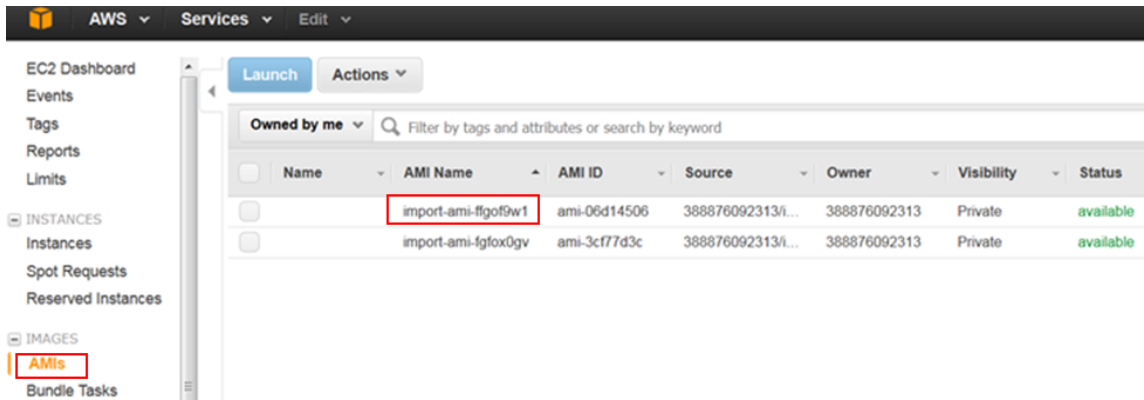
FIGURE 160 Select AMI





3. Navigate to **Network & Security > Security Groups > Create Security Group**. Security group acts as a virtual firewall that controls the traffic for one or more instances.

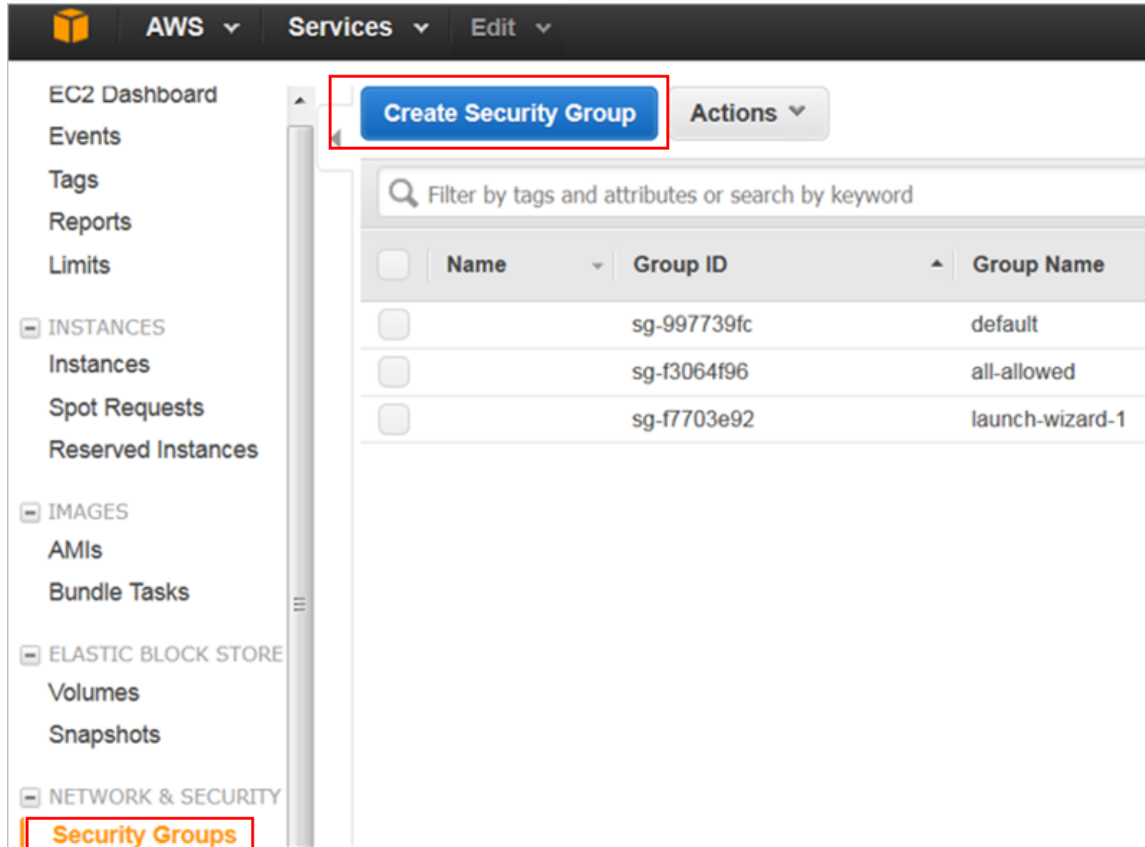
**FIGURE 161** Create Security Group



- Define the setup group name, description, ports and the firewall rule. The table lists the common service ports. For more information, see Ports to open for AP-vSZ communication.


| Port Number | Description                                                                              |
|-------------|------------------------------------------------------------------------------------------|
| <i>UDP</i>  |                                                                                          |
| 161         | SNMP                                                                                     |
| 12223       | ZD AP forward update using FTP (control connection)                                      |
| <i>TCP</i>  |                                                                                          |
| 21          | ZD AP forward update using FTP (control connection)                                      |
| 22          | AP SSH                                                                                   |
| 91          | AP forward update using HTTP                                                             |
| 443         | Allows AP get SSH private key and do AP FW update via HTTPs                              |
| 7443        | Public API                                                                               |
| 8022        | SSH for management (mgmt-acl is enabled on 1 nic vSZ)                                    |
| 8080        | vSZ setup wizard using the web user interface (User will be redirected to the port 8443) |
| 8443        | vSZ web user interface                                                                   |
| 8090, 8099  | WISPr for non-web-proxy user equipment                                                   |
| 8100        | WISPr for web-proxy user equipment                                                       |
| 9998        | Tomcat for WISPr (internal WISPr portal uses the port 9998)                              |
| 9080, 9443  | Northbound API (NBI)                                                                     |
| 16384-65000 | ZD AP forward update using FTP (data connection)                                         |

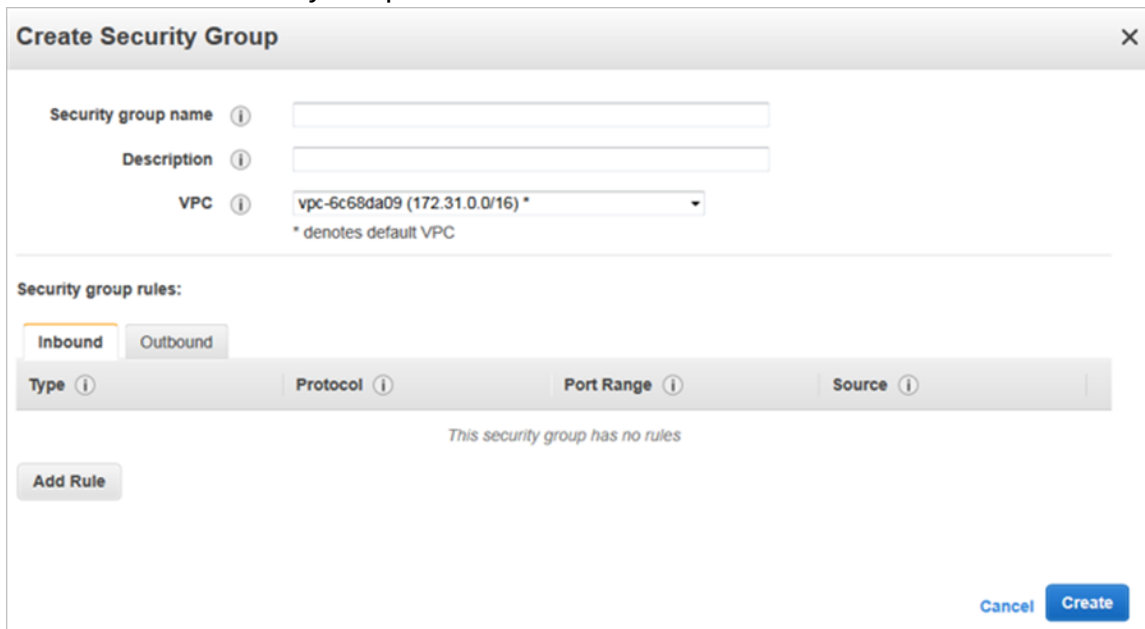**FIGURE 162** Define Security Group




5. Navigate to **Instances** and click on **Launch Instances**. Follow these steps.
  - a) Launch Instance

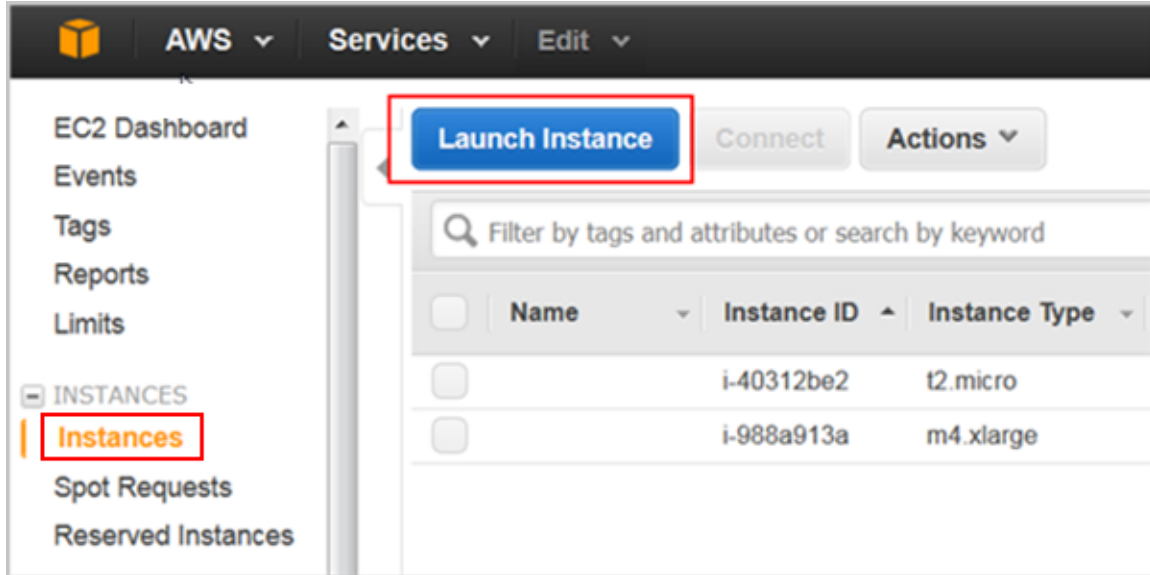**FIGURE 163** Launch instances



- b) Navigate to **My AMIs** and choose the **Amazon Machine Image (AMI)** that you imported previously.

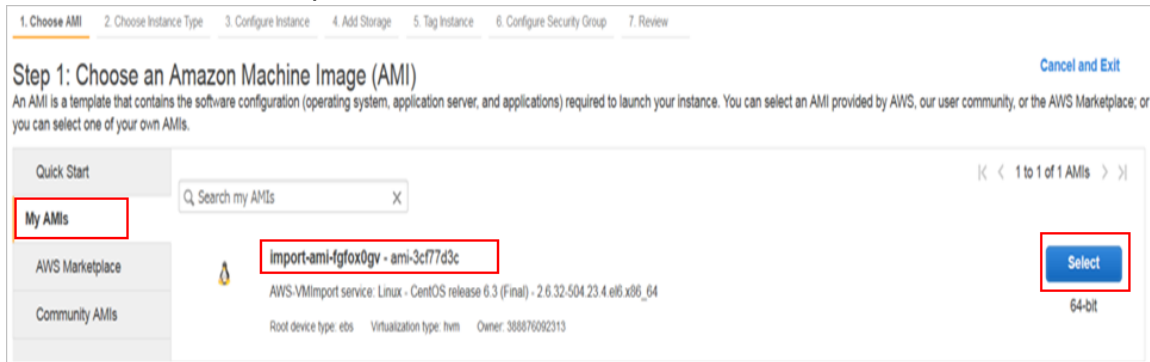**FIGURE 164** Choose the imported AMI



- c) Click **Next**.
    - d) Choose a suitable instance type. In this example the instance type is *m4.xlarge*. Based on the number of APs and client counts, select the instance type to fit the recommended system resources.  
The minimum memory and CPU requirements have changed in this release. You may need to upgrade your infrastructure before upgrading. Please read carefully. This is the minimum requirement recommended. Refer to Table 5 and Table 6 in the chapter Preparing to Install the vSZ.

**FIGURE 165** Choose the instance type

**Step 2: Choose an Instance Type**  
Amazon EC2 provides a wide selection of instance types optimized to fit different use cases. Instances are virtual servers that can give you the flexibility to choose the appropriate mix of resources for your applications. [Learn more](#) about instance types and how to choose the right one for your application.

Filter by: All instance types Current generation Show/Hide Columns

Currently selected: m4.xlarge (13 ECUs, 4 vCPUs, 2.4 GHz, Intel Xeon E5-2676v3, 16 GiB memory, EBS only)

|                                     | Family          | Type                                          | vCPUs | Memory (GiB) |
|-------------------------------------|-----------------|-----------------------------------------------|-------|--------------|
| <input type="checkbox"/>            | General purpose | t2.micro<br><small>Free tier eligible</small> | 1     | 1            |
| <input type="checkbox"/>            | General purpose | t2.small                                      | 1     | 2            |
| <input type="checkbox"/>            | General purpose | t2.medium                                     | 2     | 4            |
| <input type="checkbox"/>            | General purpose | t2.large                                      | 2     | 8            |
| <input type="checkbox"/>            | General purpose | m4.large                                      | 2     | 8            |
| <input checked="" type="checkbox"/> | General purpose | m4.xlarge                                     | 4     | 16           |

- e) Click **Next**.
- f) Select the required network, subnet, and private IP address.  
The private IP address cannot be changed once the vSZ image is launched.

**FIGURE 166** Configure the instance

**Step 3: Configure Instance Details**  
Configure the instance to suit your requirements. You can launch multiple instances from the same AMI, request Spot Instances to take advantage of lower prices, or use Reserved Instances for long-term savings.

Number of instances:

Purchasing option:  Request Spot Instances

Network: vpc-6c68da09 (172.31.0.0/16) (default) Create new VPC

Subnet: No preference (default subnet in any Availability Zone) Create new subnet

Auto-assign Public IP: Use subnet setting (Enable)

Placement group: No placement group

IAM role: None Create new IAM role


- g) Click **Next**.
- h) Change the size of storage as required.

FIGURE 167 Change the storage size




- i) Click **Next**.
- j) Specify the vSZ instance by giving it a name.

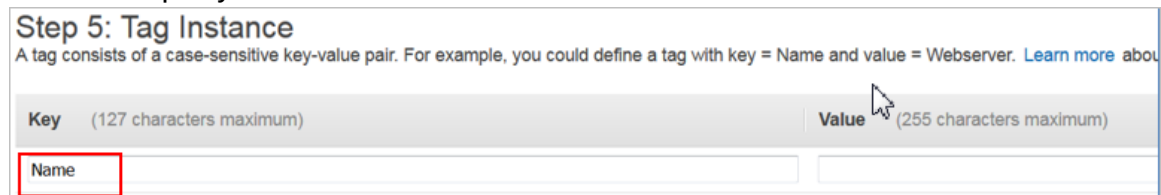FIGURE 168 Specify the vSZ instance




- k) Click **Next**.
- l) Create a new security group or select an existing group. Configure the rules if required.

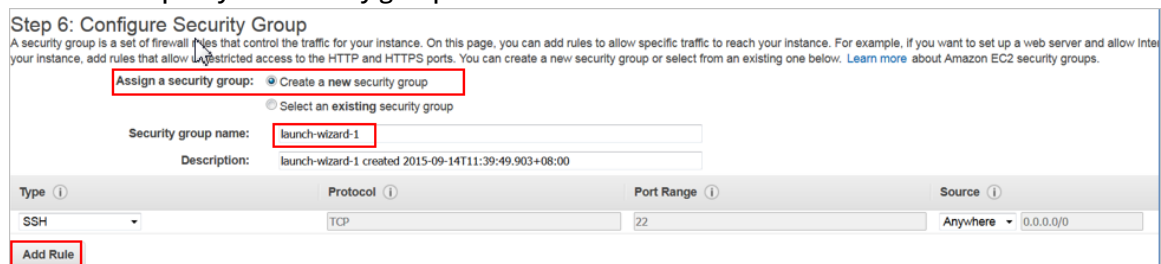FIGURE 169 Specify the security group




- m) Click **Next**.
- n) Review the configuration settings.

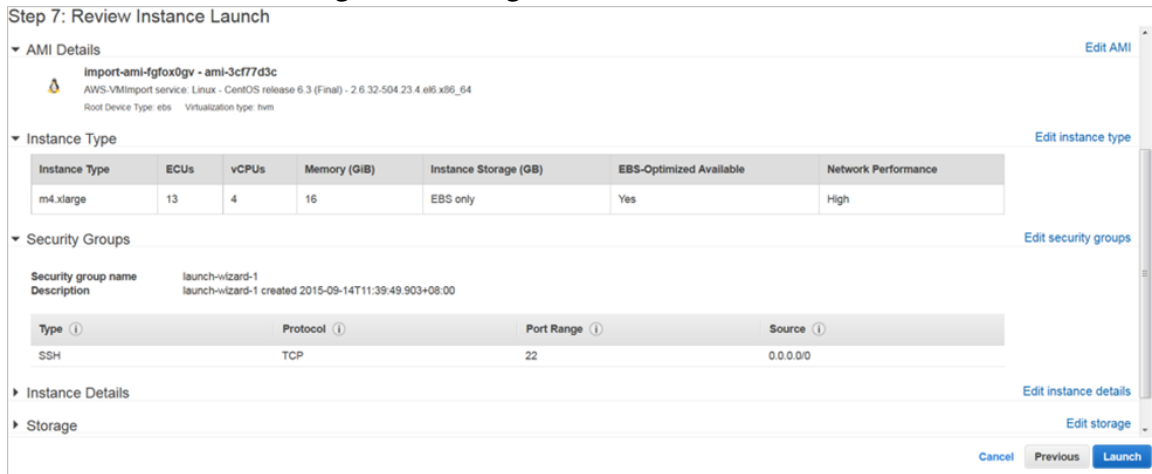**FIGURE 170** Review the configuration settings



- o) Click **Launch**
- p) Select the **Proceed without a key pair** for vSZ instance.

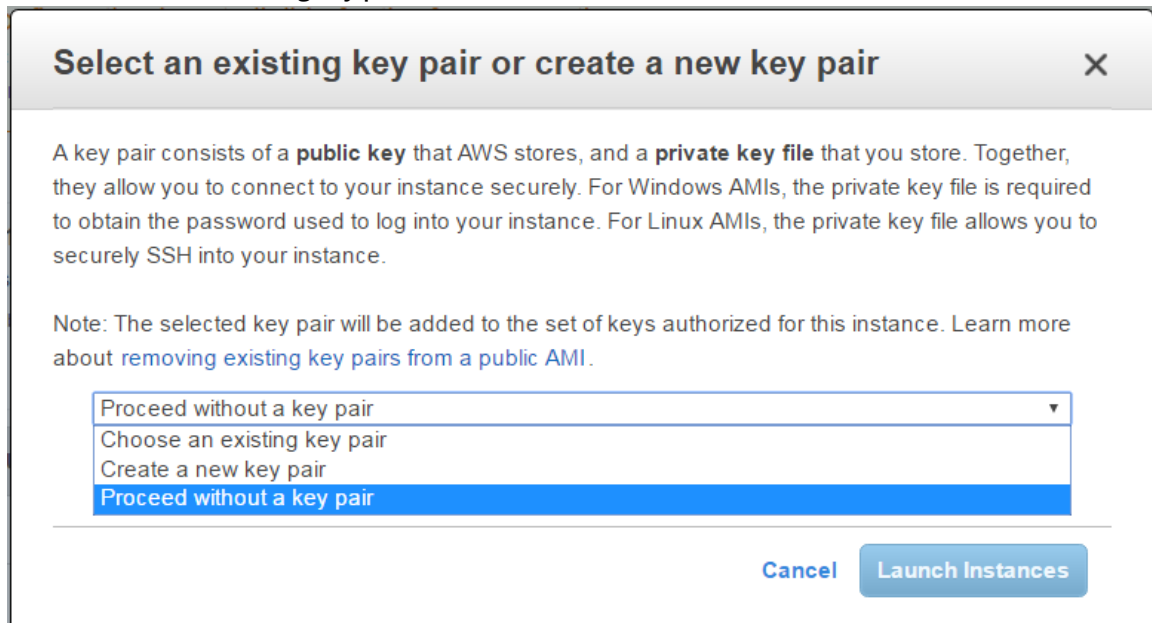**FIGURE 171** Select existing key pair



- q) Verify that the vSZ instance is running. Connect the vSZ instance with the selected key pair using the SSH interface.

# Configuring AWS for a vSZ Instance


Follow these steps to configure AWS for creating and launching a vSZ instance.

## Attach a New Disk Volume

Follow these steps to add a new disk volume.

1. Navigate to **EC2 Dashboard** > **Elastic Block Store** > **Volumes** and click **Create Volume** as shown.

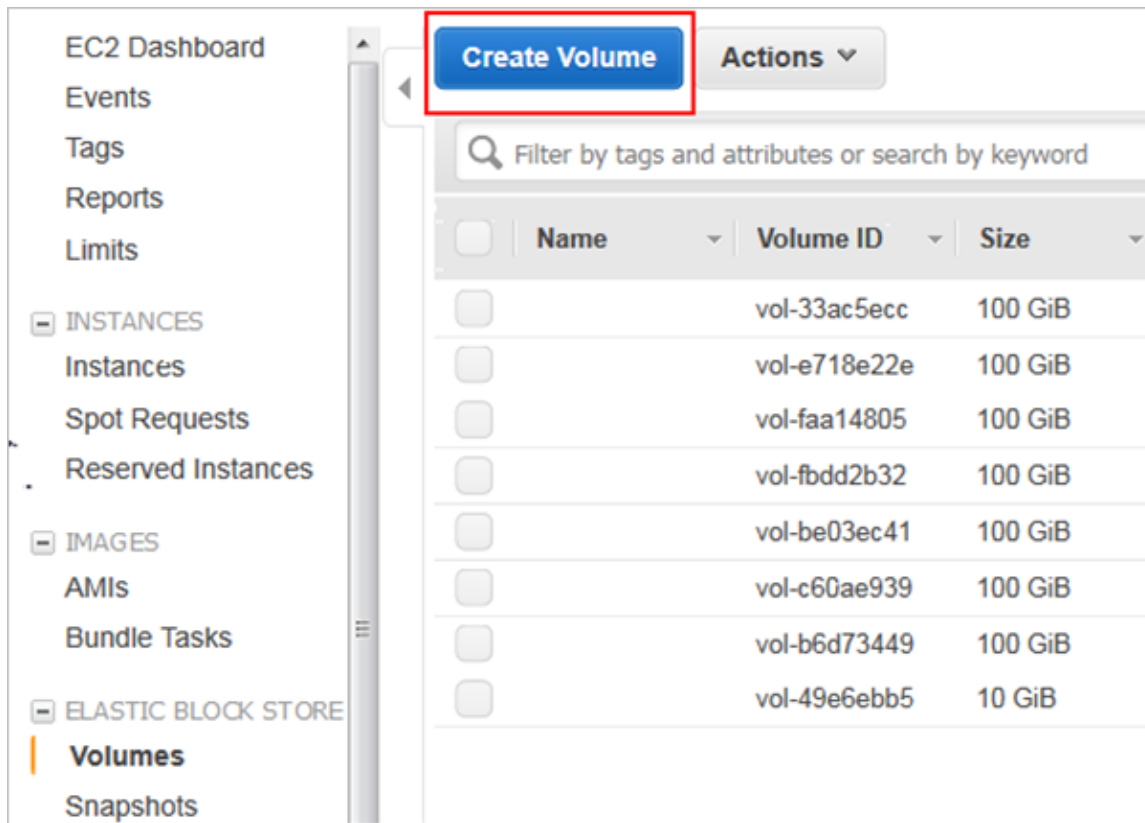**FIGURE 172** Create Volume



2. Enter the required disk type, size and availability zone.

**FIGURE 173** Create Volume

The 'Create Volume' dialog box contains the following fields and options:

- Type:** General Purpose (SSD)
- Size (GiB):** 100 (Min: 1 GiB, Max: 16384 GiB)
- IOPS:** 300 / 3000 (Baseline of 3 IOPS per GiB)
- Availability Zone:** ap-northeast-1a
- Snapshot ID:** Search (case-insensitive)
- Encryption:**  Encrypt this volume

Buttons: Cancel, Create

3. Click **Create**.
4. Right click on the newly created disk and select **Attach Volume**. Enter the instance identifier and the desired device name.

**FIGURE 174** Attach Volume

The 'Attach Volume' dialog box contains the following fields and options:

- Volume:** vol-c9ca0736 in ap-northeast-1a
- Instance:** Search instance ID or Name tag in ap-northeast-1a
- Device:** [Empty text box]

Buttons: Cancel, Attach

5. Click **Attach**.




## Allocate a Public IP Address

Follow these steps to allocate a public IP address.

1. Navigate to **EC2 Dashboard > Network & Security > Elastic IPs**. Click **Allocate New Address** as shown.

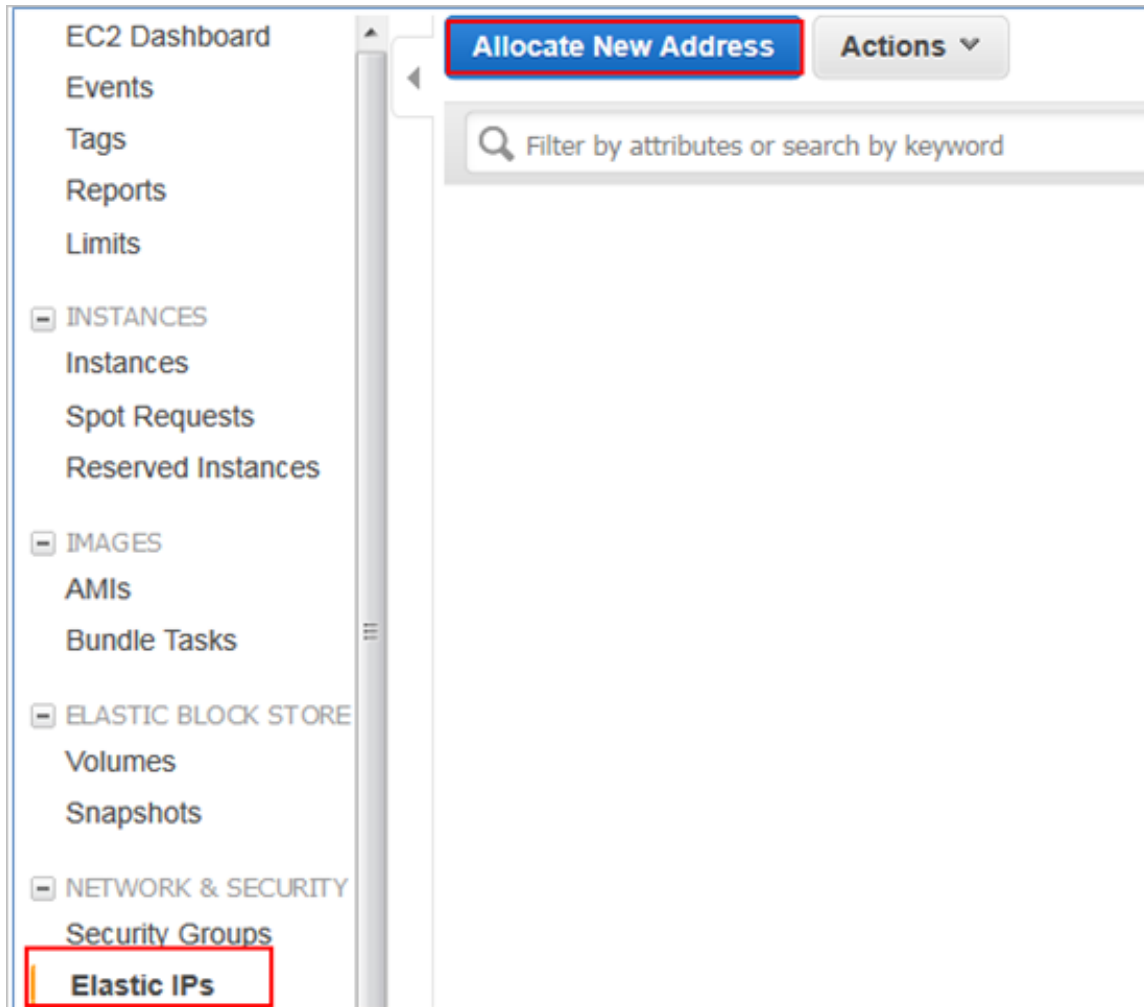**FIGURE 175** Allocate New IP Address



2. Click **Create**.

3. Right click on the newly created IP address and select **Associate Address**. Enter the instance identifier or network interface and the desired device name.

**FIGURE 176** Associate Address

**Associate Address** [X]

Select the instance OR network interface to which you wish to associate this IP address (54.178.178.186)

**Instance** Search instance ID or Name tag

**Or**

**Network Interface** Search network interface ID or Name tag

**Private IP Address** Select instance or interface. ⓘ

Reassociation ⓘ

**Warning**  
If you associate an Elastic IP address with your instance, your current public IP address is released. Learn more about [public IP addresses](#).

Cancel Associate

4. Click **Associate**.


## Change Security Group

Follow these steps to change the security group.

1. Navigate to Instances and right click the target instance.
2. Select **Network > Change Security Group**.

3. Select the security groups.

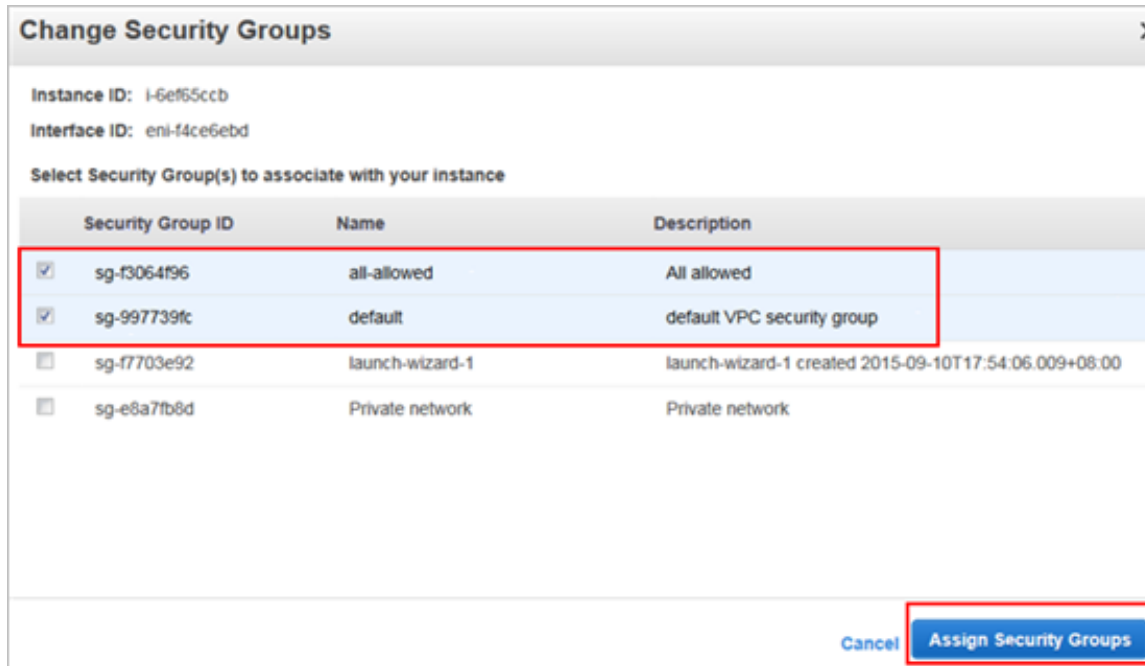**FIGURE 177** Allocate New IP Address



4. Click **Assign Security Groups**.


## Deleting a vSZ Instance

Follow these steps to delete a vSZ instance on AWS.

1. Navigate to Instances and right click to select the vSZ instance that you want to delete.


2. Select **Instance State > Terminate**.

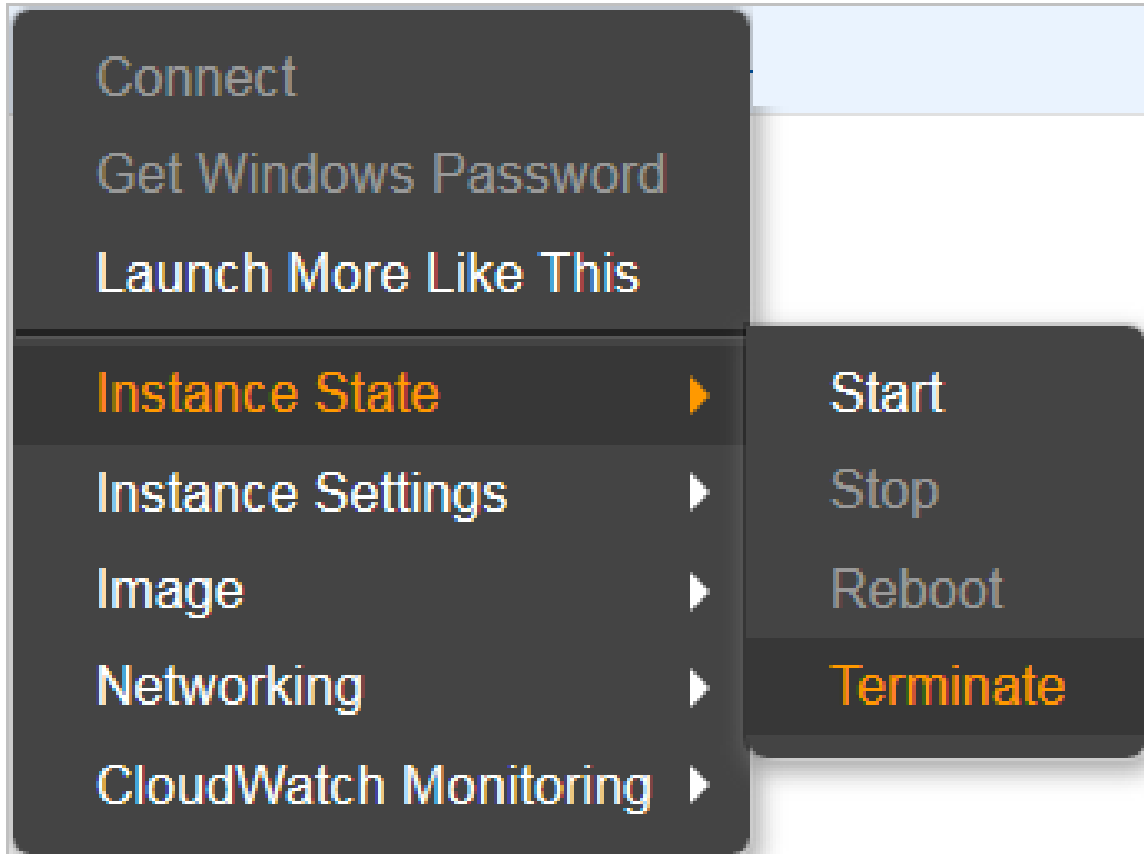**FIGURE 178** Select terminate



3. Confirm deletion of the vSZ instance by clicking on **Yes, Terminate**. The vSZ instance is deleted from AWS.

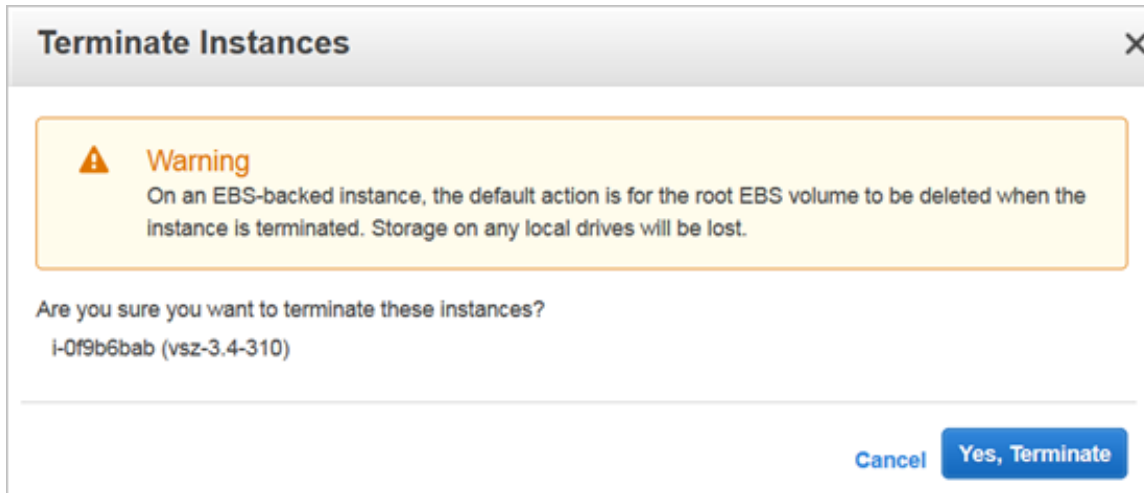**FIGURE 179** Confirm termination of vSZ instance





# Configuring the Virtual Machine Interfaces

---

- [Configuring the Virtual Machine Interfaces.....](#) 191
- [Setting Up the vSZ with One Interface.....](#) 191
- [Setting Up the vSZ with Three Interfaces.....](#) 203
- [Important Notes About Selecting the System Default Gateway.....](#) 205

## Configuring the Virtual Machine Interfaces

The vSZ comes with the option to operate with either one (1) network interface or three (3) network interfaces. Therefore the procedure for setting up the vSZ interface depends on the number of interfaces that it has.

Follow the procedure below that corresponds to the number of interfaces that the vSZ you are installing has:

- [Setting Up the vSZ with One Interface](#) on page 191
- [Setting Up the vSZ with Three Interfaces](#) on page 203

### NOTE

By default, the VMWare ESXi package comes with three network interfaces. If you want to deploy the vSZ with only one interface, you can edit the virtual machine settings to remove the extra interfaces. The KVM package, on the other hand, comes with a single interface. If you want to deploy the vSZ with three interfaces, edit the virtual machine settings to create two additional interfaces.

## Setting Up the vSZ with One Interface

Follow these steps to set up the vSZ with a single network interface

1. Log on to the console using; **User name: admin Password: admin**
2. At the **vSZ>** prompt, enter **en** to enable privileged mode.

3. At the **Password** prompt, enter **admin**. The **vSZ#** prompt appears.

**FIGURE 180** At the vSZ> prompt, enter setup

```
#####  
#      Welcome to vSZ      #  
#####  
vSZ login: admin  
Password:  
Please wait. CLI initializing...  
  
Welcome to the Ruckus Virtual SmartZone Command Line Interface  
Version: 5.0.0.0.661  
  
vSZ> en  
Password: *****  
  
vSZ# _
```

4. Enter **setup**. The console displays the current network settings (if any), and then displays the following prompt: **Do you want to setup network? [YES/no]**
5. Enter **YES**. The next screen prompts you to select the profile configuration that you want to use for this instance of vSZ. The options include: **(1) High-Scale (2) Essentials**



6. Enter the number that corresponds to the profile configuration that you want to deploy.  
If you selected Essentials and the virtual machine has insufficient memory resources available (for example, the VM has only 8GB of RAM when the minimum RAM requirement is 12GB), you will be unable to continue with the setup process.

**FIGURE 181** Enter the number that corresponds to the profile that you want to deploy

```
Password:
Please wait. CLI initializing...

Welcome to the Ruckus Virtual SmartZone Command Line Interface
Version: 5.0.0.0.661

vSZ> en
Password: *****

vSZ# setup

#####
Start vSZ setup process:
#####

*****
vSZ Profile
*****
1. Essentials
2. High Scale
Enter "i" for more information.
*****
Select vSZ Profile (1/2): 2
WARNING! You cannot change the vSZ profile once you complete setup. Are you sure
you want to install the "High Scale" profile? (y/n)[Y] _
```

7. Enter **Y** for confirmation. At the **IP Version Support** prompt, enter one of the following options: **1: IPv4 Only 2: IPv4 and IPv6**.

**FIGURE 182** Configure the IP address settings of the single interface

```
vSZ# setup
#####
Start vSZ setup process:
#####

*****
vSZ Profile
*****
1. Essentials
2. High Scale
Enter "i" for more information.
*****
Select vSZ Profile (1/2): 2
WARNING! You cannot change the vSZ profile once you complete setup. Are you sure
you want to install the "High Scale" profile? (y/n)[Y] y
Network is not setup.

*****
IP Version Support
*****
1. IPv4 only
2. IPv4 and IPv6
*****
Select address type: (1/2) _
```

8. The **IPv4 address setup for Control, Cluster, Management** option appears. At the **Select IP configuration** prompt, enter **1** for Manual and **2** for DHCP.

**FIGURE 183** Configure the IP version setup

```
*****
1. Essentials
2. High Scale
Enter "i" for more information.
*****
Select vSZ Profile (1/2): 2
WARNING! You cannot change the vSZ profile once you complete setup. Are you sure
you want to install the "High Scale" profile? (y/n)[Y] y
Network is not setup.

*****
IP Version Support
*****
1. IPv4 only
2. IPv4 and IPv6
*****
Select address type: (1/2) 1

*****
IPv4 address setup for Control,Cluster,Management
*****
1. Manual
2. DHCP
*****
Select IP configuration: (1/2) _
```

9. At the **Primary DNS Server** prompt, enter the primary DNS server on the network.
10. At the **Secondary DNS Server** prompt, enter the secondary DNS server (if any) on the network.

11. Enter **y** to apply settings.

**FIGURE 184** Apply Settings

```
*****
IP Version Support Settings:
*****
IP Version Support   : IPv4 only

Interface IPv4 settings:
*****
Control,Cluster,Management:
*****
IP Type              : DHCP
IP Address           : 192.168.30.136
Netmask              : 255.255.255.0
Gateway              : 192.168.30.1

*****
DNS Server Settings:
*****
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
*****
Enter 'y' to apply, 'n' to modify
Do you want to apply the settings? (y/n) y
Please wait while sytem configures the network.
It may take a few minutes...
*****
```

12. To accept settings enter **y**. Else, enter **n**

**FIGURE 185** Accept Settings

```
*****
Current Network Settings (After Applying)
*****
*****
IP Version Support Settings:
*****
IP Version Support   : IPv4 only

Interface IPv4 settings:
*****
Control,Cluster,Management:
*****
IP Type              : DHCP
IP Address           : 192.168.30.136
Netmask              : 255.255.255.0
Gateway              : 192.168.30.1

*****
DNS Server Settings:
*****
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
*****
Enter 'y' to accept, 'n' to modify
Accept these settings and continue? (y/n) y_
```

13. To setup a network, enter **y**. Else, enter **n**.

**FIGURE 186** Network Setup

```
#####
Start vSZ setup process:
#####
Current Network Settings
*****
IP Version Support Settings:
*****
IP Version Support   : IPv4 only

Interface IPv4 settings:
*****
Control,Cluster,Management:
*****
IP Type              : DHCP
IP Address           : 192.168.30.136
Netmask              : 255.255.255.0
Gateway              : 192.168.30.1

*****
DNS Server Settings:
*****
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
*****
Do you want to setup network? (y/n) n_
```

14. Choose the option for cluster setup. Enter **c** to create a new cluster or **j** to join an existing cluster.

**FIGURE 187** Cluster Setup

```
IP Type           : DHCP
IP Address        : 192.168.30.136
Netmask           : 255.255.255.0
Gateway           : 192.168.30.1

*****
DNS Server Settings:
*****
Primary DNS Server : 8.8.8.8
Secondary DNS Server : 8.8.4.4
*****
Do you want to setup network? (y/n) n
(C)reate a new cluster or (J)oin an exist cluster (c/j): c
Cluster Name (cluster name can contain letters (a-z, A-Z), numbers (0-9), and dashes (-)): Ruckus-cluster-1
Controller Description: vSZ-H-1

*****
Create/Join       : create
DISCOVERY PROTOCOL: tcp
Cluster Name      : Ruckus-cluster-1
Blade ID          : 8df2de6d-836d-4654-a496-7cd1ac6dd979
DESCRIPTION       : vSZ-H-1
*****
Are these correct (y/n): _
```

15. Enter the following information:

- **Cluster Name**
- **Controller Description**

**Create/Join** cluster, **DISCOVERY PROTOCOL**, **Cluster Name**, **Blade ID**, and **DESCRIPTION** are created by the system.

16. When the prompt **Are these correct? (y/n)** appears, enter **y** to confirm the cluster setup. Enter the controller name of the blade and enter **y** to specify if the controller is behind NAT. Else, enter **n**.

FIGURE 188 Configure Cluster Setup

```
*****
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
*****
Do you want to setup network? (y/n) n
(C)reate a new cluster or (J)oin an exist cluster (c/j): c
Cluster Name (cluster name can contain letters (a-z, A-Z), numbers (0-9), and dashes (-)): Ruckus-cluster-1
Controller Description: vSZ-H-1

*****
Create/Join          : create
DISCOVERY PROTOCOL: tcp
Cluster Name        : Ruckus-cluster-1
Blade ID             : 8df2de6d-836d-4654-a496-7cd1ac6dd979
DESCRIPTION          : vSZ-H-1
*****
Are these correct (y/n): y
Enter the controller name of the blade ([a-zA-Z0-9-]): vSZ-H-1
Is this controller behind NAT? (y/n) n
System UTC Time: 2018-05-30 01:59:10 UTC
NTP Server ([a-zA-Z0-9.-]): [ntp.ruckuswireless.com]
Check if NTP server [ntp.ruckuswireless.com] is reachable...
System time after synchronization: 2018-05-30 01:59:16 UTC
*****
```



17. To Convert ZoneDirector APs in factory settings to vSZ APs to vSZ APs automatically, enter **y**, else enter **n**.

**FIGURE 189** Converting Factory Settings to vSZ Settings

```
shes (-): Ruckus-cluster-1
Controller Description: vSZ-H-1

*****
Create/Join      : create
DISCOVERY PROTOCOL: tcp
Cluster Name    : Ruckus-cluster-1
Blade ID       : 8df2de6d-836d-4654-a496-7cd1ac6dd979
DESCRIPTION     : vSZ-H-1
*****
Are these correct (y/n): y
Enter the controller name of the blade ([a-zA-Z0-9-]): vSZ-H-1
Is this controller behind NAT? (y/n) n
System UTC Time: 2018-05-30 01:59:10 UTC
NTP Server ([a-zA-Z0-9.-]): [ntp.ruckuswireless.com]
Check if NTP server [ntp.ruckuswireless.com] is reachable...
System time after synchronization: 2018-05-30 01:59:16 UTC
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
n
Reset admin's password!
Enter admin password:
Enter admin password again:
Enter the CLI enable command password:
Enter the CLI enable command password again: _
```

18. In **Reset admin's password**, press **<Enter>**.

19. Enter the following information:

- **Enter the admin password**
- **Enter the admin password again**
- **Enter the CLI enable command password**
- **Enter the CLI enable command password again**

The password reset confirmation appears and starts setup process.

**FIGURE 190** Admin Password Reset

```
*****
Create/Join      : create
DISCOVERY PROTOCOL: tcp
Cluster Name    : Ruckus-cluster-1
Blade ID        : 8df2de6d-836d-4654-a496-7cd1ac6dd979
DESCRIPTION     : vSZ-H-1
*****
Are these correct (y/n): y
Enter the controller name of the blade ([a-zA-Z0-9-]): vSZ-H-1
Is this controller behind NAT? (y/n) n
System UTC Time: 2018-05-30 01:59:10 UTC
NTP Server ([a-zA-Z0-9.-]): [ntp.ruckuswireless.com]
Check if NTP server [ntp.ruckuswireless.com] is reachable...
System time after synchronization: 2018-05-30 01:59:16 UTC
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
n
Reset admin's password!
Enter admin password:
Enter admin password again:
Enter the CLI enable command password:
Enter the CLI enable command password again:
Reset admin's password done!
Setup configurations done. Starting setup process after 5 seconds...
_
```

20. The setup process begins.

FIGURE 191 Setup Process Begins

```
System time after synchronization: 2018-05-30 01:59:16 UTC
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
Convert ZoneDirector APs in factory settings to vSZ APs automatically (y/n) [N]
n
Reset admin's password!
Enter admin password:
Enter admin password again:
Enter the CLI enable command password:
Enter the CLI enable command password again:
Reset admin's password done!
Setup configurations done. Starting setup process after 5 seconds...
/etc/init.d/snmpd restart
New hostname: vSZ-H-1
Change admin password done!

*****
Check installation status
*****
Wait for cluster config operation start!
Wait for cluster config operation start!
Wait for cluster config operation start!
Wait for cluster config operation start!
Bootstrapping, Wed May 30 02:00:33 UTC 2018
Blade Channel Opened, Wed May 30 02:00:36 UTC 2018
[## #####.....]20%_
```

You have completed configuring the vSZ interfaces. You are now ready to run the vSZ Setup Wizard. See Using the Setup Wizard to Install vSZ.

## Setting Up the vSZ with Three Interfaces

1. Log on to the console using the following credentials: **User name: admin Password: admin**
2. At the **vSZ>** prompt, enter **en** to enable privileged mode.
3. At the **Password** prompt, enter **admin**. The **vSZ#** prompt appears.

4. Enter **setup**. The console displays the current network settings (if any), and then displays the prompt: **Choose IP Version Support (either 1. IPv4 only or 2. IPv4 and IPv6)**

FIGURE 192 At the vSZ> prompt, enter setup

```
vSZ# setup
#####
Start vSZ setup process:
#####
Network is not setup.

#####
IP Version Support
#####
1. IPv4 only
2. IPv4 and IPv6
#####
Select address type: (1/2) 1
```

5. At the **Select IP configuration** prompt, enter **1** to set up the *control interface* manually.
6. Configure the IP address, netmask, and gateway of the control interface, and then press **<Enter>**. The IP address configuration that you entered appears.

FIGURE 193 Configure the IP address settings of the control interface


```
#####
IPv4 address setup for Control interface
#####
1. Manual
2. DHCP
#####
Select IP configuration: (1/2) 1
IP Address: 11.22.0.122
Netmask: 255.255.0.0
Gateway: 172.17.32.122
Please enter an address in the same subnet
Gateway: 11.22.0.1
```

7. At the **Select IP configuration** prompt, enter **1** to set up the cluster interface manually.
8. Configure the IP address, netmask, and gateway of the *cluster interface*, and then press **<Enter>**.
9. At the **Select IP configuration** prompt, enter **1** to set up the management interface manually.
10. Configure the IP address, netmask, and gateway of the management interface, and then press **<Enter>**.  
Take note of the IP address that you assign to the management interface – you will use this IP address to log on to the vSZ web interface.

11. When the message **Select system default gateway (Control, Cluster, Management)?**, enter **Control** or **Management**, depending on your network topology (see [Important Notes About Selecting the System Default Gateway](#) on page 205).

This entry is case-sensitive. Make sure you enter the system default gateway exactly as shown at the prompt.

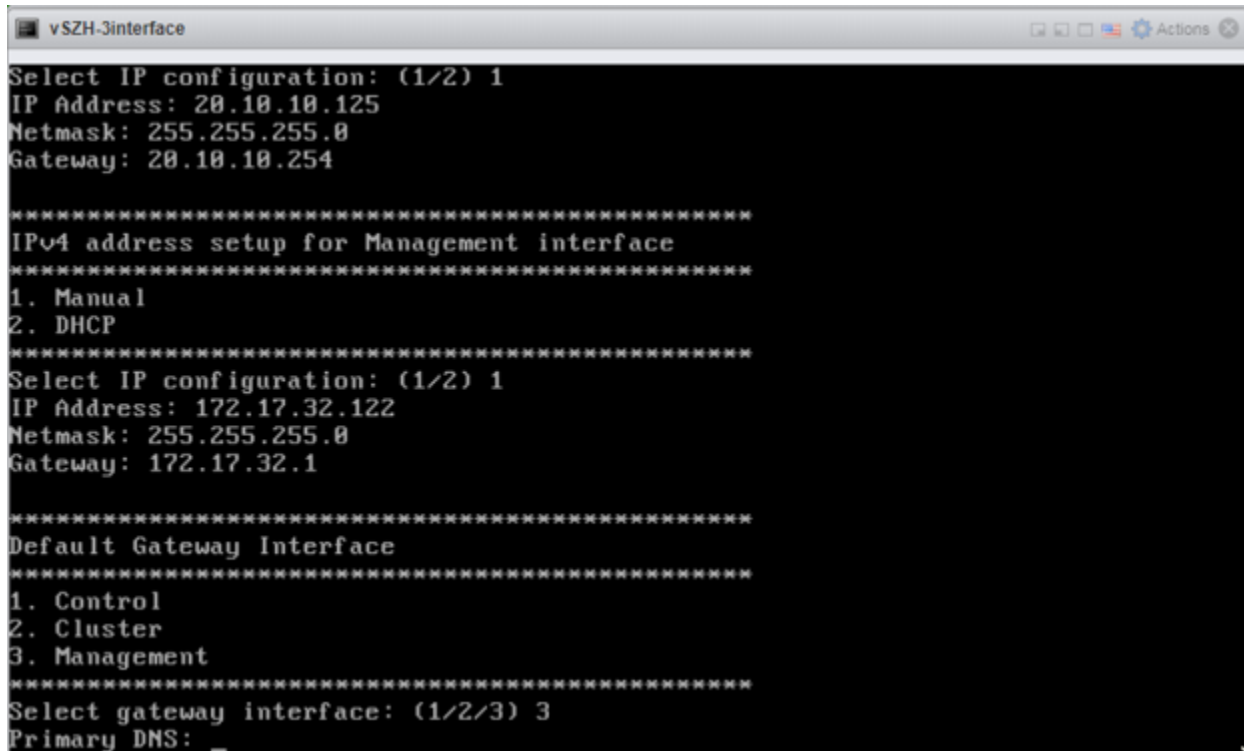**FIGURE 194** When prompted for the system default gateway, enter either Management or Control (depending on your network design)



```
vSZH-3interface
Select IP configuration: (1/2) 1
IP Address: 20.10.10.125
Netmask: 255.255.255.0
Gateway: 20.10.10.254

*****
IPv4 address setup for Management interface
*****
1. Manual
2. DHCP
*****
Select IP configuration: (1/2) 1
IP Address: 172.17.32.122
Netmask: 255.255.255.0
Gateway: 172.17.32.1

*****
Default Gateway Interface
*****
1. Control
2. Cluster
3. Management
*****
Select gateway interface: (1/2/3) 3
Primary DNS: _
```

12. When prompted, enter the primary and secondary DNS server IP addresses.
13. Enter **restart network**.

You have completed configuring the vSZ interfaces. You are now ready to run the vSZ Setup Wizard. See [Using the Setup Wizard to Install vSZ](#) on page 207.

## Important Notes About Selecting the System Default Gateway

Depending on your network topology, you may select either the Management or Control interface as the system default gateway.

- If all of the managed APs are located in different locations on the Internet, the vSZ may not know all of the IP subnets of these APs. In this case, the control interface should be set as the default gateway for the vSZ and you will need to add a static route to reach the management network.

## Configuring the Virtual Machine Interfaces

### Important Notes About Selecting the System Default Gateway

- If all of the managed APs belong to a single subnet or to multiple subnets on which you can set the route statically, then you can set the management interface as the default gateway users can set default gateway for the vSZ and set static routes for the vSZ to reach all of its managed APs.

# Using the Setup Wizard to Install vSZ

---

|                                                                                      |     |
|--------------------------------------------------------------------------------------|-----|
| • Before You Begin.....                                                              | 207 |
| • Step 1: Start the Setup Wizard and Set the Language.....                           | 208 |
| • Step 2: Select the Profile Configuration That Corresponds to Your vSZ License..... | 208 |
| • Step 3: Configure the Management IP Address Settings.....                          | 210 |
| • Step 4: Configure Dual Mode IP Address Settings Using CLI.....                     | 211 |
| • Step 5: Configure the Cluster Settings.....                                        | 221 |
| • Step 6: Set the Administrator Password.....                                        | 223 |
| • Step 7: Verify the Settings.....                                                   | 224 |
| • Logging On to the Web Interface.....                                               | 226 |

## Before You Begin

The Setup Wizard helps you perform the initial configuration of the vSZ by presenting the vSZ configuration options in a set of easy-to-complete screens.

The Setup Wizard will prompt you to select one of the two available profile configurations (High-Scale profile and Essentials profile). You must select the profile configuration that corresponds to the vSZ license that you purchased. Before you start the Setup Wizard, make sure you know the profile configuration that you need to select. If you are unsure which profile configuration you need to select, contact Ruckus Networks Support.

Follow these steps to run and complete the vSZ Setup Wizard:

- Start the Setup Wizard and Set the Language
- Select the Profile Configuration That Corresponds to Your vSZ License
- Configure the Management IP Address Settings
- Configure Dual Mode IP Address Settings Using CLI
- Configure the Cluster Settings
- Set the Administrator Password
- Verify the Settings


### NOTE

This guide describes the Setup Wizard screens that appear when you select the High-Scale profile configuration. If you select the Essentials profile configuration, the screens that appear may be slightly different.

## Step 1: Start the Setup Wizard and Set the Language

1. Start your web browser, and then enter the following in the address bar: **https://{management-IP-address}:8443**, where management-IP-address is the address you assigned to the management interface. The vSZ Setup Wizard appears, displaying the **Language** page.

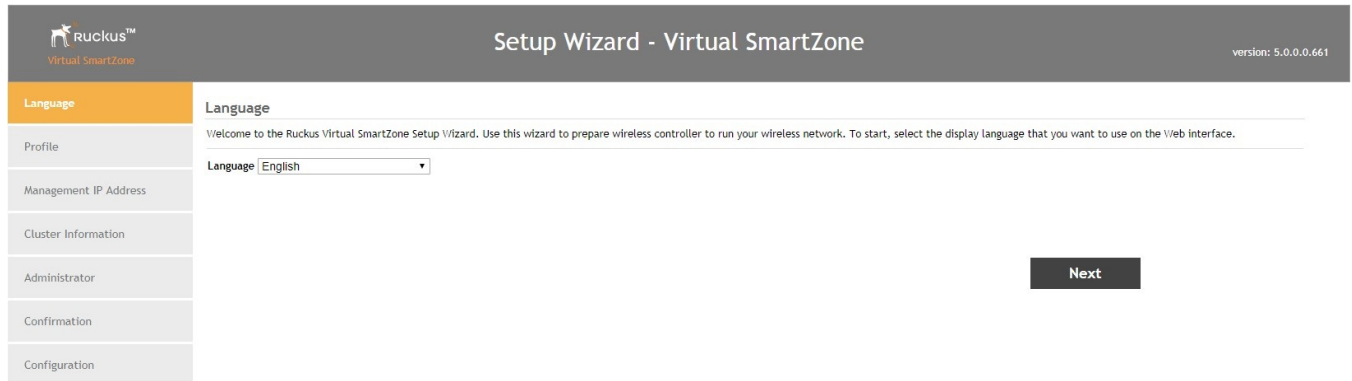**FIGURE 195** The Language page



2. Select your preferred language for the vSZ web interface. Available options include:
  - English
  - Traditional Chinese
  - Simplified Chinese
3. Click **Next**. The **Profile** page appears.

## Step 2: Select the Profile Configuration That Corresponds to Your vSZ License

1. Select the profile configuration that corresponds to the vSZ license that you purchased. Available profile configurations include:
  - High Scale
  - Essentials



- Click **Next**. The Confirmation message appears. Once you accept the confirmation, the **Management IP** page appears.

**FIGURE 196** Select a profile configuration that matches your vSZ license

Setup Wizard - Virtual SmartZone

version: 3.5.0.0.562

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Language              | <b>Profile</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Profile</b>        | Please select profile configuration.<br><b>Profile:</b> <span style="border: 1px solid #ccc; padding: 2px;">High Scale</span>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Management IP Address | <b>High-Scale</b><br>The High-Scale operating profile is designed for very large scale networks. In this mode, each controller node supports up to 10,000 APs and 100,000 clients, while a cluster can support up to 30,000 APs and 300,000 clients. High-Scale mode supports functions commonly required by service providers, including managed service provider (MSP) and MIMO workflows, as well as advanced network segmentation by domain and zone (with support for thousands of zones). The High-Scale mode is optimized for network access and AP control functions, leaving historical traffic and health stats, reporting, and logging to external tools-like SmartCell Insight (SCI) or 3rd party tools. Please see the "Getting Started Guide" to determine the recommended system resources to run in High-Scale mode.                                                                                                               |
| Cluster Information   | <b>Essentials</b><br>The Essentials operating profile is designed primarily for enterprise networks. In this mode, each controller node supports up to 1,000 APs and 20,000 clients, while a cluster can support up to 3,000 APs and 60,000 clients. Essentials mode supports functions commonly required by enterprise, hospitality, education, retail, healthcare, and businesses in many other market types as well as small-scale MSPs. The network can be segmented into different zones, with support for up to 1024 zones. The Essentials mode is optimized to handle the full scope of network management and control functions, including AP control, short-term reporting, logging, troubleshooting, and traffic and health analysis. For many months or years of historical data, we recommend SmartCell Insight (SCI). Please see the "Getting Started Guide" to determine the recommended system resources to run in Essentials mode. |
| Administrator         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Confirmation          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Configuration         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

Back
Next

## Step 3: Configure the Management IP Address Settings

The vSZ comes in either a single network interface or three network interfaces (one interface each for Control (AP), Cluster, and Management (Web) traffic). The following procedure assumes that the vSZ you are installing uses a single network interface.

If the vSZ that you are installing comes with three network interfaces, you must configure each of the three interfaces to be on three different subnets. Failure to do so may result in loss of access to the web interface or failure of system functions and services.

1. In *IP Version Support*, select one of the following options:

**IPv4 Only:** Click this option if you want the controller to obtain an IPv4 address from a DHCP server on the network.

**IPv4 and IPv6:** Click this option if you want the controller to obtain both IPv4 and IPv6 addresses from DHCP and DHCPv6 servers on the network. Refer to Step 4: Configure Dual Mode IP Address Settings Using CLI for configuring dual setup using CLI. This is an alternative method for configuring IPv4 and IPv6 manually if the DHCP server is not available on the network.

**FIGURE 197** Select the IP version support

The screenshot shows the 'Setup Wizard - Virtual SmartZone' interface. On the left is a navigation menu with options: Language, Profile, Management IP Address (highlighted), Cluster Information, Administrator, Confirmation, and Configuration. The main content area is titled 'Management IP' and includes a sub-header 'IP Version Support' with radio buttons for 'IPv4 only' (selected) and 'IPv4 and IPv6'. Below this is a dropdown menu for 'Control(AP)/Cluster/Management(Web)'. The 'IPv4' section contains radio buttons for 'Static' (selected) and 'DHCP'. Below are input fields for 'IP Address \*' (192.168.30.188), 'Netmask \*' (255.255.255.0), and 'Gateway \*' (192.168.30.1). At the bottom, there are fields for 'Default Gateway\*' (Control(AP)/Cluster/M), 'Primary DNS Server' (8.8.8.8), and 'Secondary DNS Server' (8.8.4.4). A 'Next' button is located at the bottom right.

2. Configure the IP address settings of the *Control (AP/DataPlane)* interface.
  - a) Under the **IPv4** section, click **Static**, and then enter the network settings that you want to assign to the AP/ DataPlane interface, through which client traffic and configuration data are sent and received.

Although it is possible to use DHCP to assign IP address settings to the Control interface automatically, Ruckus Networks strongly recommends assigning a static IP address to this interface. The following network settings are required (others are optional):

    - IP address
    - Netmask
    - Gateway
  - a) If you clicked IPv4 and IPv6 at the beginning of this procedure, under the IPv6 section, click **Auto Configuration** if you want the controller to obtain its IP address from Router Advertisements (RAs) or from a DHCPv6 server on the network. If you want to manually assign the IPv6 network address, click **Static**, and then set the values for the following: IP address (IPv6): Enter an IPv6 address (global only) with a prefix length (for example, **1234::5678:0:C12/123**). Link-local addresses are unsupported. Gateway: Enter an IPv6 address (global or link-local) without a prefix length. Here are examples:

Global address without a prefix length: **1234::5678:0:C12**

Link-local address without a prefix length: **fe80::5678:0:C12**
3. At the bottom of the screen, select the interface that you want to set as the default system gateways for IPv4 and IPv6 (if enabled), and then type the **Default Gateway**, **Primary DNS Server** address and **Secondary DNS Server** Address. The appropriate interface to use as the default system gateway depends on the topology of your network. See [Important Notes About Selecting the System Default Gateway](#) on page 205 for more information.
4. Check the network settings that you have configured.
5. Click the **Next** to continue. The controller validates and applies the network settings that you have configured. Continue to [Step 5: Configure the Cluster Settings](#) on page 221

## Important Notes About Selecting the System Default Gateway

Depending on your network topology, you may select either the Management or Control interface as the system default gateway.

- If all of the managed APs are located in different locations on the Internet, the vSZ may not know all of the IP subnets of these APs. In this case, the control interface should be set as the default gateway for the vSZ and you will need to add a static route to reach the management network.
- If all of the managed APs belong to a single subnet or to multiple subnets on which you can set the route statically, then you can set the management interface as the default gateway users can set default gateway for the vSZ and set static routes for the vSZ to reach all of its managed APs.

## Step 4: Configure Dual Mode IP Address Settings Using CLI

The following are the steps to configure the dual setup using CLI. This is an alternative method of configuring IPv4 and IPv6 manually if the DHCP server is not available on the network.

1. Using CLI execute the setup command: **vSZ# setup**
2. In **vSZ Profile**, choose either **1. Essentials** or **2. High Scale**.

3. In **IP Version Support**, choose **2. IPv4 and IPv6**.

**FIGURE 198** Choose 2. IPv4 and IPv6 to use dual mode IP addresses

```
vSZ# setup

#####
Start vSZ setup process:
#####

*****
vSZ Profile
*****
1. Essentials
2. High Scale
*****
Select vSZ Profile (1/2): 1
Current network settings:

    Network not setup!

*****
IP Version Support
*****
1. IPv4 only
2. IPv4 and IPv6
*****
Select address type: (1/2) _
```

4. Configure the IPv4 address settings that you want to assign to the AP/DataPlane interface, through which client traffic and configuration data are sent and received.
  - a) Enter the setup for **Control** as either:
    1. Manual
    2. DHCP
  - b) Enter the IP configuration as 2 (DHCP).
  - c) Enter following network settings as required:
    - IP address
    - Netmask
    - Default gateway
  - d) Save the networking configuration of **Control** settings.

FIGURE 199 IPv4 Control Settings

```
*****
IPv4 address setup for Control
*****
1. MANUAL
2. DHCP
*****
Select IP configuration (1/2): 2
*****
Control:
*****
IP Address      : 182.21.160.66
Netmask         : 255.255.255.240
Gateway         : 182.21.160.65
*****
Are these correct (y/n): y
Execute networking configuration of Control!
Save networking configuration of Control!
*****
```

- e) Enter the setup for Cluster as either: **1. Manual 2. DHCP**
- f) Enter the IP configuration as 1 (Manual)
- g) Enter following network settings as required: **IP address, Netmask, and Default gateway**
- h) Save the networking configuration of **Cluster** settings.

FIGURE 200 IPv4 Cluster Settings

```
*****
IPv4 address setup for Cluster
*****
1. MANUAL
2. DHCP
*****
Select IP configuration (1/2): 1
IP Address: 182.21.160.82
Netmask: 255.255.255.240
Gateway: 182.21.160.85
*****
Cluster:
*****
IP Address      : 182.21.160.82
Netmask        : 255.255.255.240
Gateway        : 182.21.160.85
*****
Are these correct (y/n): y
Execute networking configuration of Cluster!
Save networking configuration of Cluster!
*****
```

- i) Enter the setup for Management as either: **1. Manual 2. DHCP**
- j) Enter the IP configuration as **2** (DHCP)
- k) Enter following network settings as required:
  - IP Address
  - Netmask
  - Gateway

- l) Save the networking configuration of **Management** settings

**FIGURE 201 IPv4 Management Settings**

```
*****  
IPv4 address setup for Management  
*****  
1. MANUAL  
2. DHCP  
*****  
Select IP configuration (1/2): 2  
*****  
Management:  
*****  
IP Address      : 172.19.10.2  
Netmask         : 255.255.0.0  
Gateway         : 172.19.10.254  
*****  
Are these correct (y/n): y  
Execute networking configuration of Management!  
Save networking configuration of Management!
```

The available gateway for Control, Cluster and Management will be displayed. You can select the system default gateway.

**FIGURE 202 Default Gateway Settings**



```
*****  
Available Gateway:  
*****  
Control           : 182.21.160.65You  
Cluster           : 182.21.160.85  
Management        : 172.19.10.254  
*****  
Select system default gateway (Control, Cluster, Management)? Control  
Primary DNS: 4.2.2.2  
Secondary DNS:  
Control NAT IP:
```

5. If the controller is behind a NAT server, add the control NAT server IP address, and then hit Enter.

**FIGURE 203** NAT server IP address

```
Control NAT IP:  
Network would be restarted. You could connect to vSZ back by using Management po  
rt (10.20.110.8)!!  
Enter "restart network" or press Enter to continue... restarrrt network
```

6. Configure the IPv6 address settings that you want to assign to the AP/Data Plane interface, through which client traffic and configuration data are sent and received.

**NOTE**

The cluster interface setting does not support IPv6 addresses.

- a) Enter the setup for Control as either: **1. Manual 2. Auto Configuration**
- b) Enter the IP configuration as **1** (Manual).
- c) Enter following network settings as required:
  - IPv6 Address
  - Gateway
- d) Save the networking configuration of **Control** settings.

**FIGURE 204 IPv6 Control Settings**

```
IPv6 address setup for Control
*****
1. MANUAL
2. AUTO CONFIGURATION
*****
Select IP configuration: (1/2) 1

IPv6 Address: 3000:2:1:1::1/64
Gateway: 3000:2:1:1::254
*****
Control:
*****
IP Address      : 3000:2:1:1::1/64
Gateway         : 3000:2:1:1::254
*****
Are these correct (y/n): y
Execute networking configuration of Control!
Save networking configuration of Control!
```

- e) Enter the setup for Management as either: 1. Manual2. Auto Configuration
- f) Enter the IP configuration as **1** (Manual)
- g) Enter following network settings as required: IP addressDefault gateway
- h) Save the networking configuration of **Management** settings.

**FIGURE 205** IPv6 Management Settings

## IPv6 address setup for Management

\*\*\*\*\*

1. MANUAL

2. AUTO CONFIGURATION

\*\*\*\*\*

Select IP configuration: (1/2) 1

IPv6 Address: 3000:2:1:1::2/64

Gateway: 3000:2:1:1::254

\*\*\*\*\*

Management:

\*\*\*\*\*

IP Address : 3000:2:1:1::2/64

Gateway : 3000:2:1:1::254

\*\*\*\*\*

Are these correct (y/n): y

Execute networking configuration of Management!

Save networking configuration of Management!

The available gateway for Control and Management will be displayed. You can select the system default gateway.

**FIGURE 206** Default Gateway Settings

```
Available Gateway:
.....
Control          : 3000:2:1:1::254
Management      : 3000:2:1:1::254
.....
Select system default gateway (Control, Management)? Control
Primary DNS: 3000:2:1:1::254
Secondary DNS:
Network would be restarted. You could connect to SCG back by using Management port (172.19.10.2 or 3000:2:1:1::2)!!
Enter "restart network" or press Enter to continue... restart network
```

7. Enter "restart network".

- Go back to the controller's web interface, and then go to **System > Cluster > Control Planes**. Then, expand the node, select the Cluster plane, and click **Configure**.

The **Edit Control Plane Network Settings** page appears.

**FIGURE 207** Control Plane Network Settings

This page lists the network configuration settings of the selected control plane. You can modify the interface settings, northbound control interface settings, or manually configure the static routes.

**Physical Interfaces** | Static Routes

Control/Cluster/Management Interface

- \* IP Mode:  Static  DHCP
- \* IP Address:
- \* Subnet Mask:
- Gateway:
- Control NAT IP:

Default Gateway & DNS

IPv4 Default Gateway & DNS

- \* Default Gateway: Control/Cluster/Manag ▼
- Primary DNS Server:
- Secondary DNS Server:

OK Cancel

- Verify that the Control Plane network settings display the IPv4 and IPv6 addresses that you configured.
- Continue to [Step 5: Configure the Cluster Settings](#) on page 221

## Step 5: Configure the Cluster Settings

The next step is to configure the vSZ cluster settings. The actions that you need to perform in this step depend on whether you are creating a new cluster (with this vSZ as the first node) or you are setting up this vSZ to join an existing cluster.

- [If This vSZ Is Forming a New Cluster](#) on page 222
- [If This vSZ Is Joining an Existing Cluster](#) on page 222

**FIGURE 208** The Cluster Information page, showing the New Cluster option

Language

Profile

Management IP Address

Cluster Information

Administrator

Confirmation

Configuration

Cluster Information

vSZ Cluster Setting: New Cluster

Cluster Name: Ruckus-vSZ-H-Cluster

Controller Name: vSZ-H-1

Controller Description: vSZ-H-vSZ-H-1

Default Country Code: United States

NTP Server: ntp.ruckuswireless.com

AP Conversion  Convert ZoneDirector APs in factory settings to Virtual SmartZone APs automatically

Is this controller behind NAT?

Next Back

## If This vSZ Is Forming a New Cluster

Follow these steps if you want to use this vSZ to create a new cluster.

On the **Cluster Information** page, configure the following settings:

1. In **vSZ Cluster Setting**, select **New Cluster**.
2. In **Cluster Name**, type a name for the new cluster that you are creating.

### NOTE

The **Cluster Name** and **Controller Name** boxes only accept alphanumeric characters, hyphens (-), and underscores (\_). They do not accept the space character or other special characters (for example, \$, \*, #, !).

3. In **Controller Name**, type a name for the vSZ controller in this new cluster.
4. In **Controller Description**, type a brief description for the vSZ controller.
5. In **Default Country Code**, select the country.
6. In **NTP Server**, type the address of the NTP server from which members of the cluster will obtain and synchronize time. The default NTP server is **ntp.ruckuswireless.com**
7. If you want ZoneDirector APs that are in factory default settings to be converted to SmartZone APs automatically, select the **AP Conversion** check box.
8. If the controller is behind NAT, select the check box and enter the **Controller NAT IP**.
9. Click **Next** to continue to the **Administrator** page.

## If This vSZ Is Joining an Existing Cluster

If this is not the first vSZ cluster on the network, you can set up this vSZ virtual appliance to join an existing cluster.

A vSZ cluster supports a maximum of four nodes. If you are building a vSZ-E cluster with more than two nodes, two (2) additional cores must be added to each node to support the added search and replication capabilities.

## NOTE

To add this vSZ to an existing cluster, the entire target cluster must be in a healthy state (no node must be in “out of service” state). If any member node is out of service, the join request will fail. You will need to remove any out-of-service node from the cluster before you can add a new node successfully.

Follow these steps to configure this to join an existing cluster.

1. In **vSZ Cluster Setting**, select **Join Existing Cluster**.
2. In **Cluster Name**, type the name of the cluster that this vSZ is joining.  
The **Cluster Name** and **Controller Name** boxes only accept alphanumeric characters, hyphens (-), and underscores (\_). They do not accept the space character or other special characters (for example, \$, \*, #, !).
3. In **Controller Name (optional)**, type a name that you want to assign to this new controller.
4. In **Controller Description**, type a description for this new controller.
5. In **Join Exist vSZ Cluster IP**, type the IP address of the leader in the existing cluster.
6. In **Admin Password**, type the administrator password to the web interface of the leader node.
7. Click **Next** to continue to the **Administrator** page. See [Step 6: Set the Administrator Password](#) on page 223.

**FIGURE 209** The Cluster Information page, showing the Join Existing Cluster option

The screenshot shows the 'Setup Wizard - Virtual SmartZone' interface. The top header includes the Ruckus logo and version information (1.5.0.0.789). A sidebar on the left lists navigation options, with 'Cluster Information' selected. The main content area is titled 'Cluster Information' and features a dropdown menu for 'vSZ Cluster Setting' set to 'Join Existing Cluster'. Below this are input fields for 'Cluster Name', 'Controller Name', 'Controller Description', 'Join Exist vSZ Cluster IP', and 'Admin Password'. At the bottom right, there are 'Next' and 'Back' buttons.

If the firmware version on this vSZ (shown in the bottom-left area of the **Cluster Information** page) does not match the firmware version of the cluster, a message appears and prompts you to upgrade the vSZ firmware. Click **Upgrade**, and then follow the prompts to perform the upgrade.

## Step 6: Set the Administrator Password

Set the administrator passwords for the web interface and command line interface (CLI).

Follow these steps to set the web interface and CLI passwords.

**NOTE**

The web interface and CLI passwords must be at least eight (8) characters in length and must include one number, one letter, and one special character (for example, \$, \*, #, !).

1. In **Admin Password**, type a password that you want to use to access the web interface.
2. In **Confirm Password**, retype the password above to confirm.
3. In **Enable Password**, type a password that you want to use to enable CLI access to the vSZ.
4. In **Confirm Password**, retype the password above to confirm.
5. Click **Next** to continue. The **Confirmation** page appears and displays all the controller settings that you have configured using the Setup Wizard.

**FIGURE 210** Set the web interface and CLI passwords

The screenshot shows the 'Setup Wizard - Virtual SmartZone' interface. On the left is a vertical navigation menu with the following items: Language, Profile, Management IP Address, Cluster Information, Administrator (highlighted in orange), Confirmation, and Configuration. The main content area is titled 'Administrator' and contains the following text and fields:

- Language**: Administrator
- Profile**: Enter Admin's password and password that permits administrative access to the Web interface. (Use this information to log into the Web interface after this setup is complete, to further configure your new wireless network.)
- Management IP Address**: Admin Password \* [input field], Confirm Password \* [input field]
- Cluster Information**: Enter CLI enable password and password that provides advance command. Enable Password \* [input field], Confirm Password \* [input field]
- Administrator**: (This section is currently active and highlighted in orange in the navigation menu.)
- Confirmation**: [empty]
- Configuration**: [empty]

At the bottom right of the form, there are two buttons: 'Next' and 'Back'.

## Step 7: Verify the Settings

After you complete setting the web interface and CLI passwords, check the **Confirmation** page and review all of the controller settings that you have configured using the Setup Wizard.


Follow these steps to verify the controller settings that you have configured.

1. Verify that all the settings displayed on the **Confirmation** page are correct.



- If they are all correct, click **Finish** to apply the settings and activate the controller on the network.

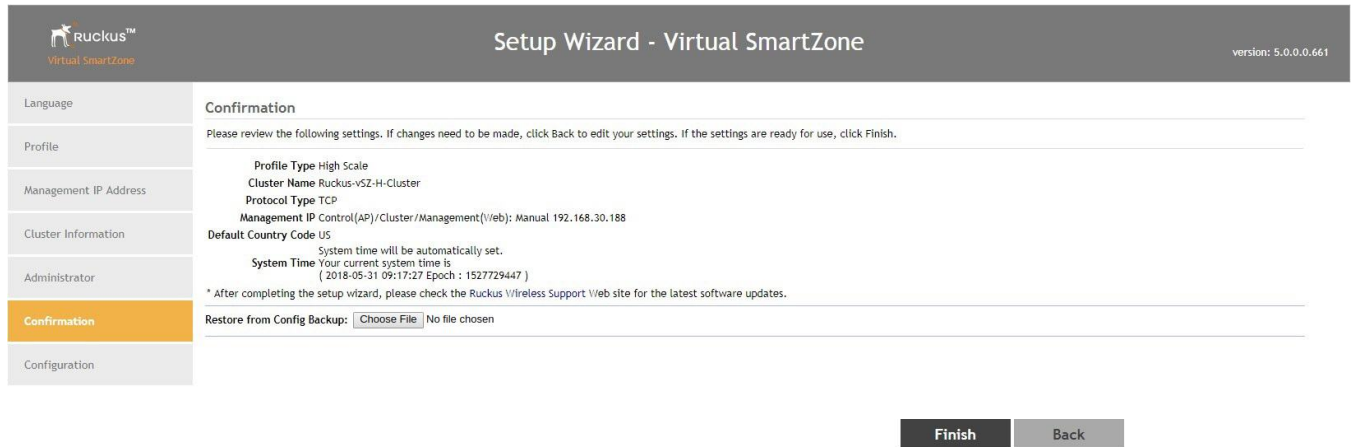**FIGURE 211** The Confirmation page




**NOTE**

If you find an incorrect setting, click the **Back** button until you reach the related page, and then edit the settings. When you finish editing the settings, click the **Next** button until you reach the **Confirmation** page again.

A progress bar appears and displays the progress of applying the settings, starting the vSZ services, and activating the vSZ on the network.

When the process is complete, the progress bar shows the message 100% Done. The page also shows the IP address through which you can access the vSZ web interface to manage the controller.

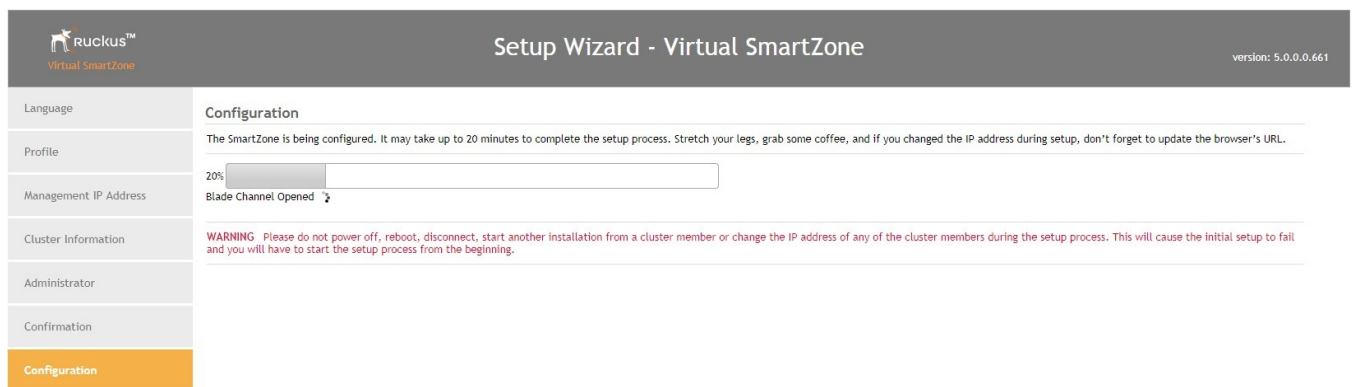**FIGURE 212** Setup is complete when the progress bar shows “100% Done”



Congratulations! You have completed the Setup Wizard. You are now ready to log on to the web interface. Go to **https://{management-IP-address}:8443**, and then log on with the user name and password that you assigned to the web interface.

## Logging On to the Web Interface

You can access the web interface from any computer that is on the same subnet as the management (web) interface. Follow these steps to log on to the vSZ web interface.


1. On a computer that is on the same subnet as the Management (Web) interface, start a web browser.
2. In the address bar, enter the IP address that you assigned to the Management (Web) interface and append a colon and 8443 (vSZ management port number) at the end of the address. The vSZ web interface logon page appears.

If the IP address that you assigned to the Management (Web) interface is 10.10.101.1, then you should enter:

```
https://10.10.101.1:8443
```

The vSZ logon page appears.

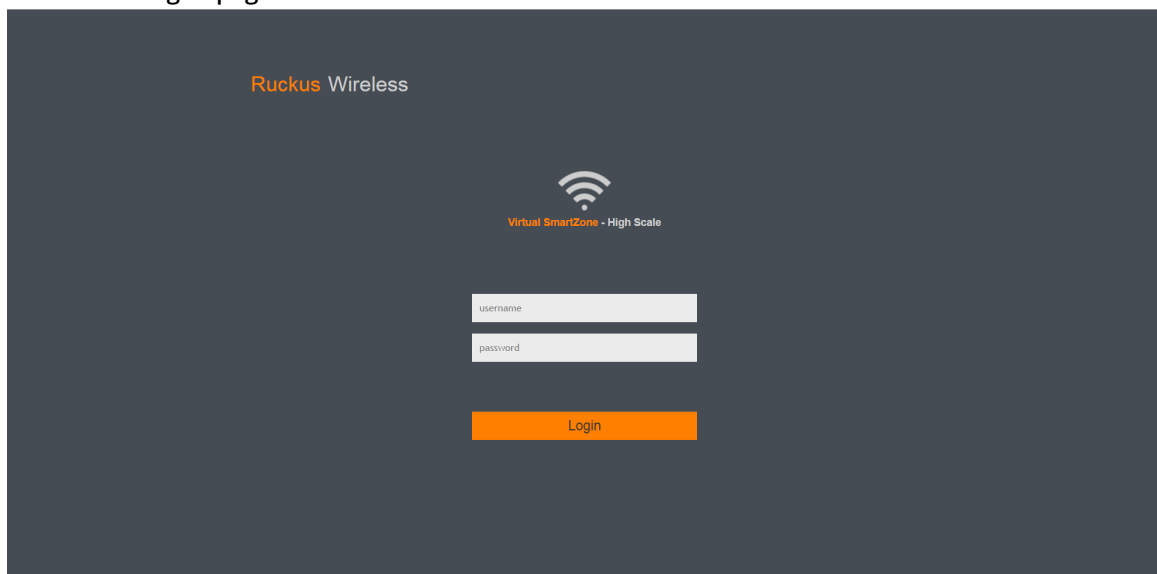**FIGURE 213** The vSZ logon page



3. In **User Name**, type **admin**.
4. In **Password**, type the administrator password that you assigned to the web interface earlier.
5. Click **Log On**. The web interface refreshes, and then displays the vSZ dashboard page, which indicates that you have logged on successfully.

You are now ready to configure the controller. For information on how to configure the controller, refer to the **Administrator Guide** for the controller platform that you have installed.

# Deployment of vSZ

---

- [Deploy vSZ on ESXi Server.....](#)227
- [Deploy vSZ on Linux Server.....](#) 245

## Deploy vSZ on ESXi Server

### Hardware Requirement and Prerequisite for ESXi Server

The following are the hardware and prerequisite for deploying vSZ on ESXi 5.5 or later version.

#### Hardware Requirement

1. DELL Inc. PowerEdge R530
2. ESXi Server License 5.5 or later version
3. Broadcom NetXtreme BCM5720 Gigabit Ethernet 4 Ports
4. Intel Ethernet 10G 2P X520
5. CPU minimum 8 cores
6. vSphere ESXi Server 5.5 or later version
7. 1 or 3 vNICs
8. 16 GB memory
9. 256 GB Hard disk

#### Prerequisite

- A hypervisor on ESXi to install vSZ. Recommended version is ESXi 5.5 or later version.
- Download the vSZ package (.OVA file) from [Ruckus support](#) .
- The IP addresses, netmask, gateway, DNS, DHCP and NAT support for vSZ.
- Ensure that the vSZ license that you have, is a high-capacity mode or an essential mode.
- Ensure the number of physical network interfaces. Choose the interface group, 3 or 1, that would be used implement for vSZ. vSZ-E mode supports only 1 interface group. vSZ-H mode supports both 3 and 1 interface groups.
- Before you power on vSZ, ensure that the networking is configured on ESXi.
- Recommended to use static network addresses that are assigned to vSZ during setup.

#### NOTE

Due to different servers and NIC, the deployment procedure mentioned in this section is for reference.


## Topology for vSZ Deployment on ESXi 5.5 Server

The network topologies for vSZ deployment on ESXi 5.5 server.

The following are basic topologies for setting up vSZ. Based on your requirement you can choose any of the alternatives for deployment.

- High-Scale mode with three group interfaces.

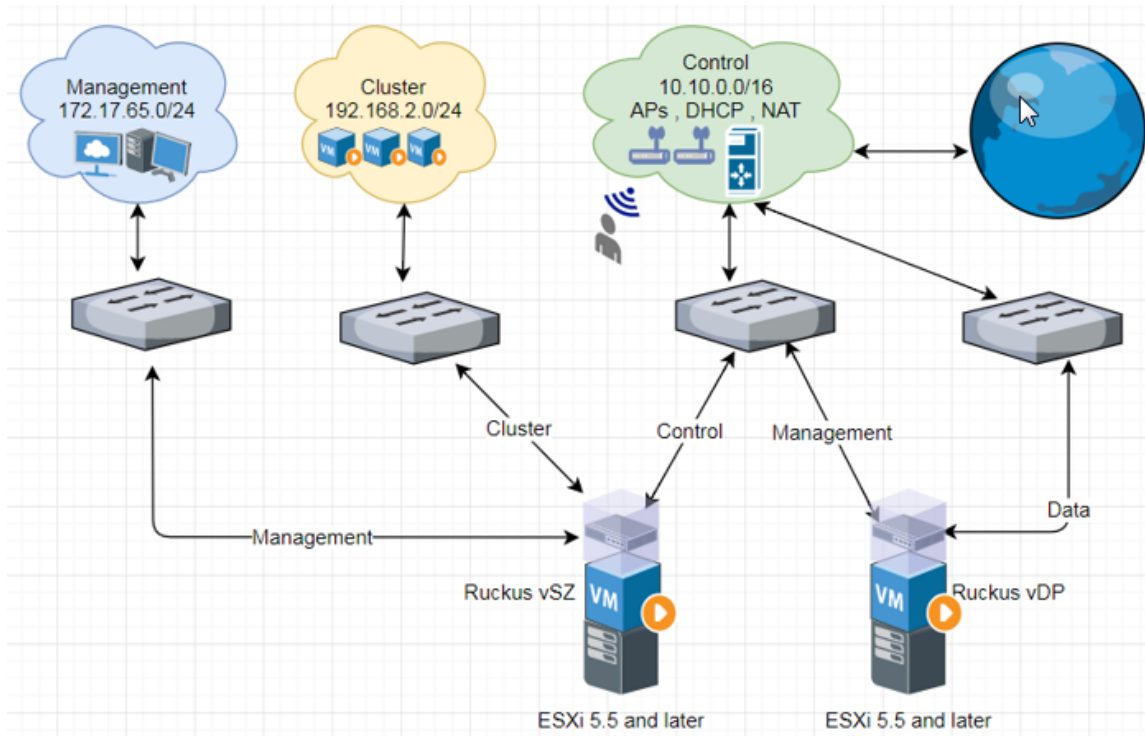**FIGURE 214** vSZ-H with Three Group Interfaces



- Essentials mode with one group interface.

FIGURE 215 Example 1: vSZ-E with one Group Interface


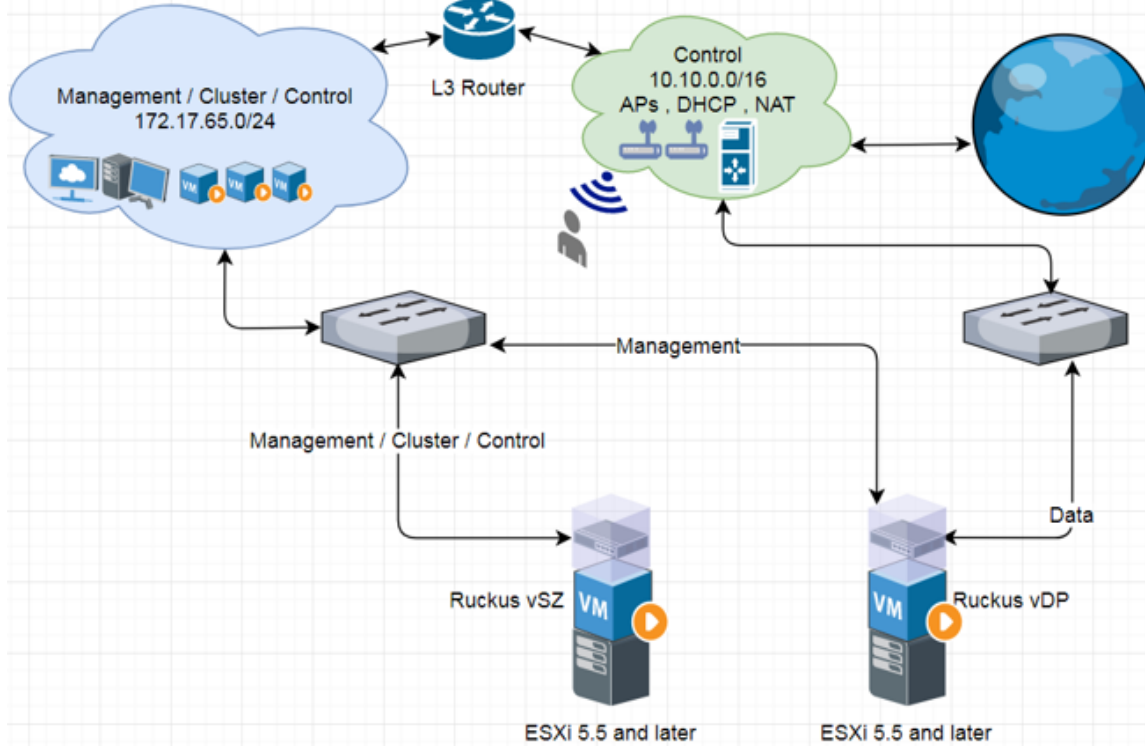


FIGURE 216 Example 2: vSZ-E with one Group Interface

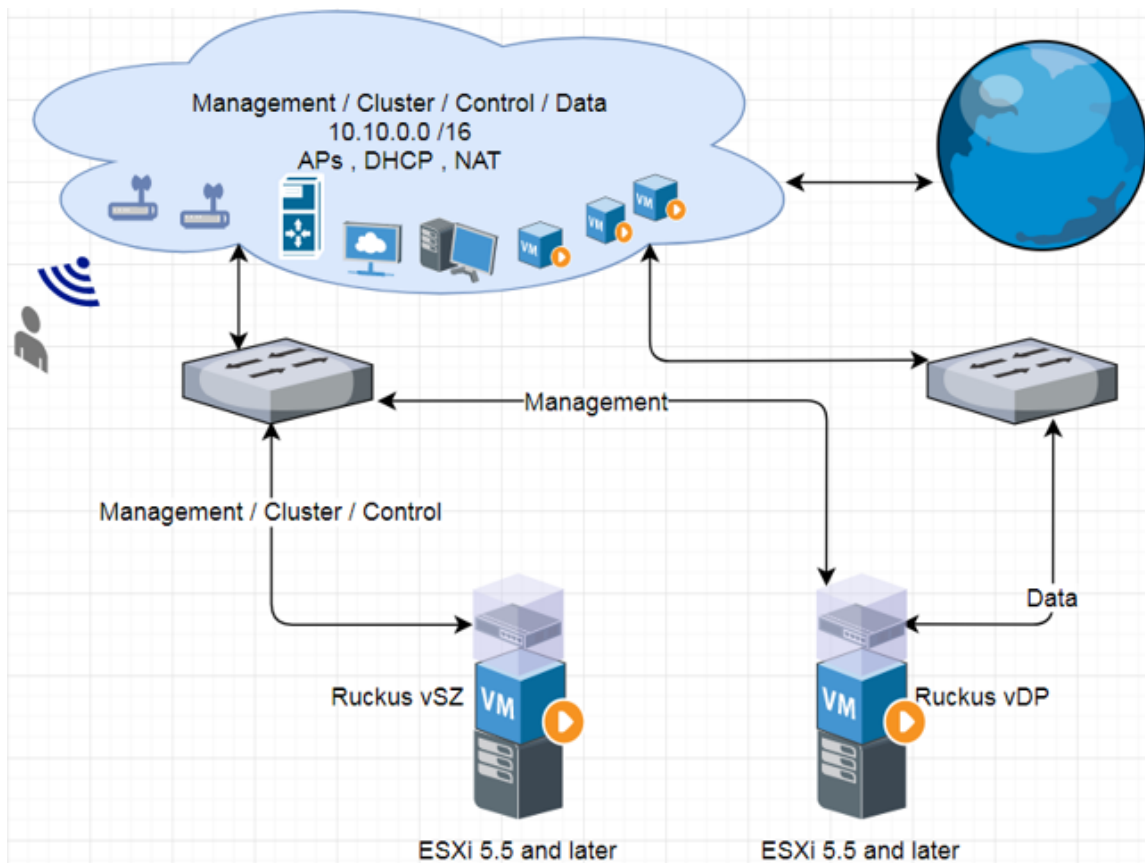

## Deployment Procedure on the ESXi Server

The following are basic instructions for setting up vSZ on the ESXi server.

VMware ESXi 6.7 is installed and working.


1. Login to the server through vSphere client tool as seen below.

**FIGURE 217** Login to vSphere



The vSphere Client management page appears as shown in the following figure.

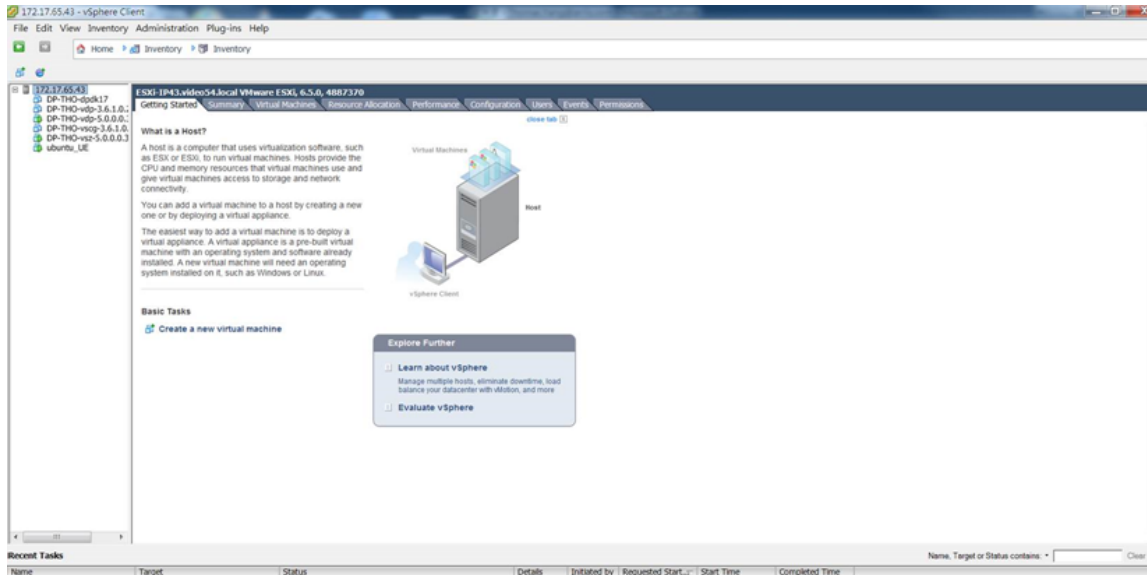FIGURE 218 vSphere Client management page



2. Navigate to **Configuration > Network Adapters**. Ensure the physical ports are linked to the correct port speed as seen below.


FIGURE 219 Define network adapters

| Device                                                         | Speed      | Configured         | Switch   | MAC Address      | Observed IP ranges       | Wake on LAN Sup... |
|----------------------------------------------------------------|------------|--------------------|----------|------------------|--------------------------|--------------------|
| <b>Broadcom Corporation NetXtreme BCM5720 Gigabit Ethernet</b> |            |                    |          |                  |                          |                    |
| vmnic3                                                         | Cluster    | 1000 ... 1000 Full | vSwitch3 | 18:66:da:7c:c... | None                     | No                 |
| vmnic2                                                         | Down       | Negotiate          | None     | 18:66:da:7c:c... | None                     | No                 |
| vmnic1                                                         | Control    | 1000 ... 1000 Full | vSwitch1 | 18:66:da:7c:c... | 10.10.0.1-10.10.255.2... | No                 |
| vmnic0                                                         | Management | 1000 ... 1000 Full | vSwitch0 | 18:66:da:7c:c... | 172.17.65.98-172.17...   | No                 |
| <b>Intel(R) Ethernet 10G 2P X520 Adapter</b>                   |            |                    |          |                  |                          |                    |
| vmnic5                                                         | Down       | Negotiate          | None     | a0:36:9f:98:4... | None                     | No                 |
| vmnic4                                                         | Data       | 10000... Negotiate | vSwitch2 | a0:36:9f:98:4... | 10.10.0.1-10.10.255.2... | No                 |



3. Create each vSphere standard switch (vSwitch) using the physical network adapters since vSZ requires three interfaces for management, cluster, and control. Navigate to **Configuration > Networking > Add Networking**. Select the option **Virtual Machine** to choose the connection type.

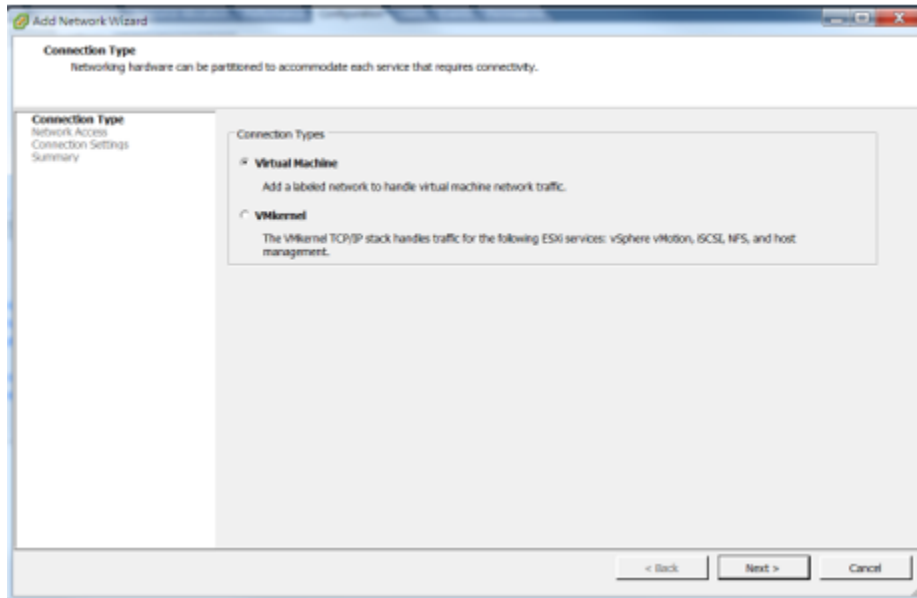
**FIGURE 220** Define connection type



4. Click **Next**.
5. Select the Network Adapter from the list and click **Next**.


6. Enter the **Network Label** and click **Next** as shown in the following figure.

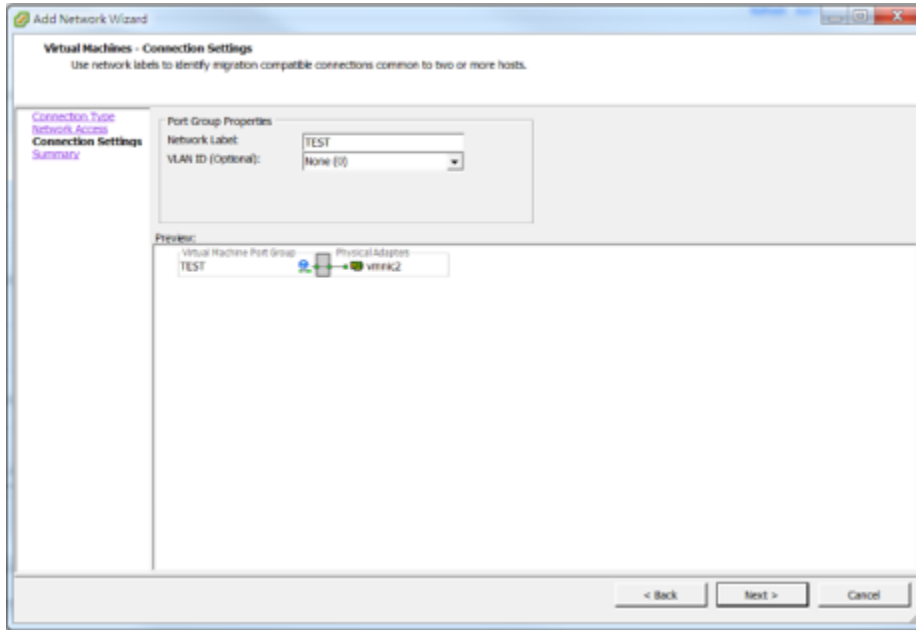**FIGURE 221** Define the Network Adapter



7. Click **Finish**.
8. View the created vSwitch as seen below.

**FIGURE 222** View created vSwitch




- Repeat step 3 to step 6 to create three vSwitch for vSZ. View the created vSwitch as seen below.

**NOTE**

vSZ management interface is associated to the Control-IP-Domain.

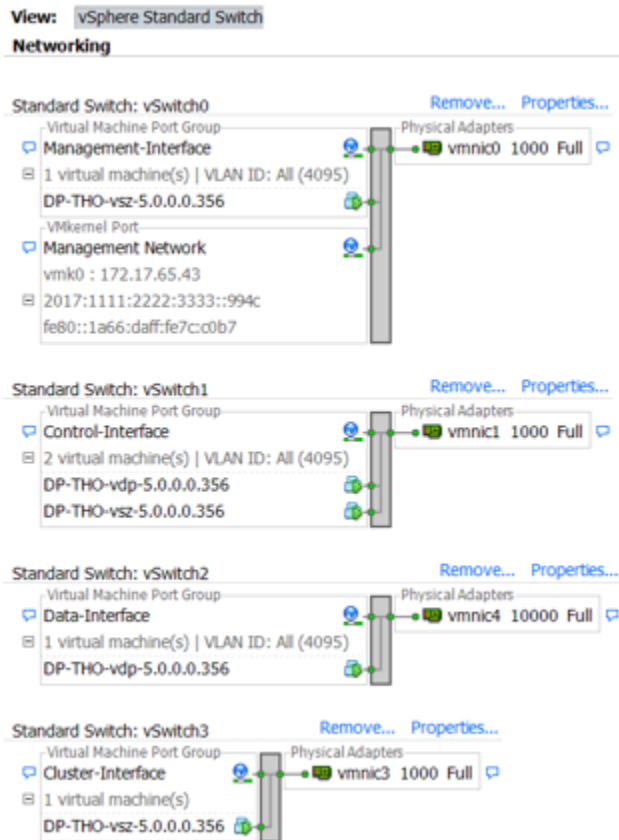**FIGURE 223** View vSwitch for management and data interfaces




- Download the vSZ (.ova file) from the Ruckus Website.
- Click **File > Deploy OVF Template**.

The Deploy OVF Template form appears.

12. Click **Browse** to select the source location to install the OVF package as shown in the following figure.

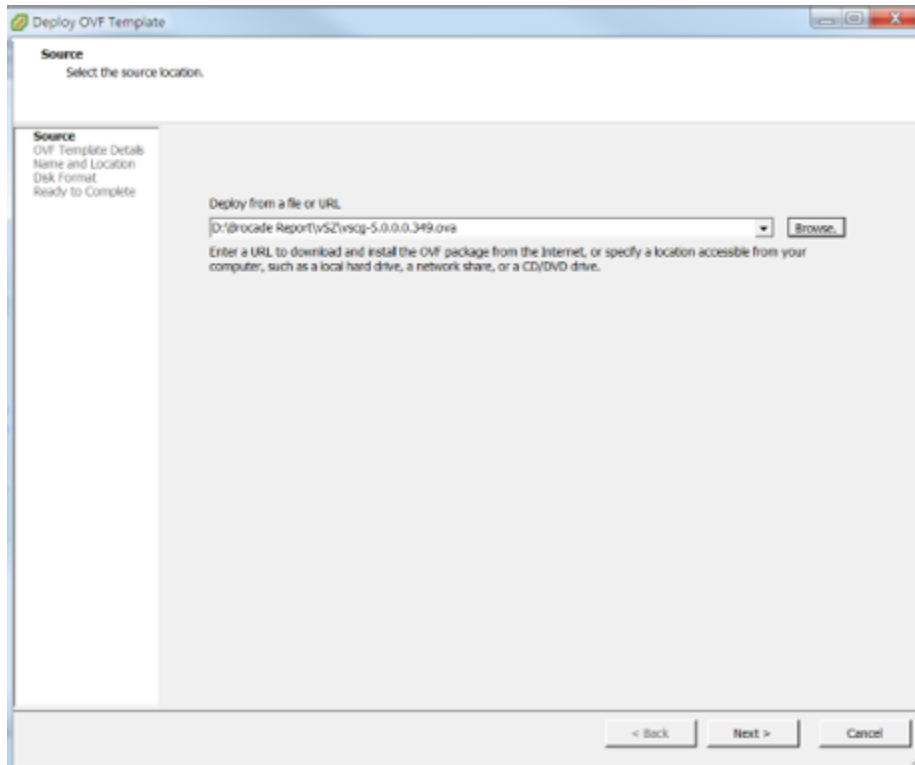
**FIGURE 224** Deploy the file



13. Click **Next**.

14. Enter the vSZ datastore name and choose the disk format as seen below.

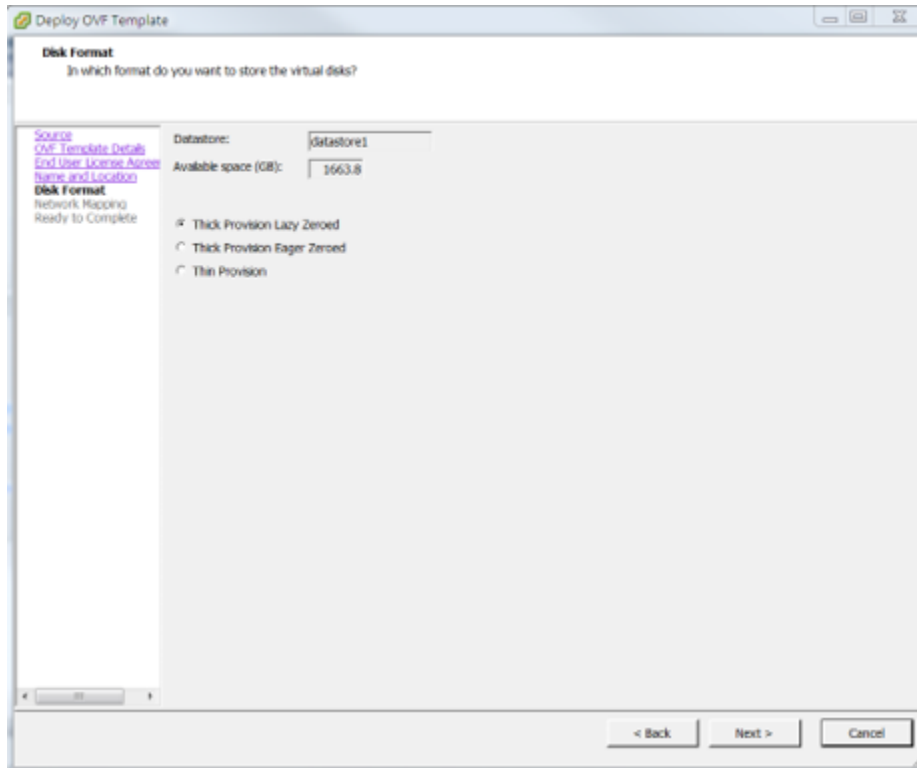
**FIGURE 225** Choose the disk format



15. Click **Next** and wait for deploying.


16. From the vSphere client, select **Edit Settings** to change network interface settings for vSZ-H and vSZ-E as shown in the following figure.

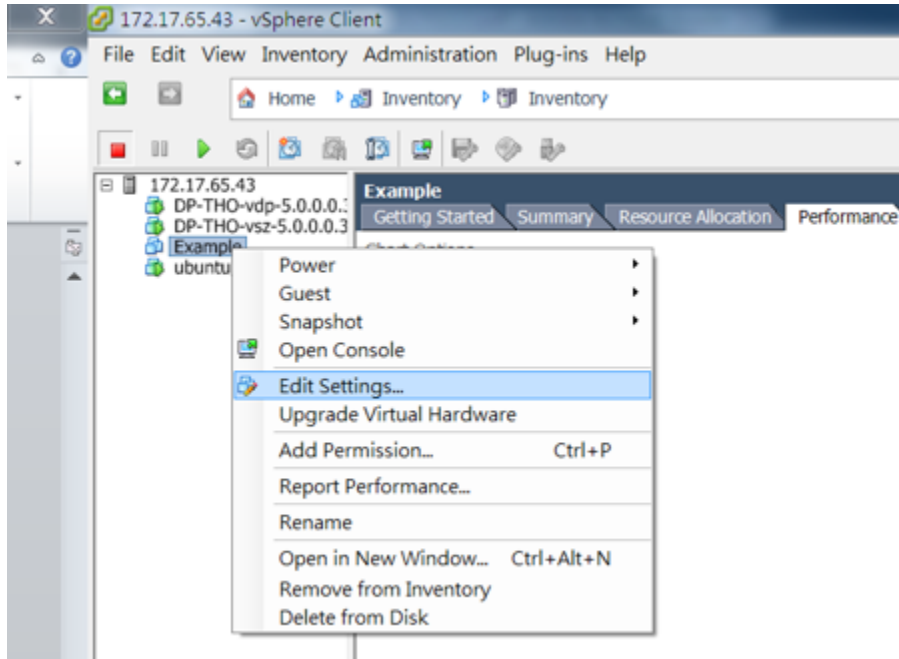**FIGURE 226** Edit Settings




17. By default, vSZ supports three network interfaces as shown in the figure.

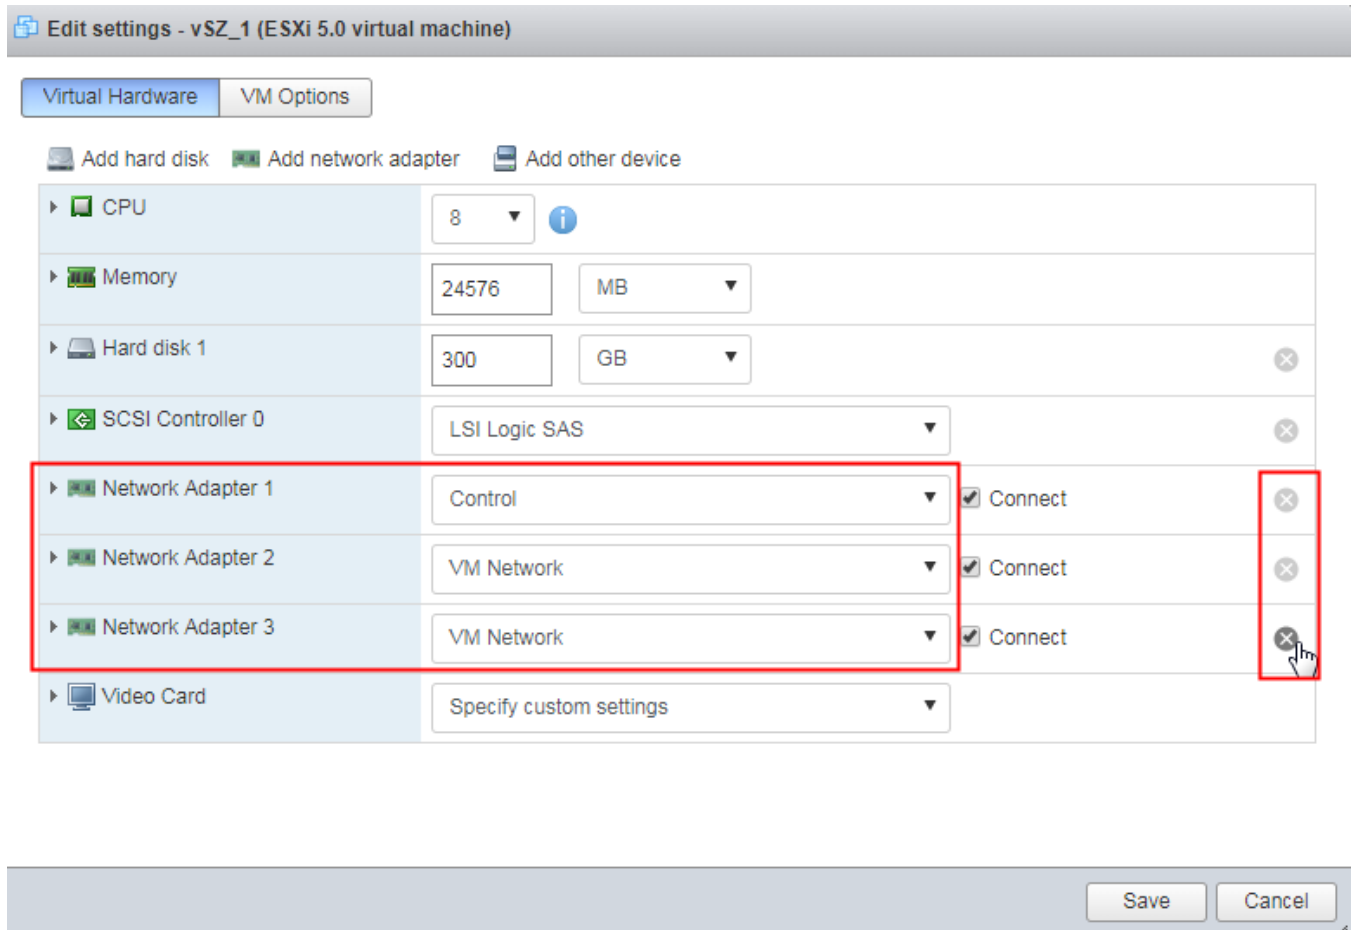**FIGURE 227** vSZ-H Mode Running Three Interfaces



**NOTE**


If your vSZ is running as Essential mode, select two interfaces and click the  **Remove** button.

## Connect to vSZ Using CLI on ESXi Server

Follow the below procedures to connect to vSZ.

Open a CLI console window to run the deployed vSZ.

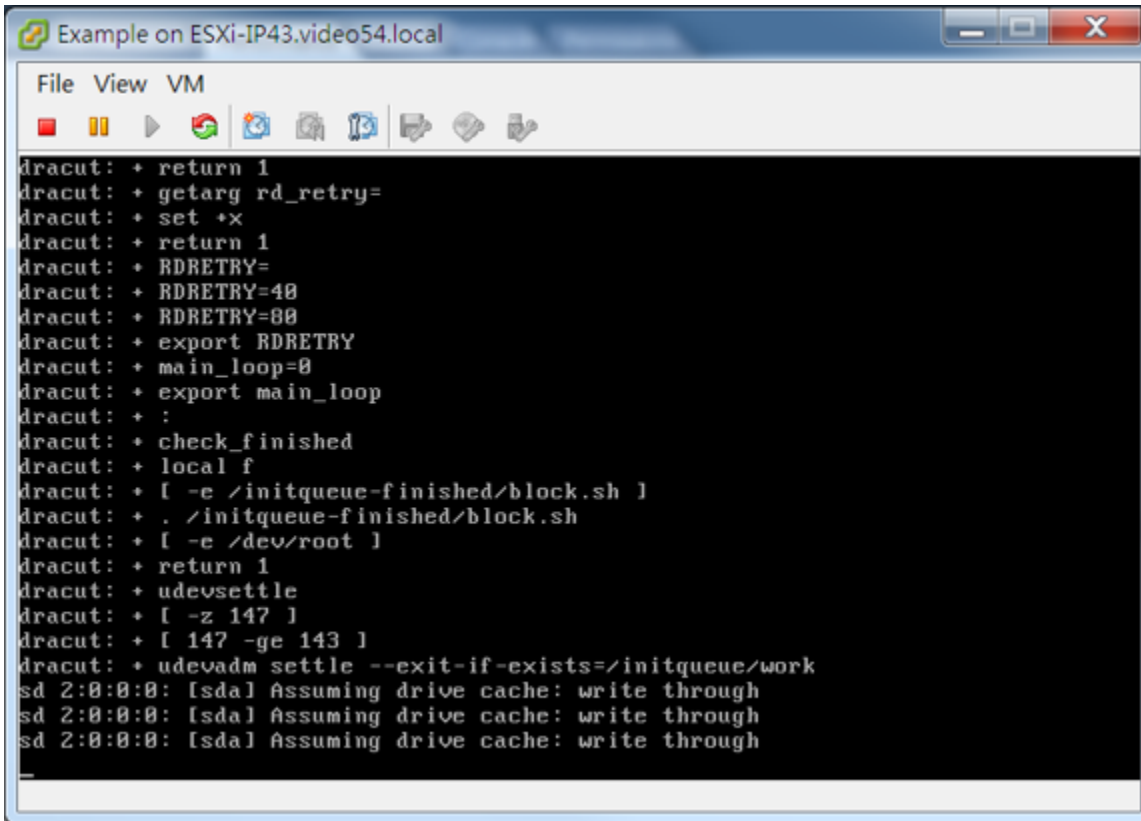FIGURE 228 Run vSZ on the console




```
Example on ESXi-IP43.video54.local
File View VM
dracut: + return 1
dracut: + getarg rd_retry=
dracut: + set +x
dracut: + return 1
dracut: + RDRETRY=
dracut: + RDRETRY=40
dracut: + RDRETRY=00
dracut: + export RDRETRY
dracut: + main_loop=0
dracut: + export main_loop
dracut: + :
dracut: + check_finished
dracut: + local f
dracut: + [ -e /initqueue-finished/block.sh ]
dracut: + . /initqueue-finished/block.sh
dracut: + [ -e /dev/root ]
dracut: + return 1
dracut: + udevsettle
dracut: + [ -z 147 ]
dracut: + [ 147 -ge 143 ]
dracut: + udevadm settle --exit-if-exists=/initqueue/work
sd 2:0:0:0: [sd] Assuming drive cache: write through
sd 2:0:0:0: [sd] Assuming drive cache: write through
sd 2:0:0:0: [sd] Assuming drive cache: write through
```

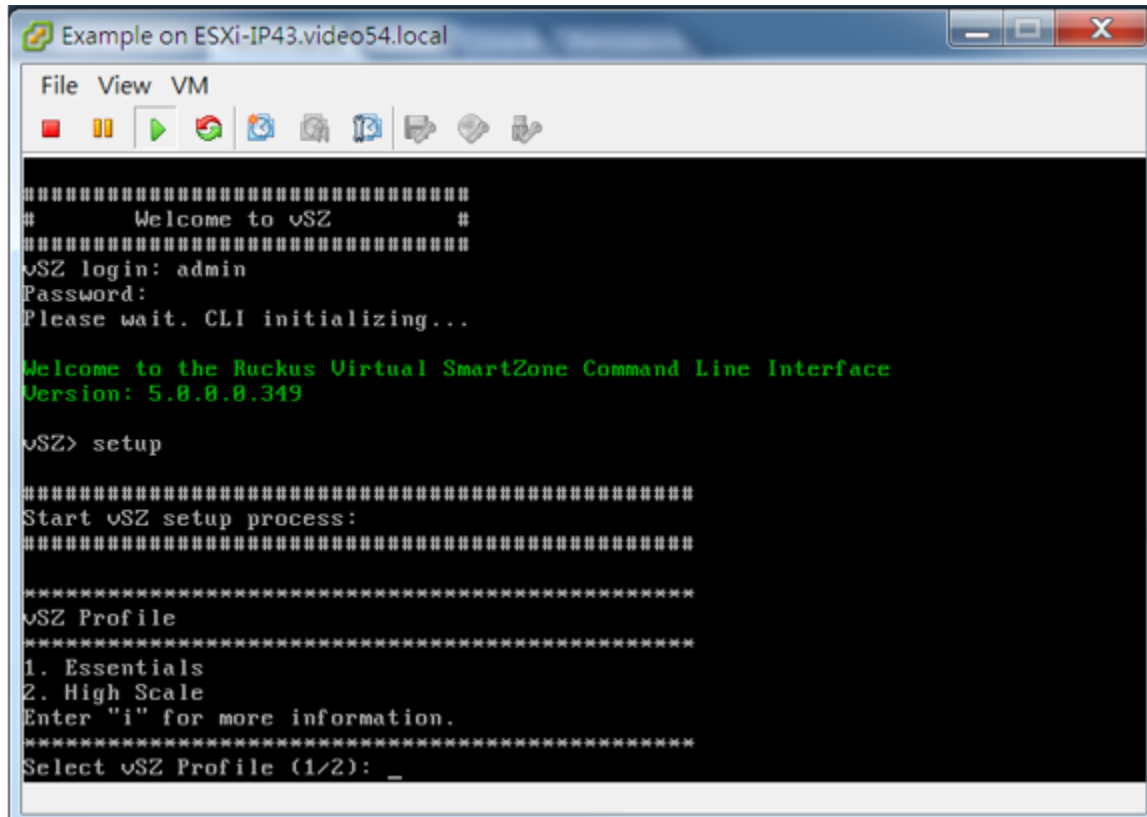1. At the login prompt, login using **administrator** credentials of username and password. Run the **setup** command to initialize vSZ as shown in the figure below.

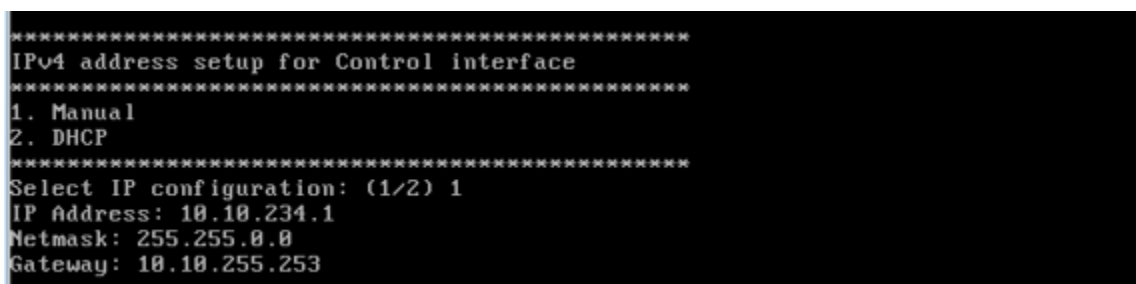


FIGURE 229 Login and Privileged mode



2. Enter **2** for High-Scale mode and press **Y** to continue.
3. Enter static IP address for control interface as shown in the figure below.

FIGURE 230 Static IP Address for Control Interface



4. Enter static IP address for cluster interface as shown in the figure below.

**FIGURE 231** Static IP Address for Cluster Interface

```
*****  
IPv4 address setup for Cluster interface  
*****  
1. Manual  
2. DHCP  
*****  
Select IP configuration: (1/2) 1  
Please enter number range from 1 to 2.  
Select IP configuration: (1/2) 1  
IP Address: 192.168.2.234  
Netmask: 255.255.255.0  
Gateway: 192.168.2.1
```

5. Enter static IP address for management interface as shown in the figure below.

**FIGURE 232** Static IP Address for Management Interface

```
*****  
IPv4 address setup for Management interface  
*****  
1. Manual  
2. DHCP  
*****  
Select IP configuration: (1/2) 1  
IP Address: 172.17.65.234  
Netmask: 255.255.255.0  
Gateway: 172.17.65.1
```

6. Select the default gateway interface. Enter **1** for control interface, **2** for cluster interface, and **3** for management interface as shown in the figure below.

**FIGURE 233** Default Gateway Interface

```
*****  
Default Gateway Interface  
*****  
1. Control  
2. Cluster  
3. Management  
*****  
Select gateway interface: (1/2/3) 3_
```


7. Enter the DNS server setting and press **Y** to apply all setting.

**FIGURE 234** DNS Server Settings

```
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
DNS Server Settings:
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Enter 'y' to apply, 'n' to modify
Do you want to apply the settings? (y/n) y_
```

8. Access the web link <http://172.17.65.234:8443> to continue other setting as shown in the figure below.

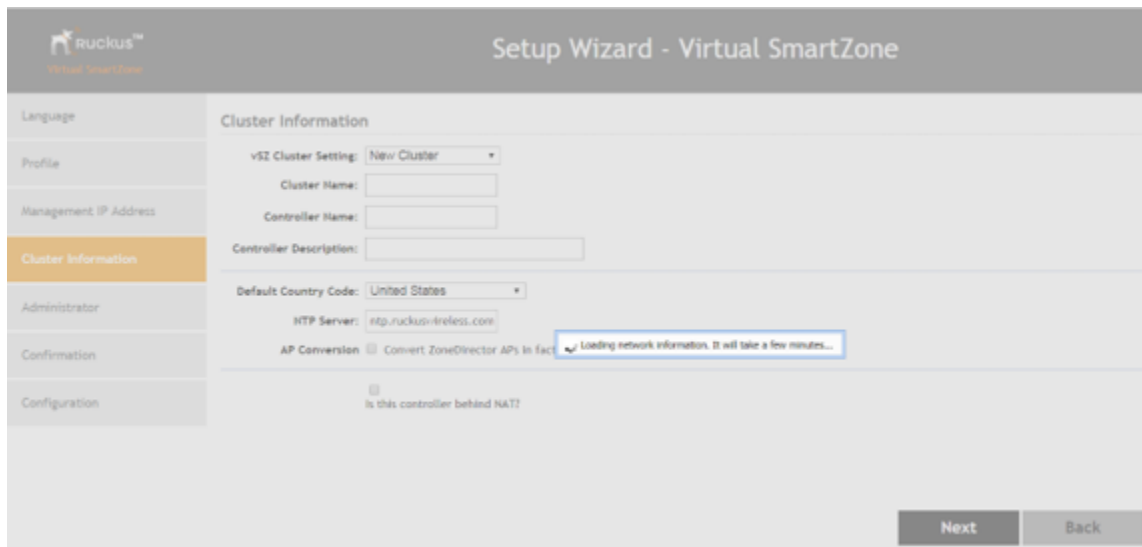**FIGURE 235** vSZ Web UI



9. Enter your **Cluster Information** and click **Next** as shown in the following figure.

**FIGURE 236** Cluster Information

Cluster Information

vSZ Cluster Setting:

Cluster Name:

Controller Name:

Controller Description:

Default Country Code:

NTP Server:

AP Conversion  Convert ZoneDirector APs in factory settings to Virtual SmartZone APs automatically

Is this controller behind NAT?

**Next** **Back**

10. Enter your vSZ Administrator password requirements and click **Next** as shown in the following figure.

**FIGURE 237** vSZ Administrator Password

Administrator

Enter Admin's password and password that permits administrative access to the Web interface. (Use this information to log into the Web interface after this setup is complete, to further configure your new wireless network.)

Admin Password \*

Confirm Password \*

Enter CLI enable password and password that provides advance command

Enable Password \*

Confirm Password \*

**Next** **Back**

11. Click **Finish** and wait until vSZ is configured.
12. After vSZ is configured, reconnect to vSZ web as shown in the following figure.

**FIGURE 238** vSZ Configuration

Configuration


The SmartZone is being configured. It may take up to 20 minutes to complete the setup process. Stretch your legs, grab some coffee, and if you changed the IP address during setup, don't forget to update the browser's URL.

100%  
Done

Reconnect to the SmartZone's web interface  
<https://172.17.65.234:8443/vmg/>

13. Enter **Username** and **Password** to access vSZ as shown in the following figure.

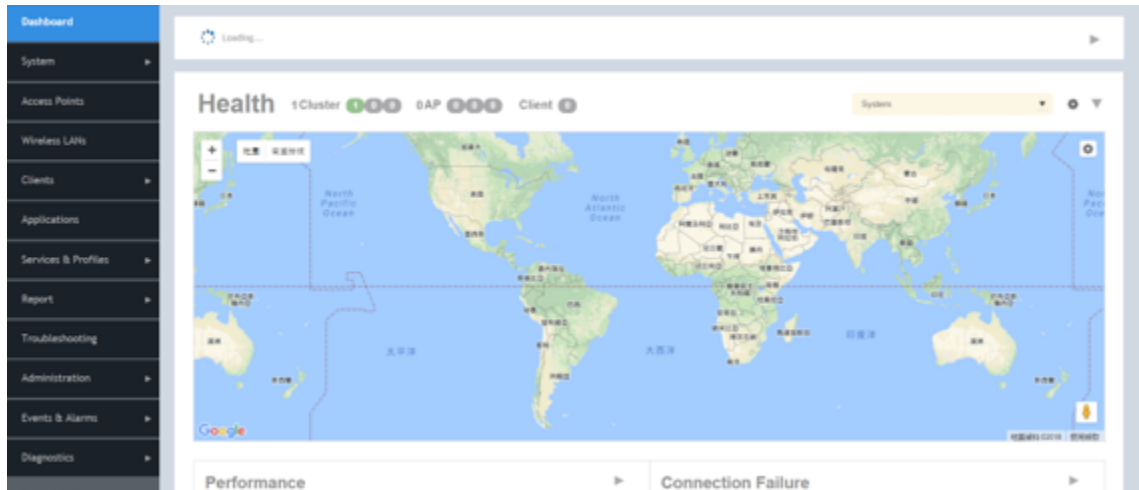**FIGURE 239** vSZ Homepage



## Deploy vSZ on Linux Server

### Hardware Requirement and Prerequisite for LINUX CentOS 7

The following are the hardware and prerequisite for deploying vSZ on LINUX CentOS 7.

#### Hardware Requirement

1. DELL Inc. PowerEdge R320
2. Linux CentOS 7
3. Broadcom NetXtreme BCM5720 Gigabit Ethernet 2 Ports
4. Intel Ethernet 10G 2P X520

#### Prerequisite

- A Linux host enabled KVM which to install vSZ VM. Prefer CentOS 7 and later.
- Download the vSZ package (.qcow2 file) from [Ruckus support](#).
- The IP addresses, netmask, gateway, DNS, DHCP and NAT support for vSZ.
- Ensure if the vSZ license that you have, is a high-capacity mode or an essential mode.
- 1Ensure the number of physical network interfaces. Choose the interface group, 3 or 1, that would be used implement for vSZ. vSZ-E mode supports only 1 interface group. vSZ-H mode supports both 3 and 1 interface groups.
- Before you power on vSZ, ensure that the networking is configured on LINUX.
- Recommended to use static network addresses that are assigned to vSZ during setup.
- Using CentOS 7, install KVM package with the **yum** command.

```
root@localhost ruckusvnc]# yum -y install qemu-kvm qemu-img virt-manager virt-viewer virt-install
libvirt libvirt-phthon libvirt-client
```

## Deployment of vSZ

### Deploy vSZ on Linux Server

- Ensure KVM is active and running the following command.

```
[root@localhost ruckusvnc]# systemctl status libvirt
```

- Edit the following commands and file.

```
sudo yum install grub2-common

gedit /etc/default/grub
GRUB_TIMEOUT=5
GRUB_DISTRIBUTOR="$(sed 's, release .*$,,g' /etc/system-release)"
GRUB_DEFAULT=saved
GRUB_DISABLE_SUBMENU=true
GRUB_TERMINAL_OUTPUT="console"
GRUB_CMDLINE_LINUX="crashkernel=auto rd.lvm.lv=centos/root rd.lvm.lv=centos/swap rhgb quiet
intel_iommu=on"
GRUB_DISABLE_RECOVERY="true"

sudo grub2-mkconfig -o /boot/grub2/grub.cfg
```

- Reboot Linux host.

#### **NOTE**

Due to different servers and NIC, the deployment procedure mentioned in this section is for reference.


## Topology for vSZ Deployment on LINUX CentOS7

The network topologies for vSZ deployment on LINUX CentOS 7.

The following are basic topologies for setting up vSZ. Based on your requirement you can choose any of the alternatives for deployment.

- High-Scale mode with three group interfaces.

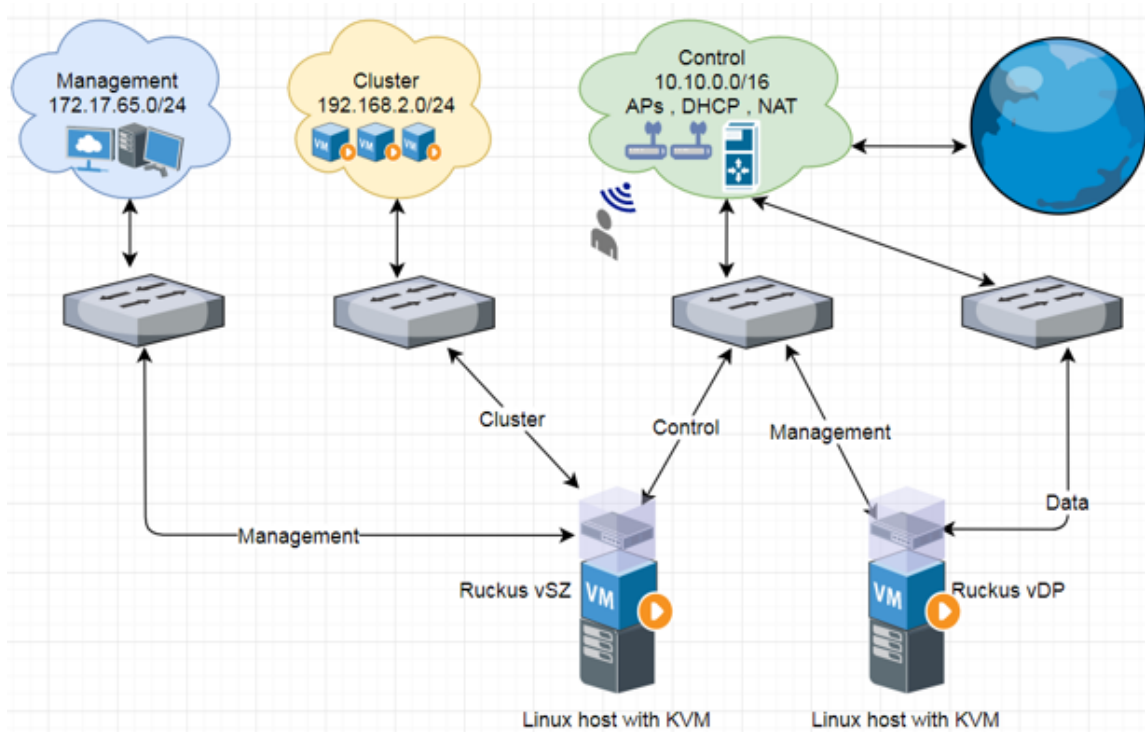FIGURE 240 vSZ-H with Three Group Interfaces



- Essentials mode with one group interface.

FIGURE 241 Example 1: vSZ-E with one Group Interface


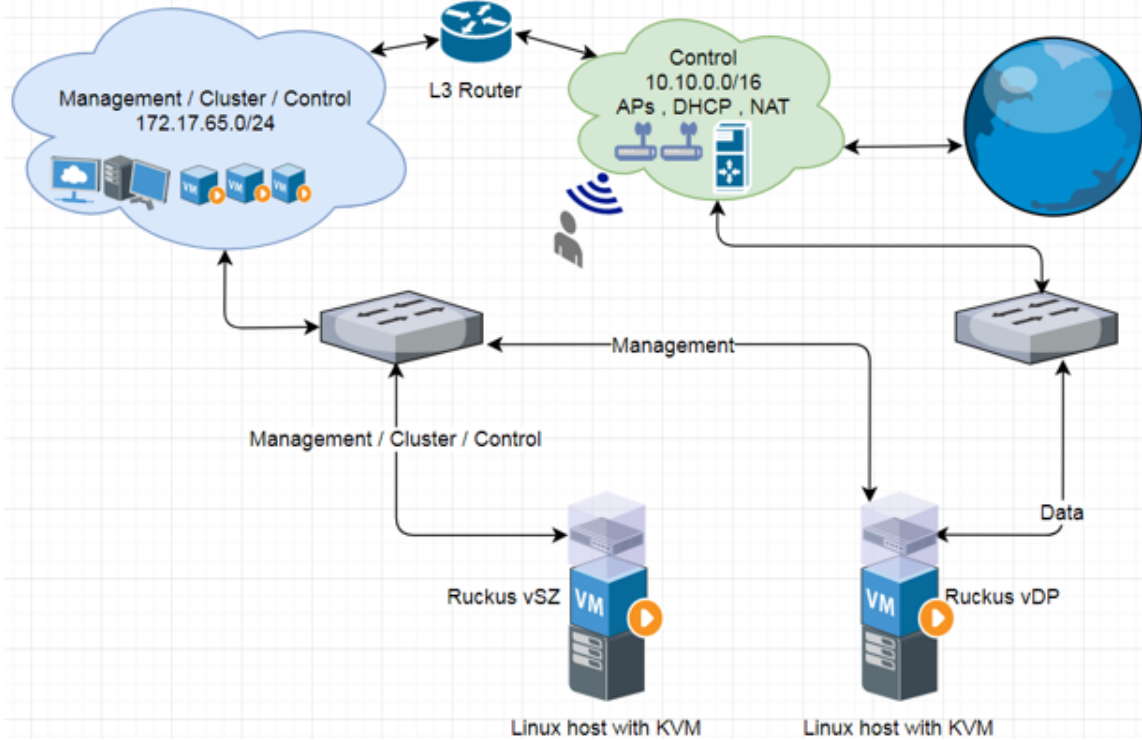


FIGURE 242 Example 2: vSZ-E with one Group Interface

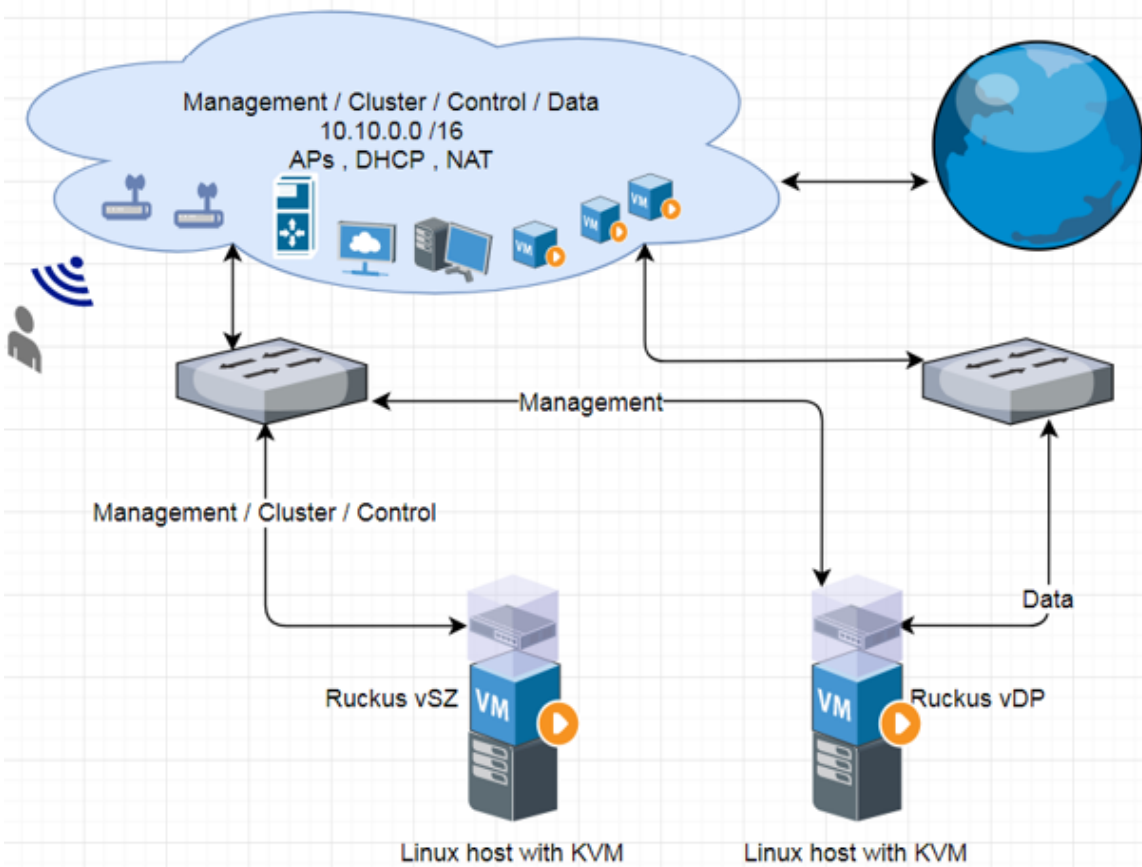




## Deployment Procedure on the LINUX Server

The following are basic instructions for setting up vSZ on LINUX KVM.

LINUX CentOS 7 KVM Package is installed and working.


1. Download vSZ package (.qcow2 file) from Ruckus website.
2. From VNC Viewer, click **System Tools** and open the **Virtual Machine Manager** tool. The vSZ status must appear Running as shown in the following figure.

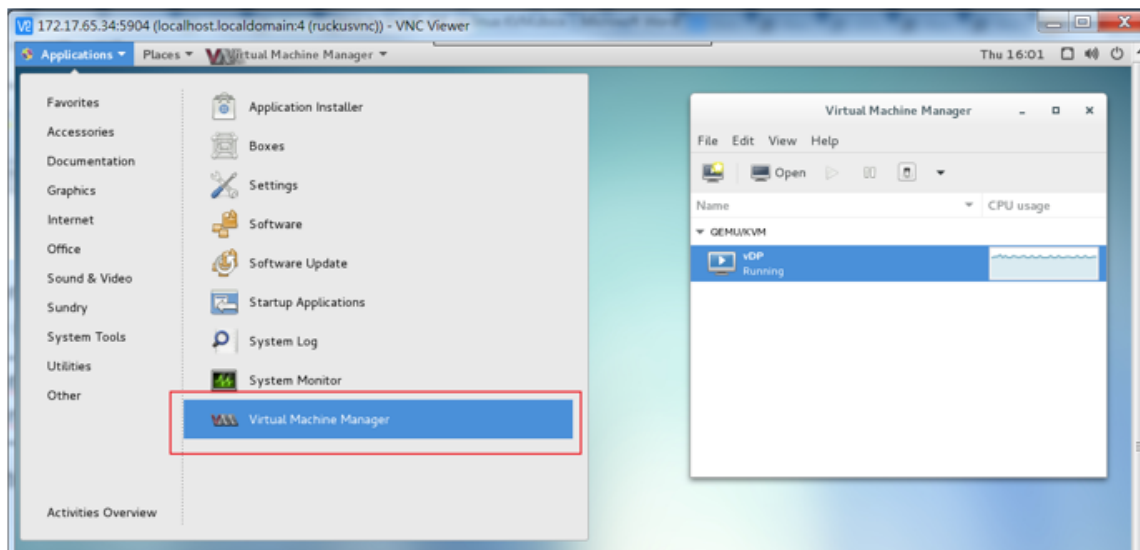**FIGURE 243** Virtual Machine Manager




3. Create a new VM.
  - a) Click **File** and select **New Virtual Machine** as shown in the following figure.

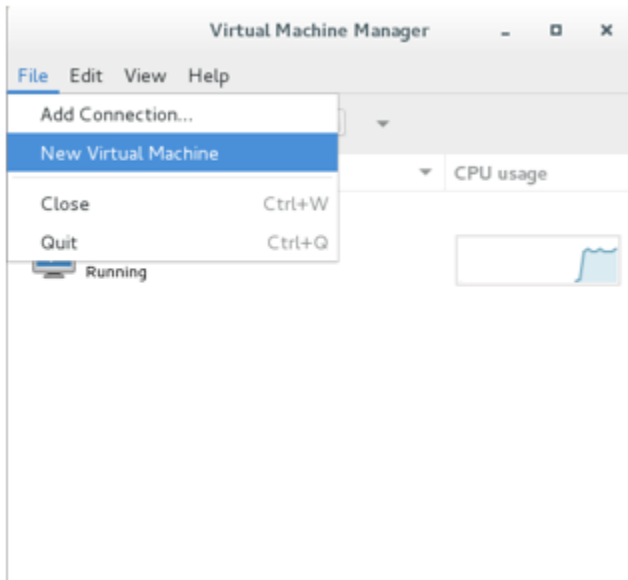**FIGURE 244** Creating a Virtual Machine




- b) In the New VM dialog box, choose the disk format option as shown in the following figure.

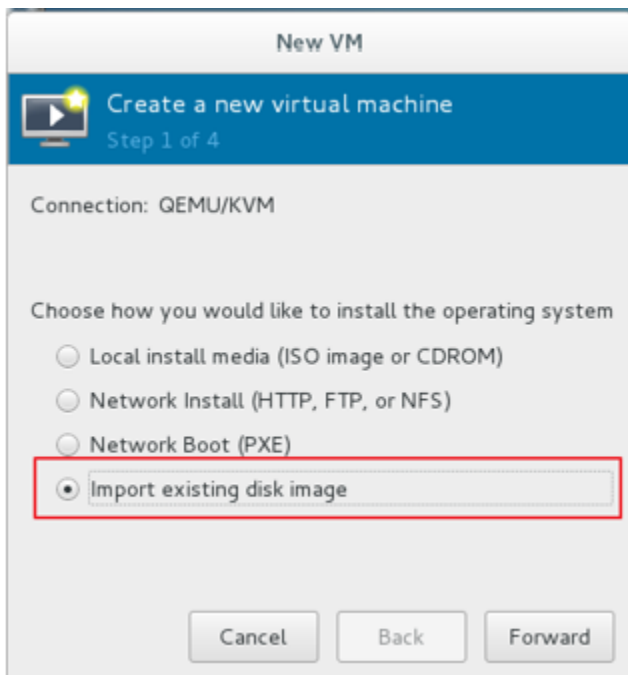**FIGURE 245** Disk Format




- c) Click **Forward**.
- d) Choose destination storage path and storage volume. Click **Browse Local** as show in the following figure.

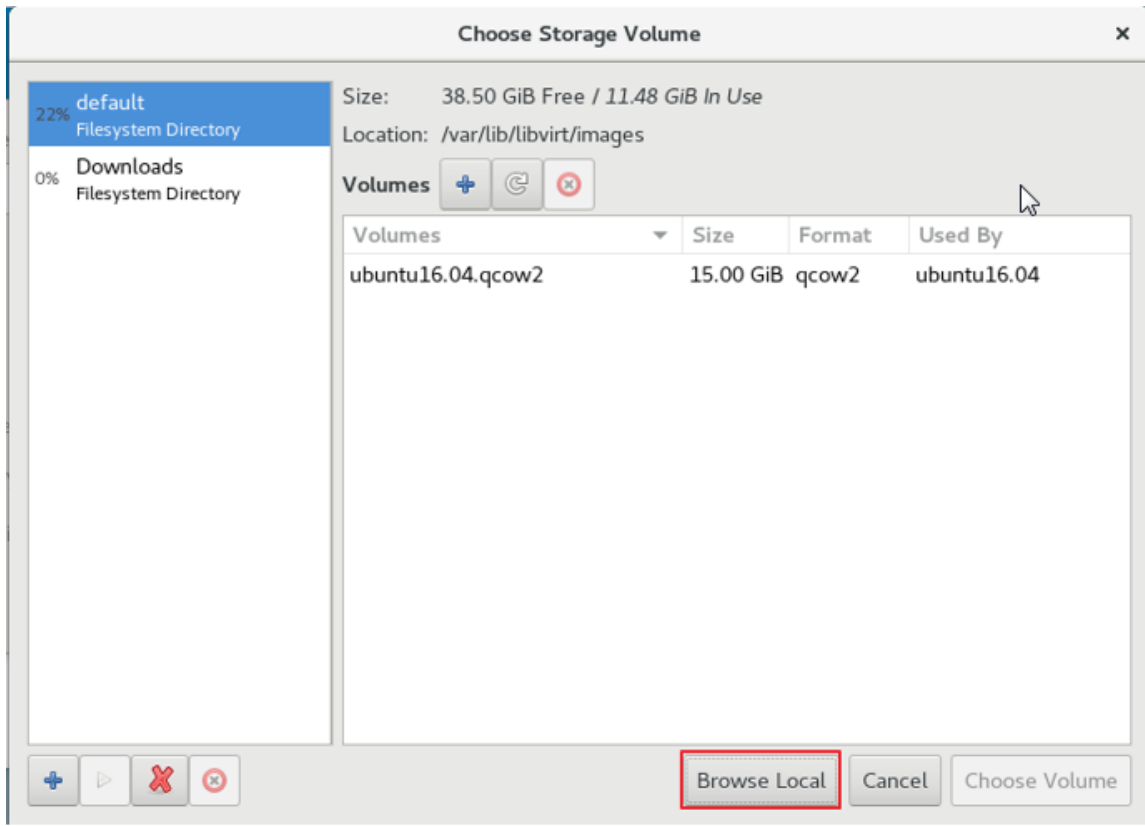**FIGURE 246** Storage Volume




- e) Select the vSZ file and click **Open** as shown in the following figure.

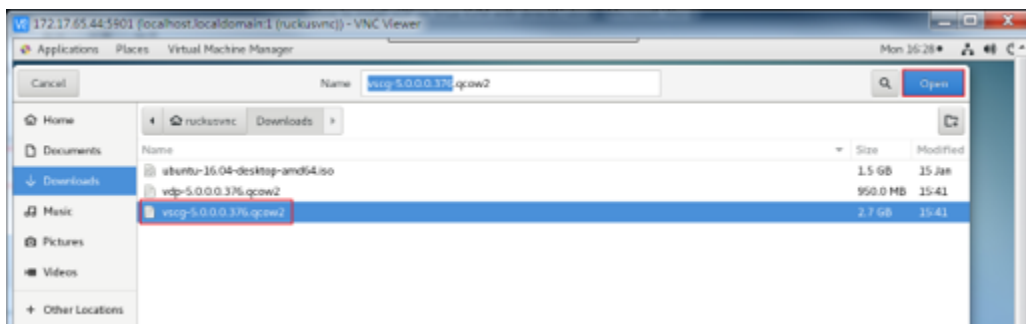**FIGURE 247** vSZ File



- f) To select the storage path, click **Browse** as shown in the following figure.

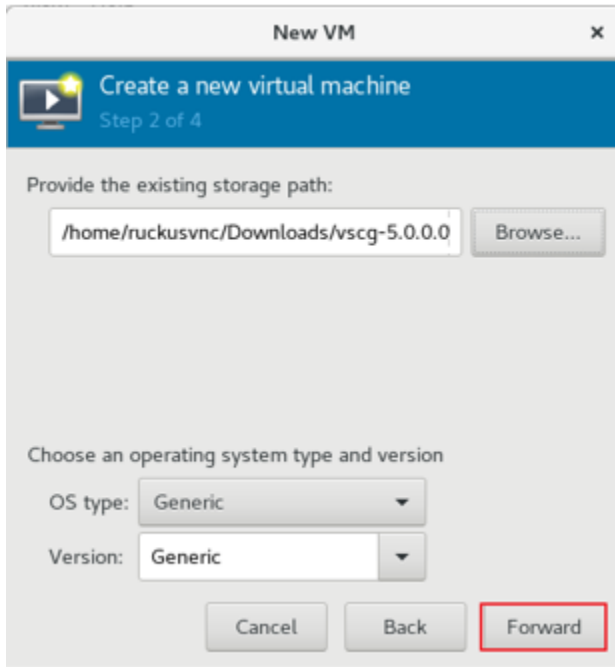**FIGURE 248** Storage Path




- g) Click **Forward**.
- h) Enter the **Memory (RAM)** and **CPUs** setting as shown in the following figure.

**NOTE**

Memory (RAM) must be 15GB and CPUs must be 4 cores.

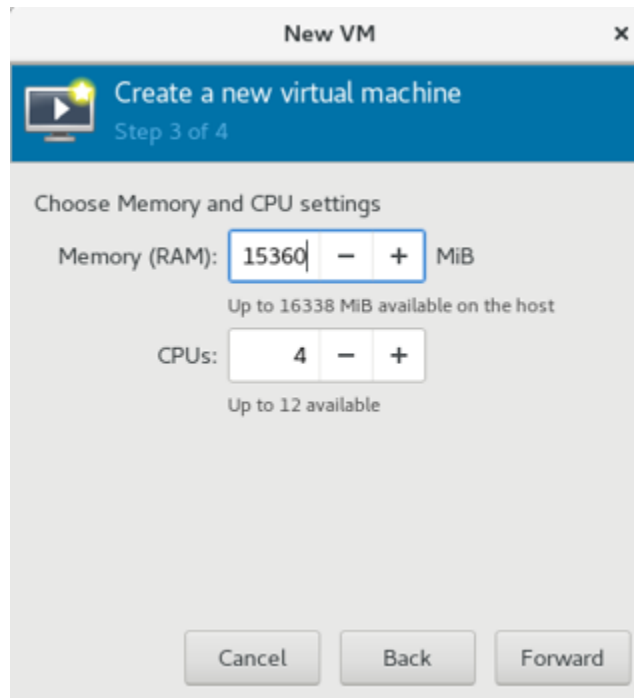**FIGURE 249** Memory and CPU Settings




- i) Click **Forward**.
- j) To confirm the installation process, click **Finish** as shown in the following figure.

**NOTE**

The sequence for Network interfaces must first be Management and the Data.

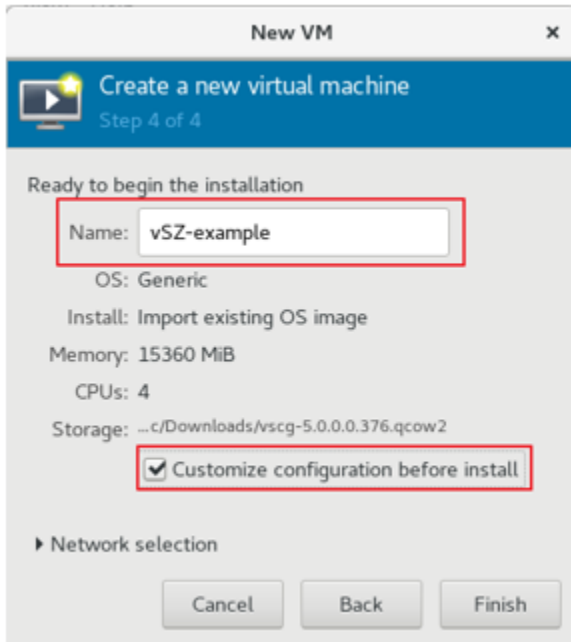**FIGURE 250** Installation Confirmation



- From the VNC Viewer, click **Add Hardware**, select the NIC and choose the **Device model** to update the Control, Cluster and Management interface associate as shown in the following figures.

**NOTE**

vSZ needs three interfaces; Control, Cluster, and Management.

**NOTE**

For Essential mode, you need not add two NICs.

**FIGURE 251** Control Interface

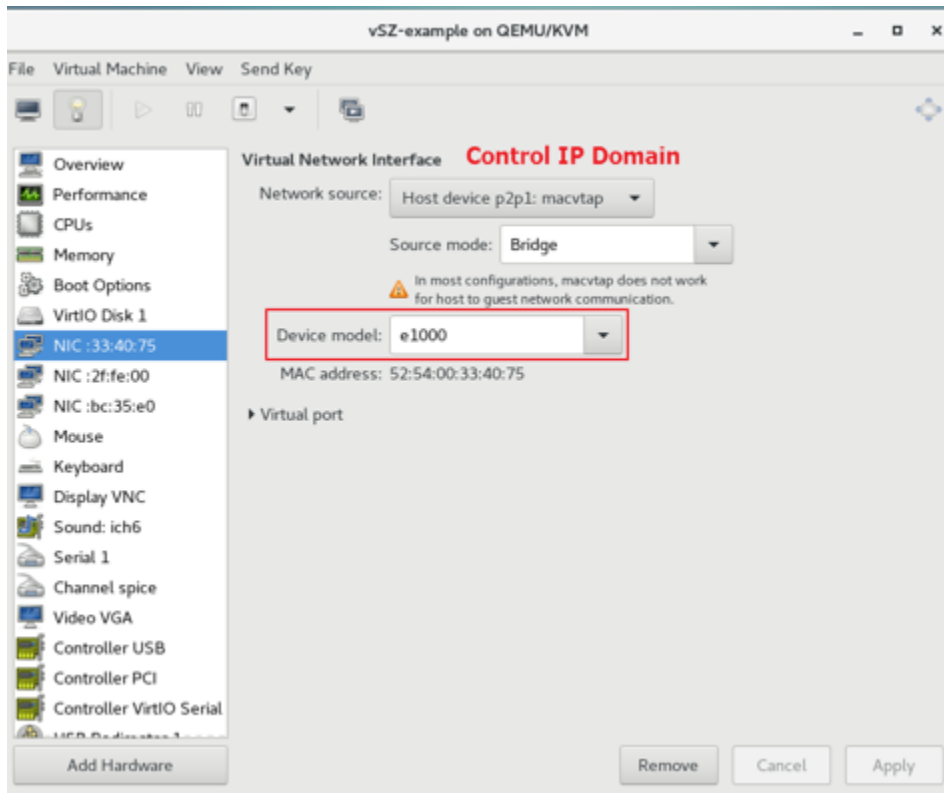


FIGURE 252 Cluster Interface

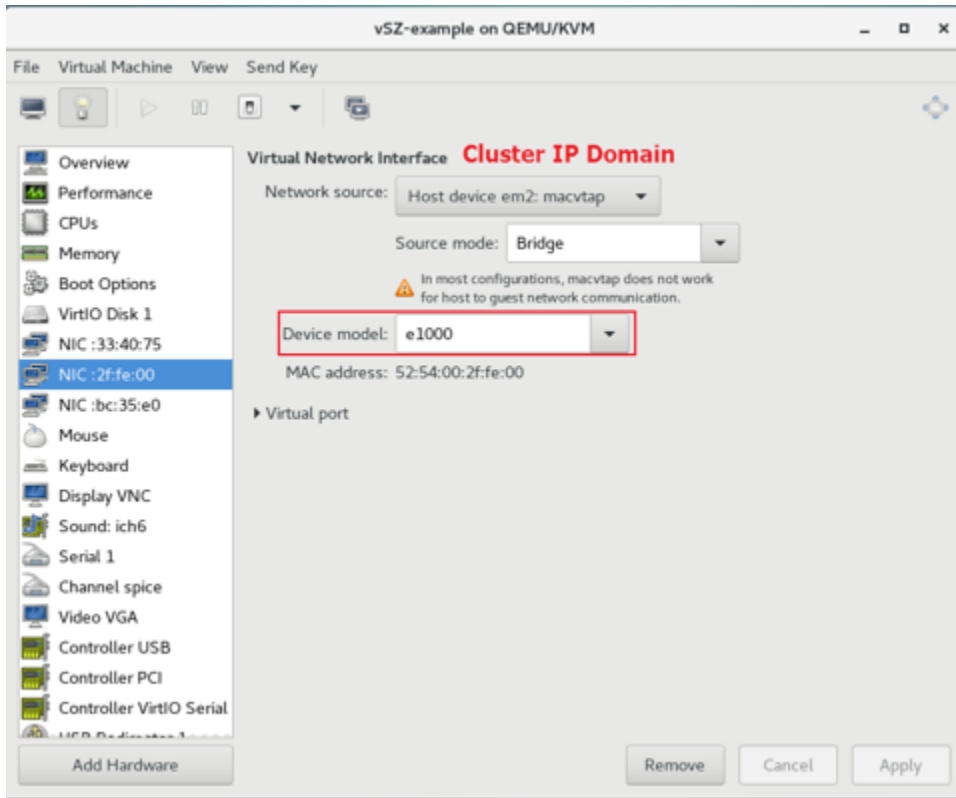
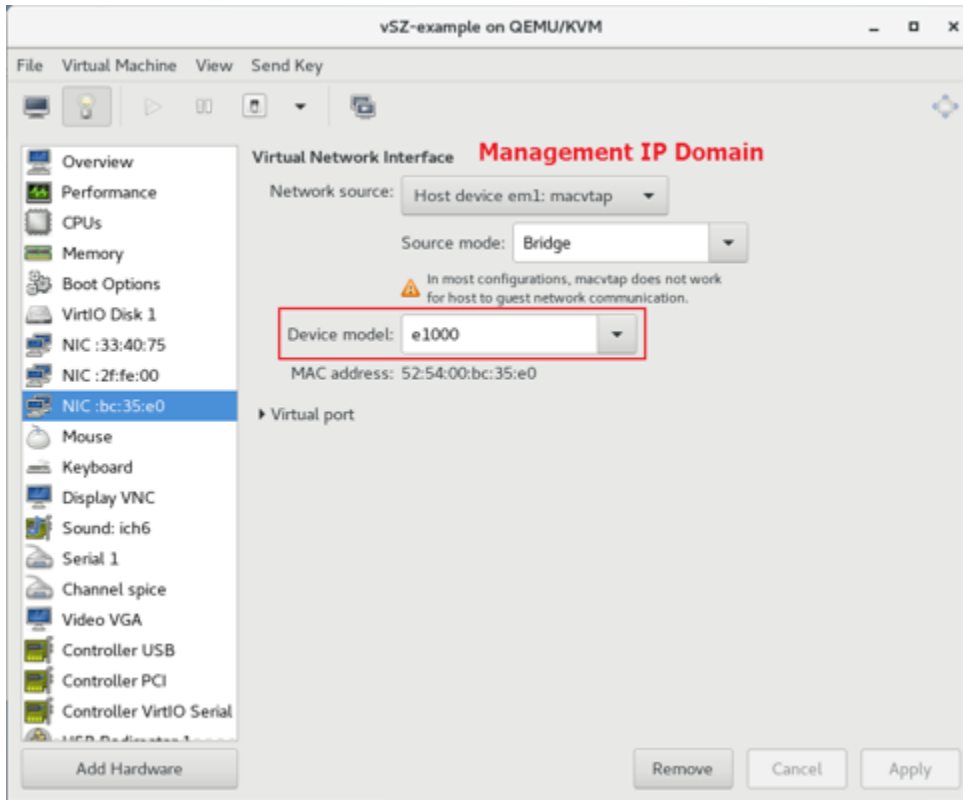


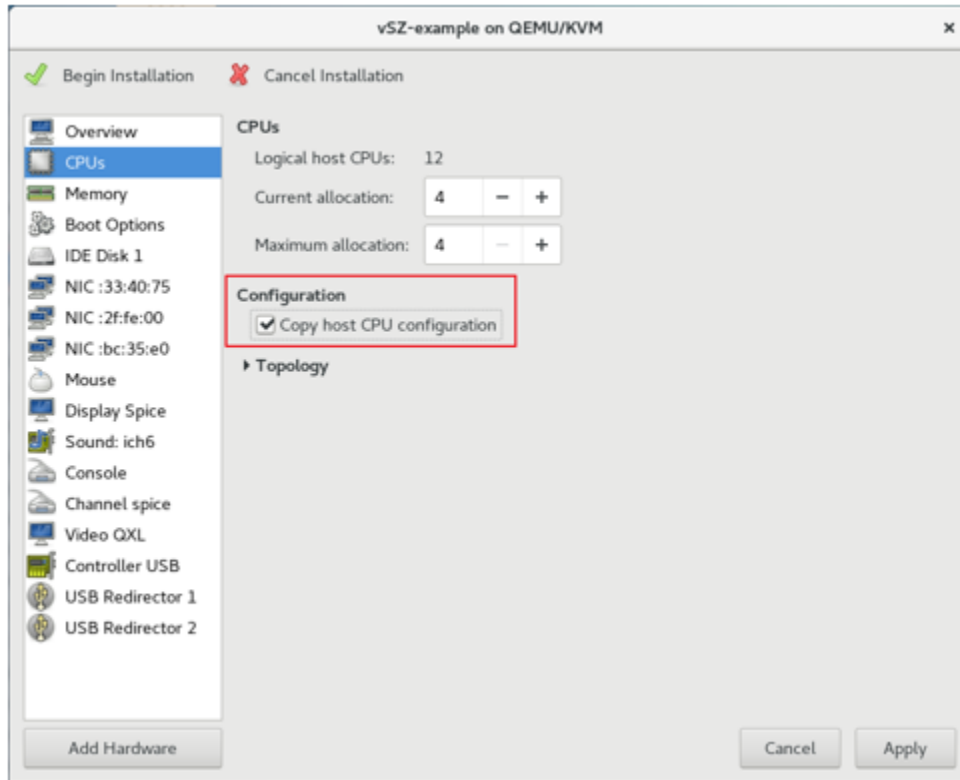


FIGURE 253 Management Interface




5. Define the CPU Configuration. Select the **Copy host CPU configuration** check box as shown in the following figure.

**FIGURE 254** CPU Configuration




6. Define the IDE Disk Configuration. Choose the **Disk bus** option as shown in the following figure.

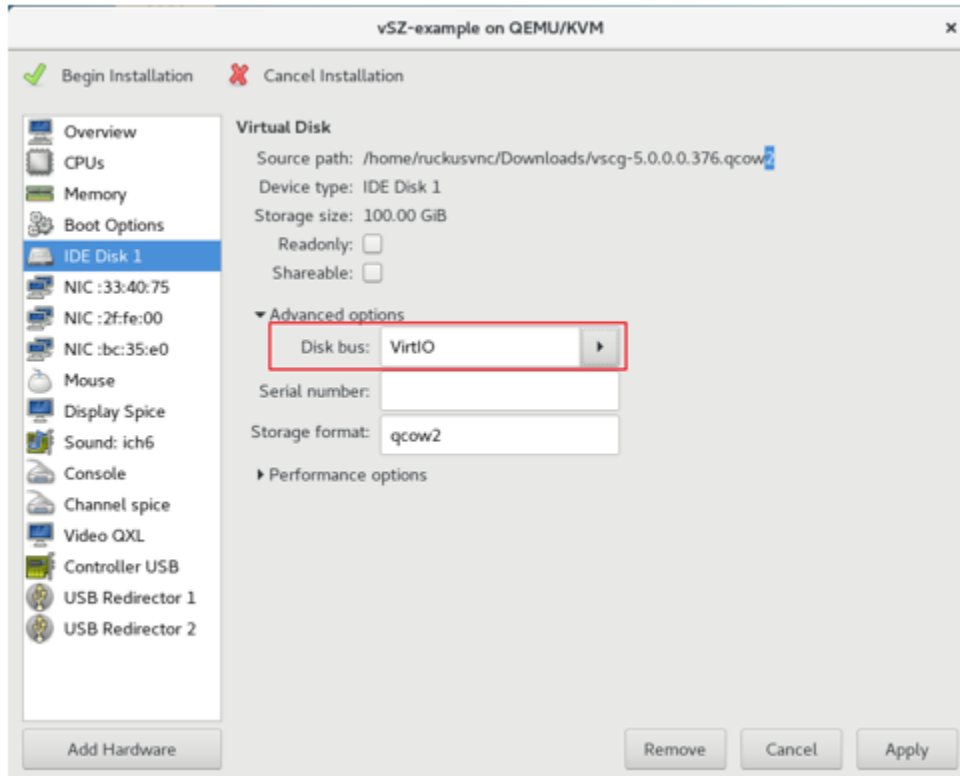**FIGURE 255** IDE Disk Configuration



7. Select **Begin Installation** as shown in the following figure.

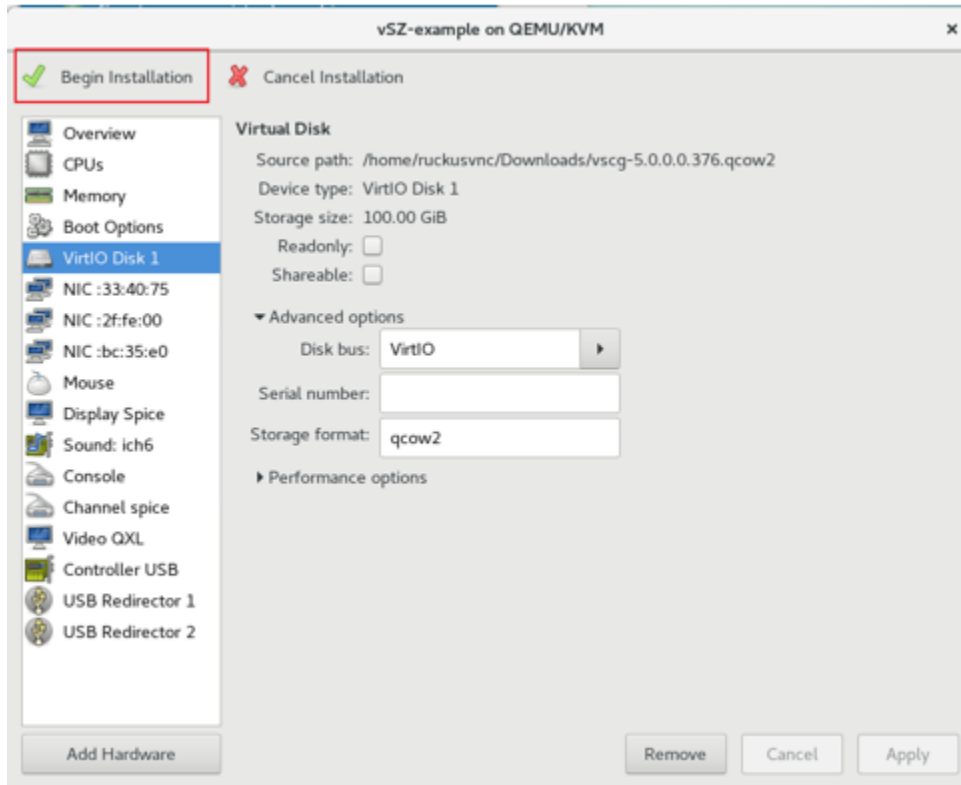**FIGURE 256** Begin Installation



## Connect to vSZ Using CLI on LINUX Server

Follow the below procedures to connect to vSZ.


Open a CLI console window to run the deployed vSZ.

FIGURE 257 Run vSZ on the console

```
vSZ-example on QEMU/KVM
File Virtual Machine View Send Key
Starting syslog-ng: [ OK ]
Calling the system activity data collector (sadc)...
Start system...
Starting monitoring for UG vg88: 1 logical volume(s) in volume group "vg88" mo
nitored
[ OK ]
expr: syntax error
expr: syntax error
B
ip6tables: Applying firewall rules: [ OK ]
iptables: Applying firewall rules: [ OK ]
Bringing up loopback interface: [ OK ]
Bringing up interface bond: Device eth* does not seem to be present, delaying i
nitialization.
[ OK ]
fgrep: ifcfg-ifcfg-eth*: No such file or directory
fgrep: ifcfg-ifcfg-eth*: No such file or directory
fgrep: ifcfg-ifcfg-eth*: No such file or directory
egrep: ifcfg-ifcfg-eth*: No such file or directory
Bringing up interface ifcfg-eth*: Device eth* does not seem to be present, dela
ying initialization.
[ FAILED ]
Bringing up interface br:
Determining IP information for br..."up" is invalid lladdr.
-
```


1. At the login prompt, login using **administrator** credentials of username and password. Run the **setup** command to initialize vSZ as shown in the figure below.

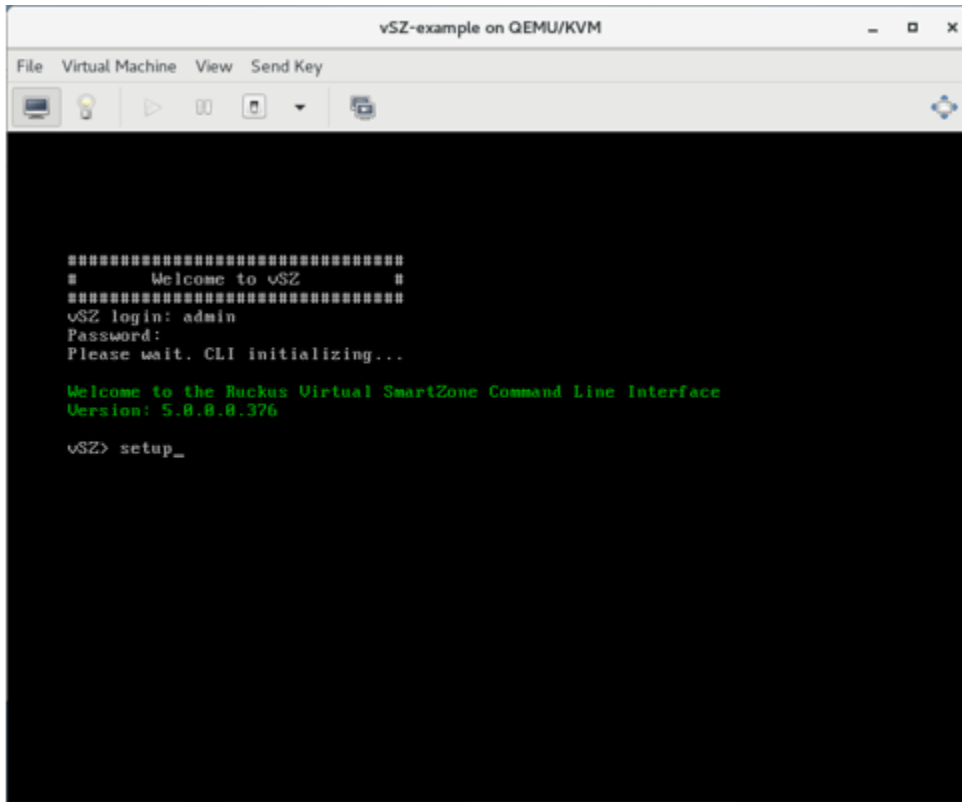**FIGURE 258** Login and Privileged mode



2. Enter **2** for High-Scale mode and press **Y** to continue.
3. Choose IP version **IPv4 only** or **IPv4 and IPv6**. For example, press **1** for **IPv4**.
4. Enter static IP address for control interface as shown in the figure below.

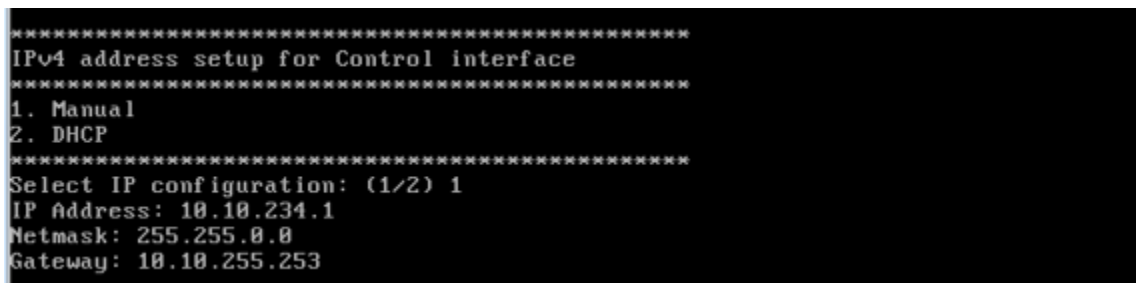**FIGURE 259** Static IP Address for Control Interface



5. Enter static IP address for cluster interface as shown in the figure below.

**FIGURE 260** Static IP Address for Cluster Interface

```
*****  
IPv4 address setup for Cluster interface  
*****  
1. Manual  
2. DHCP  
*****  
Select IP configuration: (1/2) 1  
Please enter number range from 1 to 2.  
Select IP configuration: (1/2) 1  
IP Address: 192.168.2.234  
Netmask: 255.255.255.0  
Gateway: 192.168.2.1
```

6. Enter static IP address for management interface as shown in the figure below.

**FIGURE 261** Static IP Address for Management Interface

```
*****  
IPv4 address setup for Management interface  
*****  
1. Manual  
2. DHCP  
*****  
Select IP configuration: (1/2) 1  
IP Address: 172.17.65.234  
Netmask: 255.255.255.0  
Gateway: 172.17.65.1
```

7. Select the default gateway interface. Enter **1** for control interface, **2** for cluster interface, and **3** for management interface as shown in the figure below.

**FIGURE 262** Default Gateway Interface

```
*****  
Default Gateway Interface  
*****  
1. Control  
2. Cluster  
3. Management  
*****  
Select gateway interface: (1/2/3) 3_
```


8. Enter the DNS server setting and press **Y** to apply all setting.

**FIGURE 263** DNS Server Settings

```
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
DNS Server Settings:
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Primary DNS Server   : 8.8.8.8
Secondary DNS Server : 8.8.4.4
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Enter 'y' to apply, 'n' to modify
Do you want to apply the settings? (y/n) y_
```

9. Access the web link <http://172.17.65.234:8443> to continue other setting as shown in the figure below.

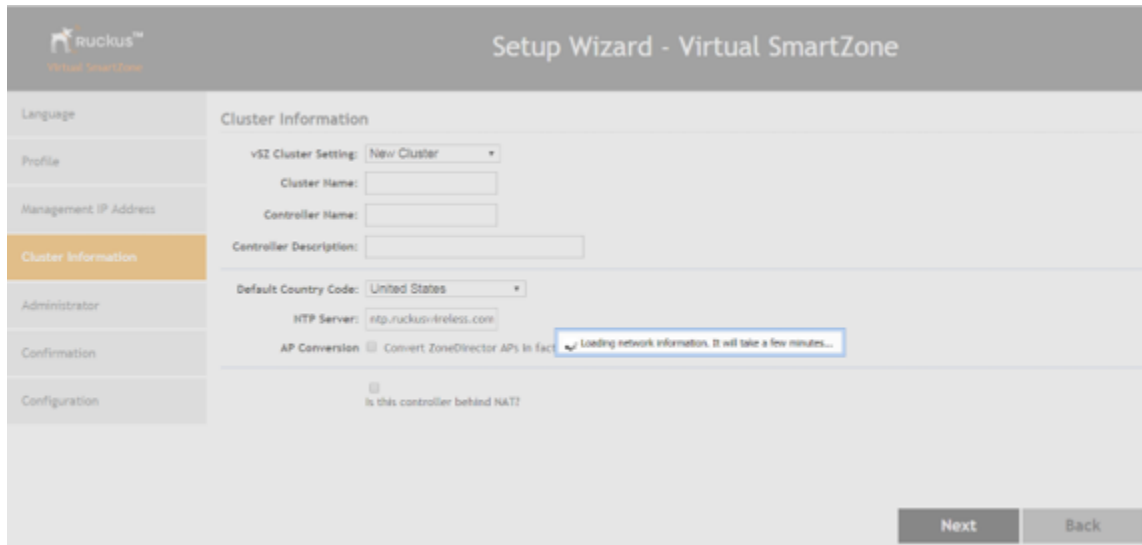
**FIGURE 264** vSZ Web UI






10. Enter your **Cluster Information** and click **Next** as shown in the following figure.

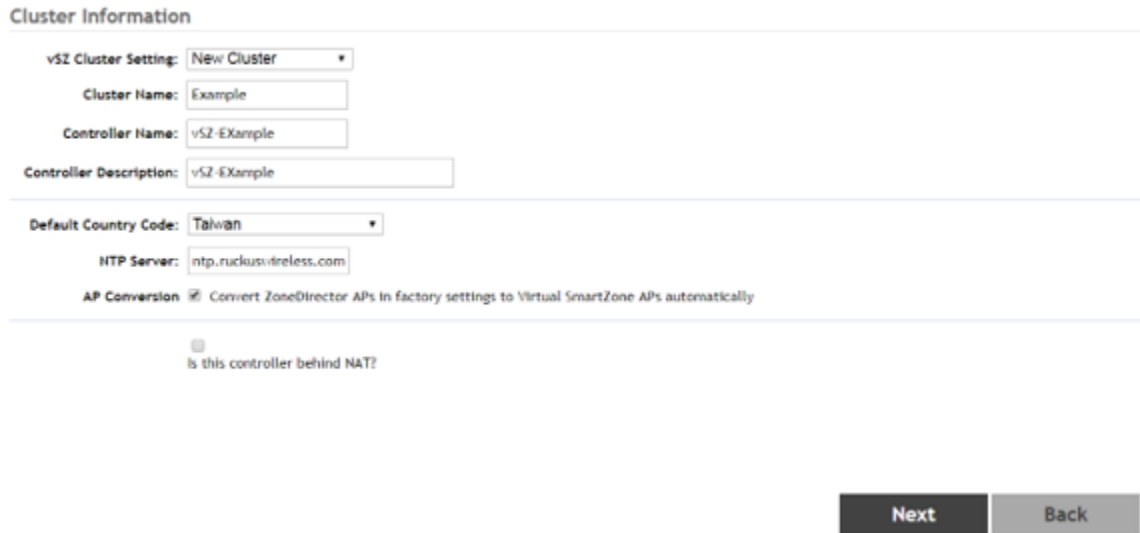**FIGURE 265** Cluster Information




11. Enter your vSZ Administrator password requirements and click **Next** as shown in the following figure.

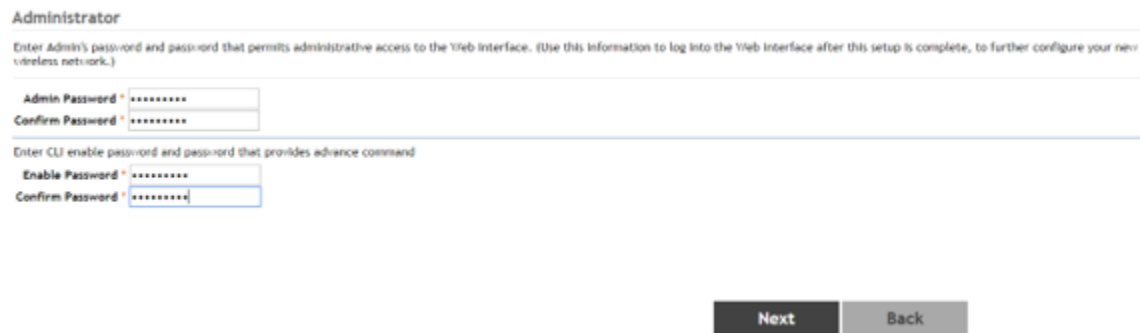**FIGURE 266** vSZ Administrator Password




12. Click **Finish** and wait until vSZ is configured.
13. After vSZ is configured, reconnect to vSZ web as shown in the following figure.

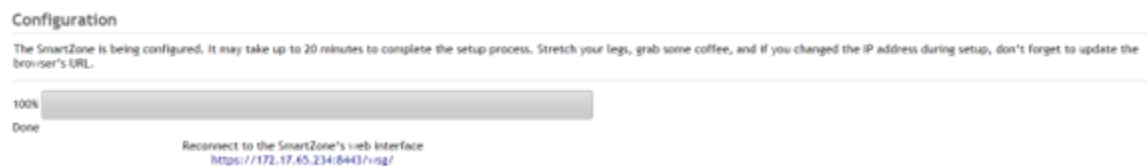**FIGURE 267** vSZ Configuration



14. Enter **Username** and **Password** to access vSZ as shown in the following figure.

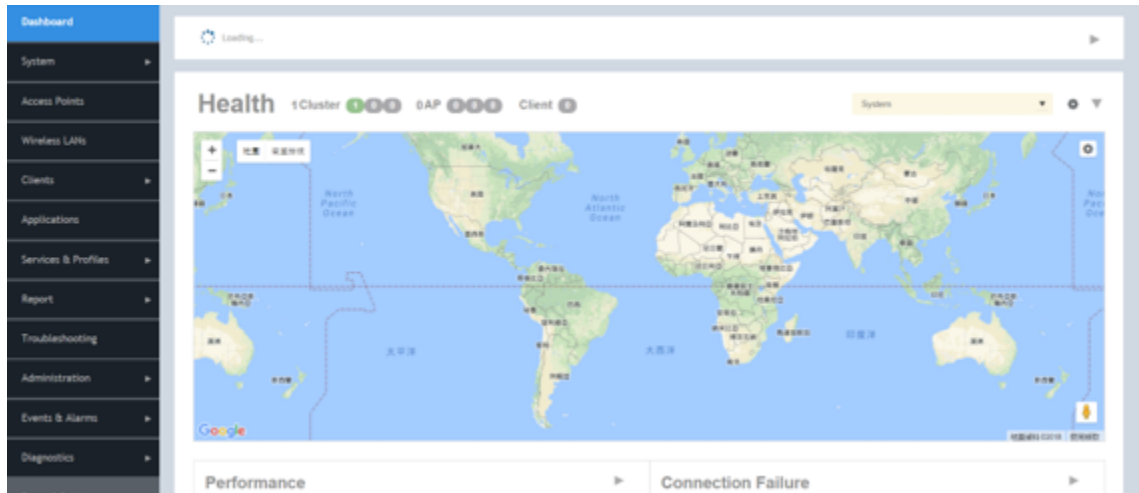**FIGURE 268** vSZ Homepage



# Upgrading the Controller for Microsoft Azure, AWS, and GCE Platforms

- Upgrading the Controller for Microsoft Azure, AWS, and GCE Platforms..... 267
- Upgrading the Controller Software..... 267
- Verifying the Upgrade..... 270
- Rolling Back to a Previous Software Version..... 270

## Upgrading the Controller for Microsoft Azure, AWS, and GCE Platforms

Ruckus Networks may periodically release controller software updates that contain new features, enhancements, and fixes for known issues.

These software updates may be made available on the Ruckus Networkssupport website or released through authorized channels.



### CAUTION

Although the software upgrade process has been designed to preserve all controller settings, Ruckus Networks strongly recommends that you back up the controller cluster before performing an upgrade. Having a cluster backup will ensure that you can easily restore the controller system if the upgrade process fails for any reason.



### CAUTION

Ruckus Networks strongly recommends that you ensure that all interface cables are intact during the upgrade procedure.



### CAUTION

Ruckus Networks strongly recommends that you ensure that the power supply is not disrupted during the upgrade procedure.

### NOTE

If you are managing a vSZ, you can also perform system configuration backup, restore, and upgrade from the controller command line interface.

## Upgrading the Controller Software

This section outlines the procedure to upgrade the controller software for Microsoft Azure, Amazon Web Services, Google Computing Engine platforms.

Follow these steps to upgrade the controller software.



### CAUTION

Ruckus Networks strongly recommends backing up the controller cluster before performing the upgrade. If the upgrade process fails for any reason, you can use the latest backup file to restore the controller cluster.

**NOTE**

Before starting this procedure, you should have already obtained a valid controller software upgrade file from Ruckus Networks Support or an authorized reseller.

vSZ supports APs starting version 3.4. You must first upgrade the vSZ. Only a new vSZ can handle an old vDP. During the vSZ upgrade, all tunnels will stay up except the main tunnel which moves to the vSZ.

Upgrade to 5.0 does not support data migration (statistics, events, administrator logs). Existing system and network configuration is preserved. For further clarification, Contact Ruckus support.


To Upgrade:

1. Copy the software upgrade file that you received from Ruckus Networks to the computer where you are accessing the controller web interface or to any location on the network that is accessible from the web interface.
2. Go to **Administration > Upgrade**.
3. In the **Upload** section, click the **Browse** button, and then browse to the location of the software upgrade file.

Typically, the file name of the software upgrade file is `scg-installer_{version}.ximg`.

Select the **Run Pre-Upgrade Validations** check box to verify if the data migration was successful. This option allows you to verify data migration errors before performing the upgrade. If data migration was unsuccessful, the following error is displayed: `Exception occurred during the validation of data migration. Please apply the system configuration backup and contact system administrator.`

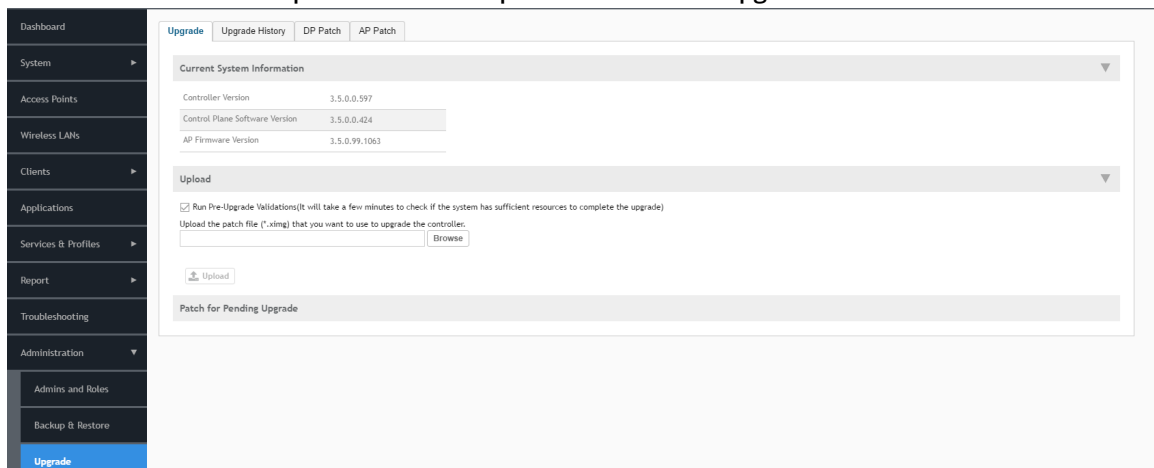**FIGURE 269** Click Browse in the Upload section to upload the software upgrade file



4. Select the software upgrade file, and then click **Open**.
5. Click **Upload** to upload the software upgrade file. The controller uploads the file to its database, and then performs file verification. After the file is verified, the **Upgrade Pending Patch Information** section is populated with information about the upgrade file.

6. Start the upgrade process by clicking one of the following buttons:
  - **Upgrade:** Click this button to start the upgrade process without backing up the current controller cluster or its system configuration.
  - **Backup & Upgrade:** Click this button to back up the controller cluster and system configuration before performing the upgrade.



**CAUTION**


**Ruckus Networks strongly recommends using Backup & Upgrade when performing the upgrade. If the upgrade process fails for any reason, you can use the latest backup file to restore the controller cluster.**

A confirmation message appears.

7. Click **Yes**.


The controller starts the process that you selected. The screens that appear next will depend on the process that you selected to upgrade immediately or to back up and then upgrade the controller.

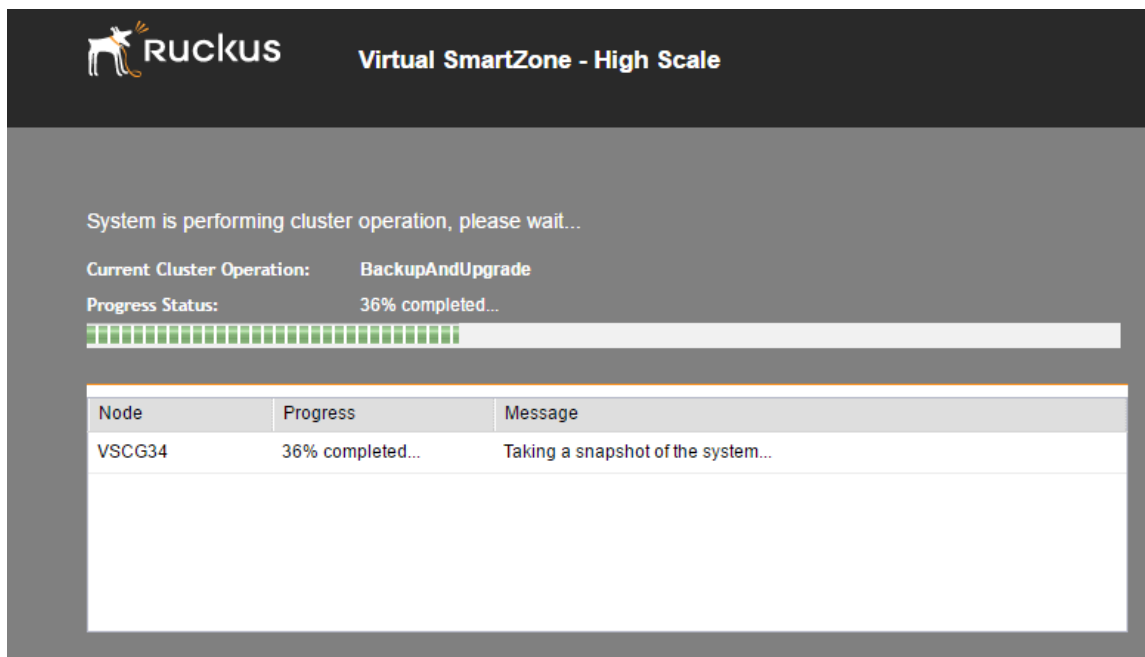**FIGURE 270** The System Upgrade page displays the status of the upgrade process



When the upgrade (or backup-and-upgrade) process is complete, the controller logs you off the web interface automatically. Wait for a few minutes until the web interface log on page appears.

**FIGURE 271** The controller web interface may display the following message as it completes the upgrade process



When the controller logon page appears again, you have completed upgrading the controller.  
Continue to the Verifying the Upgrade task to check if the upgrade was completed successfully.

## Verifying the Upgrade

Follow these steps to verify that the controller upgrade was completed successfully.


1. Log on to the controller web interface.
2. Go to **Administration > Upgrade**.
3. In the **Current System Information** section, check the value for Controller Version.

If the firmware version is newer than the firmware version that controller was using before you started the upgrade process, then the upgrade process was completed successfully.

### NOTE

APs periodically send scheduled configuration requests to the controller, including the firmware version. Therefore, when an AP joins a zone for the first time, the firmware version is verified by the controller. If the firmware version is different from that which is configured for the zone, the controller responds with a request to upgrade it, after which the AP initiates a request to upgrade the firmware using HTTP.

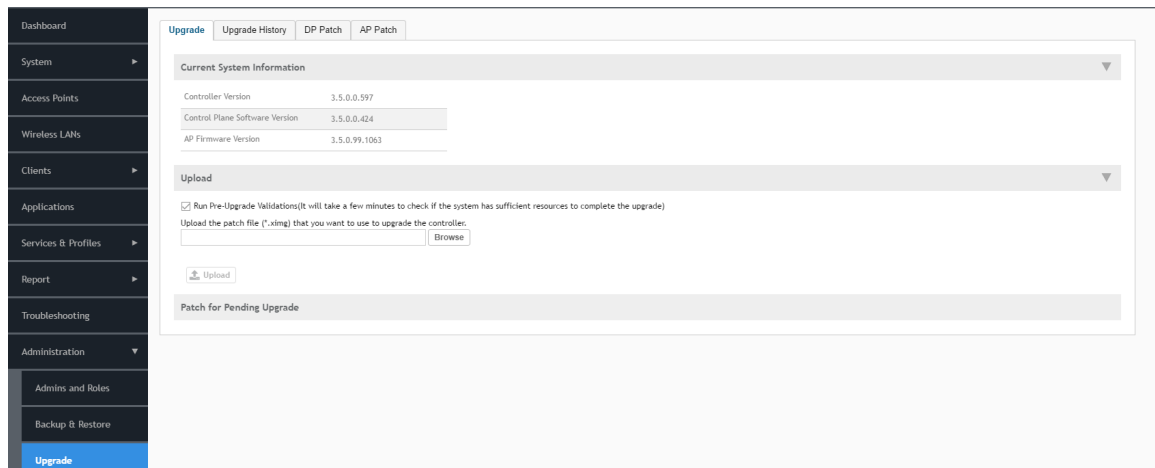**FIGURE 272** Check the value for Controller Version



## Rolling Back to a Previous Software Version

There are two scenarios in which you may want to roll back the controller software to a previous version:

1. You encounter issues during the software upgrade process and the controller cannot be upgraded successfully. In this scenario, you can only perform the software rollback from the **CLI** using the restore local command. If you have a two-node controller cluster, run the restore local command on each of the nodes to restore them to the previous software before attempting to upgrade them again.
2. You prefer a previous software version to the newer version to which you have upgraded successfully. For example, you feel that the controller does not operate normally after you upgraded to the newer version and you want to restore the previous software version, which was more stable. In this scenario, you can perform the software rollback either from

the web interface or the **CLI**. If you have a two-node controller cluster, you must have cluster backup on both of the nodes.

To ensure that you will be able to roll back to a previous version, Ruckus Networks strongly recommends the following before attempting to upgrade the controller software:

- Always back up the controller before attempting a software upgrade. If you are managing a multi-node cluster, back up the entire cluster, and then verify that the backup process completes successfully. See [Creating a Cluster Backup](#) on page 271 for more information.
- If you have an FTP server, back up the entire cluster and upload the backup files from all the nodes in a cluster to a remote FTP server.

## Backing Up and Restoring Clusters

Back up the controller cluster periodically to ensure that you can restore the control plane, data plane, and AP firmware versions as well as the system configuration in the cluster if a system failure occurs.

This section covers the following topics:

### NOTE

You can also perform these procedures from the vSZ command line interface. Note, however, that you will need to execute the commands on each node.

### Creating a Cluster Backup

Follow these steps to back up an entire controller cluster.

1. Take note of the current system time.

To view the current system time, go to **System > General Settings > Time**.

2. Go to **Administration > Backup & Restore**.
3. Click **Backup Entire Cluster**.

The following confirmation message appears: `Are you sure you want to back up the cluster?`

4. Click **Yes**.

The following message appears: `The cluster is in maintenance mode. Please wait a few minutes.`


When the cluster backup process is complete, a new entry appears in the **Cluster Backups** section with a Created On value that is approximate to the time when you started the cluster backup process.

### NOTE

If you have an FTP server, back up the entire cluster and upload the backup files from all the nodes in a cluster to a remote FTP server.

You have completed backing up the controller cluster.

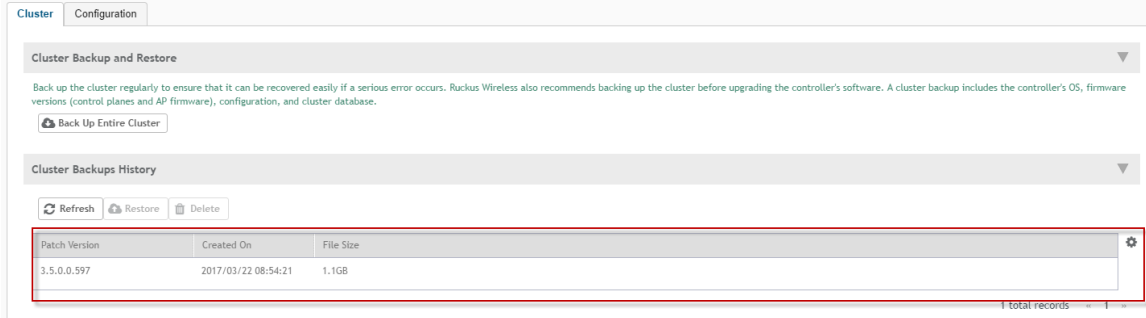**FIGURE 273** A new entry appears in the Cluster Backups section




## Restoring a Cluster Backup

When restoring a cluster backup, remember that you must perform the restore procedure on the exact same node which you generated the cluster backup.

Follow these steps to restore a cluster backup

1. Go to **Administration > Backup & Restore**.
2. In the **Cluster Backups History** section, locate the cluster backup that you want to restore.
3. Select the backup file that you want to restore, and then click **Restore**.

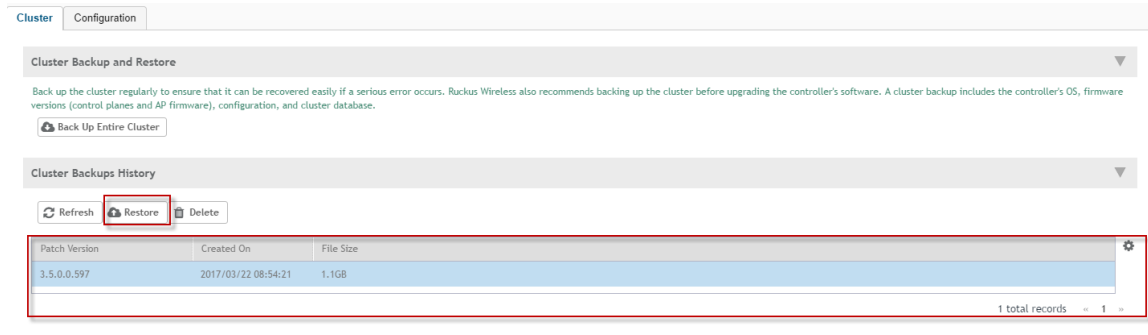
**FIGURE 274** Select the backup file, and then click Restore





- The following confirmation message appears: Are you sure you want to restore the cluster?. Click **Yes**.

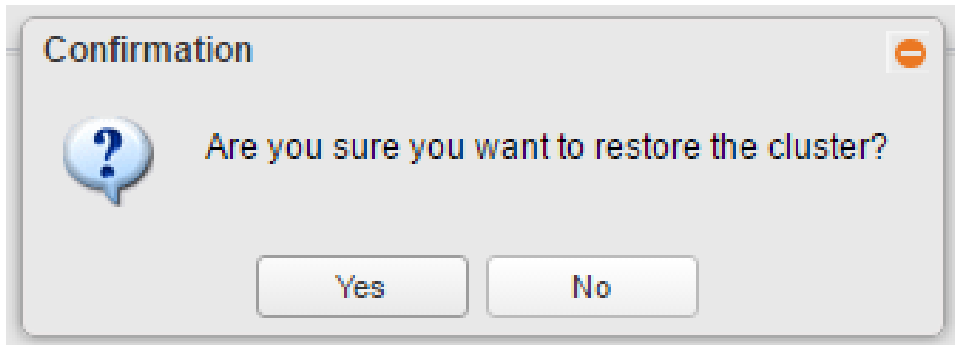**FIGURE 275** Confirm Restore



The page refreshes, and then the following message appears: System is restoring! Please wait...

**NOTE**

The cluster restore process may take several minutes to complete.

When the restore process is complete, the controller logs you off the web interface automatically.

Do not refresh the controller web interface while the restore process is in progress. Wait for the restore process to complete successfully.

- Log back on to the controller web interface.


**NOTE**

If the web interface displays the message Cluster is out of service. Please try again in a few minutes. appears after you log on to the controller web interface, wait for about three minutes. The dashboard will appear shortly. The message appears because the controller is still initializing its processes.

- Go to **Administration > Upgrade**, and then check the **Current System Information** section and verify that all nodes in the cluster have been restored to the previous version and are all in service.
- Go to **Diagnostics > Application Logs**.
- Check the **Health Status** column and verify that all of the controller processes are online.

You have completed restoring the cluster backup. After the upgrade is complete, go to the **Application Logs** page and verify that all of the controller processes are online.

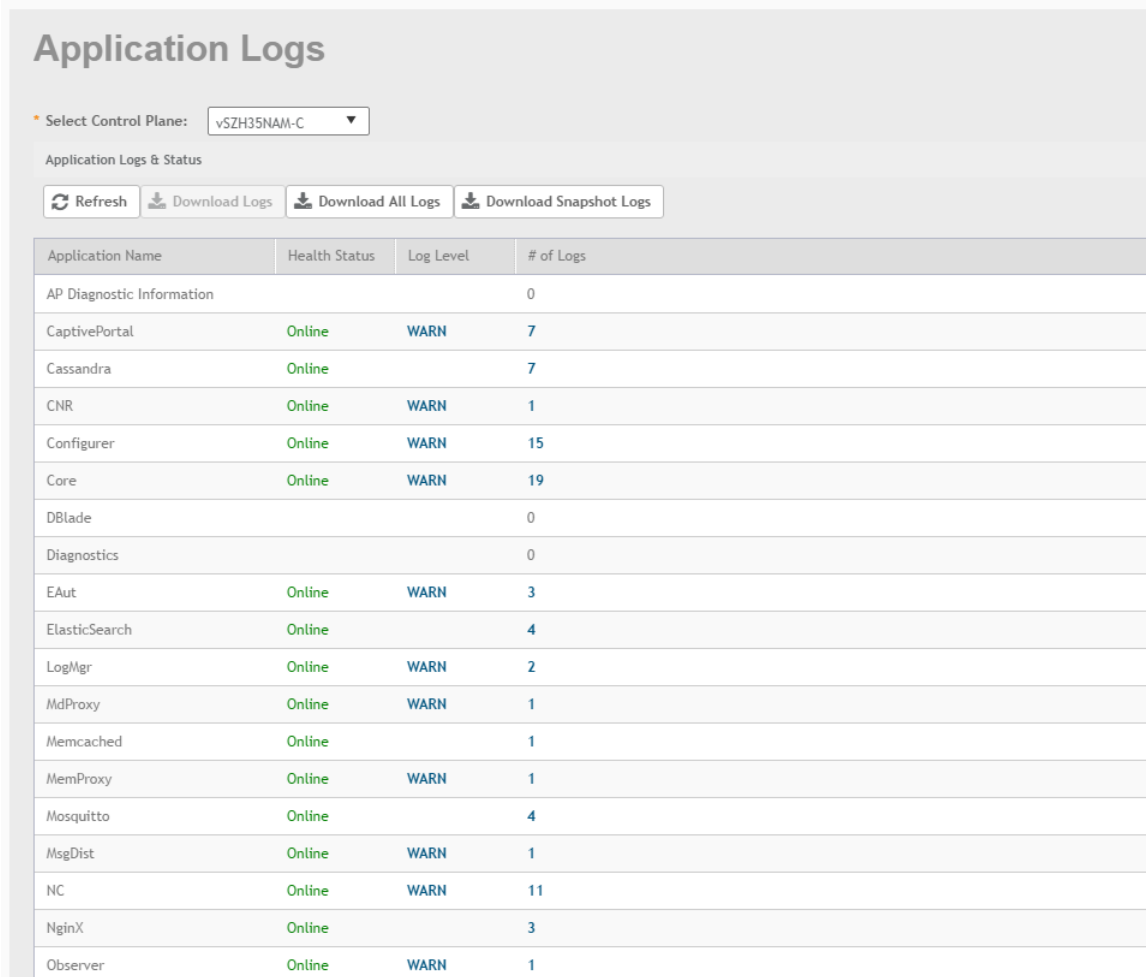**FIGURE 276** On the Application Logs page, verify that all controller processes are online



The screenshot shows the 'Application Logs' page for control plane 'vSZH35NAM-C'. It includes a table with columns for Application Name, Health Status, Log Level, and # of Logs. All processes listed are in an 'Online' state.

| Application Name          | Health Status | Log Level | # of Logs |
|---------------------------|---------------|-----------|-----------|
| AP Diagnostic Information |               |           | 0         |
| CaptivePortal             | Online        | WARN      | 7         |
| Cassandra                 | Online        |           | 7         |
| CNR                       | Online        | WARN      | 1         |
| Configurer                | Online        | WARN      | 15        |
| Core                      | Online        | WARN      | 19        |
| DBlade                    |               |           | 0         |
| Diagnostics               |               |           | 0         |
| EAut                      | Online        | WARN      | 3         |
| ElasticSearch             | Online        |           | 4         |
| LogMgr                    | Online        | WARN      | 2         |
| MdProxy                   | Online        | WARN      | 1         |
| Memcached                 | Online        |           | 1         |
| MemProxy                  | Online        | WARN      | 1         |
| Mosquitto                 | Online        |           | 4         |
| MsgDist                   | Online        | WARN      | 1         |
| NC                        | Online        | WARN      | 11        |
| NginX                     | Online        |           | 3         |
| Observer                  | Online        | WARN      | 1         |

### Restoring a Cluster Backup Using the CLI

Follow these steps to restore a cluster backup using the CLI.

1. Enter the vSZ CLI.
2. Enter the following command and enter the password to log into the CLI.

```
VSCG35> en  
Password:
```

3. Enter the following command to restore a cluster backup:

```
VSCG35> restore
```

All the cluster backups are listed in an order of the cluster backup created date.

4. Specify the number mentioned against the cluster backup that you wish to restore.

You have restored the cluster backup.

FIGURE 277 Cluster Backup Restore Using CLI

```
Welcome to the Ruckus Virtual SmartZone - High Scale Command Line Interface
Version: 3.4.0.0.855

VSC634> en
Password: *****

VSC634# restore
config      local      network

VSC634# restore
No.  Created on          Patch Version      File Size
-----
1    2016-04-25 12:37:27 GMT  3.4.0.0.677       1.7GB
2    2016-06-01 04:14:55 GMT  3.4.0.0.704       999MB
3    2016-06-06 04:09:34 GMT  3.4.0.0.838       1GB

Please choose a backup to restore or 'No' to cancel: 2
Please make sure the restore backup version available in all nodes in the cluster, otherwise restore process will fail
This action will reboot the system. Do you want to restore whole cluster system (or input 'no' to cancel)? [yes/no] yes
```

## Deleting a Cluster Backup

Follow these steps to delete a cluster backup.


1. Go to **Administration > Backup & Restore**.
2. In the **Cluster Backups History** section of the **Cluster** tab, locate the cluster backup that you want to delete, and then click it.

The cluster backup becomes highlighted, which indicates that you have selected it.

3. Click  **Delete**.

A confirmation message appears.

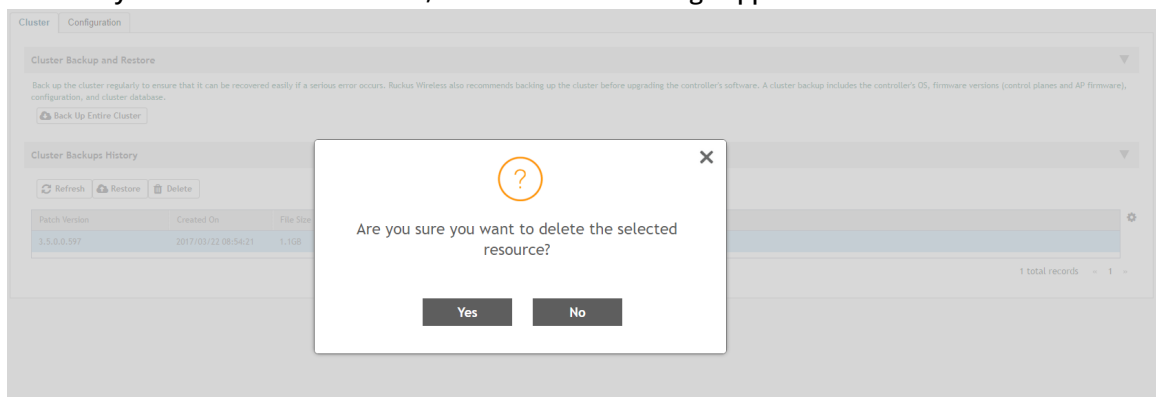FIGURE 278 After you click the Delete button, a confirmation message appears



4. Click **Yes**.

The page refreshes, and then the cluster backup that you deleted disappears from the **Cluster Backups History** section.

You have completed deleting a cluster backup.



© 2019 ARRIS Enterprises LLC. All rights reserved.  
Ruckus Wireless, Inc., a wholly owned subsidiary of ARRIS International plc.  
350 West Java Dr., Sunnyvale, CA 94089 USA  
[www.ruckuswireless.com](http://www.ruckuswireless.com)