

# Ruckus SmartZone 100 and Virtual SmartZone- Essentials SNMP MIB Reference, 5.2.1

Supporting SmartZone 5.2.1

# Copyright, Trademark and Proprietary Rights Information

© 2020 CommScope, Inc. All rights reserved.

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc. and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

## Export Restrictions

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

*These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.*

## Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, COMMSCOPE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. CommScope does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. CommScope does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise. As a condition of your use of the Materials, you warrant to CommScope that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

## Limitation of Liability

IN NO EVENT SHALL COMMSCOPE, COMMSCOPE AFFILIATES, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIERS, LICENSORS AND THIRD PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF COMMSCOPE HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

## Trademarks

ARRIS, the ARRIS logo, COMMSCOPE, RUCKUS, RUCKUS WIRELESS, the Ruckus logo, the Big Dog design, BEAMFLEX, CHANNELFLY, FASTIRON, ICX, SMARTCELL and UNLEASHED are trademarks of CommScope, Inc. and/or its affiliates. Wi-Fi Alliance, Wi-Fi, the Wi-Fi logo, Wi-Fi Certified, the Wi-Fi CERTIFIED logo, Wi-Fi Protected Access, the Wi-Fi Protected Setup logo, Wi-Fi Protected Setup, Wi-Fi Multimedia and WPA2 and WMM are trademarks or registered trademarks of Wi-Fi Alliance. All other trademarks are the property of their respective owners.

# Contents

---

<b>Preface.....</b>	<b>17</b>
Document Conventions.....	17
Notes, Cautions, and Safety Warnings.....	17
Command Syntax Conventions.....	17
Document Feedback.....	18
RUCKUS Product Documentation Resources.....	18
Online Training Resources.....	18
Contacting RUCKUS Customer Services and Support.....	19
What Support Do I Need?.....	19
Open a Case.....	19
Self-Service Resources.....	19
<b>About This Guide.....</b>	<b>21</b>
Introduction.....	21
What's New in This Document.....	21
Terminology.....	21
References.....	22
<b>SNMP Configuration and Standard MIB.....</b>	<b>23</b>
Overview.....	23
Enabling and Disabling SNMP Traps.....	23
Updating SNMP V2 and V3 Configuration Flow and SNMP Logs.....	24
Standard MIB.....	26
Host Resource MIB.....	26
UCD MIB.....	27
SNMPv2 MIB (RFC3418).....	27
RFC1213 MIB (RFC1213).....	27
Decoding Traps.....	27
Generate Traps Using CLI.....	28
SNMP Agent for APs.....	28
Limitations.....	29
Enable SNMP Agent.....	29
Enable Override Settings.....	31
View SNMP Configuration.....	34
Disable SNMP Agents.....	35
<b>Using SNMP Walk Scripts.....</b>	<b>41</b>
Steps for using SNMP Walk Scripts.....	41
Setup Environment.....	41
Installing SNMP Client Tool.....	41
Ruckus MIB files in the MIB directory.....	42
Tips for Writing Your Own Scripts.....	42
<b>Ruckus Event MIB.....</b>	<b>43</b>
Introduction.....	43
Ruckus Event Trap.....	43
ruckusSZSystemMiscEventTrap.....	47
ruckusSZUpgradeSuccessTrap.....	47

ruckusSZUpgradeFailedTrap.....	48
ruckusSZNodeRestartedTrap.....	48
ruckusSZNodeShutdownTrap.....	49
ruckusSZCPUUsageThresholdExceededTrap.....	49
ruckusSZMemoryUsageThresholdExceededTrap.....	50
ruckusSZDiskUsageThresholdExceededTrap.....	50
ruckusSZLicenseUsageThresholdExceededTrap.....	51
ruckusSZAPMiscEventTrap.....	51
ruckusSZAPConnectedTrap.....	52
ruckusSZAPDeletedTrap.....	53
ruckusSZAPDisconnectedTrap.....	53
ruckusSZAPLostHeartbeatTrap.....	54
ruckusSZAPRebootTrap.....	54
ruckusSZCriticalAPConnectedTrap.....	55
ruckusSZCriticalAPDisconnectedTrap.....	56
ruckusSZAPRejectedTrap.....	56
ruckusSZAPConfUpdateFailedTrap.....	57
ruckusSZAPConfUpdatedTrap.....	57
ruckusSZAPSwapOutModelDiffTrap.....	58
ruckusSZAPPreProvisionModelDiffTrap.....	59
ruckusSZAPFirmwareUpdateFailedTrap.....	59
ruckusSZAPFirmwareUpdatedTrap.....	60
ruckusSZAPWlanOversubscribedTrap.....	60
ruckusSZAPFactoryResetTrap.....	61
ruckusSZCableModemDownTrap.....	61
ruckusSZCableModemRebootTrap.....	62
ruckusSZAPManagedTrap.....	63
ruckusSZCPUUsageThresholdBackToNormalTrap.....	63
ruckusSZMemoryUsageThresholdBackToNormalTrap.....	64
ruckusSZDiskUsageThresholdBackToNormalTrap.....	64
ruckusSZCableModemUpTrap.....	64
ruckusSZAPDiscoverySuccessTrap.....	65
ruckusSZCMResetByUserTrap.....	66
ruckusSZCMResetFactoryByUserTrap.....	66
ruckusSZMaliciousRogueAPTimeoutTrap.....	67
ruckusSZAPLBSConnectSuccessTrap.....	67
ruckusSZAPLBSNoResponsesTrap.....	68
ruckusSZAPLBSAuthFailedTrap.....	69
ruckusSZAPLBSConnectFailedTrap.....	69
ruckusSZCGGeneralRogueAPTrap.....	70
ruckusSZAPTunnelBuildFailedTrap.....	70
ruckusSZAPTunnelBuildSuccessTrap.....	71
ruckusSZAPTunnelDisconnectedTrap.....	72
ruckusSZAPSoftGRETTunnelFailoverPtoSTrap.....	72
ruckusSZAPSoftGRETTunnelFailoverStoPTrap.....	73
ruckusSZAPSoftGREGatewayNotReachableTrap.....	74
ruckusSZAPSoftGREGatewayReachableTrap.....	74
ruckusSZDPConfUpdateFailedTrap.....	75
ruckusSZDPLostHeartbeatTrap.....	75
ruckusSZDPDisconnectedTrap.....	76

ruckusSZDPPhyInterfaceDownTrap.....	76
ruckusSZDPStatusUpdateFailedTrap.....	77
ruckusSZDPStatisticUpdateFaliedTrap.....	77
ruckusSZDPConnectedTrap.....	78
ruckusSZDPPhyInterfaceUpTrap.....	78
ruckusSZDPConfUpdatedTrap.....	78
ruckusSZDPTunnelTearDownTrap.....	79
ruckusSZDPAcceptTunnelRequestTrap.....	79
ruckusSZDPRejectTunnelRequestTrap.....	80
ruckusSZDPTunnelSetUpTrap.....	80
ruckusSZDPDiscoverySuccessTrap.....	80
ruckusSZDPDiscoveryFailTrap.....	81
ruckusSZDPDeletedTrap.....	81
ruckusSZDPUgradeStartTrap.....	82
ruckusSZDPUgradingTrap.....	82
ruckusSZDPUgradeSuccessTrap.....	82
ruckusSZDPUgradeFailedTrap.....	83
ruckusSZClientMiscEventTrap.....	83
ruckusSZNodeJoinFailedTrap.....	83
ruckusSZNodeRemoveFailedTrap.....	84
ruckusSZNodeOutOfServiceTrap.....	84
ruckusSZClusterInMaintenanceStateTrap.....	85
ruckusSZClusterBackupFailedTrap.....	85
ruckusSZClusterRestoreFailedTrap.....	86
ruckusSZClusterAppStoppedTrap.....	86
ruckusSZNodeBondInterfaceDownTrap.....	87
ruckusSZNodePhyInterfaceDownTrap.....	87
ruckusSZClusterLeaderChangedTrap.....	88
ruckusSZClusterUpgradeSuccessTrap.....	88
ruckusSZNodeBondInterfaceUpTrap.....	88
ruckusSZNodePhyInterfaceUpTrap.....	89
ruckusSZClusterBackToInServiceTrap.....	89
ruckusSZBackupClusterSuccessTrap.....	90
ruckusSZNodeJoinSuccessTrap.....	90
ruckusSZClusterAppStartTrap.....	90
ruckusSZNodeRemoveSuccessTrap.....	91
ruckusSZClusterRestoreSuccessTrap.....	91
ruckusSZNodeBackToInServiceTrap.....	92
ruckusSZSshTunnelSwitchedTrap.....	92
ruckusSZClusterCfgBackupStartTrap.....	92
ruckusSZClusterCfgBackupSuccessTrap.....	93
ruckusSZClusterCfgBackupFailedTrap.....	93
ruckusSZClusterCfgRestoreSuccessTrap.....	94
ruckusSZClusterCfgRestoreFailedTrap.....	94
ruckusSZClusterUploadSuccessTrap.....	94
ruckusSZClusterUploadFailedTrap.....	95
ruckusSZClusterOutOfServiceTrap.....	95
ruckusSZClusterUploadVDPFirmwareStartTrap.....	95
ruckusSZClusterUploadVDPFirmwareSuccessTrap.....	96
ruckusSZClusterUploadVDPFirmwareFailedTrap.....	96

ruckusSZIpmiTempBBTrap.....	96
ruckusSZIpmiTempPTrap.....	97
ruckusSZIpmiFanTrap.....	97
ruckusSZIpmiFanStatusTrap.....	98
ruckusSZIpmiRETempBBTrap.....	98
ruckusSZIpmiRETempPTrap.....	99
ruckusSZIpmiREFanTrap.....	99
ruckusSZIpmiREFanStatusTrap.....	100
ruckusSZFtpTransferErrorTrap.....	100
ruckusSZSystemLBSConnectSuccessTrap.....	101
ruckusSZSystemLBSNoResponseTrap.....	101
ruckusSZSystemLBSAuthFailedTrap.....	101
ruckusSZSystemLBSConnectFailedTrap.....	102
ruckusSZProcessRestartTrap.....	102
ruckusSZServiceUnavailableTrap.....	103
ruckusSZKeepAliveFailureTrap.....	103
ruckusSZResourceUnavailableTrap.....	104
ruckusSZSmfRegFailedTrap.....	104
ruckusSZHipFailoverTrap.....	105
ruckusSZConfUpdFailedTrap.....	105
ruckusSZConfRcvFailedTrap.....	105
ruckusSZLostCnxnToDbladeTrap.....	106
ruckusSZAuthSrvrNotReachableTrap.....	106
ruckusSZAccSrvrNotReachableTrap.....	107
ruckusSZAuthFailedNonPermanentIDTrap.....	107
ruckusSZAPAcctRespWhileInvalidConfigTrap.....	108
ruckusSZAPAcctMsgDropNoAcctStartMsgTrap.....	108
ruckusSZUnauthorizedCoaDmMessageDroppedTrap.....	109
ruckusSZConnectedToDbladeTrap.....	109
ruckusSZSessUpdatedAtDbladeTrap.....	110
ruckusSZSessUpdateErrAtDbladeTrap.....	110
ruckusSZSessDeletedAtDbladeTrap.....	111
ruckusSZSessDeleteErrAtDbladeTrap.....	111
ruckusSZLicenseSyncSuccessTrap.....	112
ruckusSZLicenseSyncFailedTrap.....	112
ruckusSZLicenseImportSuccessTrap.....	113
ruckusSZLicenseImportFailedTrap.....	113
ruckusSZSyslogServerReachableTrap.....	114
ruckusSZSyslogServerUnreachableTrap.....	114
ruckusSZSyslogServerSwitchedTrap.....	114
ruckusSZAPRadiusServerReachableTrap.....	115
ruckusSZAPRadiusServerUnreachableTrap.....	115
ruckusSZAPLDAPServerReachableTrap.....	116
ruckusSZAPLDAPServerUnreachableTrap.....	117
ruckusSZAPADServerReachableTrap.....	117
ruckusSZAPADServerUnreachableTrap.....	118
ruckusSZAPUsbSoftwarePackageDownloadedTrap.....	119
ruckusSZAPUsbSoftwarePackageDownloadFailedTrap.....	119
ruckusSZEspAuthServerReachableTrap.....	120
ruckusSZEspAuthServerUnreachableTrap.....	121

ruckusSZEspAuthServerResolvableTrap.....	121
ruckusSZEspAuthServerUnResolvableTrap.....	122
ruckusSZEspDNATServerReachableTrap.....	123
ruckusSZEspDNATServerUnreachableTrap.....	123
ruckusSZEspDNATServerResolvableTrap.....	124
ruckusSZEspDNATServerUnresolvableTrap.....	125
ruckusRateLimitTORSurpassedTrap.....	125
ruckusSZIPSecTunnelAssociatedTrap.....	126
ruckusSZIPSecTunnelDisassociatedTrap.....	126
ruckusSZIPSecTunnelAssociateFailedTrap.....	127
Ruckus Event Object.....	128
ruckusSZEventDescription.....	129
ruckusSZClusterName.....	129
ruckusSZEventCode.....	130
ruckusSZProcessName.....	130
ruckusSZEventCtrlIP.....	130
ruckusSZEventSeverity.....	130
ruckusSZEventType.....	130
ruckusSZEventNodeMgmtIp.....	131
ruckusSZEventNodeName.....	131
ruckusSZCPUPerc.....	131
ruckusSZMemoryPerc.....	131
ruckusSZDiskPerc.....	131
ruckusSZEventMacAddr.....	131
ruckusSZEventFirmwareVersion.....	132
ruckusSZEventUpgradedFirmwareVersion.....	132
ruckusSZEventAPMacAddr.....	132
ruckusSZEventReason.....	132
ruckusSZEventAPName.....	132
ruckusSZEventAPIP.....	132
ruckusSZEventAPLocation.....	133
ruckusSZEventAPGPSCoordinates.....	133
ruckusSZEventAPDescription.....	133
ruckusSZAPModel.....	133
ruckusSZConfigAPModel.....	133
ruckusSZAPConfigID.....	133
ruckusSZEventAPIPv6.....	134
ruckusSZLBSURL.....	134
ruckusSZLBSPort.....	134
ruckusSZEventSSID.....	134
ruckusSZEventRogueMac.....	134
ruckusPrimaryGRE.....	134
ruckusSecondaryGRE.....	135
ruckusSoftGREGatewayList.....	135
ruckusSZSoftGREGWAddress.....	135
ruckusSZEventClientMacAddr.....	135
ruckusSZDPKey.....	135
ruckusSZDPConfigID.....	135
ruckusSZDPIP.....	136
ruckusSZNetworkPortID.....	136

ruckusSZNetworkInterface.....	136
ruckusSZSwitchStatus.....	136
ruckusSZTemperatureStatus.....	136
ruckusSZProcessorId.....	136
ruckusSZFanId.....	137
ruckusSZFanStatus.....	137
ruckusSZLicenseType.....	137
ruckusSZLicenseUsagePerc.....	137
ruckusSZLicenseServerName.....	137
ruckusSZIPSecGWAddress.....	137
ruckusSZSyslogServerAddress.....	138
ruckusSZSrcSyslogServerAddress.....	138
ruckusSZDestSyslogServerAddress.....	138
ruckusSZFtpIp.....	138
ruckusSZFtpPort.....	138
ruckusSZUEImsi.....	138
ruckusSZUEMsisdn.....	139
ruckusSZAuthSrvrIp.....	139
ruckusSZRadProxyIp.....	139
ruckusSZAccSrvrIp.....	139
ruckusSZRadSrvrIp.....	139
ruckusSZUserName.....	139
ruckusSZFileName.....	140
ruckusSZLDAPSRvrIp.....	140
ruckusSZADSRvrIp.....	140
ruckusSZSoftwareName.....	140
ruckusSZDomainName.....	140
ruckusSZDNATip.....	140
<b>Ruckus System MIB.....</b>	<b>141</b>
Introduction.....	141
ruckusSZSystemStatsNumAP.....	141
ruckusSZSystemStatsNumSta.....	141
ruckusSZSystemStatsWLANTotalRxPkts.....	142
ruckusSZSystemStatsWLANTotalRxBytes.....	142
ruckusSZSystemStatsWLANTotalRxMulticast.....	142
ruckusSZSystemStatsWLANTotalTxPkts.....	142
ruckusSZSystemStatsWLANTotalTxBytes.....	142
ruckusSZSystemStatsWLANTotalTxMulticast.....	143
ruckusSZSystemStatsWLANTotalTxFail.....	143
ruckusSZSystemStatsWLANTotalTxRetry.....	143
ruckusSZSystemStatsSerialNumber.....	143
Ruckus System Command (SysCommands).....	143
ruckusCTRLSysCmdReboot.....	144
Ruckus Controller System Node Table.....	144
ruckusCtrlSystemNodeEntry.....	145
ruckusCtrlSystemNodeName.....	145
ruckusCtrlSystemNodeMgmtIp.....	145
ruckusCtrlSystemNodeMgmtIpv6.....	145
ruckusCtrlSystemNodeMgmtMac.....	145
ruckusCtrlSystemNodeModel.....	146

ruckusCtrlSystemNodeVersion.....	146
ruckusCtrlSystemNodeSerialNumber.....	146
ruckusCtrlSystemNodeUptime.....	146
ruckusCtrlSystemNodeNumApLicense.....	146
ruckusCtrlSystemNodeNumApConnected.....	147
ruckusCtrlSystemNodeStatus.....	147
ruckusCtrlSystemClusterStatus.....	147
ruckusCtrlSystemNodeClusterHAState.....	147
ruckusCtrlSystemNodeClusterHARoles.....	148
<b>Ruckus Controller Zone Table.....</b>	<b>148</b>
RuckusCtrlZoneEntry.....	148
ruckusCtrlZoneId.....	148
ruckusCtrlZoneName.....	149
ruckusCtrlZoneCountryCode.....	149
ruckusCtrlZoneNumApConnected.....	149
ruckusCtrlZoneNumApDisconnected.....	149
<b>Ruckus WLAN MIB.....</b>	<b>151</b>
Introduction.....	151
Ruckus SZ WLAN.....	151
ruckusSZWLANIndex.....	151
ruckusSZWLANSSID.....	151
ruckusSZWLANNumSta.....	152
ruckusSZWLANRxBytes.....	152
ruckusSZWLANTxBytes.....	152
ruckusSZWLANAuthType.....	152
Ruckus SZ AP.....	152
ruckusSZAPMac.....	153
ruckusSZAPGroup.....	153
ruckusSZAPName.....	153
ruckusSZAPUptime.....	153
ruckusSZAPFWversion.....	154
ruckusSZAPModel.....	154
ruckusSZAPSerial.....	154
ruckusSZAPIp.....	154
ruckusSZAPIPType.....	154
ruckusSZAPExtIp.....	155
ruckusSZAPExtPort.....	155
ruckusSZAPNumSta.....	155
ruckusSZAPConnStatus.....	155
ruckusSZAPRegStatus.....	155
ruckusSZAPConfigStatus.....	156
ruckusSZAPLocation.....	156
ruckusSZAPGPSInfo.....	156
ruckusSZAPMeshRole.....	156
ruckusSZAPDescription.....	156
ruckusSZAPRXBytes.....	157
ruckusSZAPTXXBytes.....	157
ruckusSZAPIpsecSessionTime.....	157
ruckusSZAPIpsecTXPkts.....	157
ruckusSZAPIpsecRXPkts.....	157

ruckusSZAPIpsecTXBytes.....	158
ruckusSZAPIpsecRXBytes.....	158
ruckusSZAPIpsecTXPktsDropped.....	158
ruckusSZAPIpsecRXPktsDropped.....	158
ruckusSZAPIpsecTXIdleTime.....	158
ruckusSZAPIpsecRXIdleTime.....	159
Ruckus SZ Configuration WLAN Statistics.....	159
ruckusSZConfigWLANID.....	159
ruckusSZConfigWLANSSID.....	160
ruckusSZConfigWLANDescription.....	160
ruckusSZConfigWLANName.....	160
ruckusSZConfigWLANWLANServiceType.....	160
ruckusSZConfigWLANAuthentication.....	160
ruckusSZConfigWLANEncryption.....	161
ruckusSZConfigWLANWEPKeyIndex.....	161
ruckusSZConfigWLANWEPKey.....	161
ruckusSZConfigWLANWPAcCipherType.....	161
ruckusSZConfigWLANWPAKey.....	161
ruckusSZConfigWLANWirelessClientIsolation.....	162
ruckusSZConfigWLANZeroITActivation.....	162
ruckusSZConfigWLANServicePriority.....	162
ruckusSZConfigWLANAccountingUpdateInterval.....	162
ruckusSZConfigWLANVlanID.....	162
ruckusSZConfigWLANHideSSID.....	163
ruckusSZConfigWLANMaxClientsPerAP.....	163
Ruckus SCG Client Information.....	163
ruckusCtrlClientMac.....	163
ruckusCtrlClientStatus.....	164
<b>Ruckus AP MIB.....</b>	<b>165</b>
Ruckus Controller AP Group Table.....	165
ruckusCtrlApGroupEntry.....	166
ruckusCtrlApGroupZoneld.....	166
ruckusCtrlApGroupId.....	166
ruckusCtrlApGroupName.....	166
ruckusCtrlApGroupNumApConnected.....	166
ruckusCtrlApGroupNumApDisconnected.....	167
Ruckus Controller Summary AP Table.....	167
ruckusCtrlSummaryApEntry.....	169
ruckusCtrlSummaryApIndexType.....	169
ruckusCtrlSummaryApIndexUUID.....	169
ruckusCtrlSummaryApDomainId.....	169
ruckusCtrlSummaryApZoneld.....	169
ruckusCtrlSummaryApApGroupId.....	170
ruckusCtrlSummaryApMac.....	170
ruckusCtrlSummaryApDomainName.....	170
ruckusCtrlSummaryApZoneName.....	170
ruckusCtrlSummaryApName.....	171
ruckusCtrlSummaryApLocation.....	171
Ruckus Controller AP Client Table.....	171
ruckusCtrlApClientEntry.....	172

ruckusCtrlApClientApMac.....	172
ruckusCtrlApClientMac.....	172
Ruckus Controller AP Table.....	172
ruckusCtrlApEntry.....	175
ruckusCtrlApMac.....	175
ruckusCtrlApDomainId.....	175
ruckusCtrlApDomainName.....	175
ruckusCtrlApZoneld.....	175
ruckusCtrlApZoneName.....	176
ruckusCtrlApApGroupId.....	176
ruckusCtrlApApGroupName.....	176
ruckusCtrlApIp.....	176
ruckusCtrlApIpv6.....	176
ruckusCtrlApNetmask.....	177
ruckusCtrlApGateway.....	177
ruckusCtrlApIpDnsSvr1.....	177
ruckusCtrlApIpDnsSvr2.....	177
ruckusCtrlApIpv6DnsSvr1.....	177
ruckusCtrlApIpv6DnsSvr2.....	178
ruckusCtrlApName.....	178
ruckusCtrlApDescription.....	178
ruckusCtrlApStatus.....	178
ruckusCtrlApModel.....	178
ruckusCtrlApSerialNumber.....	179
ruckusCtrlApSwVersion.....	179
ruckusCtrlApLocation.....	179
ruckusCtrlApGpsInfo.....	179
ruckusCtrlApTemperature.....	179
ruckusCtrlApUptime.....	180
ruckusCtrlApLastConfSyncTime.....	180
ruckusCtrlApCpuUtilization.....	180
ruckusCtrlApTotalMemory.....	180
ruckusCtrlApFreeMemory.....	180
ruckusCtrlApFreeStorage.....	181
ruckusCtrlApEtherPortStatus.....	181
ruckusCtrlApCableModemMac.....	181
ruckusCtrlApCableModemSerialNumber.....	181
ruckusCtrlApNumRadios.....	182
ruckusCtrlApNumWlans.....	182
ruckusCtrlApNumAssocClients.....	182
ruckusCtrlApStatsRxBytes.....	182
ruckusCtrlApStatsTxBytes.....	182
ruckusCtrlApStatsRxDataBytes.....	183
ruckusCtrlApStatsTxDataBytes.....	183
ruckusCtrlApStatsRxPkts.....	183
ruckusCtrlApStatsTxPkts.....	183
ruckusCtrlApStatsRxDataPkts.....	183
ruckusCtrlApStatsTxDataPkts.....	184
ruckusCtrlApStatsRxErrorPkts.....	184
ruckusCtrlApStatsTxErrorPkts.....	184

ruckusCtrlApStatsRxDropPkts.....	184
ruckusCtrlApStatsTxDropPkts.....	184
ruckusCtrlApMeshRole.....	185
ruckusCtrlApNumMeshHops.....	185
ruckusCtrlApConnectScgCplp.....	185
ruckusCtrlApConnectScgCplpv6.....	185
ruckusCtrlApConnectScgDplp.....	185
ruckusCtrlApConnectScgDplpv6.....	186
ruckusCtrlApLanStatsRxBytes.....	186
ruckusCtrlApLanStatsTxBytes.....	186
ruckusCtrlApLanStatsRxPkts.....	186
ruckusCtrlApLanStatsTxPkts.....	186
ruckusCtrlApLanStatsRxErrorPkts.....	187
ruckusCtrlApLanStatsTxErrorPkts.....	187
ruckusCtrlApLanStatsRxDroppedPkts.....	187
ruckusCtrlApLanStatsTxDroppedPkts.....	187
ruckusCtrlApIpsecRxBytes.....	187
ruckusCtrlApIpsecTxBytes.....	188
ruckusCtrlApIpsecRxPkts.....	188
ruckusCtrlApIpsecTxPkts.....	188
ruckusCtrlApIpsecRxDropPkts.....	188
ruckusCtrlApIpsecTxDropPkts.....	188
ruckusCtrlApIpsecSessionTime.....	189
ruckusCtrlApIpsecRxIdleTime.....	189
ruckusCtrlApIpsecTxIdleTime.....	189
Ruckus Controller Radio Table.....	189
ruckusCtrlApRadioEntry.....	191
ruckusCtrlApRadioApMac.....	192
ruckusCtrlApRadioIndex.....	192
ruckusCtrlApRadioNumWlans.....	192
ruckusCtrlApRadioType.....	192
ruckusCtrlApRadioChannelWidth.....	193
ruckusCtrlApRadioChannel.....	193
ruckusCtrlApRadioTxPower.....	193
ruckusCtrlApRadioBeaconPeriod.....	193
ruckusCtrlApRadioPowerMgmtEnable.....	193
ruckusCtrlApRadioMeshEnable.....	194
ruckusCtrlApRadioStatsRxAirtime.....	194
ruckusCtrlApRadioStatsTxAirtime.....	194
ruckusCtrlApRadioStatsBusyAirtime.....	194
ruckusCtrlApRadioStatsTotalAirtime.....	195
ruckusCtrlApRadioAntennaGain.....	195
ruckusCtrlApRadioStatsSnr.....	195
ruckusCtrlApRadioStatsNoiseFloor.....	195
ruckusCtrlApRadioStatsNumAssocClients.....	195
ruckusCtrlApRadioStatsNumAuthClients.....	196
ruckusCtrlApRadioStatsNumMaxClients.....	196
ruckusCtrlApRadioStatsPhyError.....	196
ruckusCtrlApRadioStatsRxWepFail.....	196
ruckusCtrlApRadioStatsRxDecryptCrcError.....	196

ruckusCtrlApRadioStatsRxMicError.....	197
ruckusCtrlApRadioStatsRxBytes.....	197
ruckusCtrlApRadioStatsTxBytes.....	197
ruckusCtrlApRadioStatsRxPkts.....	197
ruckusCtrlApRadioStatsTxPkts.....	197
ruckusCtrlApRadioStatsRxMcastPkts.....	198
ruckusCtrlApRadioStatsTxMcastPkts.....	198
ruckusCtrlApRadioStatsRxErrorPkts.....	198
ruckusCtrlApRadioStatsTxErrorPkts.....	198
ruckusCtrlApRadioStatsRxPktErrorRate.....	198
ruckusCtrlApRadioStatsTxPktErrorRate.....	199
ruckusCtrlApRadioStatsTxPktRetryRate.....	199
ruckusCtrlApRadioStatsTxRetryPkts.....	199
ruckusCtrlApRadioStatsRxDropPkts.....	199
ruckusCtrlApRadioStatsTxDropPkts.....	199
ruckusCtrlApRadioStatsNumAuthReqs.....	200
ruckusCtrlApRadioStatsNumAuthResps.....	200
ruckusCtrlApRadioStatsNumAuthSuccess.....	200
ruckusCtrlApRadioStatsNumAuthFail.....	200
ruckusCtrlApRadioStatsAuthFailRate.....	200
ruckusCtrlApRadioStatsNumAssocReq.....	201
ruckusCtrlApRadioStatsNumAssocResp.....	201
ruckusCtrlApRadioStatsNumReassocReq.....	201
ruckusCtrlApRadioStatsNumReassocResp.....	201
ruckusCtrlApRadioStatsNumAssocSuccess.....	201
ruckusCtrlApRadioStatsNumAssocFail.....	202
ruckusCtrlApRadioStatsAssocSuccessRate.....	202
ruckusCtrlApRadioStatsAssocFailRate.....	202
Ruckus Controller AP WLAN Table.....	202
ruckusCtrlApWlanEntry.....	203
ruckusCtrlApWlanApMac.....	204
ruckusCtrlApWlanRadioIndex.....	204
ruckusCtrlApWlanBssid.....	204
ruckusCtrlApWlanAuthMethod.....	204
ruckusCtrlApWlanEncryptMethod.....	205
ruckusCtrlApWlanId.....	205
ruckusCtrlApWlanName.....	205
ruckusCtrlApWlanRadioChannel.....	205
ruckusCtrlApWlanSsid.....	205
ruckusCtrlApWlanVlanId.....	206
ruckusCtrlApWlanRtsThreshold.....	206
ruckusCtrlApWlanDownRateLimit.....	206
ruckusCtrlApWlanUpRateLimit.....	206
ruckusCtrlApWlanIsBcastDisable.....	206
ruckusCtrlApWlanIsGuest.....	207
ruckusCtrlApWlanIsTunnel.....	207
ruckusCtrlApWlanStatsNumAssocClients.....	207
ruckusCtrlApWlanStatsRxPkts.....	207
ruckusCtrlApWlanStatsTxPkts.....	207
ruckusCtrlApWlanStatsRxBytes.....	208

ruckusCtrlApWlanStatsTxBytes.....	208
ruckusCtrlApWlanStatsRxDataBytes.....	208
ruckusCtrlApWlanStatsTxDataBytes.....	208
ruckusCtrlApWlanStatsRxDataPkts.....	208
ruckusCtrlApWlanStatsTxDataPkts.....	209
ruckusCtrlApWlanStatsRxBcastDataPkts.....	209
ruckusCtrlApWlanStatsTxBcastDataPkts.....	209
ruckusCtrlApWlanStatsRxMcastDataPkts.....	209
ruckusCtrlApWlanStatsTxMcastDataPkts.....	209
ruckusCtrlApWlanStatsNumAssocReq.....	210
ruckusCtrlApWlanStatsNumAssocResp.....	210
ruckusCtrlApWlanStatsNumReassocReq.....	210
ruckusCtrlApWlanStatsNumReassocResp.....	210
ruckusCtrlApWlanStatsNumAuthReq.....	210
ruckusCtrlApWlanStatsNumAuthResp.....	211
ruckusCtrlApWlanStatsNumAuthSuccess.....	211
ruckusCtrlApWlanStatsNumAuthFail.....	211
ruckusCtrlApWlanStatsAuthFailRate.....	211
ruckusCtrlApWlanStatsNumAssocFail.....	211
Ruckus Controller Client Table.....	212
ruckusCtrlClientEntry.....	213
ruckusCtrlClientMac.....	213
ruckusCtrlClientIp.....	213
ruckusCtrlClientIpv6.....	213
ruckusCtrlClientApMac.....	214
ruckusCtrlClientWlanBssid.....	214
ruckusCtrlClientSsid.....	214
ruckusCtrlClientRadioIndex.....	214
ruckusCtrlClientRadioType.....	214
ruckusCtrlClientRadioChannel.....	215
ruckusCtrlClientUsername.....	215
ruckusCtrlClientVlanId.....	215
ruckusCtrlClientOsType.....	215
ruckusCtrlClientStatus.....	216
ruckusCtrlClientAuthMode.....	216
ruckusCtrlClientStatsRssi.....	216
ruckusCtrlClientStatsSnr.....	216
ruckusCtrlClientStatsNoiseFloor.....	216
ruckusCtrlClientStatsThroughput.....	217
ruckusCtrlClientStatsRxDataBytes.....	217
ruckusCtrlClientStatsTxDataBytes.....	217
ruckusCtrlClientStatsRxDataPkts.....	217
ruckusCtrlClientStatsTxDataPkts.....	217
ruckusCtrlClientStatsTxAvgByteRate.....	218
ruckusCtrlClientStatsTxRetry.....	218
ruckusCtrlClientStatsRxError.....	218
ruckusCtrlClientStatsTxError.....	218
ruckusCtrlClientStatsTxRetryBytes.....	218
ruckusCtrlClientStatsTxDropPkts.....	219
AP Wired Client Table.....	219

ruckusCTRLApWiredClientEntry.....	219
ruckusCtrlApWiredClientApMac.....	220
ruckusCtrlApWiredClientMac.....	220
Ruckus Wired Client Table.....	220
ruckusCTRLWiredClientEntry.....	221
ruckusCtrlWiredClientMac.....	221
ruckusCtrlWiredClientUserName.....	221
ruckusCtrlWiredClientLanPort.....	222
ruckusCtrlWiredClientVlanId.....	222
ruckusCtrlWiredClientIp.....	222
ruckusCtrlWiredClientIpv6.....	222
ruckusCtrlWiredClientApMac.....	222
ruckusCtrlWiredClientAuthStatus.....	223
ruckusCtrlWiredClientRxFrames.....	223
ruckusCtrlWiredClientTxFrames.....	223
ruckusCtrlWiredClientRxBytes.....	223
ruckusCtrlWiredClientTxBytes.....	223
ruckusCtrlWiredClientRxUcastPkts.....	224
ruckusCtrlWiredClientTxUcastPkts.....	224
ruckusCtrlWiredClientRxMcastPkts.....	224
ruckusCtrlWiredClientTxMcastPkts.....	224
ruckusCtrlWiredClientRxMcastLegacyPkts.....	224
ruckusCtrlWiredClientRxBcastPkts.....	225
ruckusCtrlWiredClientTxBcastPkts.....	225
ruckusCtrlWiredClientRxDroppedPkts.....	225
ruckusCtrlWiredClientTxDroppedPkts.....	225
ruckusCtrlWiredClientRxEapolPkts.....	225
ruckusCtrlWiredClientTxEapolPkts.....	226
<b>Ruckus IPv6 MIB.....</b>	<b>227</b>
IP-FORWARD-MIB.....	227
inetCidrRouteTable.....	227
IP-MIB.....	229
ipv6IpForwarding.....	229
ipv6IpDefaultHopLimit.....	229
ipv6InterfaceTableLastChange.....	230
ipv6InterfaceTable.....	230
ipSystemStatsTable.....	231
ipIfStatsTable.....	238
ipAddressPrefixTable.....	245
ipAddressTable.....	246
ipNetToPhysicalTable.....	248
ipv6ScopeZoneIndexTable.....	249
icmpStatsTable.....	252
icmpMsgStatsTable.....	252
TCP-MIB.....	253
tcpListenerTable.....	253
tcpConnectionTable.....	253
UDP-MIB.....	254
udpEndpointTable.....	254
IPV6-MIB.....	254

ipv6Forwarding.....	254
ipv6DefaultHopLimit.....	254
ipv6Interfaces.....	255
ipv6IfTable.....	255
<b>SmartZone Event Traps.....</b>	<b>257</b>
ruckusSZSystemMiscEventTrap.....	257
ruckusSZAPMiscEventTrap.....	258
ruckusSZClientMiscEventTrap.....	258
<b>Frequently Asked Questions.....</b>	<b>259</b>
Timeout .....	259
SNMP Reports .....	260
Difference in SNMP Data.....	260
Modifying SNMP HostName.....	261
Determining the Timeout Value .....	261
Determining the Query Interval.....	261
Determining the Query Interval for AP Related Tables.....	261

# Preface

- Document Conventions..... 17
- Command Syntax Conventions..... 17
- Document Feedback..... 18
- RUCKUS Product Documentation Resources..... 18
- Online Training Resources..... 18
- Contacting RUCKUS Customer Services and Support..... 19

## Document Conventions

The following table lists the text conventions that are used throughout this guide.

**TABLE 1** Text Conventions

Convention	Description	Example
monospace	Identifies command syntax examples	<code>device(config)# interface ethernet 1/1/6</code>
<b>bold</b>	User interface (UI) components such as screen or page names, keyboard keys, software buttons, and field names	On the <b>Start</b> menu, click <b>All Programs</b> .
<i>italics</i>	Publication titles	Refer to the <i>RUCKUS Small Cell Release Notes</i> for more information.

## Notes, Cautions, and Safety Warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

### NOTE

A NOTE provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

### ATTENTION

An ATTENTION statement indicates some information that you must read before continuing with the current action or task.



### CAUTION

A CAUTION statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.



### DANGER

A DANGER statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.

## Command Syntax Conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

Convention	Description
<b>bold text</b>	Identifies command names, keywords, and command options.

## Preface

Document Feedback

Convention	Description
<i>italic text</i>	Identifies a variable.
[ ]	Syntax components displayed within square brackets are optional.
	Default responses to system prompts are enclosed in square brackets.
{ x   y   z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x   y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, for example, passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member</i> [ <i>member</i> ...].
\	Indicates a “soft” line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

## Document Feedback

Ruckus is interested in improving its documentation and welcomes your comments and suggestions.

You can email your comments to Ruckus at [#Ruckus-Docs@commscope.com](mailto:#Ruckus-Docs@commscope.com).

When contacting us, include the following information:

- Document title and release number
- Document part number (on the cover page)
- Page number (if appropriate)

For example:

- Ruckus SmartZone Upgrade Guide, Release 5.0
- Part number: 800-71850-001 Rev A
- Page 7

## RUCKUS Product Documentation Resources

Visit the RUCKUS website to locate related documentation for your product and additional RUCKUS resources.

Release Notes and other user documentation are available at <https://support.ruckuswireless.com/documents>. You can locate the documentation by product or perform a text search. Access to Release Notes requires an active support contract and a RUCKUS Support Portal user account. Other technical documentation content is available without logging in to the RUCKUS Support Portal.

White papers, data sheets, and other product documentation are available at <https://www.ruckuswireless.com>.

## Online Training Resources

To access a variety of online RUCKUS training modules, including free introductory courses to wireless networking essentials, site surveys, and products, visit the RUCKUS Training Portal at <https://training.ruckuswireless.com>.

# Contacting RUCKUS Customer Services and Support

The Customer Services and Support (CSS) organization is available to provide assistance to customers with active warranties on their RUCKUS products, and customers and partners with active support contracts.

For product support information and details on contacting the Support Team, go directly to the RUCKUS Support Portal using <https://support.ruckuswireless.com>, or go to <https://www.ruckuswireless.com> and select **Support**.

## What Support Do I Need?

Technical issues are usually described in terms of priority (or severity). To determine if you need to call and open a case or access the self-service resources, use the following criteria:

- Priority 1 (P1)—Critical. Network or service is down and business is impacted. No known workaround. Go to the **Open a Case** section.
- Priority 2 (P2)—High. Network or service is impacted, but not down. Business impact may be high. Workaround may be available. Go to the **Open a Case** section.
- Priority 3 (P3)—Medium. Network or service is moderately impacted, but most business remains functional. Go to the **Self-Service Resources** section.
- Priority 4 (P4)—Low. Requests for information, product documentation, or product enhancements. Go to the **Self-Service Resources** section.

## Open a Case

When your entire network is down (P1), or severely impacted (P2), call the appropriate telephone number listed below to get help:

- Continental United States: 1-855-782-5871
- Canada: 1-855-782-5871
- Europe, Middle East, Africa, Central and South America, and Asia Pacific, toll-free numbers are available at <https://support.ruckuswireless.com/contact-us> and Live Chat is also available.
- Worldwide toll number for our support organization. Phone charges will apply: +1-650-265-0903

We suggest that you keep a physical note of the appropriate support number in case you have an entire network outage.

## Self-Service Resources

The RUCKUS Support Portal at <https://support.ruckuswireless.com> offers a number of tools to help you to research and resolve problems with your RUCKUS products, including:

- Technical Documentation—<https://support.ruckuswireless.com/documents>
- Community Forums—<https://forums.ruckuswireless.com/ruckuswireless/categories>
- Knowledge Base Articles—<https://support.ruckuswireless.com/answers>
- Software Downloads and Release Notes—[https://support.ruckuswireless.com/#products\\_grid](https://support.ruckuswireless.com/#products_grid)
- Security Bulletins—<https://support.ruckuswireless.com/security>

Using these resources will help you to resolve some issues, and will provide TAC with additional data from your troubleshooting analysis if you still require assistance through a support case or RMA. If you still require help, open and manage your case at [https://support.ruckuswireless.com/case\\_management](https://support.ruckuswireless.com/case_management).



# About This Guide

- Introduction..... 21
- What's New in This Document..... 21
- Terminology..... 21
- References..... 22

## Introduction

This *SmartZone SNMP MIB Reference Guide* describes the SNMP Management Information Bases (MIBs) that the SmartZone 100 (SZ-100) and Virtualized SmartZone-Essentials (vSZ-E) (collectively referred to as “the controller” throughout this guide) supports.

This guide is written for service operators and system administrators who are responsible for managing, configuring, and troubleshooting Ruckus devices. Consequently, it assumes a basic working knowledge of local area networks, wireless networking, and wireless devices.

### NOTE

If release notes are shipped with your product and the information there differs from the information in this guide, follow the instructions in the release notes.

Most user guides and release notes are available in Adobe Acrobat Reader Portable Document Format (PDF) or HTML on the support b site at <https://support.ruckuswireless.com/contact-us>.

## What's New in This Document

No new MIBs were added as part of 5.2.1 release.

## Terminology

The following table lists the terms used in this guide.

**TABLE 2** Terms used in this guide

Term	Description
AAA	Authentication, Authorization, and Accounting
AP	Access Point
APN	Access Point Name
CDR	Call Detail Record
CGF	Charging Data Function
CIP	Channel Interface Processor
DHCP	Dynamic Host Configuration Protocol
EAP-AKA	Extensible Authentication Protocol for Authentication and Key Agreement
EAP-SIM	Extensible Authentication Protocol for GSM Subscriber Identity Module
GGSN	Gateway GPRS Support Node
GSN	GPRS Support Node
GTP-C	GPRS Tunneling Protocol – Control Plane

## About This Guide

### References

**TABLE 2** Terms used in this guide (continued)

Term	Description
HLR	Home Location Register
IPSP	IP Signaling Point
LBS	Location Based Service
MIB	Management Information Bases
NAK	Negative Acknowledgment
NBI	Northbound Interface
OID	Object Identifier
PDG	Packet Data Gateway
SG	Signaling Gateway
SmartZone-CBlade	SmartZone Controller Blade
SmartZone-DBlade	SmartZone Data Blade
SNMP	Simple Network Management Protocol
SZ	SmartZone 100
TCP	Transmission Control Protocol
TTG	Tunnel Termination Gateway
UE	User Equipment
UE-IP	User Equipment - IP Address
UE-MAC	User Equipment - MAC Address

## References

The following table lists the specifications and standards that are referred to in this guide.

**TABLE 3** References used in this guide

No.	Reference Number	Description
1	RFC3418	Defines managed objects that describe the behavior of a Simple Network Management Protocol (SNMP) entity
2	RFC1213	Defines the second version of the Management Information Base (MIB-II) for use with network management protocols on TCP/IP-based Internets.

# SNMP Configuration and Standard MIB

---

- Overview..... 23
- Enabling and Disabling SNMP Traps..... 23
- Updating SNMP V2 and V3 Configuration Flow and SNMP Logs..... 24
- Standard MIB..... 26
- Decoding Traps..... 27
- Generate Traps Using CLI..... 28
- SNMP Agent for APs..... 28

## Overview

This document describes the SNMP management information bases (MIBs) that the controller supports. It also describes the overall design of the controller SNMP agent. The Smart Zone SNMP agent allows its northbound portal application to monitor the system via SNMP GET operation. It also notifies the critical events by sending traps. The Smart Zone supports V2c community and V3 user versions of SNMP. It also supports configuring the system via SNMP SET from this release. See [Updating SNMP V2 and V3 Configuration Flow and SNMP Logs](#) on page 24.

**NOTE**

For information on how to enable SNMP traps and configure the SNMP V2 and V3 settings on the controller web interface, refer to the *Administrator Guide for SmartZone 3.1.1*.

**NOTE**

Refer to [About This Guide](#) on page 21 for conventions used in this guide.


**NOTE**

For details on alarms and events refer to *Alarms and Events Guide for SmartZone 3.1.1*.

## Enabling and Disabling SNMP Traps

In the controller web interface navigate to **System > General Settings > SNMP Agent** to either enable or disable the SNMP notifications as shown in the following figure.

FIGURE 1 SNMP notifications

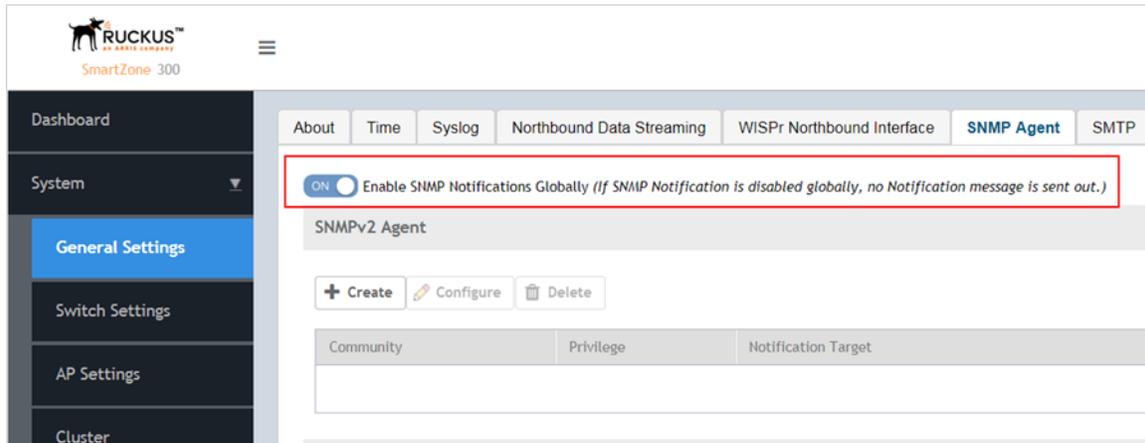

If the SNMP notification is disabled, it will not send any messages to the receiver. It also does not allow any community or a user to enable or configure the notification target address.

## Updating SNMP V2 and V3 Configuration Flow and SNMP Logs

Using the controller web interface add or update V2 and V3 communities / users and set the operation (set/get/trap) configurations. Navigate to **System > General Settings > SNMP Agent** to create SNMP V2 and V3 agents as shown in the below figures.

**NOTE**

For information on how to enable the SNMP V2 and V3 settings on the controller web interface, refer to the *Administrator Guide*.

The controller supports a maximum of eight SNMP user profiles and eight trap destinations for SNMPv2 and SNMv3. In the previous releases this was unlimited.

FIGURE 2 Create or enable SNMP V2


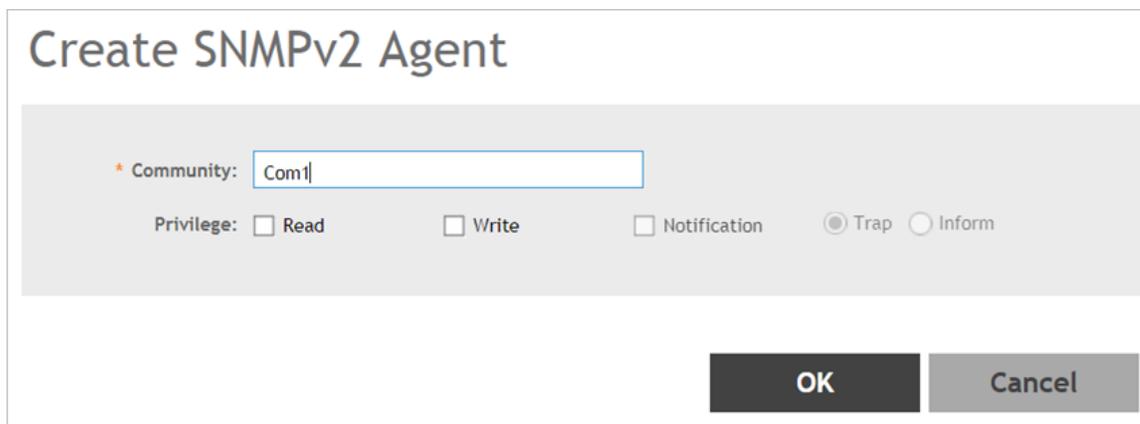


FIGURE 3 Create or enable SNMP V3

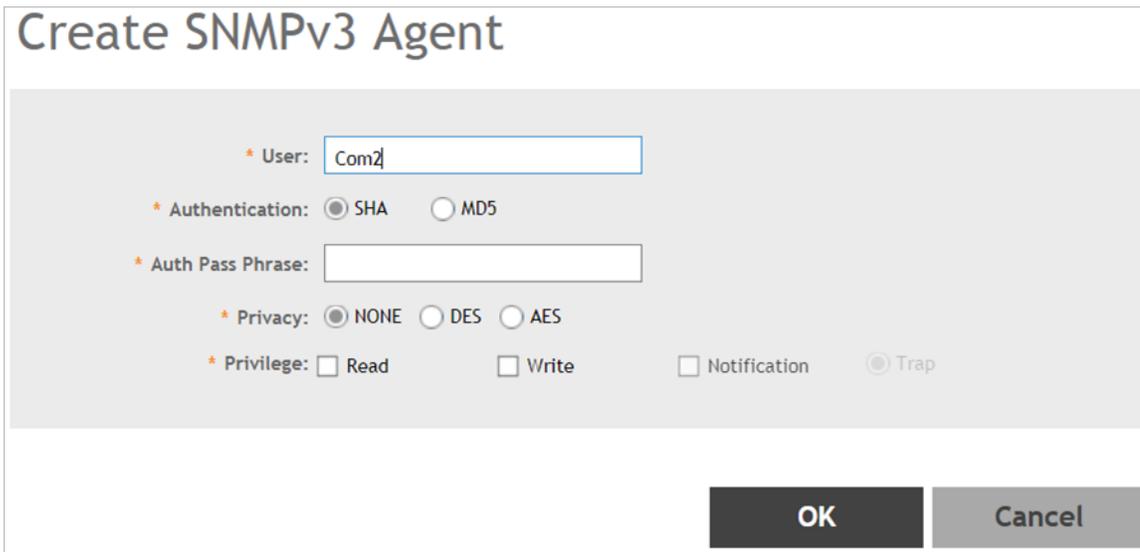

The screenshot shows a configuration window titled "Create SNMPv3 Agent". It contains several fields and options for setting up an SNMPv3 agent:


- User:** A text input field containing the value "Com2".
- Authentication:** Two radio button options: "SHA" (selected) and "MD5".
- Auth Pass Phrase:** An empty text input field.
- Privacy:** Three radio button options: "NONE" (selected), "DES", and "AES".
- Privilege:** Four checkbox options: "Read", "Write", "Notification", and "Trap". The "Trap" checkbox is selected.

At the bottom right of the dialog, there are two buttons: "OK" and "Cancel".

### SNMP Logs

On the controller web interface, navigate to **Diagnostics > Application Log** to view the SNMP logs. SNMP is listed in the *Application Name* column.

FIGURE 4 SNMP logs

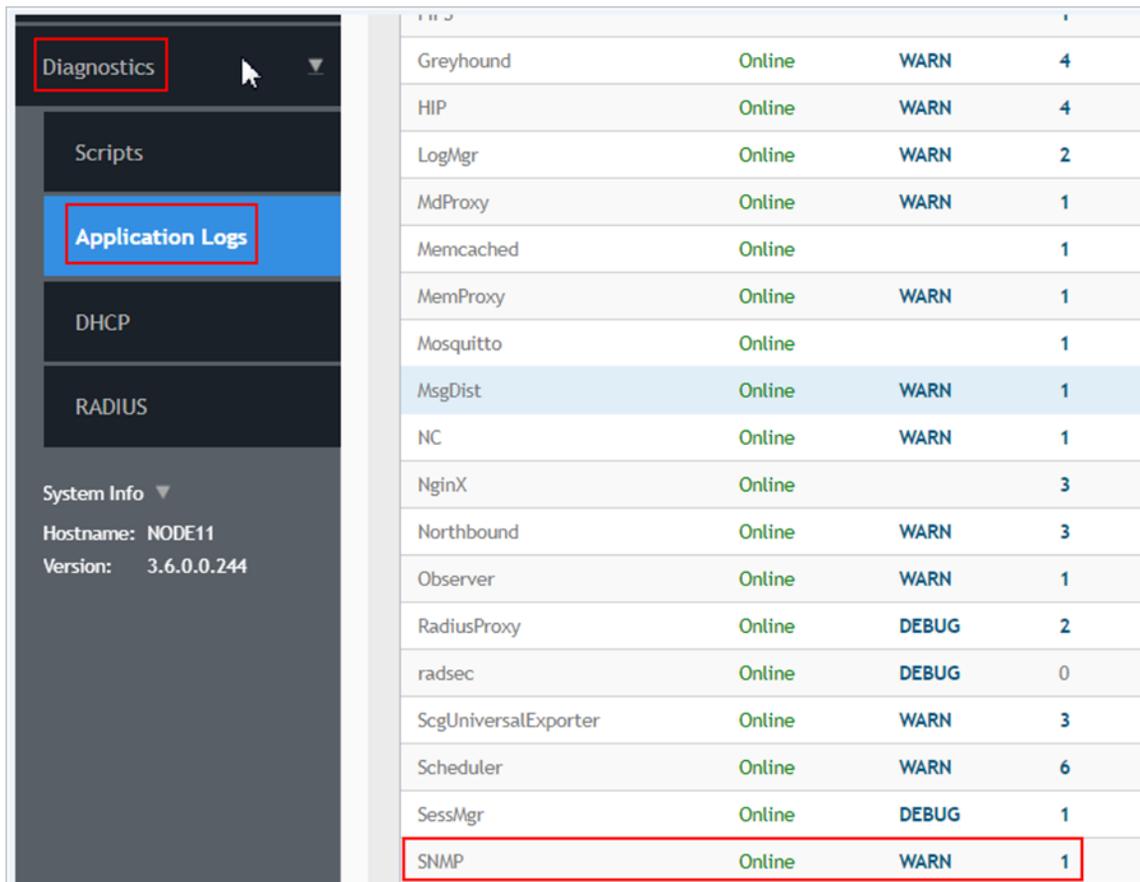

Greyhound	Online	WARN	4
HIP	Online	WARN	4
LogMgr	Online	WARN	2
MdProxy	Online	WARN	1
Memcached	Online		1
MemProxy	Online	WARN	1
Mosquitto	Online		1
MsgDist	Online	WARN	1
NC	Online	WARN	1
NginX	Online		3
Northbound	Online	WARN	3
Observer	Online	WARN	1
RadiusProxy	Online	DEBUG	2
radsec	Online	DEBUG	0
ScgUniversalExporter	Online	WARN	3
Scheduler	Online	WARN	6
SessMgr	Online	DEBUG	1
SNMP	Online	WARN	1

## Standard MIB

Standard MIBs that the controller supports include:

- [Host Resource MIB](#) on page 26
- [UCD MIB](#) on page 27
- [SNMPv2 MIB \(RFC3418\)](#) on page 27
- [RFC1213 MIB \(RFC1213\)](#) on page 27

## Host Resource MIB

Host resource MIB is a standard MIB for managing controller systems. The term “host” refers to any computer that communicates with other similar computers attached to the Internet and that is directly used by one or more users.

### NOTE

To get disk information use the Host Resource MIB OID.1.3.6.1.2.1.25.2.3.

## UCD MIB

The UCD SNMP MIB contains system performance data, which was designed for ease of numerical management routines. This MIB is no longer maintained by the University of California. It is now on life support-mode and maintained by the NET-SNMP project.

- To get CPU information use the UCD MIB OIDs.
  - .1.3.6.1.4.1.2021.10.1.3.1 (1 minute load)
  - .1.3.6.1.4.1.2021.10.1.3.2 (5 minute load)
  - .1.3.6.1.4.1.2021.10.1.3.3 (15 minute load)
- To get memory information use the OID.1.3.6.1.4.1.2021.4

## SNMPv2 MIB (RFC3418)

SNMPv2-MIB (RFC3418) define managed objects that describe the behavior of a Simple Network Management Protocol (SNMP) entity.

### NOTE

RFC3418 obsoletes RFC1907 – the management information base for v2 of the Simple Network Management Protocol (SNMPv2).

## RFC1213 MIB (RFC1213)

RFC1213-MIB (RFC1213) define the second version of the management information base (MIB-II) for use with network management protocols on TCP/IP- based Internets. This RFC specifies an IAB standards track protocol for the Internet community, and requests discussion and suggestions for improvements.

### NOTE

To get network information use the OID.1.3.6.1.2.1.2.2.

### NOTE

For more information about RFC1213-MIB (RFC1213), refer to the current edition of the “IAB Official Protocol Standards” for the standardization state and status of this protocol. Distribution of this memo is unlimited.

Ruckus private MIBs are categorized into the following types:

- [Ruckus Event MIB](#) on page 43
- [Ruckus System MIB](#) on page 141
- [Ruckus WLAN MIB](#) on page 151
- [SmartZone Event Traps](#) on page 257

## Decoding Traps

To extract the variable bindings from the trap, it is recommended to use the OID (of the variables) instead of their positions. The reason is that the OID never changes while the position may change when additional variables are added to the trap. For example, the ruckusSZSystemMiscEventTrap trap may originally contain the following four variable bindings:

```
ruckusSZEvtSeverity  
ruckusSZEvtCode  
ruckusSZEvtType  
ruckusSZEvtDescription
```

Assuming in a future release, a new variable binding - ruckusSZEventAPGPSCoordinates, is added to this trap, then ruckusSZSystemMiscEventTrap trap will have the following variable bindings:

```
ruckusSZEventSeverity  
ruckusSZEventCode  
ruckusSZEventType  
ruckusSZEventAPName  
ruckusSZEventAPMacAddr  
ruckusSZEventAPIP  
ruckusSZEventAPLocation  
ruckusSZEventAPDescription  
ruckusSZEventAPGPSCoordinates  
ruckusSZEventDescription  
ruckusSZEventAPIPv6
```

If the variable bindings are extracted based on the position, the original logic fails when the binding - RuckusSZEventAPGPSCoordinates is added.

Though a newly-added variable binding is normally added at the end of the existing binding, sometimes it may be placed in the middle to make it consistent with other traps.

**NOTE**

For details on variable OIDs refer to [Ruckus Event Object](#) on page 128.

## Generate Traps Using CLI

Using the CLI console execute the following commands to trigger SNMP traps. These set of commands is for testing purposes, where fake or test traps are generated manually to test communication and message parsing with upper systems.

**FIGURE 5** SNMP Traps Using CLI

```
NMS32(diagnostic)# trigger-trap  
all          trigger all traps  
  
<eventcode>  Multi-Traps separated by comma, for example: trigger-trap 123,122,133  
  
NMS32(diagnostic)# trigger-trap 1601  
Successful operation  
  
NMS32(diagnostic)# trigger-trap all  
Successful operation  
  
NMS32(diagnostic)# trigger-trap 1601,1602  
Successful operation  
  
NMS32(diagnostic)# █
```

## SNMP Agent for APs

APs by default have SNMP Agent disabled. This can be changed either using the controller's interface or CLI console.

## Limitations

- Only one target notification is allowed in both SNMP v2 and v3 agents
- You can have a maximum count of three (3) each for community and user groups
- Community or users should not have the same privileges. For example:
  - Read or write or notification privileges should not be enabled in two communities
  - Read or write or notification should not be enabled in two users

## Enable SNMP Agent

### Option 1 - User Interface

In the controller interface navigate to **Access Points > Zone**. Click on the + sign to add the zone. In the create Zone page select **AP SNMP Options** for all the APs in the controller as seen in the below screen.

Privilege option - **target** refers to adding SNMP target notification and **inform** refers to sending SNMP information notifications to the selected community.

#### NOTE


For AP SNMP Inform privilege option for SNMP v3 Agent is not supported.

**FIGURE 6** Enabling SNMP options for Zone APs

The screenshot shows a configuration window for a Zone. At the top, there are fields for 'Name' and 'Description', and radio buttons for 'Type' (Domain, Zone, AP Group). The 'Zone' option is selected. Below this is a 'Parent Group' dropdown set to 'System'. The main configuration area is titled 'Configuration' and has a dropdown menu set to 'AP SNMP Options'. Under this menu, there is a toggle for 'Enable AP SNMP' which is turned ON. Below that are sections for 'SNMPv2 Agent' and 'SNMPv3 Agent'. The 'SNMPv2 Agent' section has buttons for '+ Create', 'Configure', and 'Delete'. Below these buttons is a table with three columns: 'Community', 'Privilege', and 'Notification Target'. The 'SNMPv3 Agent' section is currently empty. At the bottom right of the window are 'OK' and 'Cancel' buttons.

To enable SNMP options in Zone templates navigate to **System > Templates > Zone Templates**. Select **AP SNMP Options** for all the APs in the controller as seen in the below figure.

FIGURE 7 Enabling SNMP options for Zone Templates

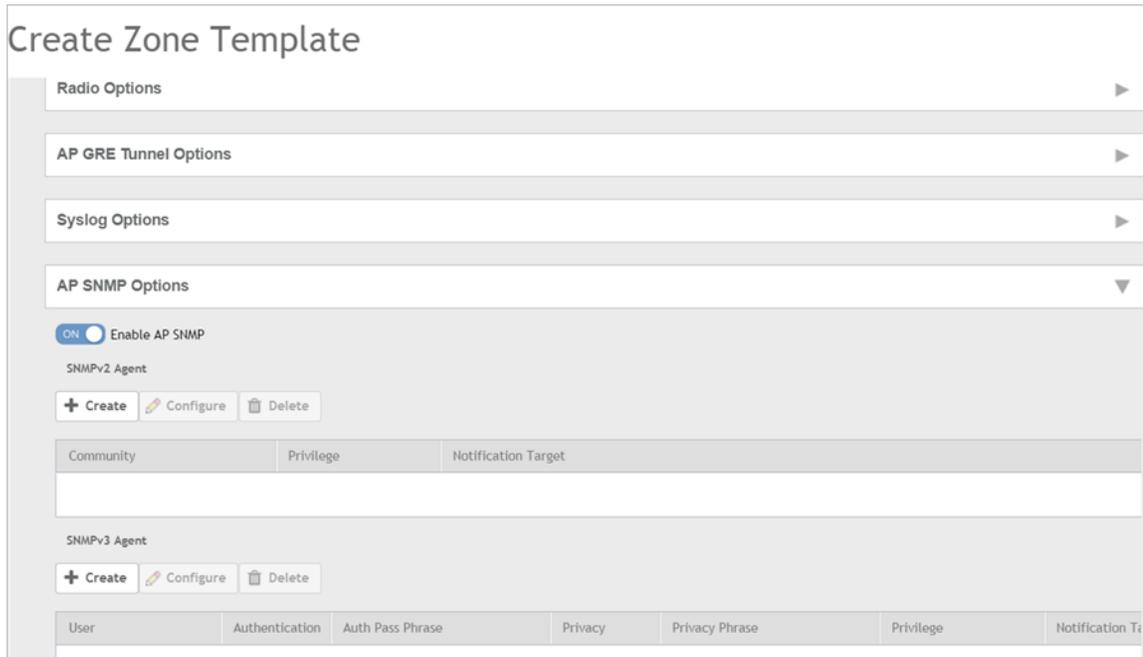

### Option 2 - CLI Console

Using the CLI console login with your administrator user credentials. Execute the common settings AP SNMP options to enable the SNMP agents as seen in Figure 8. This setting will be applied to all APs connected to the controller.

FIGURE 8 Enabling SNMP options using CLI

```
INDUSSZ-53# config
INDUSSZ-53(config)# common-settings
INDUSSZ-53(config-common-settings)# ap-snmp-options
INDUSSZ-53(config-common-settings-ap-snmp-options)# ap-snmp
INDUSSZ-53(config-common-settings-ap-snmp-options)# snmp-v2-community admin
INDUSSZ-53(config-common-settings-ap-snmp-options-snmp-v2-community)# read
INDUSSZ-53(config-common-settings-ap-snmp-options-snmp-v2-community)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config-common-settings-ap-snmp-options)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config-common-settings)# exit
Do you want to update this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config)#
```


## Enable Override Settings

If you want to set up a different policy for a specific AP, you need to enable the override option for a particular AP or for a AP Group.

### Option 1 - User Interface


Using the controller interface navigate to **Access Points**. Select the AP and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to enable the *Override* option for a particular AP as seen in the following figure.

FIGURE 9 Setting the Override option for a particular AP

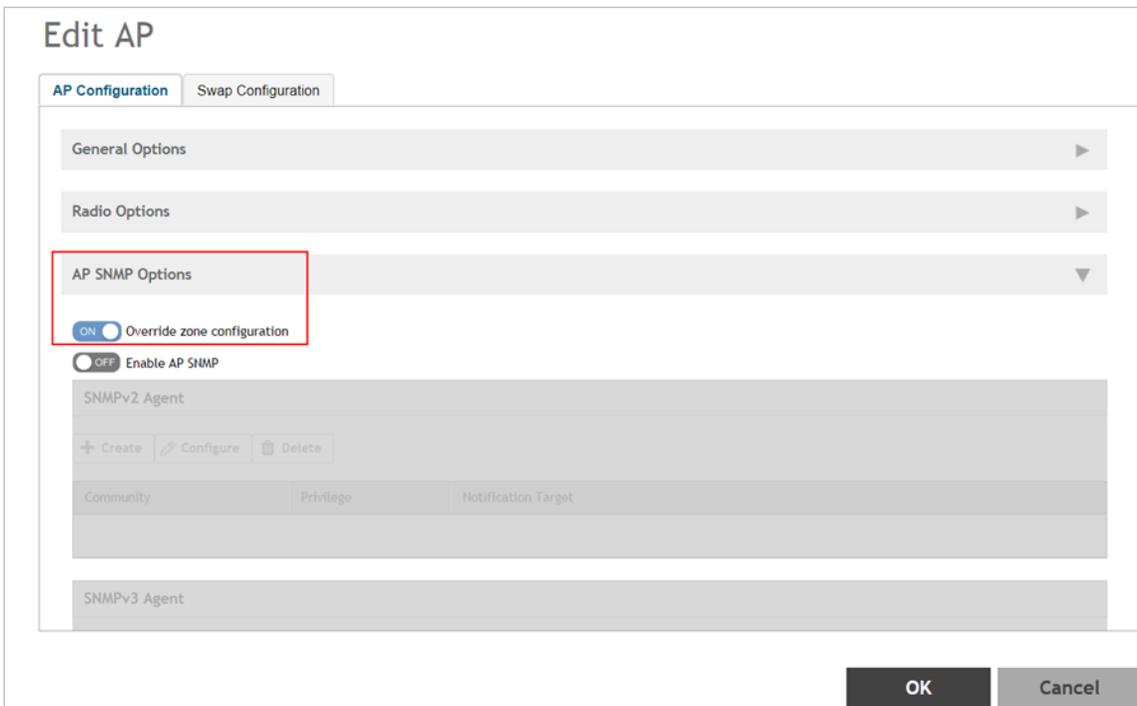


Using the controller interface navigate to **Access Points**. Select the AP Group and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to enable the *Override* option for a particular AP Group in an AP as seen in the below figure.

FIGURE 10 Setting the Override option for a AP Group

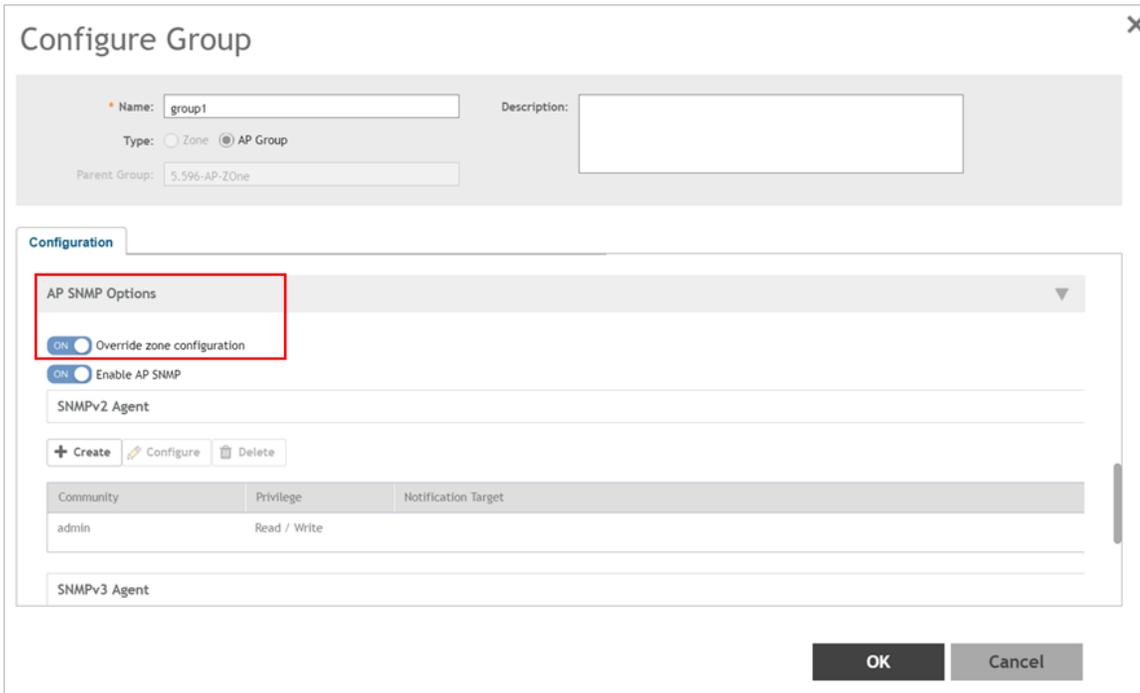

Using the controller interface navigate to **Access Points**. Select the Zone and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to enable the *Override* option for a particular Zone in an AP as seen in the below figure.

FIGURE 11 Setting the Override option for Zone in an AP

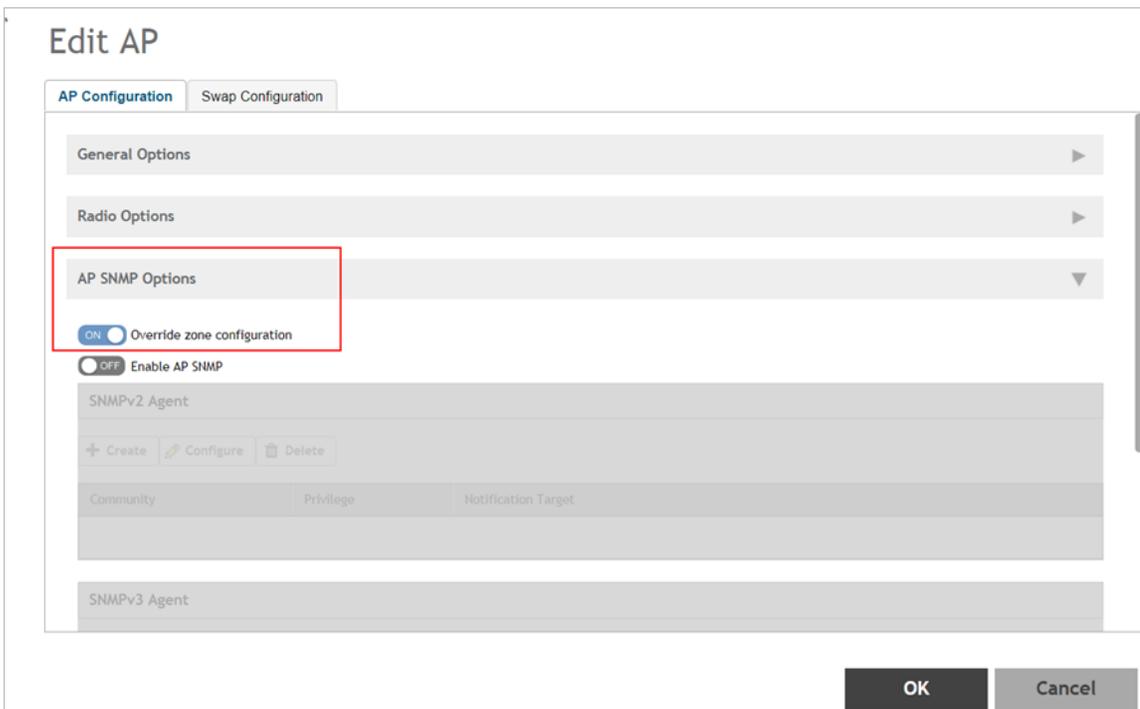

## Option 2 - CLI Console

Login to CLI console with your administrator user credentials. Execute the common settings commands as seen in [Figure 12](#). This setting will be applied to a particular AP.

**FIGURE 12** Setting the Override option using CLI for a AP

```
INDUSSZ-53(config)# ap 94:F6:65:14:C7:10
INDUSSZ-53(config-ap)# override-ap-snmp-options
INDUSSZ-53(config-ap)# ap-snmp-options
INDUSSZ-53(config-ap-ap-snmp-options)# ap-snmp
INDUSSZ-53(config-ap-ap-snmp-options)# snmp-v3-user
<name>      User Name
INDUSSZ-53(config-ap-ap-snmp-options)# snmp-v3-user test
<cr>
INDUSSZ-53(config-ap-ap-snmp-options)# snmp-v3-user test
INDUSSZ-53(config-ap-ap-snmp-options-snmp-v3-user)# █
INDUSSZ-53(config-ap-ap-snmp-options-snmp-v3-user)# auth md5 testing123
INDUSSZ-53(config-ap-ap-snmp-options-snmp-v3-user)# privacy aes testing123
INDUSSZ-53(config-ap-ap-snmp-options-snmp-v3-user)# read
INDUSSZ-53(config-ap-ap-snmp-options-snmp-v3-user)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config-ap-ap-snmp-options)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config-ap)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUSSZ-53(config)# █
```

Login to CLI console with your administrator user credentials. Execute the common settings commands as seen in [Figure 13](#). This setting will be applied to a AP Group.

**FIGURE 13** Setting the Override option using CLI for a AP Group

```
INDUS-52(config)# ap-group group3
INDUS-52(config-ap-group)# override-ap-snmp-options
INDUS-52(config-ap-group)# ap-snmp-options
INDUS-52(config-ap-group-ap-snmp-options)# ap-snmp
INDUS-52(config-ap-group-ap-snmp-options)# snmp-v2-community test2
INDUS-52(config-ap-group-ap-snmp-options-snmp-v2-community)# read
INDUS-52(config-ap-group-ap-snmp-options-snmp-v2-community)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUS-52(config-ap-group-ap-snmp-options)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUS-52(config-ap-group)# exit
Do you want to save this context configuration (or input 'no' to cancel)? [yes/no] yes
INDUS-52(config)#
```

Apart from that, you can not only enable or disable SNMP, but also configure SNMPv2/v3 communities.

## View SNMP Configuration

To view the SNMP configurations applied to Access Points, login to AP CLI console. Execute the command `GET SNMP` as shown in the following figure.


FIGURE 14 AP GET SNMP

```
rkscli: get snmp
SNMP enable : enable
SNMP version : v2c and v3
SNMPv2 ro community : admin
SNMPv2 rw community :
SNMPv2 sys contact : https://support.ruckuswireless.com/contact_us
SNMPv2 sys location :
SNMPv2 trap enable : disable
SNMPv2 trap server :
SNMPv2 trap/inform : TRAP
OK
rkscli:
rkscli: get snmpv3
SNMP enable : enable
SNMP version : v2c and v3
SNMPv3 ro username : ruckus
SNMPv3 ro auth type :
SNMPv3 ro auth key :
SNMPv3 ro privacy type :
SNMPv3 ro privacy key :
SNMPv3 rw username : ruckus
SNMPv3 rw auth type :
SNMPv3 rw auth key :
SNMPv3 rw privacy type :
SNMPv3 rw privacy key :
SNMPv3 trap enable : enable
SNMPv3 trap Svr Ip : 172.19.7.88
SNMPv3 trap username : test
SNMPv3 trap auth type : SHA
SNMPv3 trap auth key : testing123
SNMPv3 trap privacy type : DES
SNMPv3 trap privacy key : testing123
SNMPv3 trap/inform : TRAP
OK
rkscli: █
```

## Disable SNMP Agents


Using the controller interface navigate to **Access Points**. Select the AP and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to disable the *AP SNMP* option for all APs as seen in the below figure. Make sure that the *Enable AP SNMP* button is turned off.

FIGURE 15 Disable AP SNMP for all APs

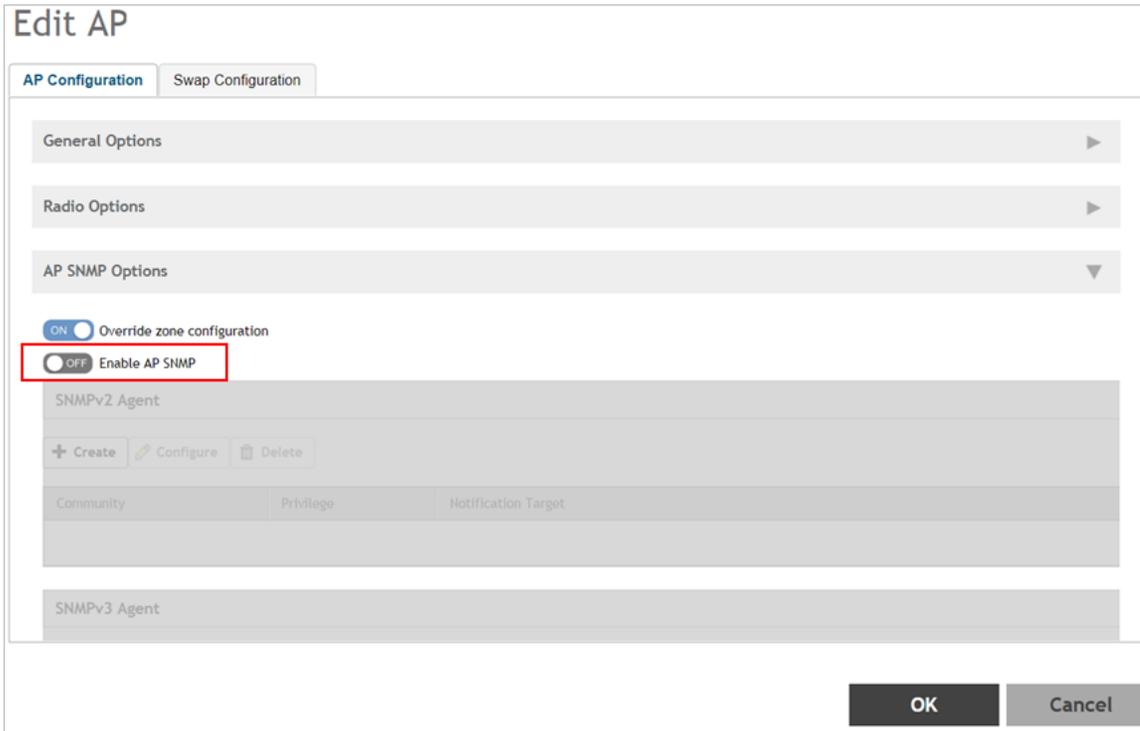

Using the controller interface navigate to **Access Points**. Select the AP and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to disable the *AP SNMP* option in a Zone for all APs as seen in the below figure. Make sure that the *Enable AP SNMP* button is turned off.

FIGURE 16 Disable AP SNMP for APs in a AP Zone

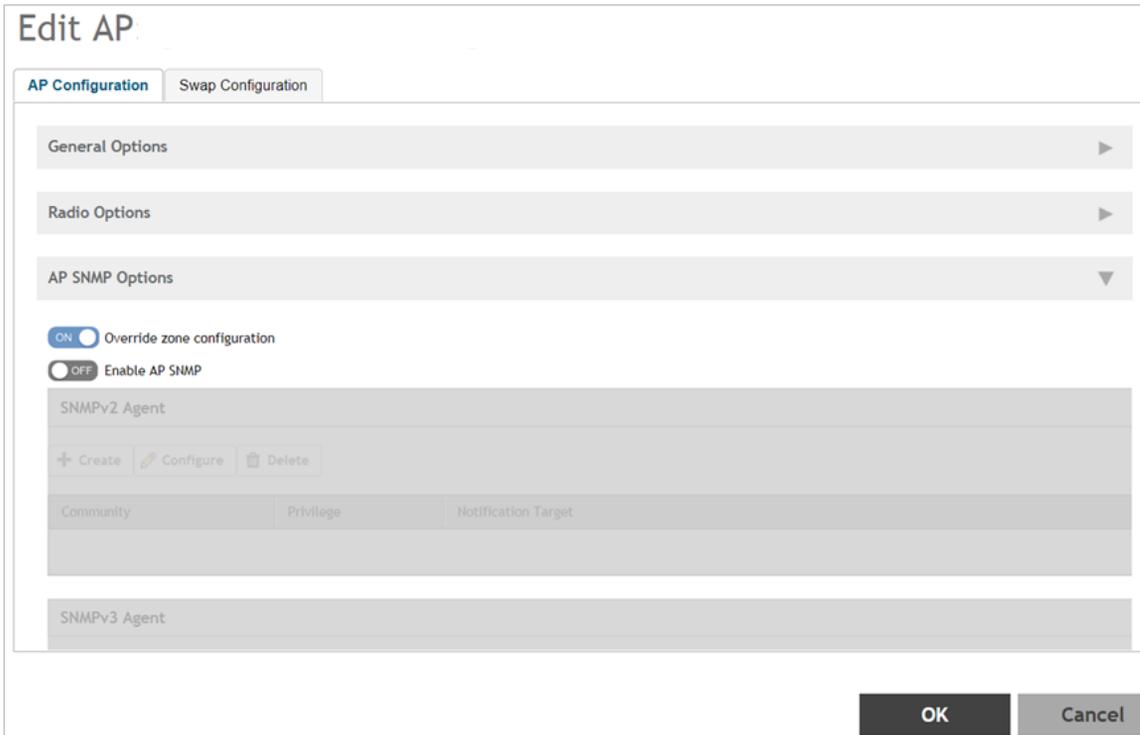


Using the controller interface navigate to **Access Points**. Select the AP Group and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to disable the *AP SNMP* option in a AP Group for all APs as seen in the below figure. Make sure that the *Enable AP SNMP* button is turned off.

FIGURE 17 Disable AP SNMP for AP Group in a AP Zone

The screenshot shows the 'Configure Group' interface. At the top, there are fields for 'Name' (377) and 'Description' (q). Below these are radio buttons for 'Type' (Domain, Zone, AP Group), with 'Zone' selected. A 'Parent Group' field is set to 'System'. The main section is titled 'Configuration' and contains a dropdown menu for 'AP SNMP Options'. Below this, the 'Enable AP SNMP' option is shown as a toggle switch that is turned off, highlighted with a red box. Underneath are sections for 'SNMPv2 Agent' and 'SNMPv3 Agent', each with 'Create', 'Configure', and 'Delete' buttons. At the bottom right, there are 'OK' and 'Cancel' buttons.

To disable AP SNMP for AP Zone in Zone Template navigate to the controller user interface **System > Templates > Zone Template**. Select the required zone template and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to disable the *AP SNMP* option. Make sure that the *Enable AP SNMP* button is turned off.

**FIGURE 18** Disable AP SNMP for AP Zone in a AP Zone Template

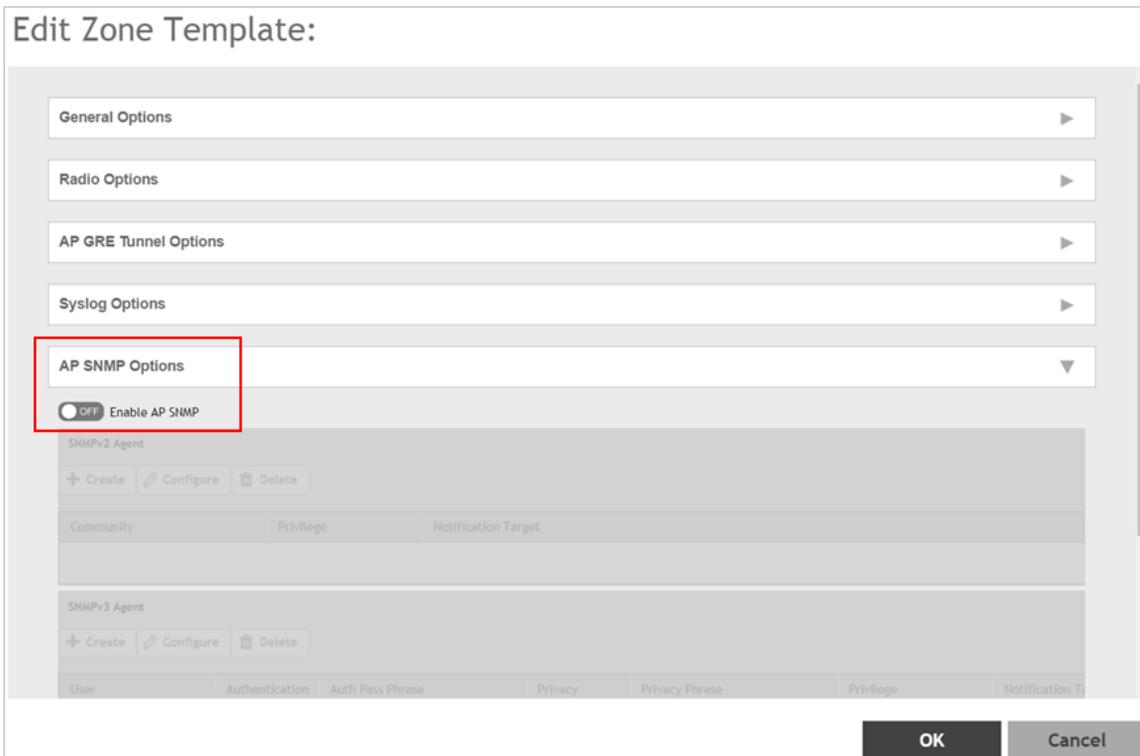

To disable AP SNMP for an AP Zone in a Zone Template pertaining to AP Groups navigate to the controller user interface **Access Points**. . Select the AP Group and click on the **Configuration** tab. In the configuration page select **AP SNMP Options** to disable the *AP SNMP* option in a AP Group for all APs as seen in the below figure. Make sure that the *Enable AP SNMP* button is turned off.

FIGURE 19 Disable AP SNMP for AP Zone in a AP Zone Template in AP Group

The screenshot shows the 'Configure Group' interface. At the top, there are fields for 'Name' (377) and 'Description' (q). Below these are radio buttons for 'Type' (Domain, Zone, AP Group), with 'Zone' selected. A 'Parent Group' field contains 'System'. The 'Configuration' tab is active, showing 'AP SNMP Options' with a dropdown arrow. A red box highlights the 'Enable AP SNMP' toggle switch, which is currently turned off. Below this are sections for 'SNMPv2 Agent' and 'SNMPv3 Agent', each with 'Create', 'Configure', and 'Delete' buttons. The 'SNMPv2 Agent' section has a table with columns 'Community', 'Privilege', and 'Notification Target'. The 'SNMPv3 Agent' section has a table with columns 'User', 'Authentication', 'Auth. Pass Phrase', 'Privacy', 'Privacy Phrase', 'Privilege', and 'Notification Target'. At the bottom right are 'OK' and 'Cancel' buttons.

# Using SNMP Walk Scripts

---

The following procedure helps you in creating sample shell scripts to query all entries in RuckusCtrlAp related tables (AP, AP Radio, AP WLAN).

## Steps for using SNMP Walk Scripts

The following are the steps for using SNMP walk scripts.

1. Get the MAC list using ruckusCTRLSummaryApTable
2. Translate all output MAC addresses in the OID format
3. Utilize SNMP cache. It gets all the attributes (based on the rows first and not column) of an AP through snmpget or snmpwalk.  
Do retry for unsuccessful APs if required.

### NOTE

The below scripts are example codes for walking through all the APs in the controller.

## Setup Environment

The following is the requirement to setup the required environment.

- **Shell:** Dash or bash
- **Operating System:** Linux

### Procedure

1. Install NET SNMP client tools (snmpget and snmpwalk) by referring to <http://www.net-snmp.org/download.html>.
2. Save the downloaded MIB files in the MIB directory.
3. Ensure that the following MIB files are installed in the system
  - a. IANAifType-MIB
  - b. IF-MIB
  - c. IPV6-TC
  - d. SNMPv2-CONF
  - e. SNMPv2-SMI
  - f. SNMPv2-TC

## Installing SNMP Client Tool

Execute the following script to install SNMP client using:

### Ubuntu

```
apt-get install snmp
```

## Using SNMP Walk Scripts

Ruckus MIB files in the MIB directory

### RedHat

```
yum install net-snmp net-snmp-libs net-snmp-utils
```

## Ruckus MIB files in the MIB directory

Execute the following script to save the Ruckus MIB files in the MIB directory using:

### Ubuntu and RedHat

```
cd RUCKUS_MIB_Directory
sudo cp RUCKUS-*.txt /usr/share/snmp/mibs/
```

### Usage

Execute the following script to use the Ruckus MIB files.

```
sh <sample_script>.sh <SZ IP address> <snmpcmd options>
```

### SNMP CMD Options

Refer to the OPTIONS section in <http://net-snmp.sourceforge.net/docs/man/snmpcmd.html>. For example, using SNMPv2 with read community *public* for controller with the IP address 172.17.1.2.

```
sh walk_ruckusCTRLApTable_sample.sh 172.17.1.2 -mall -v2c -c public
```

where *-mall* is an option required for these scripts or you may not be able to get the results.

## Tips for Writing Your Own Scripts

1. Use *-Oe* with *snmpget/snmpwalk* to output index(MAC address) in OID format.
2. *snmpget* can send 128 OIDs at a time.
3. Always get all OIDs of the same AP first, instead of OIDs for all APs.
4. AP related tables cache data for 15 seconds. This means that you may get the same result if you do not wait for cache timeout.
5. You can use *NET-SNMP-AGENT-MIB::nsCacheStatus* to check cache status of a table. If your system supports *snmpset*, you can also force it to clean cache via *snmpset*.
6. Be careful with the output format. Refer to OUTPUT OPTIONS link <http://net-snmp.sourceforge.net/docs/man/snmpcmd.html>

# Ruckus Event MIB

- Introduction.....43
- Ruckus Event Trap.....43
- Ruckus Event Object..... 128

## Introduction

The objects contained in the RUCKUS-SZ-EVENT-MIB group provide information about the controller supported traps.

**NOTE**

For details on alarms and events refer to *SmartZone Alarms and Events Guide*.

## Ruckus Event Trap

The following table lists the MIB, OID, and description of each object in the RUCKUS-SZ group.

Trap Name	Object Identifier
<a href="#">ruckusSZSystemMiscEventTrap</a> on page 47	.1.3.6.1.4.1.25053.2.11.1.1
<a href="#">ruckusSZUpgradeSuccessTrap</a> on page 47	.1.3.6.1.4.1.25053.2.11.1.2
<a href="#">ruckusSZUpgradeFailedTrap</a> on page 48	.1.3.6.1.4.1.25053.2.11.1.3
<a href="#">ruckusSZNodeRestartedTrap</a> on page 48	.1.3.6.1.4.1.25053.2.11.1.4
<a href="#">ruckusSZNodeShutdownTrap</a> on page 49	.1.3.6.1.4.1.25053.2.11.1.5
<a href="#">ruckusSZCPUUsageThresholdExceededTrap</a> on page 49	.1.3.6.1.4.1.25053.2.11.1.6
<a href="#">ruckusSZMemoryUsageThresholdExceededTrap</a> on page 50	.1.3.6.1.4.1.25053.2.11.1.7
<a href="#">ruckusSZDiskUsageThresholdExceededTrap</a> on page 50	.1.3.6.1.4.1.25053.2.11.1.8
<a href="#">ruckusSZLicenseUsageThresholdExceededTrap</a> on page 51	.1.3.6.1.4.1.25053.2.11.1.19
<a href="#">ruckusSZAPMiscEventTrap</a> on page 51	.1.3.6.1.4.1.25053.2.11.1.20
<a href="#">ruckusSZAPConnectedTrap</a> on page 52	.1.3.6.1.4.1.25053.2.11.1.21
<a href="#">ruckusSZAPDeletedTrap</a> on page 53	.1.3.6.1.4.1.25053.2.11.1.22
<a href="#">ruckusSZAPDisconnectedTrap</a> on page 53	.1.3.6.1.4.1.25053.2.11.1.23
<a href="#">ruckusSZAPLostHeartbeatTrap</a> on page 54	.1.3.6.1.4.1.25053.2.11.1.24
<a href="#">ruckusSZAPRebootTrap</a> on page 54	.1.3.6.1.4.1.25053.2.11.1.25
<a href="#">ruckusSZCriticalAPConnectedTrap</a> on page 55	.1.3.6.1.4.1.25053.2.11.1.26
<a href="#">ruckusSZCriticalAPDisconnectedTrap</a> on page 56	.1.3.6.1.4.1.25053.2.11.1.27
<a href="#">ruckusSZAPRejectedTrap</a> on page 56	.1.3.6.1.4.1.25053.2.11.1.28
<a href="#">ruckusSZAPConfUpdateFailedTrap</a> on page 57	.1.3.6.1.4.1.25053.2.11.1.29
<a href="#">ruckusSZAPConfUpdatedTrap</a> on page 57	.1.3.6.1.4.1.25053.2.11.1.30
<a href="#">ruckusSZAPSwapOutModelDiffTrap</a> on page 58	.1.3.6.1.4.1.25053.2.11.1.31
<a href="#">ruckusSZAPPreProvisionModelDiffTrap</a> on page 59	.1.3.6.1.4.1.25053.2.11.1.32
<a href="#">ruckusSZAPFirmwareUpdateFailedTrap</a> on page 59	.1.3.6.1.4.1.25053.2.11.1.34
<a href="#">ruckusSZAPFirmwareUpdatedTrap</a> on page 60	.1.3.6.1.4.1.25053.2.11.1.35

Trap Name	Object Identifier
<a href="#">ruckusSZAPWlanOverSubscribedTrap</a> on page 60	.1.3.6.1.4.1.25053.2.11.1.36
<a href="#">ruckusSZAPFactoryResetTrap</a> on page 61	.1.3.6.1.4.1.25053.2.11.1.37
<a href="#">ruckusSZCableModemDownTrap</a> on page 61	.1.3.6.1.4.1.25053.2.11.1.38
<a href="#">ruckusSZCableModemRebootTrap</a> on page 62	.1.3.6.1.4.1.25053.2.11.1.39
<a href="#">ruckusSZAPManagedTrap</a> on page 63	.1.3.6.1.4.1.25053.2.11.1.41
<a href="#">ruckusSZCPUUsageThresholdBackToNormalTrap</a> on page 63	.1.3.6.1.4.1.25053.2.11.1.42
<a href="#">ruckusSZMemoryUsageThresholdBackToNormalTrap</a> on page 64	.1.3.6.1.4.1.25053.2.11.1.43
<a href="#">ruckusSZDiskUsageThresholdBackToNormalTrap</a> on page 64	.1.3.6.1.4.1.25053.2.11.1.44
<a href="#">ruckusSZCableModemUpTrap</a> on page 64	.1.3.6.1.4.1.25053.2.11.1.45
<a href="#">ruckusSZAPDiscoverySuccessTrap</a> on page 65	.1.3.6.1.4.1.25053.2.11.1.46
<a href="#">ruckusSZCMResetByUserTrap</a> on page 66	.1.3.6.1.4.1.25053.2.11.1.47
<a href="#">ruckusSZCMResetFactoryByUserTrap</a> on page 66	.1.3.6.1.4.1.25053.2.11.1.48
<a href="#">ruckusSZMaliciousRogueAPTimeoutTrap</a> on page 67	.1.3.6.1.4.1.25053.2.11.1.54
<a href="#">ruckusSZAPLBSConnectSuccessTrap</a> on page 67	.1.3.6.1.4.1.25053.2.11.1.55
<a href="#">ruckusSZAPLBSNoResponsesTrap</a> on page 68	.1.3.6.1.4.1.25053.2.11.1.56
<a href="#">ruckusSZAPLBSAuthFailedTrap</a> on page 69	.1.3.6.1.4.1.25053.2.11.1.57
<a href="#">ruckusSZAPLBSConnectFailedTrap</a> on page 69	.1.3.6.1.4.1.25053.2.11.1.58
<a href="#">ruckusSZCGGeneralRogueAPTrap</a> on page 70	.1.3.6.1.4.1.25053.2.11.1.59
<a href="#">ruckusSZAPTunnelBuildFailedTrap</a> on page 70	.1.3.6.1.4.1.25053.2.11.1.60
<a href="#">ruckusSZAPTunnelBuildSuccessTrap</a> on page 71	.1.3.6.1.4.1.25053.2.11.1.61
<a href="#">ruckusSZAPTunnelDisconnectedTrap</a> on page 72	.1.3.6.1.4.1.25053.2.11.1.62
<a href="#">ruckusSZAPSoftGRE Tunnel Failover PtoS Trap</a> on page 72	.1.3.6.1.4.1.25053.2.11.1.65
<a href="#">ruckusSZAPSoftGRE Tunnel Failover StoP Trap</a> on page 73	.1.3.6.1.4.1.25053.2.11.1.66
<a href="#">ruckusSZAPSoftGRE Gateway Not Reachable Trap</a> on page 74	.1.3.6.1.4.1.25053.2.11.1.67
<a href="#">ruckusSZAPSoftGRE Gateway Reachable Trap</a> on page 74	.1.3.6.1.4.1.25053.2.11.1.68
<a href="#">ruckusSZDPConfUpdateFailedTrap</a> on page 75	.1.3.6.1.4.1.25053.2.11.1.70
<a href="#">ruckusSZDPLostHeartbeatTrap</a> on page 75	.1.3.6.1.4.1.25053.2.11.1.71
<a href="#">ruckusSZDPDisconnectedTrap</a> on page 76	.1.3.6.1.4.1.25053.2.11.1.72
<a href="#">ruckusSZDPPhyInterfaceDownTrap</a> on page 76	.1.3.6.1.4.1.25053.2.11.1.73
<a href="#">ruckusSZDPStatusUpdateFailedTrap</a> on page 77	.1.3.6.1.4.1.25053.2.11.1.74
<a href="#">ruckusSZDPStatisticUpdateFailedTrap</a> on page 77	.1.3.6.1.4.1.25053.2.11.1.75
<a href="#">ruckusSZDPConnectedTrap</a> on page 78	.1.3.6.1.4.1.25053.2.11.1.76
<a href="#">ruckusSZDPPhyInterfaceUpTrap</a> on page 78	.1.3.6.1.4.1.25053.2.11.1.77
<a href="#">ruckusSZDPConfUpdatedTrap</a> on page 78	.1.3.6.1.4.1.25053.2.11.1.78
<a href="#">ruckusSZDPTunnelTearDownTrap</a> on page 79	.1.3.6.1.4.1.25053.2.11.1.79
<a href="#">ruckusSZDPAcceptTunnelRequestTrap</a> on page 79	.1.3.6.1.4.1.25053.2.11.1.81
<a href="#">ruckusSZDPRejectTunnelRequestTrap</a> on page 80	.1.3.6.1.4.1.25053.2.11.1.82
<a href="#">ruckusSZDPTunnelSetUpTrap</a> on page 80	.1.3.6.1.4.1.25053.2.11.1.85
<a href="#">ruckusSZDPDiscoverySuccessTrap</a> on page 80	.1.3.6.1.4.1.25053.2.11.1.86
<a href="#">ruckusSZDPDiscoveryFailTrap</a> on page 81	.1.3.6.1.4.1.25053.2.11.1.87
<a href="#">ruckusSZDPDeletedTrap</a> on page 81	.1.3.6.1.4.1.25053.2.11.1.94
<a href="#">ruckusSZDPUpgradeStartTrap</a> on page 82	.1.3.6.1.4.1.25053.2.11.1.95

Trap Name	Object Identifier
<a href="#">ruckusSZDPUgradingTrap</a> on page 82	.1.3.6.1.4.1.25053.2.11.1.96
<a href="#">ruckusSZDPUgradeSuccessTrap</a> on page 82	.1.3.6.1.4.1.25053.2.11.1.97
<a href="#">ruckusSZDPUgradeFailedTrap</a> on page 83	.1.3.6.1.4.1.25053.2.11.1.98
<a href="#">ruckusSZClientMiscEventTrap</a> on page 83	.1.3.6.1.4.1.25053.2.11.1.100
<a href="#">ruckusSZNodeJoinFailedTrap</a> on page 83	.1.3.6.1.4.1.25053.2.11.1.200
<a href="#">ruckusSZNodeRemoveFailedTrap</a> on page 84	.1.3.6.1.4.1.25053.2.11.1.201
<a href="#">ruckusSZNodeOutOfServiceTrap</a> on page 84	.1.3.6.1.4.1.25053.2.11.1.202
<a href="#">ruckusSZClusterInMaintenanceStateTrap</a> on page 85	.1.3.6.1.4.1.25053.2.11.1.203
<a href="#">ruckusSZClusterBackupFailedTrap</a> on page 85	.1.3.6.1.4.1.25053.2.11.1.204
<a href="#">ruckusSZClusterRestoreFailedTrap</a> on page 86	.1.3.6.1.4.1.25053.2.11.1.205
<a href="#">ruckusSZNodeBondInterfaceDownTrap</a> on page 87	.1.3.6.1.4.1.25053.2.11.1.207
<a href="#">ruckusSZNodePhyInterfaceDownTrap</a> on page 87	.1.3.6.1.4.1.25053.2.11.1.208
<a href="#">ruckusSZClusterLeaderChangedTrap</a> on page 88	.1.3.6.1.4.1.25053.2.11.1.209
<a href="#">ruckusSZClusterUpgradeSuccessTrap</a> on page 88	.1.3.6.1.4.1.25053.2.11.1.210
<a href="#">ruckusSZNodeBondInterfaceUpTrap</a> on page 88	.1.3.6.1.4.1.25053.2.11.1.211
<a href="#">ruckusSZNodePhyInterfaceUpTrap</a> on page 89	.1.3.6.1.4.1.25053.2.11.1.212
<a href="#">ruckusSZClusterBackToInServiceTrap</a> on page 89	.1.3.6.1.4.1.25053.2.11.1.216
<a href="#">ruckusSZBackupClusterSuccessTrap</a> on page 90	.1.3.6.1.4.1.25053.2.11.1.217
<a href="#">ruckusSZNodeJoinSuccessTrap</a> on page 90	.1.3.6.1.4.1.25053.2.11.1.218
<a href="#">ruckusSZClusterAppStartTrap</a> on page 90	.1.3.6.1.4.1.25053.2.11.1.219
<a href="#">ruckusSZNodeRemoveSuccessTrap</a> on page 91	.1.3.6.1.4.1.25053.2.11.1.220
<a href="#">ruckusSZClusterRestoreSuccessTrap</a> on page 91	.1.3.6.1.4.1.25053.2.11.1.221
<a href="#">ruckusSZNodeBackToInServiceTrap</a> on page 92	.1.3.6.1.4.1.25053.2.11.1.222
<a href="#">ruckusSZSshTunnelSwitchedTrap</a> on page 92	.1.3.6.1.4.1.25053.2.11.1.223
<a href="#">ruckusSZClusterCfgBackupStartTrap</a> on page 92	.1.3.6.1.4.1.25053.2.11.1.224
<a href="#">ruckusSZClusterCfgBackupSuccessTrap</a> on page 93	.1.3.6.1.4.1.25053.2.11.1.225
<a href="#">ruckusSZClusterCfgBackupFailedTrap</a> on page 93	.1.3.6.1.4.1.25053.2.11.1.226
<a href="#">ruckusSZClusterCfgRestoreSuccessTrap</a> on page 94	.1.3.6.1.4.1.25053.2.11.1.227
<a href="#">ruckusSZClusterCfgRestoreFailedTrap</a> on page 94	.1.3.6.1.4.1.25053.2.11.1.228
<a href="#">ruckusSZClusterUploadSuccessTrap</a> on page 94	.1.3.6.1.4.1.25053.2.11.1.229
<a href="#">ruckusSZClusterUploadFailedTrap</a> on page 95	.1.3.6.1.4.1.25053.2.11.1.230
<a href="#">ruckusSZClusterOutOfServiceTrap</a> on page 95	.1.3.6.1.4.1.25053.2.11.1.231
<a href="#">ruckusSZClusterUploadVDPFirmwareStartTrap</a> on page 95	.1.3.6.1.4.1.25053.2.11.1.232
<a href="#">ruckusSZClusterUploadVDPFirmwareSuccessTrap</a> on page 96	.1.3.6.1.4.1.25053.2.11.1.233
<a href="#">ruckusSZClusterUploadVDPFirmwareFailedTrap</a> on page 96	.1.3.6.1.4.1.25053.2.11.1.234
<a href="#">ruckusSZIpmiTempBBTrap</a> on page 96	.1.3.6.1.4.1.25053.2.11.1.251
<a href="#">ruckusSZIpmiTempPTrap</a> on page 97	.1.3.6.1.4.1.25053.2.11.1.256
<a href="#">ruckusSZIpmiFanTrap</a> on page 97	.1.3.6.1.4.1.25053.2.11.1.258
<a href="#">ruckusSZIpmiFanStatusTrap</a> on page 98	.1.3.6.1.4.1.25053.2.11.1.261
<a href="#">ruckusSZIpmiRETempBBTrap</a> on page 98	.1.3.6.1.4.1.25053.2.11.1.265
<a href="#">ruckusSZIpmiRETempPTrap</a> on page 99	.1.3.6.1.4.1.25053.2.11.1.270
<a href="#">ruckusSZIpmiREFanTrap</a> on page 99	.1.3.6.1.4.1.25053.2.11.1.272

Ruckus Event MIB  
Ruckus Event Trap

Trap Name	Object Identifier
<a href="#">ruckusSZIpmiREFanStatusTrap</a> on page 100	.1.3.6.1.4.1.25053.2.11.1.275
<a href="#">ruckusSZFtpTransferErrorTrap</a> on page 100	.1.3.6.1.4.1.25053.2.11.1.280
<a href="#">ruckusSZSystemLBSConnectSuccessTrap</a> on page 101	.1.3.6.1.4.1.25053.2.11.1.290
<a href="#">ruckusSZSystemLBSNoResponseTrap</a> on page 101	.1.3.6.1.4.1.25053.2.11.1.291
<a href="#">ruckusSZSystemLBSAuthFailedTrap</a> on page 101	.1.3.6.1.4.1.25053.2.11.1.292
<a href="#">ruckusSZSystemLBSConnectFailedTrap</a> on page 102	.1.3.6.1.4.1.25053.2.11.1.293
<a href="#">ruckusSZProcessRestartTrap</a> on page 102	.1.3.6.1.4.1.25053.2.11.1.300
<a href="#">ruckusSZServiceUnavailableTrap</a> on page 103	.1.3.6.1.4.1.25053.2.11.1.301
<a href="#">ruckusSZKeepAliveFailureTrap</a> on page 103	.1.3.6.1.4.1.25053.2.11.1.302
<a href="#">ruckusSZResourceUnavailableTrap</a> on page 104	.1.3.6.1.4.1.25053.2.11.1.304
<a href="#">ruckusSZSmfRegFailedTrap</a> on page 104	.1.3.6.1.4.1.25053.2.11.1.305
<a href="#">ruckusSZHipFailoverTrap</a> on page 105	.1.3.6.1.4.1.25053.2.11.1.306
<a href="#">ruckusSZConfUpdFailedTrap</a> on page 105	.1.3.6.1.4.1.25053.2.11.1.307
<a href="#">ruckusSZConfRcvFailedTrap</a> on page 105	.1.3.6.1.4.1.25053.2.11.1.308
<a href="#">ruckusSZLostCnxnToDbladeTrap</a> on page 106	.1.3.6.1.4.1.25053.2.11.1.309
<a href="#">ruckusSZAuthSrvrNotReachableTrap</a> on page 106	.1.3.6.1.4.1.25053.2.11.1.314
<a href="#">ruckusSZAccSrvrNotReachableTrap</a> on page 107	.1.3.6.1.4.1.25053.2.11.1.315
<a href="#">ruckusSZAuthFailedNonPermanentIDTrap</a> on page 107	.1.3.6.1.4.1.25053.2.11.1.317
<a href="#">ruckusSZAPAcctRespWhileInvalidConfigTrap</a> on page 108	.1.3.6.1.4.1.25053.2.11.1.347
<a href="#">ruckusSZAPAcctMsgDropNoAcctStartMsgTrap</a> on page 108	.1.3.6.1.4.1.25053.2.11.1.348
<a href="#">ruckusSZUnauthorizedCoaDmMessageDroppedTrap</a> on page 109	.1.3.6.1.4.1.25053.2.11.1.349
<a href="#">ruckusSZConnectedToDbladeTrap</a> on page 109	.1.3.6.1.4.1.25053.2.11.1.350
<a href="#">ruckusSZSessUpdatedAtDbladeTrap</a> on page 110	.1.3.6.1.4.1.25053.2.11.1.354
<a href="#">ruckusSZSessUpdateErrAtDbladeTrap</a> on page 110	.1.3.6.1.4.1.25053.2.11.1.355
<a href="#">ruckusSZSessDeletedAtDbladeTrap</a> on page 111	.1.3.6.1.4.1.25053.2.11.1.356
<a href="#">ruckusSZSessDeleteErrAtDbladeTrap</a> on page 111	.1.3.6.1.4.1.25053.2.11.1.357
<a href="#">ruckusSZLicenseSyncSuccessTrap</a> on page 112	.1.3.6.1.4.1.25053.2.11.1.358
<a href="#">ruckusSZLicenseSyncFailedTrap</a> on page 112	.1.3.6.1.4.1.25053.2.11.1.359
<a href="#">ruckusSZLicenseImportSuccessTrap</a> on page 113	.1.3.6.1.4.1.25053.2.11.1.360
<a href="#">ruckusSZLicenseImportFailedTrap</a> on page 113	.1.3.6.1.4.1.25053.2.11.1.361
<a href="#">ruckusSZSyslogServerReachableTrap</a> on page 114	.1.3.6.1.4.1.25053.2.11.1.370
<a href="#">ruckusSZSyslogServerUnreachableTrap</a> on page 114	.1.3.6.1.4.1.25053.2.11.1.371
<a href="#">ruckusSZSyslogServerSwitchedTrap</a> on page 114	.1.3.6.1.4.1.25053.2.11.1.372
<a href="#">ruckusSZAPRadiusServerReachableTrap</a> on page 115	.1.3.6.1.4.1.25053.2.11.1.400
<a href="#">ruckusSZAPRadiusServerUnreachableTrap</a> on page 115	.1.3.6.1.4.1.25053.2.11.1.401
<a href="#">ruckusSZAPLDAPServerReachableTrap</a> on page 116	.1.3.6.1.4.1.25053.2.11.1.402
<a href="#">ruckusSZAPLDAPServerUnreachableTrap</a> on page 117	.1.3.6.1.4.1.25053.2.11.1.403
<a href="#">ruckusSZAPADServerReachableTrap</a> on page 117	.1.3.6.1.4.1.25053.2.11.1.404
<a href="#">ruckusSZAPADServerUnreachableTrap</a> on page 118	.1.3.6.1.4.1.25053.2.11.1.405
<a href="#">ruckusSZAPUsbSoftwarePackageDownloadedTrap</a> on page 119	.1.3.6.1.4.1.25053.2.11.1.406
<a href="#">ruckusSZAPUsbSoftwarePackageDownloadFailedTrap</a> on page 119	.1.3.6.1.4.1.25053.2.11.1.407
<a href="#">ruckusSZEspAuthServerReachableTrap</a> on page 120	.1.3.6.1.4.1.25053.2.11.1.408

Trap Name	Object Identifier
<a href="#">ruckusSZEspAuthServerUnreachableTrap</a> on page 121	.1.3.6.1.4.1.25053.2.11.1.409
<a href="#">ruckusSZEspAuthServerResolvableTrap</a> on page 121	.1.3.6.1.4.1.25053.2.11.1.410
<a href="#">ruckusSZEspAuthServerUnResolvableTrap</a> on page 122	.1.3.6.1.4.1.25053.2.11.1.411
<a href="#">ruckusSZEspDNATServerReachableTrap</a> on page 123	.1.3.6.1.4.1.25053.2.11.1.412
<a href="#">ruckusSZEspDNATServerUnreachableTrap</a> on page 123	.1.3.6.1.4.1.25053.2.11.1.413
<a href="#">ruckusSZEspDNATServerResolvableTrap</a> on page 124	.1.3.6.1.4.1.25053.2.11.1.414
<a href="#">ruckusSZEspDNATServerUnresolvableTrap</a> on page 125	.1.3.6.1.4.1.25053.2.11.1.415
<a href="#">ruckusRateLimitTORSurpassedTrap</a> on page 125	.1.3.6.1.4.1.25053.2.11.1.500
<a href="#">ruckusSZIPSecTunnelAssociatedTrap</a> on page 126	.1.3.6.1.4.1.25053.2.11.1.600
<a href="#">ruckusSZIPSecTunnelDisassociatedTrap</a> on page 126	.1.3.6.1.4.1.25053.2.11.1.601
<a href="#">ruckusSZIPSecTunnelAssociateFailedTrap</a> on page 127	.1.3.6.1.4.1.25053.2.11.1.602

**NOTE**

Auto clearance of SNMP trap occurs when a trap is cleared by another trap. The **Cleared by SNMP Trap** row indicates the auto clearance information. All other traps are cleared manually. The **Cleared by Matching** row contains the information that a user can use to clear the corresponding trap.

## ruckusSZSystemMiscEventTrap

**TABLE 4** ruckusSZSystemMiscEventTrap

Object Name	ruckusSZSystemMiscEventTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.1
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventDescription
Description	Generic trap triggered by administrator specified miscellaneous event. The event severity, event code, event type, event description are displayed.
Generated by Event Code	Refer to <a href="#">SmartZone Event Traps</a> on page 257 - <a href="#">ruckusSZSystemMiscEventTrap</a> on page 257

## ruckusSZUpgradeSuccessTrap

**TABLE 5** ruckusSZUpgradeSuccessTrap

Object Name	ruckusSZUpgradeSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.2
Trap Severity	Informational

**TABLE 5** ruckusSZUpgradeSuccessTrap (continued)

Object Name	ruckusSZUpgradeSuccessTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventFirmwareVersion ruckusSZEventUpgradedFirmwareVersion
Description	Triggered by the SmartZone success event. The event severity, event code, event type, node name, MAC address, management IP address, firmware version and upgraded firmware version are displayed.
Generated by Event Code	813:upgradeClusterNodeSuccess

## ruckusSZUpgradeFailedTrap

**TABLE 6** ruckusSZUpgradeFailedTrap

Object Name	ruckusSZUpgradeFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.3
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventFirmwareVersion ruckusSZEventUpgradedFirmwareVersion
Description	Triggered by the SmartZone upgrade failure event. The event severity, event code, event type, firmware version and upgraded firmware version are displayed.
Generated by Event Code	815:upgradeClusterFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZUpgradeSuccessTrap</a> on page 47 (.1.3.6.1.4.1.25053.2.11.1.210).

## ruckusSZNodeRestartedTrap

**TABLE 7** ruckusSZNodeRestartedTrap

Object Name	ruckusSZNodeRestartedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.4
Trap Severity	Major

**TABLE 7** ruckusSZNodeRestartedTrap (continued)

Object Name	ruckusSZNodeRestartedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventReason
Description	Triggered by the SmartZone restart event. The event severity, event code, event type, node name, MAC address, management IP address and restart reason are displayed.
Generated by Event Code	826:nodeRebooted

## ruckusSZNodeShutdownTrap

**TABLE 8** ruckusSZNodeShutdownTrap

Object Name	ruckusSZNodeShutdownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.5
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by the SmartZone shutdown event. The event severity, event code, event type, node name, MAC address and management IP address are displayed.
Generated by Event Code	828:nodeShutdown
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodeRestartedTrap</a> on page 48 (.1.3.6.1.4.1.25053.2.11.1.4).
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZCPUUsageThresholdExceededTrap

**TABLE 9** ruckusSZCPUUsageThresholdExceededTrap

Object Name	ruckusSZCPUUsageThresholdExceededTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.6
Trap Severity	Critical

**TABLE 9** ruckusSZCPUUsageThresholdExceededTrap (continued)

Object Name	ruckusSZCPUUsageThresholdExceededTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZCPUPerc
Description	Triggered by the SmartZone CPU threshold exceeded event. The usage percentage threshold can be configured as 60% to 90%. This trap is sent if the usage percentage exceeds the configured threshold. The event severity, event code, event type, node name, MAC address and CPU usage percentage are displayed.
Generated by Event Code	950:cpuThresholdExceeded
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZCPUUsageThresholdBackToNormalTrap</a> on page 63 (.1.3.6.1.4.1.25053.2.11.1.42)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZMemoryUsageThresholdExceededTrap

**TABLE 10** ruckusSZMemoryUsageThresholdExceededTrap

Object Name	ruckusSZMemoryUsageThresholdExceededTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.7
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZMemoryPerc
Description	Triggered by the SmartZone memory threshold exceeded event. The usage percentage threshold can be configured as 60% to 90%. This trap is sent if the usage percentage exceeds the configured threshold. The event severity, event code, event type, node name, MAC address and memory usage percentage are displayed.
Generated by Event Code	951:memoryThresholdExceeded
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZMemoryUsageThresholdBackToNormalTrap</a> on page 64 (.1.3.6.1.4.1.25053.2.11.1.43)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZDiskUsageThresholdExceededTrap

**TABLE 11** ruckusSZDiskUsageThresholdExceededTrap

Object Name	ruckusSZDiskUsageThresholdExceededTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.8
Trap Severity	Critical

**TABLE 11** ruckusSZDiskUsageThresholdExceededTrap (continued)

Object Name	ruckusSZDiskUsageThresholdExceededTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZDiskPerc
Description	Triggered when there is a SmartZone disk usage threshold exceeded event. The usage percentage threshold can be configured as 60% to 90%. This trap is sent if the usage percentage exceeds the configured threshold. The event severity, event code, event type, node name, MAC address and disk usage percentage are displayed.
Generated by Event Code	952:diskUsageThresholdExceeded
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDiskUsageThresholdBackToNormalTrap</a> on page 64 (.1.3.6.1.4.1.25053.2.11.1.44)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZLicenseUsageThresholdExceededTrap

**TABLE 12** ruckusSZLicenseUsageThresholdExceededTrap

Object Name	ruckusSZLicenseUsageThresholdExceededTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.19
Trap Severity	Warning
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZLicenseType ruckusSZLicenseUsagePerc
Description	Triggered by the SmartZone license usage threshold exceeded event. The event severity, event code, event type, license type and license usage percentage are displayed.
Generated by Event Code	960:licenseThresholdExceeded

## ruckusSZAPMiscEventTrap

**TABLE 13** ruckusSZAPMiscEventTrap

Object Name	ruckusSZAPMiscEventTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.20

**TABLE 13** ruckusSZAPMiscEventTrap (continued)

Object Name	ruckusSZAPMiscEventTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventDescription ruckusSZEventAPIPv6
Description	Generic trap triggered by AP related miscellaneous event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, event description, and AP IPv6 are displayed.
Generated by Event Code	Refer to <a href="#">SmartZone Event Traps</a> on page 257 - <a href="#">ruckusSZAPMiscEventTrap</a> on page 258

## ruckusSZAPConnectedTrap

**TABLE 14** ruckusSZAPConnectedTrap

Object Name	ruckusSZAPConnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.21
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventReason ruckusSZEventAPIPv6
Description	Triggered by the AP connected event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, event description, reason and AP IPv6 are displayed.
Generated by Event Code	312:apConnected

## ruckusSZAPDeletedTrap

**TABLE 15** ruckusSZAPDeletedTrap

Object Name	ruckusSZAPDeletedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.22
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtAPIPv6
Description	Triggered by the AP deleted event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, and AP IPv6 are displayed.
Generated by Event Code	313:apDeleted

## ruckusSZAPDisconnectedTrap

**TABLE 16** ruckusSZAPDisconnectedTrap

Object Name	ruckusSZAPDisconnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.23
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtAPIPv6
Description	Triggered by AP connection lost event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP description, AP GPS coordinates, and AP IPv6 are displayed.
Generated by Event Code	303:apConnectionLost

**TABLE 16** ruckusSZAPDisconnectedTrap (continued)

Object Name	ruckusSZAPDisconnectedTrap
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPConnectedTrap</a> on page 52 (.1.3.6.1.4.1.25053.2.11.1.21) and <a href="#">ruckusSZCriticalAPConnectedTrap</a> on page 55 (.1.3.6.1.4.1.25053.2.11.1.26)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPLostHeartbeatTrap

**TABLE 17** ruckusSZAPLostHeartbeatTrap

Object Name	ruckusSZAPLostHeartbeatTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.24
Trap Severity	Informational
Bindings	ruckusSZEAPSeverity ruckusSZEAPCode ruckusSZEAPType ruckusSZEAPName ruckusSZEAPMacAddr ruckusSZEAPIP ruckusSZEAPLocation ruckusSZEAPDescription ruckusSZEAPGPSCoordinates ruckusSZEAPIPv6
Description	Triggered by the SmartZone lost AP heart beat event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, and AP IPv6 are displayed.
Generated by Event Code	314:apHeartbeatLost
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPConnectedTrap</a> on page 52 (.1.3.6.1.4.1.25053.2.11.1.21) and <a href="#">ruckusSZCriticalAPConnectedTrap</a> on page 55 (.1.3.6.1.4.1.25053.2.11.1.26)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPRebootTrap

**TABLE 18** ruckusSZAPRebootTrap

Object Name	ruckusSZAPRebootTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.25
Trap Severity	Informational

**TABLE 18** ruckusSZAPRebootTrap (continued)

Object Name	ruckusSZAPRebootTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventReason ruckusSZEventAPIPv6
Description	Triggered by the AP reboot event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, event reason and AP IPv6 are displayed.
Generated by Event Code	301:apRebootByUser ; 302:apRebootBySystem

## ruckusSZCriticalAPConnectedTrap

**TABLE 19** ruckusSZCriticalAPConnectedTrap

Object Name	ruckusSZCriticalAPConnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.26
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventReason ruckusSZEventAPIPv6
Description	Triggered by the AP reboot event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, event reason and AP IPv6 are displayed.
Generated by Event Code	312:apConnected

## ruckusSZCriticalAPDisconnectedTrap

**TABLE 20** ruckusSZCriticalAPDisconnectedTrap

Object Name	ruckusSZCriticalAPDisconnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.27
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtAPIPv6
Description	Triggered by the AP reboot event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, and AP IPv6 are displayed.
Generated by Event Code	303:apConnectionLost
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZCriticalAPConnectedTrap</a> on page 55 (.1.3.6.1.4.1.25053.2.11.1.26)
Cleared by Matching	ruckusSZEvtAPMacAddr(.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPRejectedTrap

**TABLE 21** ruckusSZAPRejectedTrap

Object Name	ruckusSZAPRejectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.28
Trap Severity	Minor
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtCtrlIP ruckusSZEvtReason ruckusSZEvtAPIPv6

**TABLE 21** ruckusSZAPRejectedTrap (continued)

Object Name	ruckusSZAPRejectedTrap
Description	Triggered by the AP rejected event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, event reason, and AP IPv6 are displayed.
Generated by Event Code	105:apStatusRejected
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPManagedTrap</a> on page 63 (.1.3.6.1.4.1.25053.2.11.1.41)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPConfUpdateFailedTrap

**TABLE 22** ruckusSZAPConfUpdateFailedTrap

Object Name	ruckusSZAPConfUpdateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.29
Trap Severity	Major
Bindings	ruckusSZEAPSeverity ruckusSZEAPCode ruckusSZEAPType ruckusSZEAPName ruckusSZEAPMacAddr ruckusSZEAPIP ruckusSZEAPLocation ruckusSZEAPDescription ruckusSZEAPGPSCoordinates ruckusSZAPConfigID ruckusSZEAPIPv6
Description	Triggered by the AP configuration update failed event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, configuration ID and AP IPv6 are displayed.
Generated by Event Code	111:apConfUpdateFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPConfUpdatedTrap</a> on page 57 (.1.3.6.1.4.1.25053.2.11.1.30)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPConfUpdatedTrap

**TABLE 23** ruckusSZAPConfUpdatedTrap

Object Name	ruckusSZAPConfUpdatedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.30
Trap Severity	Informational

**TABLE 23** ruckusSZAPConfUpdatedTrap (continued)

Object Name	ruckusSZAPConfUpdatedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZAPConfigID ruckusSZEventAPIPv6
Description	Triggered by AP configuration updated event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, AP configuration ID and AP IPv6 are displayed.
Generated by Event Code	110:apConfUpdated

## ruckusSZAPSwapOutModelDiffTrap

**TABLE 24** ruckusSZAPSwapOutModelDiffTrap

Object Name	ruckusSZAPSwapOutModelDiffTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.31
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZAPModel ruckusSZConfigAPModel ruckusSZEventAPIPv6
Description	Triggered when the AP model is different from the imported swap AP model. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, AP model, configuration AP model and AP IPv6 are displayed.
Generated by Event Code	113:apModelDiffWithSwapOutAP

## ruckusSZAPPreProvisionModelDiffTrap

**TABLE 25** ruckusSZAPPreProvisionModelDiffTrap

Object Name	ruckusSZAPPreProvisionModelDiffTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.32
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZAPModel ruckusSZConfigAPModel ruckusSZEvtAPIPv6
Description	Triggered when the AP model is different from imported pre-provision AP model. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, AP model, configuration AP model and AP IPv6 are displayed.
Generated by Event Code	112:apModelDiffWithPreProvConfig

## ruckusSZAPFirmwareUpdateFailedTrap

**TABLE 26** ruckusSZAPFirmwareUpdateFailedTrap

Object Name	ruckusSZAPFirmwareUpdateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.34
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtAPIPv6

**TABLE 26** ruckusSZAPFirmwareUpdateFailedTrap (continued)

Object Name	ruckusSZAPFirmwareUpdateFailedTrap
Description	Triggered by AP firmware update failed event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates and AP IPv6 are displayed.
Generated by Event Code	107:apFirmwareUpdateFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPFirmwareUpdatedTrap</a> on page 60 (.1.3.6.1.4.1.25053.2.11.1.35)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPFirmwareUpdatedTrap

**TABLE 27** ruckusSZAPFirmwareUpdatedTrap

Object Name	ruckusSZAPFirmwareUpdatedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.35
Trap Severity	Informational
Bindings	ruckusSZEAPSeverity ruckusSZEAPCode ruckusSZEAPType ruckusSZEAPName ruckusSZEAPMacAddr ruckusSZEAPIP ruckusSZEAPLocation ruckusSZEAPDescription ruckusSZEAPGPSCoordinates ruckusSZEAPIPv6
Description	Triggered by AP firmware update success event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates and AP IPv6 are displayed.
Generated by Event Code	106:apFirmwareUpdated

## ruckusSZAPWlanOversubscribedTrap

**TABLE 28** ruckusSZAPWlanOversubscribedTrap

Object Name	ruckusSZAPWlanOversubscribedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.36
Trap Severity	Major

**TABLE 28** ruckusSZAPWlanOversubscribedTrap (continued)

Object Name	ruckusSZAPWlanOversubscribedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates
Description	Triggered by AP WLAN oversubscribe event. The event severity, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, zone name and event code are displayed.
Generated by Event Code	114:apWlanMismatched

## ruckusSZAPFactoryResetTrap

**TABLE 29** ruckusSZAPFactoryResetTrap

Object Name	ruckusSZAPFactoryResetTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.37
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventAPIPv6
Description	Triggered by the AP factory reset event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates and AP IPv6 are displayed.
Generated by Event Code	305:apFactoryReset

## ruckusSZCableModemDownTrap

**TABLE 30** ruckusSZCableModemDownTrap

Object Name	ruckusSZCableModemDownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.10.1.38

**TABLE 30** ruckusSZCableModemDownTrap (continued)

Object Name	ruckusSZCableModemDownTrap
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventAPIPv6
Description	Triggered by the AP cable modem down event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates and AP IPv6 are displayed.
Generated by Event Code	316:cableModemDown
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZCableModemUpTrap</a> on page 64 (.1.3.6.1.4.1.25053.2.11.1.45)
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZCableModemRebootTrap

**TABLE 31** ruckusSZCableModemRebootTrap

Object Name	ruckusSZCableModemRebootTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.39
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventAPIPv6
Description	Triggered when there is an AP cable modem reboot event. The event severity, event code, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates and AP IPv6 are displayed.
Generated by Event Code	318:cmRebootByUser

## ruckusSZAPManagedTrap

**TABLE 32** ruckusSZAPManagedTrap

Object Name	ruckusSZAPManagedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.41
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZEvtCtrlIP
Description	Triggered when there is an AP managed event. The event severity, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, zone name, target zone name, control IP address and event code are displayed.
Generated by Event Code	103:apStatusManaged

## ruckusSZCPUUsageThresholdBackToNormalTrap

**TABLE 33** ruckusSZCPUUsageThresholdBackToNormalTrap

Object Name	ruckusSZCPUUsageThresholdBackToNormalTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.42
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtNodeName ruckusSZEvtMacAddr ruckusSZCPUPerc
Description	Triggered when the controller CPU temperature status is back to normal. The event severity, event code, event type, node name, MAC address, and CPU usage percentage are displayed.
Generated by Event Code	953:cpuThresholdBackToNormal

## ruckusSZMemoryUsageThresholdBackToNormalTrap

**TABLE 34** ruckusSZMemoryUsageThresholdBackToNormalTrap

Object Name	ruckusSZMemoryUsageThresholdBackToNormalTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.43
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtNodeName ruckusSZEvtMacAddr ruckusSZMemoryPerc
Description	Triggered when the controller memory temperature status is back to normal. The event severity, event code, event type, node name, MAC address, and memory usage percentage are displayed.
Generated by Event Code	954:memoryThresholdBackToNormal

## ruckusSZDiskUsageThresholdBackToNormalTrap

**TABLE 35** ruckusSZDiskUsageThresholdBackToNormalTrap

Object Name	ruckusSZDiskUsageThresholdBackToNormalTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.44
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtNodeName ruckusSZEvtMacAddr ruckusSZDiskPerc
Description	Triggered when the controller disk temperature status is back to normal. The event severity, event code, event type, node name, MAC address, and memory usage percentage are displayed.
Generated by Event Code	955:diskUsageThresholdBackToNormal

## ruckusSZCableModemUpTrap

**TABLE 36** ruckusSZCableModemUpTrap

Object Name	ruckusSZCableModemUpTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.45
Trap Severity	Informational

**TABLE 36** ruckusSZCableModemUpTrap (continued)

Object Name	ruckusSZCableModemUpTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventAPIPv6
Description	Triggered when the controller disk temperature status is back to normal. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, and AP IP v6 are displayed.
Generated by Event Code	325:cableModemUp

## ruckusSZAPDiscoverySuccessTrap

**TABLE 37** ruckusSZAPDiscoverySuccessTrap

Object Name	ruckusSZAPDiscoverySuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.46
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventCtrlIP ruckusSZEventAPIPv6
Description	Triggered by the event where the AP is discovered successfully. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, event control IP address, and AP IPv6 address are displayed.
Generated by Event Code	101:apDiscoverySuccess

## ruckusSZCMResetByUserTrap

**TABLE 38** ruckusSZCMResetByUserTrap

Object Name	ruckusSZCMResetByUserTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.47
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventReason ruckusSZEventAPIPv6
Description	Triggered by the event where the AP cable modem starts a soft reboot triggered by the user. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, event reason and AP IPV6 address are displayed.
Generated by Event Code	326:cmResetByUser

## ruckusSZCMResetFactoryByUserTrap

**TABLE 39** ruckusSZCMResetFactoryByUserTrap

Object Name	ruckusSZCMResetFactoryByUserTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.48
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventReason ruckusSZEventAPIPv6

**TABLE 39** ruckusSZCMResetFactoryByUserTrap (continued)

Object Name	ruckusSZCMResetFactoryByUserTrap
Description	Triggered by the event where the AP cable modem is set to factory default by the user. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, event reason and AP IPv6 address are displayed.
Generated by Event Code	327:cmResetFactoryByUser

## ruckusSZMaliciousRogueAPTimeoutTrap

**TABLE 40** ruckusSZMaliciousRogueAPTimeoutTrap

Object Name	ruckusSZMaliciousRogueAPTimeoutTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.54
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventRogueMac ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZEventAPIPv6
Description	Triggered when the rogue AP disappears. The event severity, event code, event type, AP rouge MAC IP address, SSID value, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, and AP IP v6 are displayed.
Generated by Event Code	185:maliciousRogueAPTimeout

## ruckusSZAPLBSConnectSuccessTrap

**TABLE 41** ruckusSZAPLBSConnectSuccessTrap

Object Name	ruckusSZAPLBSConnectSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.55
Trap Severity	Informational

**TABLE 41** ruckusSZAPLBSConnectSuccessTrap (continued)

Object Name	ruckusSZAPLBSConnectSuccessTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZLBSURL ruckusSZLBSPort ruckusSZEventAPIPv6
Description	Triggered when the AP successfully connect to the LS event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, LBS URL, LBS port and AP IP v6 are displayed.
Generated by Event Code	703:apLBSConnectSuccess

## ruckusSZAPLBSNoResponsesTrap

**TABLE 42** ruckusSZAPLBSNoResponsesTrap

Object Name	ruckusSZAPLBSNoResponsesTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.56
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZLBSURL ruckusSZLBSPort ruckusSZEventAPIPv6
Description	Triggered when an event is raised since the LS fails to respond to the connecting AP. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, LBS URL, LBS port and AP IP v6 are displayed.
Generated by Event Code	701:apLBSNoResponses

## ruckusSZAPLBSAuthFailedTrap

**TABLE 43** ruckusSZAPLBSAuthFailedTrap

Object Name	ruckusSZAPLBSAuthFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.57
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZLBSURL ruckusSZLBSPort ruckusSZEvtAPIPv6
Description	Triggered by the authentication failure event when the AP tries connecting to the LS. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, LBS URL, LBS port and AP IP v6 are displayed.
Generated by Event Code	702:apLBSAuthFailed

## ruckusSZAPLBSConnectFailedTrap

**TABLE 44** ruckusSZAPLBSConnectFailedTrap

Object Name	ruckusSZAPLBSConnectFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.58
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZLBSURL ruckusSZLBSPort ruckusSZEvtAPIPv6

**TABLE 44** ruckusSZAPLBSConnectFailedTrap (continued)

Object Name	ruckusSZAPLBSConnectFailedTrap
Description	An event is raised when the AP fails in connecting to LS. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, LBS URL, LBS port and AP IP v6 are displayed.
Generated by Event Code	704:apLBSConnectFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPLBSConnectSuccessTrap</a> on page 67 (.1.3.6.1.4.1.25053.2.11.1.55)
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSCGGeneralRogueAPTrap

**TABLE 45** ruckusSCGGeneralRogueAPTrap

Object Name	ruckusSCGGeneralRogueAPTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.59
Trap Severity	Warning
Bindings	ruckusSCGEventSeverity ruckusSCGEventType ruckusSCGEventRogueMac ruckusSCGEventSSID ruckusSCGEventAPName ruckusSCGEventAPMacAddr ruckusSCGEventAPIP ruckusSCGEventAPLocation ruckusSCGEventAPDescription ruckusSCGEventAPGPSCoordinates ruckusSCGEventZoneName ruckusSCGEventCode ruckusSCGEventAPIPv6
Description	Triggered when the AP detects a rogue AP classified by policy event. The event severity, event type, rogue AP MAC IP address, ssid, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, zone name, event code and AP IPv6 address are displayed.
Generated by Event Code	186:generalRogueAPDetected

## ruckusSZAPTunnelBuildFailedTrap

**TABLE 46** ruckusSZAPTunnelBuildFailedTrap

Object Name	ruckusSZAPTunnelBuildFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.60
Trap Severity	Informational

**TABLE 46** ruckusSZAPTunnelBuildFailedTrap (continued)

Object Name	ruckusSZAPTunnelBuildFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDPIP ruckusSZEventReason ruckusSZEventAPIPv6
Description	Triggered by the AP build tunnel failed event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, data plane IP address, event reason and AP IP v6 are displayed.
Generated by Event Code	609:apBuildTunnelFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPTunnelBuildSuccessTrap</a> on page 71 (.1.3.6.1.4.1.25053.2.11.1.61)
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0).

## ruckusSZAPTunnelBuildSuccessTrap

**TABLE 47** ruckusSZAPTunnelBuildSuccessTrap

Object Name	ruckusSZAPTunnelBuildSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.61
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDPIP ruckusSZEventAPIPv6
Description	Triggered by the AP build tunnel success event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, data plane IP address, and AP IP v6 are displayed.

**TABLE 47** ruckusSZAPTunnelBuildSuccessTrap (continued)

Object Name	ruckusSZAPTunnelBuildSuccessTrap
Generated by Event Code	608:apBuildTunnelSuccess

## ruckusSZAPTunnelDisconnectedTrap

**TABLE 48** ruckusSZAPTunnelDisconnectedTrap

Object Name	ruckusSZAPTunnelDisconnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.62
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZDPIP ruckusSZEvtReason ruckusSZEvtAPIPv6
Description	Triggered by the AP tunnel disconnected event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, data plane IP address, event reason and AP IP v6 are displayed.
Generated by Event Code	610:apTunnelDisconnected
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPTunnelBuildSuccessTrap</a> on page 71 (.1.3.6.1.4.1.25053.2.11.1.61)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPSoftGRE Tunnel Failover PtoS Trap

**TABLE 49** ruckusSZAPSoftGRE Tunnel Failover PtoS Trap

Object Name	ruckusSZAPSoftGRE Tunnel Failover PtoS Trap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.65
Trap Severity	Warning

**TABLE 49** ruckusSZAPSoftGREtunnelFailoverPtoSTrap (continued)

Object Name	ruckusSZAPSoftGREtunnelFailoverPtoSTrap
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusPrimaryGRE ruckusSecondaryGRE ruckusSZEvtAPIPv6
Description	Triggered by the AP SoftGRE tunnel failing over from the primary server to the secondary server event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, primary GRE IP address, secondary GRE IP address and AP IP v6 are displayed.
Generated by Event Code	611:apSoftGREtunnelFailoverPtoS
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPSoftGREGatewayReachableTrap</a> on page 74 (.1.3.6.1.4.1.25053.2.11.1.68)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPSoftGREtunnelFailoverStoPTrap

**TABLE 50** ruckusSZAPSoftGREtunnelFailoverStoPTrap

Object Name	ruckusSZAPSoftGREtunnelFailoverStoPTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.66
Trap Severity	Warning
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusPrimaryGRE ruckusSecondaryGRE ruckusSZEvtAPIPv6

**TABLE 50** ruckusSZAPSoftGRE TunnelFailoverStoPTrap (continued)

Object Name	ruckusSZAPSoftGRE TunnelFailoverStoPTrap
Description	Triggered by the AP SoftGRE tunnel failing over from the secondary server to the primary secondary event. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, primary GRE IP address, secondary GRE IP address and AP IP v6 are displayed.
Generated by Event Code	612:apSoftGRE TunnelFailoverStoP
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPSoftGREGatewayReachableTrap</a> on page 74 (.1.3.6.1.4.1.25053.2.11.1.68)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPSoftGREGatewayNotReachableTrap

**TABLE 51** ruckusSZAPSoftGREGatewayNotReachableTrap

Object Name	ruckusSZAPSoftGREGatewayNotReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.67
Trap Severity	Critical
Bindings	ruckusSZESeverity ruckusSZECode ruckusSZEType ruckusSZEAPName ruckusSZEAPMacAddr ruckusSZEAPIP ruckusSZEAPLocation ruckusSZEAPDescription ruckusSZEAPGPSCoordinates ruckusSoftGREGatewayList ruckusSZEAPIPv6
Description	Triggered when the AP cannot ping/reach the SoftGRE gateway. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, GRE gateway list and AP IP v6 are displayed.
Generated by Event Code	614:apSoftGREGatewayNotReachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPSoftGREGatewayReachableTrap</a> on page 74 (.1.3.6.1.4.1.25053.2.11.1.68)
Cleared by Matching	ruckusSZEAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZAPSoftGREGatewayReachableTrap

**TABLE 52** ruckusSZAPSoftGREGatewayReachableTrap

Object Name	ruckusSZAPSoftGREGatewayReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.68
Trap Severity	Informational

**TABLE 52** ruckusSZAPSoftGREGatewayReachableTrap (continued)

Object Name	ruckusSZAPSoftGREGatewayReachableTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZSoftGREGWAddress
Description	Triggered when there is a AP SoftGRE gateway reachable event. The event severity, event type, AP name, AP MAC IP address, AP IP address, AP location, AP description, AP GPS coordinates, zone name, soft GRE gateway list and event code are displayed.
Generated by Event Code	613:apSoftGREGatewayReachable

## ruckusSZDPConfUpdateFailedTrap

**TABLE 53** ruckusSZDPConfUpdateFailedTrap

Object Name	ruckusSZDPConfUpdateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.70
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZDPConfigID
Description	Triggered by the data plane configuration update failed event. The data plane can get the updated configuration settings from the control plane, but cannot apply the updated configuration changes. The event severity, event code, event type, data plane identifier and configuration UUID are displayed.
Generated by Event Code	505:dpConfUpdateFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPConfUpdatedTrap</a> on page 78 (.1.3.6.1.4.1.25053.2.11.1.78)
Cleared by Matching	ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0)

## ruckusSZDPLostHeartbeatTrap

**TABLE 54** ruckusSZDPLostHeartbeatTrap

Object Name	ruckusSZDPLostHeartbeatTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.71
Trap Severity	Informational

**TABLE 54** ruckusSZDPLostHeartbeatTrap (continued)

Object Name	ruckusSZDPLostHeartbeatTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey
Description	Triggered by the data plane lost heart beat event. The event severity, event code, event type and data plane identifier are displayed.
Generated by Event Code	507:dpLostConnection
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPConnectedTrap</a> on page 78 (.1.3.6.1.4.1.25053.2.11.1.76)
Cleared by Matching	ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0)

## ruckusSZDPDisconnectedTrap

**TABLE 55** ruckusSZDPDisconnectedTrap

Object Name	ruckusSZDPDisconnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.72
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventCtrlIP
Description	Triggered by the data plane disconnected event. The event severity, event code, event type, data plane identifier, and control IP address are displayed.
Generated by Event Code	513:dpDisconnected
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPConnectedTrap</a> on page 78 (.1.3.6.1.4.1.25053.2.11.1.76)
Cleared by Matching	ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0)

## ruckusSZDPPhyInterfaceDownTrap

**TABLE 56** ruckusSZDPPhyInterfaceDownTrap

Object Name	ruckusSZDPPhyInterfaceDownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.73
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZNetworkPortID

**TABLE 56** ruckusSZDPPhyInterfaceDownTrap (continued)

Object Name	ruckusSZDPPhyInterfaceDownTrap
Description	Triggered by the data plane physical interface detected as down event. The event severity, event code, event type, data plane identifier, and network port identifier are displayed
Generated by Event Code	514:dpPhyInterfaceDown
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPPhyInterfaceUpTrap</a> on page 78 (.1.3.6.1.4.1.25053.2.11.1.77)
Cleared by Matching	ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0) ruckusSZNetworkPortID (.1.3.6.1.4.1.25053.2.11.2.100.0)

## ruckusSZDPStatusUpdateFailedTrap

**TABLE 57** ruckusSZDPStatusUpdateFailedTrap

Object Name	ruckusSZDPStatusUpdateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.74
Trap Severity	Minor
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey
Description	Triggered by the data plane update status failed event. The event severity, event code, event type and data plane identifier are displayed.
Generated by Event Code	510:dpUpdateStatusFailed

## ruckusSZDPStatisticUpdateFailedTrap

**TABLE 58** ruckusSZDPStatisticUpdateFailedTrap

Object Name	ruckusSZDPStatisticUpdateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.75
Trap Severity	Minor
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey
Description	Triggered by the data plane update statistics failed event. The event severity, event code, event type and data plane identifier are displayed.
Generated by Event Code	511:dpUpdateStatisticFailed

## ruckusSZDPConnectedTrap

**TABLE 59** ruckusSZDPConnectedTrap

Object Name	ruckusSZDPConnectedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.76
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventCtrlIP
Description	Triggered by the data plane connected event. The event severity, event code, event type, data plane identifier and control IP address are displayed.
Generated by Event Code	512:dpConnected

## ruckusSZDPPhyInterfaceUpTrap

**TABLE 60** ruckusSZDPPhyInterfaceUpTrap

Object Name	ruckusSZDPPhyInterfaceUpTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.77
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZNetworkPortID
Description	Triggered by the data plane physical interface up event. The event severity, event code, event type, data plane identifier and network port identifier are displayed.
Generated by Event Code	515:dpPhyInterfaceUp

## ruckusSZDPConfUpdatedTrap

**TABLE 61** ruckusSZDPConfUpdatedTrap

Object Name	ruckusSZDPConfUpdatedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.78
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZDPConfigID

**TABLE 61** ruckusSZDPConfUpdatedTrap (continued)

Object Name	ruckusSZDPConfUpdatedTrap
Description	Triggered by the data plane configuration updated event. The event severity, event code, event type, data plane identifier and configuration identifier are displayed.
Generated by Event Code	504:dpConfUpdated

## ruckusSZDPTunnelTearDownTrap

**TABLE 62** ruckusSZDPTunnelTearDownTrap

Object Name	ruckusSZDPTunnelTearDownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.79
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey ruckusSZEvtAPMacAddr ruckusSZEvtReason
Description	Triggered by the data plane tear down tunnel event. The event severity, event code, event type, data plane identifier, AP MAC address and event reason are displayed.
Generated by Event Code	603:dpTearDownTunnel
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPTunnelSetUpTrap</a> on page 80 (.1.3.6.1.4.1.25053.2.11.1.85)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0) ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0)

## ruckusSZDPAcceptTunnelRequestTrap

**TABLE 63** ruckusSZDPAcceptTunnelRequestTrap

Object Name	ruckusSZDPAcceptTunnelRequestTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.81
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey ruckusSZEvtAPMacAdd
Description	Triggered when the data plane accepts a tunnel request from the AP. The event severity, event code, event type, data plane identifier and AP MAC address are displayed.
Generated by Event Code	601:dpAcceptTunnelRequest

## ruckusSZDPRejectTunnelRequestTrap

**TABLE 64** ruckusSZDPRejectTunnelRequestTrap

Object Name	ruckusSZDPRejectTunnelRequestTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.82
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventAPMacAddr ruckusSZEventReason
Description	Triggered when the data plane rejects a tunnel request from the AP. The event severity, event code, event type, data plane identifier, AP MAC address and event reason are displayed.
Generated by Event Code	602:dpRejectTunnelRequest

**NOTE**

Trap .1.3.6.1.4.1.25053.2.11.1.85 is not applicable for vSZ-E.

## ruckusSZDPTunnelSetUpTrap

**TABLE 65** ruckusSZDPTunnelSetUpTrap

Object Name	ruckusSZDPTunnelSetUpTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.85
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventAPMacAdd
Description	Triggered when the data plane sets the tunnel. The event severity, event code, event type, data plane identifier and AP MAC address are displayed.
Generated by Event Code	627:dpSetUpTunnel

## ruckusSZDPDiscoverySuccessTrap

**TABLE 66** ruckusSZDPDiscoverySuccessTrap

Object Name	ruckusSZDPDiscoverySuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.86
Trap Severity	Informational

**TABLE 66** ruckusSZDPDiscoverySuccessTrap (continued)

Object Name	ruckusSZDPDiscoverySuccessTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventCtrlIP
Description	Triggered by the event where the data plane is successfully identified The event severity, event code, event type, data plane identifier and control plane IP address are displayed.
Generated by Event Code	501:dpDiscoverySuccess

## ruckusSZDPDiscoveryFailTrap

**TABLE 67** ruckusSZDPDiscoveryFailTrap

Object Name	ruckusSZDPDiscoveryFailTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.87
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey ruckusSZEventCtrlIP
Description	Triggered by the event where the data plane is unidentified The event severity, event code, event type, data plane identifier and control plane IP address are displayed.
Generated by Event Code	502:dpDiscoveryFail

## ruckusSZDPDeletedTrap

**TABLE 68** ruckusSZDPDeletedTrap

Object Name	ruckusSZDPDeletedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.94
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey
Description	Triggered by the event where data plane is deleted. The event severity, event code, type and data plane identifier are displayed.
Generated by Event Code	537:dpDeleted

## ruckusSZDPUpgradeStartTrap

**TABLE 69** ruckusSZDPUpgradeStartTrap

Object Name	ruckusSZDPUpgradeStartTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.95
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey
Description	Triggered by the event of data plane starting the upgrade process. The event severity, event code, event type and data plane identifier are displayed.
Generated by Event Code	550:dpUpgradeStart

## ruckusSZDPUpgradingTrap

**TABLE 70** ruckusSZDPUpgradingTrap

Object Name	ruckusSZDPUpgradingTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.96
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey
Description	Triggered by the event when data plane starts the upgrade program and configuration. The event severity, event code, event type, and data plane identifier are displayed.
Generated by Event Code	551:dpUpgrading

## ruckusSZDPUpgradeSuccessTrap

**TABLE 71** ruckusSZDPUpgradeSuccessTrap

Object Name	ruckusSZDPUpgradeSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.97
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZDPKey
Description	Triggered by the event when data plane upgrade is successful. The event severity, event code, event type, and data plane identifier are displayed.
Generated by Event Code	552:dpUpgradeSuccess

## ruckusSZDPUpgradeFailedTrap

**TABLE 72** ruckusSZDPUpgradeFailedTrap

Object Name	ruckusSZDPUpgradeFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.98
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZDPKey
Description	Triggered by the event when data plane upgrade fails. The event severity, event code, event type, and data plane identifier are displayed.
Generated by Event Code	553:dpUpgradeFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZDPUpgradeSuccessTrap</a> on page 82 (.1.3.6.1.4.1.25053.2.11.1.97)
Cleared by Matching	ruckusSZDPKey (.1.3.6.1.4.1.25053.2.11.2.80.0)

## ruckusSZClientMiscEventTrap

**TABLE 73** ruckusSZClientMiscEventTrap

Object Name	ruckusSZClientMiscEventTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.100
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventClientMacAddr ruckusSZEventDescription
Description	Generic trap triggered by specified client related miscellaneous event. The event severity, event code, event type, client MAC address and event description are displayed.
Generated by Event Code	Refer to appendix <a href="#">SmartZone Event Traps</a> on page 257 - <a href="#">ruckusSZClientMiscEventTrap</a> on page 258

## ruckusSZNodeJoinFailedTrap

**TABLE 74** ruckusSZNodeJoinFailedTrap

Object Name	ruckusSZNodeJoinFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.200
Trap Severity	Critical

**TABLE 74** ruckusSZNodeJoinFailedTrap (continued)

Object Name	ruckusSZNodeJoinFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by new node failing to join event. The event severity, event code, event type, node name, node MAC address and cluster name are displayed.
Generated by Event Code	803:newNodeJoinFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodeJoinSuccessTrap</a> on page 90 (.1.3.6.1.4.1.25053.2.11.1.218)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZNodeRemoveFailedTrap

**TABLE 75** ruckusSZNodeRemoveFailedTrap

Object Name	ruckusSZNodeRemoveFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.201
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by remove node failed event. The event severity, event type, node name, node MAC address, cluster name and event code are displayed.
Generated by Event Code	805:removeNodeFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodeRemoveSuccessTrap</a> on page 91 (.1.3.6.1.4.1.25053.2.11.1.220)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZNodeOutOfServiceTrap

**TABLE 76** ruckusSZNodeOutOfServiceTrap

Object Name	ruckusSZNodeOutOfServiceTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.202
Trap Severity	Critical

**TABLE 76** ruckusSZNodeOutOfServiceTrap (continued)

Object Name	ruckusSZNodeOutOfServiceTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by node out of service event. The event severity, event code, event type, node name, node MAC address and cluster name are displayed.
Generated by Event Code	806:nodeOutOfService
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodeBackToInServiceTrap</a> on page 92 (.1.3.6.1.4.1.25053.2.11.1.222)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZClusterInMaintenanceStateTrap

**TABLE 77** ruckusSZClusterInMaintenanceStateTrap

Object Name	ruckusSZClusterInMaintenanceStateTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.203
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered when a cluster is put into maintenance state event. The event severity, event code, event type and cluster name are displayed.
Generated by Event Code	807:clusterInMaintenanceState
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterBackToInServiceTrap</a> on page 89 (.1.3.6.1.4.1.25053.2.11.1.216).

## ruckusSZClusterBackupFailedTrap

**TABLE 78** ruckusSZClusterBackupFailedTrap

Object Name	ruckusSZClusterBackupFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.204
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered when a cluster failed to create a backup event. The event severity, event code, event type and cluster name are displayed.

**TABLE 78** ruckusSZClusterBackupFailedTrap (continued)

Object Name	ruckusSZClusterBackupFailedTrap
Generated by Event Code	810:backupClusterFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZBackupClusterSuccessTrap</a> on page 90 (.1.3.6.1.4.1.25053.2.11.1.217)

## ruckusSZClusterRestoreFailedTrap

**TABLE 79** ruckusSZClusterRestoreFailedTrap

Object Name	ruckusSZClusterRestoreFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.205
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by restore cluster failed event. The event severity, event code, event type and cluster name are displayed.
Generated by Event Code	812:restoreClusterFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterRestoreSuccessTrap</a> on page 91 (.1.3.6.1.4.1.25053.2.11.1.221)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZClusterAppStoppedTrap

**TABLE 80** ruckusSZClusterAppStoppedTrap

Object Name	ruckusSZClusterAppStoppedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.206
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessName ruckusSZEventNodeName ruckusSZEventMacAddr
Description	Triggered when an application has stopped running/functioning. The event severity, event code, event type, application name, SZ node name and node MAC address are displayed.
Generated by Event Code	816:clusterAppStop
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterAppStartTrap</a> on page 90 (.1.3.6.1.4.1.25053.2.11.1.219)
Cleared by Matching	ruckusSZProcessName(.1.3.6.1.4.1.25053.2.11.2.11.0) ruckusSZEventMacAddr(.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZNodeBondInterfaceDownTrap

**TABLE 81** ruckusSZNodeBondInterfaceDownTrap

Object Name	ruckusSZNodeBondInterfaceDownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.207
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZNetworkInterface ruckusSZEventNodeName ruckusSZEventMacAddr
Description	Triggered by node bond interface down event. The event severity, event type, network interface, controller node name, node MAC address and event code are displayed.
Generated by Event Code	821:nodeBondInterfaceDown
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodeBondInterfaceUpTrap</a> on page 88 (.1.3.6.1.4.1.25053.2.11.1.211)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0) ruckusSZNetworkInterface (.1.3.6.1.4.1.25053.2.11.2.101.0)

## ruckusSZNodePhyInterfaceDownTrap

**TABLE 82** ruckusSZNodePhyInterfaceDownTrap

Object Name	ruckusSZNodePhyInterfaceDownTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.208
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZNetworkInterface ruckusSZEventNodeName ruckusSZEventMacAddr
Description	Triggered by node physical interface down event. The event severity, event type, network interface, controller node name, node MAC address and event code are displayed.
Generated by Event Code	824:nodePhyInterfaceDown
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZNodePhyInterfaceUpTrap</a> on page 89 (.1.3.6.1.4.1.25053.2.11.1.212)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0) ruckusSZNetworkInterface (.1.3.6.1.4.1.25053.2.11.2.101.0)

## ruckusSZClusterLeaderChangedTrap

**TABLE 83** ruckusSZClusterLeaderChangedTrap

Object Name	ruckusSZClusterLeaderChangedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.209
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by cluster leader changed event. The event severity, event code, event type, SZ node name, node MAC address and cluster name are displayed.
Generated by Event Code	820:clusterLeaderChanged

## ruckusSZClusterUpgradeSuccessTrap

**TABLE 84** ruckusSZClusterUpgradeSuccessTrap

Object Name	ruckusSZClusterUpgradeSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.210
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName ruckusSZEventFirmwareVersion ruckusSZEventUpgradedFirmwareVersion
Description	Triggered when the entire cluster has been successfully upgraded. The event severity, event code, event type, cluster name, firmware version and upgraded firmware version are displayed.
Generated by Event Code	814:upgradeEntireClusterSuccess

## ruckusSZNodeBondInterfaceUpTrap

**TABLE 85** ruckusSZNodeBondInterfaceUpTrap

Object Name	ruckusSZNodeBondInterfaceUpTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.211
Trap Severity	Informational

**TABLE 85** ruckusSZNodeBondInterfaceUpTrap (continued)

Object Name	ruckusSZNodeBondInterfaceUpTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZNetworkInterface ruckusSZEventNodeName ruckusSZEventMacAddr
Description	Triggered by node bond interface up event. The event severity, event code, event type, network interface, SZ node name and SZ MAC address are displayed.
Generated by Event Code	822:nodeBondInterfaceUp

## ruckusSZNodePhyInterfaceUpTrap

**TABLE 86** ruckusSZNodePhyInterfaceUpTrap

Object Name	ruckusSZNodePhyInterfaceUpTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.212
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZNetworkInterface ruckusSZEventNodeName ruckusSZEventMacAddr
Description	Triggered by node physical interface up event. The event severity, event code, event type, network interface, SZ node name and SZ MAC address are displayed.
Generated by Event Code	825:nodePhyInterfaceUp

## ruckusSZClusterBackToInServiceTrap

**TABLE 87** ruckusSZClusterBackToInServiceTrap

Object Name	ruckusSZClusterBackToInServiceTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.216
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered when a cluster is back in service. The event severity, event code, event type and cluster name are displayed.
Generated by Event Code	808:clusterBackToInService

## ruckusSZBackupClusterSuccessTrap

**TABLE 88** ruckusSZBackupClusterSuccessTrap

Object Name	ruckusSZBackupClusterSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.217
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by backup cluster success event. The event severity, event code, event type and cluster name are displayed.
Generated by Event Code	809:backupClusterSuccess

## ruckusSZNodeJoinSuccessTrap

**TABLE 89** ruckusSZNodeJoinSuccessTrap

Object Name	ruckusSZNodeJoinSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.218
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by new node join success event. The event severity, event code, event type, SZ node name, node MAC address and cluster name are displayed.
Generated by Event Code	802:newNodeJoinSuccess

## ruckusSZClusterAppStartTrap

**TABLE 90** ruckusSZClusterAppStartTrap

Object Name	ruckusSZClusterAppStartTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.219
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessName ruckusSZEventNodeName ruckusSZEventMacAddr

**TABLE 90** ruckusSZClusterAppStartTrap (continued)

Object Name	ruckusSZClusterAppStartTrap
Description	Triggered when a cluster application starts. The event severity, event code, event type, application name, SZ node name and node MAC address are displayed.
Generated by Event Code	817:clusterAppStart

## ruckusSZNodeRemoveSuccessTrap

**TABLE 91** ruckusSZNodeRemoveSuccessTrap

Object Name	ruckusSZNodeRemoveSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.220
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by successful removal of a node. The event severity, event code, event type, SZ node name, node MAC address and cluster name are displayed.
Generated by Event Code	804:removeNodeSuccess

## ruckusSZClusterRestoreSuccessTrap

**TABLE 92** ruckusSZClusterRestoreSuccessTrap

Object Name	ruckusSZClusterRestoreSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.221
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered when a cluster has been successfully restored. The event severity, event code, event type, SZ node name, node MAC address and cluster name are displayed.
Generated by Event Code	811:restoreClusterSuccess

## ruckusSZNodeBackToInServiceTrap

**TABLE 93** ruckusSZNodeBackToInServiceTrap

Object Name	ruckusSZNodeBackToInServiceTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.222
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName
Description	Triggered by node back to in service event. The event severity, event code, event type, SZ node name, node MAC address and cluster name are displayed.
Generated by Event Code	835:nodeBackToInService

## ruckusSZSshTunnelSwitchedTrap

**TABLE 94** ruckusSZSshTunnelSwitchedTrap

Object Name	ruckusSZSshTunnelSwitchedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.223
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZEventMacAddr ruckusSZClusterName ruckusSZSwitchStatus
Description	Triggered by SSH tunnel switched event. The event severity, event code, event type, SZ node name, node MAC address, cluster name and switch status are displayed.
Generated by Event Code	833:sshTunnelSwitched

## ruckusSZClusterCfgBackupStartTrap

**TABLE 95** ruckusSZClusterCfgBackupStartTrap

Object Name	ruckusSZClusterCfgBackupStartTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.224
Trap Severity	Informational

**TABLE 95** ruckusSZClusterCfgBackupStartTrap (continued)

Object Name	ruckusSZClusterCfgBackupStartTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by start of configuration backup event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	860:clusterCfgBackupStart

## ruckusSZClusterCfgBackupSuccessTrap

**TABLE 96** ruckusSZClusterCfgBackupSuccessTrap

Object Name	ruckusSZClusterCfgBackupSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.225
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by successful configuration backup event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	861:clusterCfgBackupSuccess

## ruckusSZClusterCfgBackupFailedTrap

**TABLE 97** ruckusSZClusterCfgBackupFailedTrap

Object Name	ruckusSZClusterCfgBackupFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.226
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by failed configuration backup event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	862:clusterCfgBackupFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterCfgBackupSuccessTrap</a> on page 93

## ruckusSZClusterCfgRestoreSuccessTrap

**TABLE 98** ruckusSZClusterCfgRestoreSuccessTrap

Object Name	ruckusSZClusterCfgRestoreSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.227
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by successful configuration restoration event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	863:clusterCfgRestoreSuccess

## ruckusSZClusterCfgRestoreFailedTrap

**TABLE 99** ruckusSZClusterCfgRestoreFailedTrap

Object Name	ruckusSZClusterCfgRestoreFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.228
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by failed configuration restoration event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	864:clusterCfgRestoreFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterCfgRestoreSuccessTrap</a> on page 94 ( .1.3.6.1.4.1.25053.2.11.1.227)

## ruckusSZClusterUploadSuccessTrap

**TABLE 100** ruckusSZClusterUploadSuccessTrap

Object Name	ruckusSZClusterUploadSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.229
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by successful cluster upload event. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	831:uploadClusterSuccess

## ruckusSZClusterUploadFailedTrap

**TABLE 101** ruckusSZClusterUploadFailedTrap

Object Name	ruckusSZClusterUploadFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.230
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName ruckusSZEventReason
Description	Triggered by failed cluster upload event. The event severity, event code, event type, controller cluster name and reason are displayed.
Generated by Event Code	832:uploadClusterFailed

## ruckusSZClusterOutOfServiceTrap

**TABLE 102** ruckusSZClusterOutOfServiceTrap

Object Name	ruckusSZClusterOutOfServiceTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.231
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by the event where the cluster is out of service. The event severity, event code, event type and controller cluster name are displayed.
Generated by Event Code	843:clusterOutOfService
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZClusterBackToInServiceTrap</a> on page 89 (.1.3.6.1.4.1.25053.2.11.1.216)

## ruckusSZClusterUploadVDPFirmwareStartTrap

**TABLE 103** ruckusSZClusterUploadVDPFirmwareStartTrap

Object Name	ruckusSZClusterUploadVDPFirmwareStartTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.232
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZClusterName
Description	Triggered by the event when the when the cluster starts and uploads virtual data plane. The event severity, event code, event type and cluster name are displayed.

**TABLE 103** ruckusSZClusterUploadVDPFirmwareStartTrap (continued)

Object Name	ruckusSZClusterUploadVDPFirmwareStartTrap
Generated by Event Code	845:clusterUploadVDPFirmwareStart

## ruckusSZClusterUploadVDPFirmwareSuccessTrap

**TABLE 104** ruckusSZClusterUploadVDPFirmwareSuccessTrap

Object Name	ruckusSZClusterUploadVDPFirmwareSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.233
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZClusterName
Description	Triggered by the event when cluster uploads the virtual data plane firmware is successful. The event severity, event code, event type and cluster name are displayed.
Generated by Event Code	846:uploadClusterVDPFirmwareSuccess

## ruckusSZClusterUploadVDPFirmwareFailedTrap

**TABLE 105** ruckusSZClusterUploadVDPFirmwareFailedTrap

Object Name	ruckusSZClusterUploadVDPFirmwareFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.234
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZClusterName ruckusSZEvtReason
Description	Triggered by the event when cluster uploads the virtual data plane firmware fails. The event severity, event code, event type, cluster name, and reason are displayed.
Generated by Event Code	847:uploadClusterVDPFirmwareFailed

## ruckusSZIpmiTempBBTrap

**NOTE**

Traps .1.3.6.1.4.1.25053.2.11.1.251 to .1.3.6.1.4.1.25053.2.11.1.275 is not applicable for vSZ-E.

**TABLE 106** ruckusSZIpmiTempBBTrap

Object Name	ruckusSZIpmiTempBBTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.251
Trap Severity	Major

**TABLE 106** ruckusSZIpmiTempBBTrap (continued)

Object Name	ruckusSZIpmiTempBBTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZTemperatureStatus ruckusSZEventMacAddr
Description	Triggered by baseboard temperature event. The event severity, event code, event type, temperature status and node MAC address are displayed.
Generated by Event Code	902:ipmiThempBB
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZIpmiRETempBBTrap</a> on page 98 (.1.3.6.1.4.1.25053.2.11.1.265)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZIpmiTempPTrap

**TABLE 107** ruckusSZIpmiTempPTrap

Object Name	ruckusSZIpmiTempPTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.256
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessorId ruckusSZTemperatureStatus ruckusSZEventMacAddr
Description	Triggered by processor temperature event. The event severity, event code, event type, processor id, temperature status and controller node MAC address are displayed.
Generated by Event Code	907:ipmiThempP
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZIpmiRETempPTrap</a> on page 99 (.1.3.6.1.4.1.25053.2.11.1.270)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0) ruckusSZProcessorId (.1.3.6.1.4.1.25053.2.11.2.121.0)

## ruckusSZIpmiFanTrap

**TABLE 108** ruckusSZIpmiFanTrap

Object Name	ruckusSZIpmiFanTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.258
Trap Severity	Major

**TABLE 108** ruckusSZIpmiFanTrap (continued)

Object Name	ruckusSZIpmiFanTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZFanId ruckusSZFanStatus ruckusSZEventMacAddr
Description	Triggered when the system fan fails. The event severity, event code, event type, fan id, fan status and controller node MAC address are displayed.
Generated by Event Code	909:ipmiFan
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZIpmiFanTrap</a> (.1.3.6.1.4.1.25053.2.11.1.272)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0) ruckusSZFanId (.1.3.6.1.4.1.25053.2.11.2.122.0)

## ruckusSZIpmiFanStatusTrap

**TABLE 109** ruckusSZIpmiFanStatusTrap

Object Name	ruckusSZIpmiFanStatusTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.261
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZFanId ruckusSZFanStatus ruckusSZEventMacAddr
Description	Triggered by fan module event. The event severity, event code, event type, fan id, fan status and controller node MAC address are displayed.
Generated by Event Code	912:ipmiFanStatus
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZIpmiREFanStatusTrap</a> on page 100 (.1.3.6.1.4.1.25053.2.11.1.275)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0) ruckusSZFanId (.1.3.6.1.4.1.25053.2.11.2.122.0)

## ruckusSZIpmiRETempBBTrap

**TABLE 110** ruckusSZIpmiRETempBBTrap

Object Name	ruckusSZIpmiRETempBBTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.265
Trap Severity	Informational

**TABLE 110** ruckusSZIpmiRETempBBTrap (continued)

Object Name	ruckusSZIpmiRETempBBTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZTemperatureStatus ruckusSZEventMacAddr
Description	Triggered by the event where the base board temperature status recovers to normal condition. The event severity, event code, event type, temperature status and controller node MAC address are displayed.
Generated by Event Code	927:ipmiREThempBB

## ruckusSZIpmiRETempPTrap

**TABLE 111** ruckusSZIpmiRETempPTrap

Object Name	ruckusSZIpmiRETempPTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.270
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessorId ruckusSZTemperatureStatus ruckusSZEventMacAddr
Description	Triggered by the event where the processor temperature status recovers to normal condition. The event severity, event code, event type, processor ID, temperature status and controller node MAC address are displayed.
Generated by Event Code	932:ipmiREThempP

## ruckusSZIpmiREFanTrap

**TABLE 112** ruckusSZIpmiREFanTrap

Object Name	ruckusSZIpmiREFanTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.272
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZFanId ruckusSZFanStatus ruckusSZEventMacAddr

**TABLE 112** ruckusSZIpmiREFanTrap (continued)

Object Name	ruckusSZIpmiREFanTrap
Description	Triggered by the event where the system fan module status recovers to normal condition. The event severity, event code, event type, fan ID, fan temperature status and controller node MAC address are displayed.
Generated by Event Code	934:ipmiREFan

## ruckusSZIpmiREFanStatusTrap

**TABLE 113** ruckusSZIpmiREFanStatusTrap

Object Name	ruckusSZIpmiREFanStatusTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.275
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZFanId ruckusSZFanStatus ruckusSZEvtMacAddr
Description	Triggered by the event where fan module status recovers to normal condition. The event severity, event code, event type, fan ID, fan temperature status and controller node MAC address are displayed.
Generated by Event Code	937:ipmiREFanStatus

## ruckusSZFtpTransferErrorTrap

**TABLE 114** ruckusSZFtpTransferErrorTrap

Object Name	ruckusSZFtpTransferErrorTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.280
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZFtpIp ruckusSZFtpPort ruckusSZFileName ruckusSZEvtMacAddr
Description	Triggered by FTP transfer error event. The event severity, event code, event type, FTP server IP address, FTP server port, file name and node MAC address are displayed.
Generated by Event Code	971:ftpTransferError

## ruckusSZSystemLBSCoconnectSuccessTrap

**TABLE 115** ruckusSZSystemLBSCoconnectSuccessTrap

Object Name	ruckusSZSystemLBSCoconnectSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.290
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZLBSURL ruckusSZLBSPort
Description	Triggered by the event when the controller successfully connects to the LS. The event severity, event code, event type, controller MAC address, controller node MAC address, LBS (Location Based Service) server URL and LBS port are displayed.
Generated by Event Code	723:scgLBSCoconnectSuccess

## ruckusSZSystemLBSNoResponseTrap

**TABLE 116** ruckusSZSystemLBSNoResponseTrap

Object Name	ruckusSZSystemLBSNoResponseTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.291
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZLBSURL ruckusSZLBSPort
Description	Triggered by the controller failure response event when connecting to the LS. The event severity, event code, event type, controller MAC address, controller node MAC address, LBS server URL and LBS port are displayed.
Generated by Event Code	721:scgLBSNoResponse

## ruckusSZSystemLBSAuthFailedTrap

**TABLE 117** ruckusSZSystemLBSAuthFailedTrap

Object Name	ruckusSZSystemLBSAuthFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.292
Trap Severity	Major

**TABLE 117** ruckusSZSystemLBSAuthFailedTrap (continued)

Object Name	ruckusSZSystemLBSAuthFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZLBSURL ruckusSZLBSPort
Description	Triggered by the controller authentication failure event when connecting to the LS. The event severity, event code, event type, controller MAC address, controller node MAC address, LBS server URL and LBS port are displayed.
Generated by Event Code	722:scgLBSAuthFailed

## ruckusSZSystemLBSConnectFailedTrap

**TABLE 118** ruckusSZSystemLBSConnectFailedTrap

Object Name	ruckusSZSystemLBSConnectFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.293
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZLBSURL ruckusSZLBSPort
Description	Triggered by the controller failed to connect to LS event. The event severity, event code, event type, node MAC address, management IP address, LBS server URL and LBS port are displayed.
Generated by Event Code	724:scgLBSConnectFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZSystemLBSConnectSuccessTrap</a> on page 101 (.1.3.6.1.4.1.25053.2.11.1.290)
Cleared by Matching	ruckusSZEventMacAddr (.1.3.6.1.4.1.25053.2.11.2.20.0)

## ruckusSZProcessRestartTrap

**TABLE 119** ruckusSZProcessRestartTrap

Object Name	ruckusSZProcessRestartTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.300
Trap Severity	Major

**TABLE 119** ruckusSZProcessRestartTrap (continued)

Object Name	ruckusSZProcessRestartTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by process restart event. The event severity, event code, event type, process name, node MAC address and management IP address are displayed.
Generated by Event Code	1001:processRestart

## ruckusSZServiceUnavailableTrap

**TABLE 120** ruckusSZServiceUnavailableTrap

Object Name	ruckusSZServiceUnavailableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.301
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by service unavailable event. The event severity, event code, event type, process name, node MAC address and management IP address are displayed.
Generated by Event Code	1002:serviceUnavailable

## ruckusSZKeepAliveFailureTrap

**TABLE 121** ruckusSZKeepAliveFailureTrap

Object Name	ruckusSZKeepAliveFailureTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.302
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZSrcProcess ruckusSZProcessName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp

**TABLE 121** ruckusSZKeepAliveFailureTrap (continued)

Object Name	ruckusSZKeepAliveFailureTrap
Description	Triggered by service keep alive failure event. The event severity, event code, event type, source process name, process name, node MAC address and management IP address are displayed.
Generated by Event Code	1003:keepAliveFailure

## ruckusSZResourceUnavailableTrap

**TABLE 122** ruckusSZResourceUnavailableTrap

Object Name	ruckusSZResourceUnavailableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.304
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZSrcProcess ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventReason
Description	Triggered by resource unavailable event. The event severity, event code, event type, source process name, node MAC address, management IP address and reason are displayed.
Generated by Event Code	1006:resourceUnavailable

## ruckusSZSmfRegFailedTrap

**TABLE 123** ruckusSZSmfRegFailedTrap

Object Name	ruckusSZSmfRegFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.305
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZSrcProcess ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by SMF (System Management Framework) registration failed event. The event severity, event code, event type, source process name, node MAC address and management IP address are displayed.
Generated by Event Code	1010:smfRegFailed

## ruckusSZHipFailoverTrap

**NOTE**

This trap is not applicable for vSZ-E.

**TABLE 124** ruckusSZHipFailoverTrap

Object Name	ruckusSZHipFailoverTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.306
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZSrcProcess ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by a HIP failover event. The event severity, event code, event type, source process name, event MAC address, node management IP address are displayed.
Generated by Event Code	1016:hipFailover

## ruckusSZConfUpdFailedTrap

**TABLE 125** ruckusSZConfUpdFailedTrap

Object Name	ruckusSZConfUpdFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.307
Trap Severity	Debug
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZProcessName ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventReason
Description	Triggered by configuration update failed event. The event severity, event code, event type, process name, node MAC address, management IP address and failure reason are displayed.
Generated by Event Code	1008:cfgUpdFailed

## ruckusSZConfRcvFailedTrap

**TABLE 126** ruckusSZConfRcvFailedTrap

Object Name	ruckusSZConfRcvFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.308
Trap Severity	Debug

**TABLE 126** ruckusSZConfRcvFailedTrap (continued)

Object Name	ruckusSZConfRcvFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventReason
Description	Triggered when the SmartZone receives a message from the AP that it has failed to update its configuration. The event severity, event code, event type, node MAC address, management IP address and failure reason are displayed.
Generated by Event Code	1009:cfgRcvFailed

## ruckusSZLostCnxnToDbladeTrap

**TABLE 127** ruckusSZLostCnxnToDbladeTrap

Object Name	ruckusSZLostCnxnToDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.309
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIp ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by lost connection to data plane. The event severity, event code, event type, SZ control IP address, DP IP address, node MAC address and management IP address are displayed.
Generated by Event Code	1202:lostCnxnToDblade
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZConnectedToDbladeTrap</a> on page 109 (.1.3.6.1.4.1.25053.2.11.1.350)
Cleared by Matching	:ruckusSZEventCtrlIP (.1.3.6.1.4.1.25053.2.11.2.12.0) ruckusSZDPIP (.1.3.6.1.4.1.25053.2.11.2.82.0)

## ruckusSZAuthSrvrNotReachableTrap

**TABLE 128** ruckusSZAuthSrvrNotReachableTrap

Object Name	ruckusSZAuthSrvrNotReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.314
Trap Severity	Major

**TABLE 128** ruckusSZAauthSvrNotReachableTrap (continued)

Object Name	ruckusSZAauthSvrNotReachableTrap
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZAauthSvrIp ruckusSZRadProxyIp ruckusSZEvtMacAddr ruckusSZEvtNodeMgmtIp
Description	Triggered by authentication server not reachable event. The event severity, event code, event type, authentication server IP address, radius proxy IP address, node MAC address and management IP address are displayed.
Generated by Event Code	1601:authSvrNotReachable

## ruckusSZAccSvrNotReachableTrap

**TABLE 129** ruckusSZAccSvrNotReachableTrap

Object Name	ruckusSZAccSvrNotReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.315
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZAccSvrIp ruckusSZRadProxyIp ruckusSZEvtMacAddr ruckusSZEvtNodeMgmtIp
Description	Triggered by accounting server not reachable event. The event severity, event code, event type, accounting server IP address, radius proxy IP address, node MAC address and management IP address are displayed.
Generated by Event Code	1602:accSvrNotReachable

## ruckusSZAauthFailedNonPermanentIDTrap

**TABLE 130** ruckusSZAauthFailedNonPermanentIDTrap

Object Name	ruckusSZAauthFailedNonPermanentIDTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.317

**TABLE 130** ruckusSZAuthFailedNonPermanentIDTrap (continued)

Object Name	ruckusSZAuthFailedNonPermanentIDTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZUEImsi ruckusSZUEMsisdn ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp ruckusSZEventReason
Description	Triggered by non-permanent ID authentication failed event. The event severity, event code, event type, UE imsi, UE msisdn, node MAC address, management IP address and failure reason are displayed.
Generated by Event Code	1617:non-permanentIDauthenticationfailed

## ruckusSZAPAcctRespWhileInvalidConfigTrap

**TABLE 131** ruckusSZAPAcctRespWhileInvalidConfigTrap

Object Name	ruckusSZAPAcctRespWhileInvalidConfigTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.347
Trap Severity	Debug
Bindings	ruckusSCGEventSeverity ruckusSCGEventType ruckusSCGSrcProcess ruckusSCGUserName ruckusSCGEventMacAddr ruckusSCGEventNodeMgmtIp ruckusSCGEventCode
Description	Triggered by the event where the controller sends a response to AP accounting message but the configuration is incorrect in the controller for forwarding received message or for generating CDRs.  The event severity, event type, source process name, user name, controller node MAC IP address, management IP address and event are displayed.
Generated by Event Code	1909:apAcctRespWhileInvalidConfig

## ruckusSZAPAcctMsgDropNoAcctStartMsgTrap

**TABLE 132** ruckusSZAPAcctMsgDropNoAcctStartMsgTrap

Object Name	ruckusSZAPAcctMsgDropNoAcctStartMsgTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.348
Trap Severity	Critical

**TABLE 132** ruckusSZAPAcctMsgDropNoAcctStartMsgTrap (continued)

Object Name	ruckusSZAPAcctMsgDropNoAcctStartMsgTrap
Bindings	ruckusSCGEventSeverity ruckusSCGEventType ruckusSCGSrcProcess ruckusSCGUserName ruckusSCGEventMacAddr ruckusSCGEventNodeMgmtIp ruckusSCGEventCode
Description	Triggered by the event where the accounting message from AP is dropped from the <b>Acct Interim/Stop</b> message since the account start is not received from the AP.  The event severity, event type, source process name, user name, controller node MAC IP address, management IP address and event are displayed.
Generated by Event Code	1910:apAcctMsgDropNoAcctStartMsg

## ruckusSZUnauthorizedCoaDmMessageDroppedTrap

**TABLE 133** ruckusSZUnauthorizedCoaDmMessageDroppedTrap

Object Name	ruckusSZUnauthorizedCoaDmMessageDroppedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.349
Trap Severity	Critical
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZSrcProcess ruckusSZRadSrvrIp ruckusSZEvtMacAddr ruckusSZEvtNodeMgmtIp
Description	Triggered by the event where the controller receives COA/DM from an unauthorized AAA server. The event severity, event code, event type, source process name, AAA server IP address, node MAC address and management IP address are displayed.
Generated by Event Code	1911:unauthorizedCoaDmMessageDropped

## ruckusSZConnectedToDbladeTrap

**TABLE 134** ruckusSZConnectedToDbladeTrap

Object Name	ruckusSZConnectedToDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.350
Trap Severity	Informational

**TABLE 134** ruckusSZConnectedToDbladeTrap (continued)

Object Name	ruckusSZConnectedToDbladeTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIP ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by successful connection to data plane event. The event severity, event code, event type, control plane IP address, data plane IP address, node MAC address, and management IP address are displayed.
Generated by Event Code	1201:connectedToDblade

## ruckusSZSessUpdatedAtDbladeTrap

**NOTE**

This trap is not applicable for vSZ-E.

**TABLE 135** ruckusSZSessUpdatedAtDbladeTrap

Object Name	ruckusSZSessUpdatedAtDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.354
Trap Severity	Debug
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIP ruckusSZUEImsi ruckusSZUEMsisdn ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by successful update of session request (C-D-SESS-UPD-REQ) event. The event severity, event code, event type, control IP address, data plane IP address, IMSI code, MSIDN code and management IP address are displayed.
Generated by Event Code	1205:sessUpdatedAtDblade

## ruckusSZSessUpdateErrAtDbladeTrap

**TABLE 136** ruckusSZSessUpdateErrAtDbladeTrap

Object Name	ruckusSZSessUpdateErrAtDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.355
Trap Severity	Debug

**TABLE 136** ruckusSZSessUpdateErrAtDbladeTrap (continued)

Object Name	ruckusSZSessUpdateErrAtDbladeTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIP ruckusSZUEImsi ruckusSZUEMsisdn ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by failed deletion of session request (C-D-SESS-DEL-REQ) event. The event severity, event code, event type, control IP address, data plane IP address, IMSI code, MSIDN code and management IP address are displayed.
Generated by Event Code	1206:sessUpdateErrAtDblade

## ruckusSZSessDeletedAtDbladeTrap

**TABLE 137** ruckusSZSessDeletedAtDbladeTrap

Object Name	ruckusSZSessDeletedAtDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.356
Trap Severity	Debug
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIP ruckusSZUEImsi ruckusSZUEMsisdn ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by successful deletion of session request (C-D-SESS-DEL-REQ) event. The event severity, event code, event type, control IP address, data plane IP address, IMSI code, MSIDN code and management IP address are displayed.
Generated by Event Code	1207:sessDeletedAtDblade

## ruckusSZSessDeleteErrAtDbladeTrap

**TABLE 138** ruckusSZSessDeleteErrAtDbladeTrap

Object Name	ruckusSZSessDeleteErrAtDbladeTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.357
Trap Severity	Debug

**TABLE 138** ruckusSZSessDeleteErrAtDbladeTrap (continued)

Object Name	ruckusSZSessDeleteErrAtDbladeTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventCtrlIP ruckusSZDPIP ruckusSZUEImsi ruckusSZUEMsisdn ruckusSZEventMacAddr ruckusSZEventNodeMgmtIp
Description	Triggered by deletion of session request (C-D-SESS-DEL-REQ) failed event. The event severity, event code, event type, control IP address, data plane IP address, IMSI code, MSIDN code and management IP address are displayed.
Generated by Event Code	1208:sessDeleteErrAtDblade

## ruckusSZLicenseSyncSuccessTrap

**TABLE 139** ruckusSZLicenseSyncSuccessTrap

Object Name	ruckusSZLicenseSyncSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.358
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZLicenseServerName
Description	Triggered by successful synchronization of license data with the license server event. The event severity, event code, event type, node name and license server name are displayed.
Generated by Event Code	1250:licenseSyncSuccess

## ruckusSZLicenseSyncFailedTrap

**TABLE 140** ruckusSZLicenseSyncFailedTrap

Object Name	ruckusSZLicenseSyncFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.359
Trap Severity	Warning

**TABLE 140** ruckusSZLicenseSyncFailedTrap (continued)

Object Name	ruckusSZLicenseSyncFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName ruckusSZLicenseServerName
Description	Triggered by synchronization of license data with the license server failed event. The event severity, event code, event type, node name and license server name are displayed.
Generated by Event Code	1251:licenseSyncFail

## ruckusSZLicenseImportSuccessTrap

**TABLE 141** ruckusSZLicenseImportSuccessTrap

Object Name	ruckusSZLicenseImportSuccessTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.360
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName
Description	Triggered by successful import of license data event. The event severity, event code, event type and node name are displayed.
Generated by Event Code	1252:licenseImportSuccess

## ruckusSZLicenseImportFailedTrap

**TABLE 142** ruckusSZLicenseImportFailedTrap

Object Name	ruckusSZLicenseImportFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.361
Trap Severity	Warning
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventNodeName
Description	Triggered by import of license data failed event. The event severity, event code, event type and node name are displayed.
Generated by Event Code	1253:licenseImportFail

## ruckusSZSyslogServerReachableTrap

**TABLE 143** ruckusSZSyslogServerReachableTrap

Object Name	ruckusSZSyslogServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.370
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZSyslogServerAddress ruckusSZEvtMacAddr
Description	Triggered by the event when the syslog server is reachable. The event severity, event code, event type, syslog server address and event MAC address are displayed.
Generated by Event Code	750:syslogServerReachable

## ruckusSZSyslogServerUnreachableTrap

**TABLE 144** ruckusSZSyslogServerUnreachableTrap

Object Name	ruckusSZSyslogServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.371
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZSyslogServerAddress ruckusSZEvtMacAddr
Description	Triggered by the event when the syslog server is unreachable. The event severity, event code, event type, syslog server address and event MAC address are displayed.
Generated by Event Code	751:syslogServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZSyslogServerReachableTrap</a> on page 114 (.1.3.6.1.4.1.25053.2.11.1.370)
Cleared by Matching	ruckusSZSyslogServerAddress (.1.3.6.1.4.1.25053.2.11.2.154.0)

## ruckusSZSyslogServerSwitchedTrap

**TABLE 145** ruckusSZSyslogServerSwitchedTrap

Object Name	ruckusSZSyslogServerSwitchedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.372
Trap Severity	Informational

**TABLE 145** ruckusSZSyslogServerSwitchedTrap (continued)

Object Name	ruckusSZSyslogServerSwitchedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZSrcSyslogServerAddress ruckusSZDestSyslogServerAddress ruckusSZEventMacAddr
Description	Triggered by the event when the syslog server is switched. The event severity, event code, event type, syslog server source and destination address and event MAC address are displayed.
Generated by Event Code	752:syslogServerSwitched

## ruckusSZAPRadiusServerReachableTrap

**TABLE 146** ruckusSZAPRadiusServerReachableTrap

Object Name	ruckusSZAPRadiusServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.400
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZRadSrvrIp ruckusSZEventAPIPv6
Description	Triggered by the event when AP is able to reach the radius server successfully. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, zone name, server IP address and AP IPv6 address are displayed.
Generated by Event Code	2101:radiusServerReachable

## ruckusSZAPRadiusServerUnreachableTrap

**TABLE 147** ruckusSZAPRadiusServerUnreachableTrap

Object Name	ruckusSZAPRadiusServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.401
Trap Severity	Major

**TABLE 147** ruckusSZAPRadiusServerUnreachableTrap (continued)

Object Name	ruckusSZAPRadiusServerUnreachableTrap
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZRadSrvrIp ruckusSZEvtAPIPv6
Description	Triggered by the event when AP fails to reach the radius server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, server IP address and AP IPv6 address are displayed
Generated by Event Code	2102:radiusServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPRadiusServerReachableTrap</a> on page 115 (.1.3.6.1.4.1.25053.2.11.1.400)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0) ruckusSZRadSrvrIp (.1.3.6.1.4.1.25053.2.11.2.312.0)

## ruckusSZAPLDAPServerReachableTrap

**TABLE 148** ruckusSZAPLDAPServerReachableTrap

Object Name	ruckusSZAPLDAPServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.402
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZLDAPSrvrIp ruckusSZEvtAPIPv6
Description	Triggered by the event when AP is able to reach the lightweight directory access protocol (LDAP) server successfully. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, server IP address and AP IPv6 address are displayed

**TABLE 148** ruckusSZAPLDAPServerReachableTrap (continued)

Object Name	ruckusSZAPLDAPServerReachableTrap
Generated by Event Code	2121:ldapServerReachable

## ruckusSZAPLDAPServerUnreachableTrap

**TABLE 149** ruckusSZAPLDAPServerUnreachableTrap

Object Name	ruckusSZAPLDAPServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.403
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZLDAPSrVrIp ruckusSZEvtAPIPv6
Description	Triggered by the event when AP fails to reach the lightweight directory access protocol (LDAP) server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, server IP address and AP IPv6 address are display.
Generated by Event Code	2122:ldapServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPLDAPServerReachableTrap</a> on page 116 (.1.3.6.1.4.1.25053.2.11.1.402)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0) ruckusSZLDAPSrVrIp (.1.3.6.1.4.1.25053.2.11.2.327.0)

## ruckusSZAPADServerReachableTrap

**TABLE 150** ruckusSZAPADServerReachableTrap

Object Name	ruckusSZAPADServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.404
Trap Severity	Informational

**TABLE 150** ruckusSZAPADServerReachableTrap (continued)

Object Name	ruckusSZAPADServerReachableTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZADSrvrip ruckusSZEventAPIPv6
Description	Triggered by the event when AP is able to reach the active directory successfully. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, server IP address and AP IPv6 address are displayed.
Generated by Event Code	2141:adServerReachable

## ruckusSZAPADServerUnreachableTrap

**TABLE 151** ruckusSZAPADServerUnreachableTrap

Object Name	ruckusSZAPADServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.405
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZADSrvrip ruckusSZEventAPIPv6
Description	Triggered by the event when AP fails to reach AD server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, AD server IP address and AP IPv6 address are displayed.
Generated by Event Code	2142:adServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZAPADServerReachableTrap</a> on page 117 (.1.3.6.1.4.1.25053.2.11.1.404)

**TABLE 151** ruckusSZAPADServerUnreachableTrap (continued)

Object Name	ruckusSCGAPADServerUnreachableTrap
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0) ruckusSZADsrVrIp (.1.3.6.1.4.1.25053.2.11.2.328.0)

## ruckusSZAPUsbSoftwarePackageDownloadedTrap

**TABLE 152** ruckusSZAPUsbSoftwarePackageDownloadedTrap

Object Name	ruckusSZAPUsbSoftwarePackageDownloadedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.406
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZSoftwareName ruckusSZEvtAPIPv6
Description	Triggered by the event when AP successfully downloads its USB (Universal Serial Bus) software. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, software name and AP IPv6 address are displayed.
Generated by Event Code	370:apUsbSoftwarePackageDownloaded

## ruckusSZAPUsbSoftwarePackageDownloadFailedTrap

**TABLE 153** ruckusSZAPUsbSoftwarePackageDownloadFailedTrap

Object Name	ruckusSZAPUsbSoftwarePackageDownloadFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.407
Trap Severity	Major

**TABLE 153** ruckusSZAPUsbSoftwarePackageDownloadFailedTrap (continued)

Object Name	ruckusSZAPUsbSoftwarePackageDownloadFailedTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZSoftwareName ruckusSZEventAPIPv6
Description	Triggered by the event when AP fails to download its USB (Universal Serial Bus) software. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, software name and AP IPv6 address are displayed.
Generated by Event Code	371:apUsbSoftwarePackageDownloadFailed

## ruckusSZEspAuthServerReachableTrap

**TABLE 154** ruckusSZEspAuthServerReachableTrap

Object Name	ruckusSZEspAuthServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.408
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZAuthSrvrIp ruckusSZEventAPIPv6
Description	Triggered by the event when AP successfully reaches WeChat ESP authentication server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, authentication server IP address and AP IPv6 address are displayed.
Generated by Event Code	2151:espAuthServerReachable

## ruckusSZEspAuthServerUnreachableTrap

**TABLE 155** ruckusSZEspAuthServerUnreachableTrap

Object Name	ruckusSZEspAuthServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.409
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZAthSrvrip ruckusSZEvtAPIPv6
Description	Triggered by the event when AP fails to reach WeChat ESP authentication server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, authentication server IP address and AP IPv6 address are displayed.
Generated by Event Code	2152:espAuthServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZEspAuthServerReachableTrap</a> on page 120 (.1.3.6.1.4.1.25053.2.11.1.408)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZEspAuthServerResolvableTrap

**TABLE 156** ruckusSZEspAuthServerResolvableTrap

Object Name	ruckusSZEspAuthServerResolvableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.410
Trap Severity	Informational

**TABLE 156** ruckusSZEspAuthServerResolvableTrap (continued)

Object Name	ruckusSZEspAuthServerResolvableTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDomainName ruckusSZEventAPIPv6
Description	Triggered by the event when AP successfully resolves WeChat ESP authentication server domain name. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, domain name and AP IPv6 address are displayed.
Generated by Event Code	2153:espAuthServerResolvable

## ruckusSZEspAuthServerUnResolvableTrap

**TABLE 157** ruckusSZEspAuthServerUnResolvableTrap

Object Name	ruckusSZEspAuthServerUnResolvableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.411
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDomainName ruckusSZEventAPIPv6
Description	Triggered by the event when AP fails to resolve WeChat ESP authentication server domain name. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, domain name and AP IPv6 address are displayed.
Generated by Event Code	2154:espAuthServerUnResolvable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZEspAuthServerResolvableTrap</a> on page 121 (.1.3.6.1.4.1.25053.2.11.1.410)

**TABLE 157** ruckusSZEspAuthServerUnResolvableTrap (continued)

Object Name	ruckusSZEspAuthServerUnResolvableTrap
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZEspDNATServerReachableTrap

**TABLE 158** ruckusSZEspDNATServerReachableTrap

Object Name	ruckusSZEspDNATServerReachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.412
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDNATip ruckusSZEventAPIPv6
Description	Triggered by the event when AP successfully reaches WeChat ESP DNAT server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, DNAT server IP address and AP IPv6 address are displayed.
Generated by Event Code	2161:espDNATServerReachable

## ruckusSZEspDNATServerUnreachableTrap

**TABLE 159** ruckusSZEspDNATServerUnreachableTrap

Object Name	ruckusSZEspDNATServerUnreachableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.413
Trap Severity	Major

**TABLE 159** ruckusSZEspDNATServerUnreachableTrap (continued)

Object Name	ruckusSZEspDNATServerUnreachableTrap
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDNATip ruckusSZEventAPIPv6
Description	Triggered by the event when AP fails to reach WeChat ESP DNAT server. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, DNAT server IP address and AP IPv6 address are displayed.
Generated by Event Code	2162:espDNATServerUnreachable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZEspDNATServerReachableTrap</a> on page 123 (.1.3.6.1.4.1.25053.2.11.1.412)
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusSZEspDNATServerResolvableTrap

**TABLE 160** ruckusSZEspDNATServerResolvableTrap

Object Name	ruckusSZEspDNATServerResolvableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.414
Trap Severity	Informational
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDomainName ruckusSZEventAPIPv6
Description	Triggered by the event when AP successfully resolves WeChat ESP DNAT server domain name The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, domain name and AP IPv6 address are displayed.

**TABLE 160** ruckusSZEspDNATServerResolvableTrap (continued)

Object Name	ruckusSZEspDNATServerResolvableTrap
Generated by Event Code	2163:espDNATServerResolvable

## ruckusSZEspDNATServerUnresolvableTrap

**TABLE 161** ruckusSZEspDNATServerUnresolvableTrap

Object Name	ruckusSZEspDNATServerUnresolvableTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.415
Trap Severity	Major
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZEventAPName ruckusSZEventAPMacAddr ruckusSZEventAPIP ruckusSZEventAPLocation ruckusSZEventAPDescription ruckusSZEventAPGPSCoordinates ruckusSZDomainName ruckusSZEventAPIPv6
Description	Triggered by the event AP fails to resolve WeChat ESP DNAT server domain name. The event severity, event code, event type, AP name, AP MAC address, AP IP address, AP location, AP description, AP GPS coordinates, domain name and AP IPv6 address are displayed.
Generated by Event Code	2164:espDNATServerUnresolvable
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZEspDNATServerResolvableTrap</a> on page 124 (.1.3.6.1.4.1.25053.2.11.1.414)
Cleared by Matching	ruckusSZEventAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## ruckusRateLimitTORSurpassedTrap

**TABLE 162** ruckusRateLimitTORSurpassedTrap

Object Name	ruckusRateLimitTORSurpassedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.500
Trap Severity	Critical
Bindings	ruckusSZEventSeverity ruckusSZEventCode ruckusSZEventType ruckusSZRadSrvrIp
Description	Triggered by the event where the SmartZone receives the rate limit for Total Outstanding Requests (TOR) is surpassed. The event severity, event code, event type and AAA server IP address are displayed.

**TABLE 162** ruckusRateLimitTORSurpassedTrap (continued)

Object Name	ruckusRateLimitTORSurpassedTrap
Generated by Event Code	1302:rateLimitTORSurpassed

## ruckusSZIPSecTunnelAssociatedTrap

**TABLE 163** ruckusSZIPSecTunnelAssociatedTrap

Object Name	ruckusSZIPSecTunnelAssociatedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.600
Trap Severity	Informational
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZIPSecGWAddress ruckusSZEvtAPIPv6
Description	Triggered by the event where the AP is able to reach the secure gateway successfully. The event severity, event code, event type, AP name, MAC address, IP address, location, description, GPS coordinates, IPsec gateway address and IPv6 version are displayed.
Generated by Event Code	660:ipsecTunnelAssociated

## ruckusSZIPSecTunnelDisassociatedTrap

**TABLE 164** ruckusSZIPSecTunnelDisassociatedTrap

Object Name	ruckusSZIPSecTunnelDisassociatedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.601
Trap Severity	Major

**TABLE 164** ruckusSZIPSecTunnelDisassociatedTrap (continued)

Object Name	ruckusSZIPSecTunnelDisassociatedTrap
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZIPSecGWAddress ruckusSZEvtAPIPv6
Description	Triggered by the event where the AP is disconnected from the secure gateway. The event severity, event code, event type, AP name, MAC address, IP address, location, description, GPS coordinates, IPsec gateway address and IPv6 version are displayed.
Generated by Event Code	661:ipsecTunnelDisassociated

## ruckusSZIPSecTunnelAssociateFailedTrap

**TABLE 165** ruckusSZIPSecTunnelAssociateFailedTrap

Object Name	ruckusSZIPSecTunnelAssociateFailedTrap
Object Identifier	.1.3.6.1.4.1.25053.2.11.1.602
Trap Severity	Major
Bindings	ruckusSZEvtSeverity ruckusSZEvtCode ruckusSZEvtType ruckusSZEvtAPName ruckusSZEvtAPMacAddr ruckusSZEvtAPIP ruckusSZEvtAPLocation ruckusSZEvtAPDescription ruckusSZEvtAPGPSCoordinates ruckusSZIPSecGWAddress ruckusSZEvtAPIPv6
Description	Triggered by the event where the AP is unable to reach the secure gateway. The event severity, event type, AP name, MAC address, IP address, location, description, GPS coordinates, IPsec gateway address, and IPv6 version are displayed.
Generated by Event Code	662:ipsecTunnelAssociateFailed
Cleared by SNMP Trap	This SNMP trap is cleared by <a href="#">ruckusSZIPSecTunnelAssociatedTrap</a> on page 126 (.1.3.6.1.4.1.25053.2.11.1.600)
Cleared by Matching	ruckusSZEvtAPMacAddr (.1.3.6.1.4.1.25053.2.11.2.23.0)

## Ruckus Event Object

The objects contained in the RUCKUS-SZ-EVENT-Object group define the events for sending trap event notifications by the controller. All traps are triggered by events. The following are the trap object definitions.

Event Object	Object Identifier
<a href="#">ruckusSZEventDescription</a> on page 129	.1.3.6.1.4.1.25053.2.11.2.1
<a href="#">ruckusSZClusterName</a> on page 129	.1.3.6.1.4.1.25053.2.11.2.2
<a href="#">ruckusSZEventCode</a> on page 130	.1.3.6.1.4.1.25053.2.11.2.10
<a href="#">ruckusSZProcessName</a> on page 130	.1.3.6.1.4.1.25053.2.11.2.11
<a href="#">ruckusSZEventCtrlIP</a> on page 130	.1.3.6.1.4.1.25053.2.11.2.12
<a href="#">ruckusSZEventSeverity</a> on page 130	.1.3.6.1.4.1.25053.2.11.2.13
<a href="#">ruckusSZEventType</a> on page 130	.1.3.6.1.4.1.25053.2.11.2.14
<a href="#">ruckusSZEventNodeMgmtIp</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.15
<a href="#">ruckusSZEventNodeName</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.16
<a href="#">ruckusSZCPUPerc</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.17
<a href="#">ruckusSZMemoryPerc</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.18
<a href="#">ruckusSZDiskPerc</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.19
<a href="#">ruckusSZEventMacAddr</a> on page 131	.1.3.6.1.4.1.25053.2.11.2.20
<a href="#">ruckusSZEventFirmwareVersion</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.21
<a href="#">ruckusSZEventUpgradedFirmwareVersion</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.22
<a href="#">ruckusSZEventAPMacAddr</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.23
<a href="#">ruckusSZEventReason</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.24
<a href="#">ruckusSZEventAPName</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.25
<a href="#">ruckusSZEventAPIP</a> on page 132	.1.3.6.1.4.1.25053.2.11.2.26
<a href="#">ruckusSZEventAPLocation</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.27
<a href="#">ruckusSZEventAPGPSCoordinates</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.28
<a href="#">ruckusSZEventAPDescription</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.29
<a href="#">ruckusSZAPModel</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.31
<a href="#">ruckusSZConfigAPModel</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.32
<a href="#">ruckusSZAPConfigID</a> on page 133	.1.3.6.1.4.1.25053.2.11.2.33
<a href="#">ruckusSZEventAPIPv6</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.35
<a href="#">ruckusSZLBSURL</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.38
<a href="#">ruckusSZLBSPort</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.39
<a href="#">ruckusSZEventSSID</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.40
<a href="#">ruckusSZEventRogueMac</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.45
<a href="#">ruckusPrimaryGRE</a> on page 134	.1.3.6.1.4.1.25053.2.11.2.46
<a href="#">ruckusSecondaryGRE</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.47
<a href="#">ruckusSoftGREGatewayList</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.48
<a href="#">ruckusSZSoftGREGWAddress</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.49
<a href="#">ruckusSZEventClientMacAddr</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.50
<a href="#">ruckusSZDPKey</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.80
<a href="#">ruckusSZDPConfigID</a> on page 135	.1.3.6.1.4.1.25053.2.11.2.81
<a href="#">ruckusSZDPIP</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.82

Event Object	Object Identifier
<a href="#">ruckusSZNetworkPortID</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.100
<a href="#">ruckusSZNetworkInterface</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.101
<a href="#">ruckusSZSwitchStatus</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.102
<a href="#">ruckusSZTemperatureStatus</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.120
<a href="#">ruckusSZProcessorId</a> on page 136	.1.3.6.1.4.1.25053.2.11.2.121
<a href="#">ruckusSZFanId</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.122
<a href="#">ruckusSZFanStatus</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.123
<a href="#">ruckusSZLicenseType</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.150
<a href="#">ruckusSZLicenseUsagePerc</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.151
<a href="#">ruckusSZLicenseServerName</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.152
<a href="#">ruckusSZIPSecGWAddress</a> on page 137	.1.3.6.1.4.1.25053.2.11.2.153
<a href="#">ruckusSZSyslogServerAddress</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.154
<a href="#">ruckusSZSrcSyslogServerAddress</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.155
<a href="#">ruckusSZDestSyslogServerAddress</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.156
<a href="#">ruckusSZFtpIp</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.200
<a href="#">ruckusSZFtpPort</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.201
<a href="#">ruckusSZUEImsi</a> on page 138	.1.3.6.1.4.1.25053.2.11.2.305
<a href="#">ruckusSZUEMsisdn</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.306
<a href="#">ruckusSZAuthSrvrIp</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.307
<a href="#">ruckusSZRadProxyIp</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.308
<a href="#">ruckusSZAccSrvrIp</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.309
<a href="#">ruckusSZRadSrvrIp</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.312
<a href="#">ruckusSZUserName</a> on page 139	.1.3.6.1.4.1.25053.2.11.2.324
<a href="#">ruckusSZFileName</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.326
<a href="#">ruckusSZLDAPSrvrIp</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.327
<a href="#">ruckusSZADSrvrIp</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.328
<a href="#">ruckusSZSoftwareName</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.329
<a href="#">ruckusSZDomainName</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.330
<a href="#">rruckusSZDNATIp</a> on page 140	.1.3.6.1.4.1.25053.2.11.2.331

## ruckusSZEventDescription

**TABLE 166** ruckusSZEventDescription

Object Name	ruckusSZEventDescription
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.1
Description	Event description.

## ruckusSZClusterName

**TABLE 167** ruckusSZClusterName

Object Name	ruckusSZClusterName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.2

**TABLE 167** ruckusSZClusterName (continued)

Object Name	ruckusSZClusterName
Description	The SmartZone cluster name

## ruckusSZEventCode

**TABLE 168** ruckusSZEventCode

Object Name	ruckusSZEventCode
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.10
Description	The event code

## ruckusSZProcessName

**TABLE 169** ruckusSZProcessName

Object Name	ruckusSZProcessName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.11
Description	The process name.

## ruckusSZEventCtrlIP

**TABLE 170** ruckusSZEventCtrlIP

Object Name	ruckusSZEventCtrlIP
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.12
Description	The SmartZone node control IP address.

## ruckusSZEventSeverity

**TABLE 171** ruckusSZEventSeverity

Object Name	ruckusSZEventSeverity
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.13
Description	The event severity.

## ruckusSZEventType

**TABLE 172** ruckusSZEventType

Object Name	ruckusSZEventType
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.14
Description	The event type.

## ruckusSZEventNodeMgmtIp

**TABLE 173** ruckusSZEventNodeMgmtIp

Object Name	ruckusSZEventNodeMgmtIp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.15
Description	The SmartZone management IP address.

## ruckusSZEventNodeName

**TABLE 174** ruckusSZEventNodeName

Object Name	ruckusSZEventNodeName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.16
Description	The SmartZone node name.

## ruckusSZCPUPerc

**TABLE 175** ruckusSZCPUPerc

Object Name	ruckusSZCPUPerc
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.17
Description	The SmartZone CPU usage in percentage.

## ruckusSZMemoryPerc

**TABLE 176** ruckusSZMemoryPerc

Object Name	ruckusSZMemoryPerc
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.18
Description	The SmartZone memory usage in percentage.

## ruckusSZDiskPerc

**TABLE 177** ruckusSZDiskPerc

Object Name	ruckusSZDiskPerc
Object Identifier	.1.3.6.1.4.1.25053.2.10.2.19
Description	The SmartZone disk usage in percentage.

## ruckusSZEventMacAddr

**TABLE 178** ruckusSZEventMacAddr

Object Name	ruckusSZEventMacAddr
Object Identifier	.1.3.6.1.4.1.25053.2.10.2.20
Description	The SmartZone MAC address

## ruckusSZEventFirmwareVersion

**TABLE 179** ruckusSZEventFirmwareVersion

Object Name	ruckusSZEventFirmwareVersion
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.21
Description	The SmartZone firmware version.

## ruckusSZEventUpgradedFirmwareVersion

**TABLE 180** ruckusSZEventUpgradedFirmwareVersion

Object Name	ruckusSZEventUpgradedFirmwareVersion
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.22
Description	Controller upgrade firmware version.

## ruckusSZEventAPMacAddr

**TABLE 181** ruckusSZEventAPMacAddr

Object Name	ruckusSZEventAPMacAddr
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.23
Description	The AP MAC address

## ruckusSZEventReason

**TABLE 182** ruckusSZEventReason

Object Name	ruckusSZEventReason
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.24
Description	The event reason.

## ruckusSZEventAPName

**TABLE 183** ruckusSZEventAPName

Object Name	ruckusSZEventAPName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.25
Description	The AP name.

## ruckusSZEventAPIP

**TABLE 184** ruckusSZEventAPIP

Object Name	ruckusSZEventAPIP
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.26
Description	The AP IP address.

## ruckusSZEventAPLocation

**TABLE 185** ruckusSZEventAPLocation

Object Name	ruckusSZEventAPLocation
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.27
Description	The AP location.

## ruckusSZEventAPGPSCoordinates

**TABLE 186** ruckusSZEventAPGPSCoordinates

Object Name	ruckusSZEventAPGPSCoordinates
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.28
Description	The AP GPS coordinates.

## ruckusSZEventAPDescription

**TABLE 187** ruckusSZEventAPDescription

Object Name	ruckusSZEventAPDescription
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.29
Description	The AP description

## ruckusSZAPModel

**TABLE 188** ruckusSZAPModel

Object Name	ruckusSZAPModel
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.31
Description	The AP model.

## ruckusSZConfigAPModel

**TABLE 189** ruckusSZConfigAPModel

Object Name	ruckusSZConfigAPModel
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.32
Description	The configured AP model.

## ruckusSZAPConfigID

**TABLE 190** ruckusSZAPConfigID

Object Name	ruckusSZAPConfigID
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.33
Description	The AP configuration UUID.

## ruckusSZEventAPIv6

**TABLE 191** ruckusSZEventAPIv6

Object Name	ruckusSZEventAPIv6
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.35
Description	The AP IPv6 address.

## ruckusSZLBSURL

**TABLE 192** ruckusSZLBSURL

Object Name	ruckusSZLBSURL
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.38
Description	URL of the LBS server.

## ruckusSZLBSPort

**TABLE 193** ruckusSZLBSPort

Object Name	ruckusSZLBSPort
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.39
Description	Port of the LBS server.

## ruckusSZEventSSID

**TABLE 194** ruckusSZEventSSID

Object Name	ruckusSZEventSSID
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.40
Description	The WLAN SSID.

## ruckusSZEventRogueMac

**TABLE 195** ruckusSZEventRogueMac

Object Name	ruckusSZEventRogueMac
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.45
Description	The rouge MAC address.

## ruckusPrimaryGRE

**TABLE 196** ruckusPrimaryGRE

Object Name	ruckusPrimaryGRE
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.46
Description	The primary GRE gateway.

## ruckusSecondaryGRE

**TABLE 197** ruckusSecondaryGRE

Object Name	ruckusSecondaryGRE
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.47
Description	The secondary GRE gateway.

## ruckusSoftGREGatewayList

**TABLE 198** ruckusSoftGREGatewayList

Object Name	ruckusSoftGREGatewayList
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.48
Description	The SoftGRE gateway list. It could either be the IP address or FQDN and must have only two IPs or DN, which is separated by a semicolon (;)

## ruckusSZSoftGREGWAddress

**TABLE 199** ruckusSZSoftGREGWAddress

Object Name	ruckusSZSoftGREGWAddress
Object Identifier	.1.3.6.1.4.1.25053.2.10.2.49
Description	The SoftGRE gateway IP address.

## ruckusSZEventClientMacAddr

**TABLE 200** ruckusSZEventClientMacAddr

Object Name	ruckusSZEventClientMacAddr
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.50
Description	The client MAC address.

## ruckusSZDPKey

**TABLE 201** ruckusSZDPKey

Object Name	ruckusSZDPKey
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.80
Description	The data plane identifier.

## ruckusSZDPConfigID

**TABLE 202** ruckusSZDPConfigID

Object Name	ruckusSZDPConfigID
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.81
Description	The data plane configuration ID.

## ruckusSZDPIP

**TABLE 203** ruckusSZDPIP

Object Name	ruckusSZDPIP
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.82
Description	The data plane IP address.

## ruckusSZNetworkPortID

**TABLE 204** ruckusSZNetworkPortID

Object Name	ruckusSZNetworkPortID
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.100
Description	The network port ID.

## ruckusSZNetworkInterface

**TABLE 205** ruckusSZNetworkInterface

Object Name	ruckusSZNetworkInterface
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.101
Description	The network interface.

## ruckusSZSwitchStatus

**TABLE 206** ruckusSZSwitchStatus

Object Name	ruckusSZSwitchStatus
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.102
Description	The switch status.

## ruckusSZTemperatureStatus

**TABLE 207** ruckusSZTemperatureStatus

Object Name	ruckusSZTemperatureStatus
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.120
Description	The temperature status.

## ruckusSZProcessorId

**TABLE 208** ruckusSZProcessorId

Object Name	ruckusSZProcessorId
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.121
Description	The processor ID.

## ruckusSZFanid

**TABLE 209** ruckusSZFanid

Object Name	ruckusSZFanid
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.122
Description	The fan module ID.

## ruckusSZFanStatus

**TABLE 210** ruckusSZFanStatus

Object Name	ruckusSZFanStatus
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.123
Description	The fan module status.

## ruckusSZLicenseType

**TABLE 211** ruckusSZLicenseType

Object Name	ruckusSZLicenseType
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.150
Description	The license type

## ruckusSZLicenseUsagePerc

**TABLE 212** ruckusSZLicenseUsagePerc

Object Name	ruckusSZLicenseUsagePerc
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.151
Description	The license usage in percentage.

## ruckusSZLicenseServerName

**TABLE 213** ruckusSZLicenseServerName

Object Name	ruckusSZLicenseServerName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.152
Description	The license server name.

## ruckusSZIPSecGWAddress

**TABLE 214** ruckusSZIPSecGWAddress

Object Name	ruckusSZIPSecGWAddress
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.153
Description	The secure gateway address.

## ruckusSZSyslogServerAddress

TABLE 215 ruckusSZSyslogServerAddress

Object Name	ruckusSZSyslogServerAddress
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.154
Description	The syslog server address.

## ruckusSZSrcSyslogServerAddress

TABLE 216 ruckusSZSrcSyslogServerAddress

Object Name	ruckusSZSrcSyslogServerAddress
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.155
Description	The source address of the syslog server.

## ruckusSZDestSyslogServerAddress

TABLE 217 ruckusSZDestSyslogServerAddress

Object Name	ruckusSZDestSyslogServerAddress
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.156
Description	The destination address of the syslog server.

## ruckusSZFtpIp

TABLE 218 ruckusSZFtpIp

Object Name	ruckusSZFtpIp
Object Identifier	.1.3.6.1.4.1.25053.2.10.2.200
Description	The FTP server IP address.

## ruckusSZFtpPort

TABLE 219 ruckusSZFtpPort

Object Name	ruckusSZFtpPort
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.201
Description	The FTP server port.

## ruckusSZUEImsi

TABLE 220 ruckusSZUEImsi

Object Name	ruckusSZUEImsi
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.305
Description	The UE IMSI.

## ruckusSZUEMsisdn

**TABLE 221** ruckusSZUEMsisdn

Object Name	ruckusSZUEMsisdn
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.306
Description	The UE MSISDN.

## ruckusSZAuthSrvrlp

**TABLE 222** ruckusSZAuthSrvrlp

Object Name	ruckusSZAuthSrvrlp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.307
Description	The authentication server IP address.

## ruckusSZRadProxyIp

**TABLE 223** ruckusSZRadProxyIp

Object Name	ruckusSZRadProxyIp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.308
Description	The RADIUS proxy IP address.

## ruckusSZAccSrvrlp

**TABLE 224** ruckusSZAccSrvrlp

Object Name	ruckusSZAccSrvrlp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.309
Description	The accounting server IP address.

## ruckusSZRadSrvrlp

**TABLE 225** ruckusSZRadSrvrlp

Object Name	ruckusSZRadSrvrlp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.312
Description	The RADIUS server IP address.

## ruckusSZUserName

**TABLE 226** ruckusSZUserName

Object Name	ruckusSZUserName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.324
Description	The user name.

## ruckusSZFileName

TABLE 227 ruckusSZFileName

Object Name	ruckusSZFileName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.326
Description	The file name.

## ruckusSZLDAPsrVrlp

TABLE 228 ruckusSZLDAPsrVrlp

Object Name	ruckusSZLDAPsrVrlp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.327
Description	IP address of LDAP server.

## ruckusSZADsrVrlp

TABLE 229 ruckusSZADsrVrlp

Object Name	ruckusSZADsrVrlp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.328
Description	IP address of AD server.

## ruckusSZSoftwareName

TABLE 230 ruckusSZSoftwareName

Object Name	ruckusSZSoftwareName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.329
Description	Name of the software.

## ruckusSZDomainName

TABLE 231 ruckusSZDomainName

Object Name	ruckusSZDomainName
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.330
Description	Name of the domain.

## ruckusSZDNATIp

TABLE 232 ruckusSZDNATIp

Object Name	ruckusSZDNATIp
Object Identifier	.1.3.6.1.4.1.25053.2.11.2.331
Description	IP address of DNAT server.

# Ruckus System MIB

- Introduction..... 141
- Ruckus System Command (SysCommands)..... 143
- Ruckus Controller System Node Table..... 144
- Ruckus Controller Zone Table..... 148

## Introduction

The objects contained in the RUCKUS-SZ-SYSTEM-MIB provide information about the controller system, including its WLAN traffic, managed APs, wireless clients associated with the managed APs, and CPU and memory utilization. The following are the MIB definition system level statistics nodes for RUCKUS-SZ-SYSTEM-MIB.

### NOTE

For details on alarms and events refer to *SmartZone 100 Alarms and Events Guide*.

- [ruckusSZSystemStatsNumAP](#) on page 141
- [ruckusSZSystemStatsNumSta](#) on page 141
- [ruckusSZSystemStatsWLANTotalRxPkts](#) on page 142
- [ruckusSZSystemStatsWLANTotalRxBytes](#) on page 142
- [ruckusSZSystemStatsWLANTotalRxMulticast](#) on page 142
- [ruckusSZSystemStatsWLANTotalTxPkts](#) on page 142
- [ruckusSZSystemStatsWLANTotalTxBytes](#) on page 142
- [ruckusSZSystemStatsWLANTotalTxMulticast](#) on page 143
- [ruckusSZSystemStatsWLANTotalTxFail](#) on page 143
- [ruckusSZSystemStatsWLANTotalTxRetry](#) on page 143
- [ruckusSZSystemStatsSerialNumber](#) on page 143

## ruckusSZSystemStatsNumAP

TABLE 233 ruckusSZSystemStatsNumAP

Object Name	ruckusSZSystemStatsNumAP
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.1
Description	The number of APs.

## ruckusSZSystemStatsNumSta

TABLE 234 ruckusSZSystemStatsNumSta

Object Name	ruckusSZSystemStatsNumSta
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.2

**TABLE 234** ruckusSZSystemStatsNumSta (continued)

Object Name	ruckusSZSystemStatsNumSta
Description	The number of associated clients.

## ruckusSZSystemStatsWLANTotalRxPkts

**TABLE 235** ruckusSZSystemStatsWLANTotalRxPkts

Object Name	ruckusSZSystemStatsWLANTotalRxPkts
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.5
Description	The total number of received packets in WLAN.

## ruckusSZSystemStatsWLANTotalRxBytes

**TABLE 236** ruckusSZSystemStatsWLANTotalRxBytes

Object Name	ruckusSZSystemStatsWLANTotalRxBytes
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.6
Description	The total number of received bytes in WLAN.

## ruckusSZSystemStatsWLANTotalRxMulticast

**TABLE 237** ruckusSZSystemStatsWLANTotalRxMulticast

Object Name	ruckusSZSystemStatsWLANTotalRxMulticast
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.7
Description	The total number of received multicast packets in WLAN.

## ruckusSZSystemStatsWLANTotalTxPkts

**TABLE 238** ruckusSZSystemStatsWLANTotalTxPkts

Object Name	ruckusSZSystemStatsWLANTotalTxPkts
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.3.1.1.1.15.8
Description	The total number of transmitted packets in WLAN.

## ruckusSZSystemStatsWLANTotalTxBytes

**TABLE 239** ruckusSZSystemStatsWLANTotalTxBytes

Object Name	ruckusSZSystemStatsWLANTotalTxBytes
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.9

**TABLE 239** ruckusSZSystemStatsWLANTotalTxBytes (continued)

Object Name	ruckusSZSystemStatsWLANTotalTxBytes
Description	The total number of transmitted bytes in WLAN.

## ruckusSZSystemStatsWLANTotalTxMulticast

**TABLE 240** ruckusSZSystemStatsWLANTotalTxMulticast

Object Name	ruckusSZSystemStatsWLANTotalTxMulticast
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.10
Description	The total number of transmitted multicast packets in WLAN.

## ruckusSZSystemStatsWLANTotalTxFail

**TABLE 241** ruckusSZSystemStatsWLANTotalTxFail

Object Name	ruckusSZSystemStatsWLANTotalTxFail
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.11
Description	The total number of failed transmitted packets in WLAN

## ruckusSZSystemStatsWLANTotalTxRetry

**TABLE 242** ruckusSZSystemStatsWLANTotalTxRetry

Object Name	ruckusSZSystemStatsWLANTotalTxRetry
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.12
Description	The total number of retry transmitted packets in WLAN

## ruckusSZSystemStatsSerialNumber

**TABLE 243** ruckusSZSystemStatsSerialNumber

Object Name	ruckusSZSystemStatsSerialNumber
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.1.15.13
Description	The SmartZone serial number.

# Ruckus System Command (SysCommands)

System command (**SysCommands**) MIBs define the performing system commands for SZ node. Users can use the `snmpset` `OID.0 <value type> <value>` to perform system commands. For example,

```
snmpset -v2c -c private -m11 172.17.50.100 RUCKUS-CTRL- MIB::ruckusCTRLSysCmdReboot.0 i run-reboot
```

**NOTE**

. 0 is appended after the OID.

## ruckusCTRLSysCmdReboot

**TABLE 244** ruckusCTRLSysCmdReboot

Object Name	ruckusCTRLSysCmdReboot
Parent Node	ruckusSZSystemStats
Object Identifier	.1.3.6.1.4.1.25053.1.4.1.1.15.13
Description	<p>This object defines the system command for SZ node. Command to reboot SZ is:</p> <ul style="list-style-type: none"> <li>• <b>0</b> - Normal (default value), which means that the system has completed the reboot command or the system has been rebooted.</li> <li>• <b>1</b> - Run-reboot - once the value is set as run-reboot, user cannot stop it until the system is setup again. Users can only set OID as this value.</li> </ul> <p><b>NOTE</b> This command may fail to reboot the system due to the cluster operation.</p> <p>If it set as reboot successfully, SNMP daemon will be stopped immediately. Therefore, it should wait until the system is up again. For example:</p> <pre>snmpset -v2c -c private -m1 172.17.50.100 RUCKUS-CTRL- MIB::ruckusCTRLSysCmdReboot.0 i run-reboot</pre>

## Ruckus Controller System Node Table

The Following MIBs contained in the controller **System Node** table (**ruckusCtrlSystemNodeTable**) define the system information of each node in a cluster.

The index of the table is ruckusCtrlSystemNodeSerialNumber.

- [ruckusCtrlSystemNodeEntry](#) on page 145
- [ruckusCtrlSystemNodeName](#) on page 145
- [ruckusCtrlSystemNodeMgmtIp](#) on page 145
- [ruckusCtrlSystemNodeMgmtIpv6](#) on page 145
- [ruckusCtrlSystemNodeMgmtMac](#) on page 145
- [ruckusCtrlSystemNodeModel](#) on page 146
- [ruckusCtrlSystemNodeVersion](#) on page 146
- [ruckusCtrlSystemNodeSerialNumber](#) on page 146
- [ruckusCtrlSystemNodeUptime](#) on page 146
- [ruckusCtrlSystemNodeNumApLicense](#) on page 146
- [ruckusCtrlSystemNodeNumApConnected](#) on page 147
- [ruckusCtrlSystemNodeStatus](#) on page 147
- [ruckusCtrlSystemClusterStatus](#) on page 147
- [ruckusCtrlSystemNodeClusterHAState](#) on page 147

- [ruckusCtrlSystemNodeClusterHARoles](#) on page 148

## ruckusCtrlSystemNodeEntry

**TABLE 245** ruckusCtrlSystemNodeEntry

Object Name	ruckusCtrlSystemNodeEntry
Parent Node	ruckusCtrlSystemNodeEntry
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1
Description	The index to this table is ruckusCtrlSystemNodeSerialNumber.

## ruckusCtrlSystemNodeName

**TABLE 246** ruckusCtrlSystemNodeName

Object Name	ruckusCtrlSystemNodeName
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1.2
Description	Displays the node name.

## ruckusCtrlSystemNodeMgmtIp

**TABLE 247** ruckusCtrlSystemNodeMgmtIp

Object Name	ruckusCtrlSystemNodeMgmtIp
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1.11
Description	The node Management IP address.

## ruckusCtrlSystemNodeMgmtIpv6

**TABLE 248** ruckusCtrlSystemNodeMgmtIpv6

Object Name	ruckusCtrlSystemNodeMgmtIpv6
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1.12
Description	The node Management IP v6 address.

## ruckusCtrlSystemNodeMgmtMac

**TABLE 249** ruckusCtrlSystemNodeMgmtMac

Object Name	ruckusCtrlSystemNodeMgmtMac
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1.13
Description	The node Management MAC address.

## ruckusCtrlSystemNodeModel

**TABLE 250** ruckusCtrlSystemNodeModel

Object Name	ruckusCtrlSystemNodeModel
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.3
Description	Displays the node model.

## ruckusCtrlSystemNodeVersion

**TABLE 251** ruckusCtrlSystemNodeVersion

Object Name	ruckusCtrlSystemNodeVersion
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.9
Description	Displays the controller software version.

## ruckusCtrlSystemNodeSerialNumber

**TABLE 252** ruckusCtrlSystemNodeSerialNumber

Object Name	ruckusCtrlSystemNodeSerialNumber
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1
Description	Displays the serial number of the node

## ruckusCtrlSystemNodeUptime

**TABLE 253** ruckusCtrlSystemNodeUptime

Object Name	ruckusCtrlSystemNodeUptime
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.16
Description	UP time of the node.

## ruckusCtrlSystemNodeNumApLicense

**TABLE 254** ruckusCtrlSystemNodeNumApLicense

Object Name	ruckusCtrlSystemNodeNumApLicense
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.10
Description	Number of AP licenses for this node.

## ruckusCtrlSystemNodeNumApConnected

**TABLE 255** ruckusCtrlSystemNodeNumApConnected

Object Name	ruckusCtrlSystemNodeNumApConnected
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.19
Description	Number of APs currently connected to this node.

## ruckusCtrlSystemNodeStatus

**TABLE 256** ruckusCtrlSystemNodeStatus

Object Name	ruckusCtrlSystemNodeStatus
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.17
Description	System status of the node, where the status is: <ul style="list-style-type: none"> <li>out-of-service(0)</li> <li>in-service(8)</li> </ul>

## ruckusCtrlSystemClusterStatus

**TABLE 257** ruckusCtrlSystemClusterStatus

Object Name	ruckusCtrlSystemClusterStatus
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.18
Description	Displays the cluster status, where the status is: <ul style="list-style-type: none"> <li>in-service(0)</li> <li>out-of-service(1)</li> <li>maintenance(2)</li> <li>network-partitio-suspected(4)</li> </ul>

## ruckusCtrlSystemNodeClusterHAState

**TABLE 258** ruckusCtrlSystemNodeClusterHAState

Object Name	ruckusCtrlSystemNodeClusterHAState
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.26
Description	Displays the cluster HA status, where the status is: <ul style="list-style-type: none"> <li>enable (1)</li> <li>disable (2)</li> </ul>

## ruckusCtrlSystemNodeClusterHARoles

**TABLE 259** ruckusCtrlSystemNodeClusterHARoles

Object Name	ruckusCtrlSystemNodeClusterHARoles
Parent Node	ruckusCtrlSystemNodeTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.1.1.27
Description	Displays the cluster HA role, where the status is: <ul style="list-style-type: none"> <li>active (1)</li> <li>standby (2)</li> <li>none (3)</li> </ul>

## Ruckus Controller Zone Table

The following MIBs define the information for the controller **Zone** table (**ruckusCtrlZoneTable**) for users to easily retrieve the information for all zones. The index of the table is the *DomainId* and *Zoneld*.

To query:

- all zones in domain1, use the below command:  
`snmpwalk RUCKUS-CTRL-MIB::ruckusCTRLZoneTable`
- [RuckusCtrlZoneEntry](#) on page 148
- [ruckusCtrlZoneId](#) on page 148
- [ruckusCtrlZoneName](#) on page 149
- [ruckusCtrlZoneCountryCode](#) on page 149
- [ruckusCtrlZoneNumApConnected](#) on page 149
- [ruckusCtrlZoneNumApDisconnected](#) on page 149

## RuckusCtrlZoneEntry

**TABLE 260** RuckusCtrlZoneEntry

Object Name	RuckusCtrlZoneEntry
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1
Description	The index to this table is DomainId and Zoneld.

## ruckusCtrlZoneId

**TABLE 261** ruckusCtrlZoneId

Object Name	ruckusCtrlZoneId
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1.2
Description	The index is Zoneld.

## ruckusCtrlZoneName

**TABLE 262** ruckusCtrlZoneName

Object Name	ruckusCtrlZoneName
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1.3
Description	Displays the zone name.

## ruckusCtrlZoneCountryCode

**TABLE 263** ruckusCtrlZoneCountryCode

Object Name	ruckusCtrlZoneCountryCode
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1.4
Description	Displays the country code of the zone.

## ruckusCtrlZoneNumApConnected

**TABLE 264** ruckusCtrlZoneNumApConnected

Object Name	ruckusCtrlZoneNumApConnected
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1.9
Description	The number of APs in the zone that are currently connected to the controller.

## ruckusCtrlZoneNumApDisconnected

**TABLE 265** ruckusCtrlZoneNumApDisconnected

Object Name	ruckusCtrlZoneNumApDisconnected
Parent Node	ruckusCtrlZoneTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.3.1.10
Description	Number of APs in the zone that are currently disconnected from the controller.



# Ruckus WLAN MIB

- Introduction..... 151
- Ruckus SZ WLAN..... 151
- Ruckus SZ AP..... 152
- Ruckus SZ Configuration WLAN Statistics..... 159
- Ruckus SCG Client Information..... 163

## Introduction

The objects contained in the RUCKUS-SZ-WLAN-MIB provides information about WLANs and their statistics, including SSIDs, WLAN traffic, client count and AP information.

## Ruckus SZ WLAN

The following are the MIBs for RUCKUS-SZWLAN group.

- [ruckusSZWLANIndex](#) on page 151
- [ruckusSZWLANSSID](#) on page 151
- [ruckusSZWLANNumSta](#) on page 152
- [ruckusSZWLANRxBytes](#) on page 152
- [ruckusSZWLANTxBytes](#) on page 152
- [ruckusSZWLANAuthType](#) on page 152

## ruckusSZWLANIndex

**TABLE 266** ruckusSZWLANIndex

Object Name	ruckusSZWLANIndex
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.1.2.1.99
Description	Identifies the specific WLAN identifier in the controller system.

## ruckusSZWLANSSID

**TABLE 267** ruckusSZWLANSSID

Object Name	ruckusSZWLANSSID
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.1.2.1.1
Description	The SSID of WLAN.

## ruckusSZWLANNumSta

**TABLE 268** ruckusSZWLANNumSta

Object Name	ruckusSZWLANNumSta
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.1.12
Description	The number of client devices.

## ruckusSZWLANRxBytes

**TABLE 269** ruckusSZWLANRxBytes

Object Name	ruckusSZWLANRxBytes
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.1.14
Description	The number of received bytes.

## ruckusSZWLANTxBytes

**TABLE 270** ruckusSZWLANTxBytes

Object Name	ruckusSZWLANTxBytes
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.1.16
Description	The number of transmitted bytes.

## ruckusSZWLANAAuthType

**TABLE 271** ruckusSZWLANAAuthType

Object Name	ruckusSZWLANAAuthType
Parent Node	ruckusSZWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.1.17
Description	The authentication type.

## Ruckus SZ AP

The following are the MIBs for RUCKUS-SZAP group.

MIB	MIB
<a href="#">ruckusSZAPMac</a> on page 153	<a href="#">ruckusSZAPGroup</a> on page 153
<a href="#">ruckusSZAPUptime</a> on page 153	<a href="#">ruckusSZAPFWversion</a> on page 154
<a href="#">ruckusSZAPModel</a> on page 154	<a href="#">ruckusSZAPSerial</a> on page 154
<a href="#">ruckusSZAPIp</a> on page 154	<a href="#">ruckusSZAPIPType</a> on page 154
<a href="#">ruckusSZAPExtIp</a> on page 155	<a href="#">ruckusSZAPExtPort</a> on page 155

MIB	MIB
<a href="#">ruckusSZAPNumSta</a> on page 155	<a href="#">ruckusSZAPConnStatus</a> on page 155
<a href="#">ruckusSZAPRegStatus</a> on page 155	<a href="#">ruckusSZAPConfigStatus</a> on page 156
<a href="#">ruckusSZAPLocation</a> on page 156	<a href="#">ruckusSZAPGPSInfo</a> on page 156
<a href="#">ruckusSZAPMeshRole</a> on page 156	<a href="#">ruckusSZAPRXBytes</a> on page 157
<a href="#">ruckusSZAPTXXBytes</a> on page 157	<a href="#">ruckusSZAPIpsecSessionTime</a> on page 157
<a href="#">ruckusSZAPIpsecTXPkts</a> on page 157	<a href="#">ruckusSZAPIpsecRXPkts</a> on page 157
<a href="#">ruckusSZAPIpsecTXBytes</a> on page 158	<a href="#">ruckusSZAPIpsecRXBytes</a> on page 158
<a href="#">ruckusSZAPIpsecTXPktsDropped</a> on page 158	<a href="#">ruckusSZAPIpsecRXPktsDropped</a> on page 158
<a href="#">ruckusSZAPIpsecTXIdleTime</a> on page 158	<a href="#">ruckusSZAPIpsecRXIdleTime</a> on page 159

## ruckusSZAPMac

**TABLE 272** ruckusSZAPMac

Object Name	ruckusSZAPMac
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.1
Description	The MAC address of the AP.

## ruckusSZAPGroup

**TABLE 273** ruckusSZAPGroup

Object Name	ruckusSZAPGroup
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.2
Description	The AP group.

## ruckusSZAPName

**TABLE 274** ruckusSZAPName

Object Name	ruckusSZAPName
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.5
Description	The AP name.

## ruckusSZAPUptime

**TABLE 275** ruckusSZAPUptime

Object Name	ruckusSZAPUptime
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.6
Description	The AP uptime.

## ruckusSZAPFWversion

**TABLE 276** ruckusSZAPFWversion

Object Name	ruckusSZAPFWversion
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.7
Description	The software version.

## ruckusSZAPModel

**TABLE 277** ruckusSZAPModel

Object Name	ruckusSZAPModel
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.8
Description	The AP model.

## ruckusSZAPSerial

**TABLE 278** ruckusSZAPSerial

Object Name	ruckusSZAPSerial
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.9
Description	The AP serial number.

## ruckusSZAPIp

**TABLE 279** ruckusSZAPIp

Object Name	ruckusSZAPIp
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.10
Description	The AP IP address.

## ruckusSZAPIPType

**TABLE 280** ruckusSZAPIPType

Object Name	ruckusSZAPIPType
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.11
Description	The AP IP address type.

## ruckusSZAPExtIp

**TABLE 281** ruckusSZAPExtIp

Object Name	ruckusSZAPExtIp
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.12
Description	The external IP address.

## ruckusSZAPExtPort

**TABLE 282** ruckusSZAPExtPort

Object Name	ruckusSZAPExtPort
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.13
Description	The external port number.

## ruckusSZAPNumSta

**TABLE 283** ruckusSZAPNumSta

Object Name	ruckusSZAPNumSta
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.15
Description	The number of stations.

## ruckusSZAPConnStatus

**TABLE 284** ruckusSZAPConnStatus

Object Name	ruckusSZAPConnStatus
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.16
Description	The connection status.

## ruckusSZAPRegStatus

**TABLE 285** ruckusSZAPRegStatus

Object Name	ruckusSZAPRegStatus
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.17
Description	The registration status, which could either be pending, approved, rejected or swapped.

## ruckusSZAPConfigStatus

**TABLE 286** ruckusSZAPConfigStatus

Object Name	ruckusSZAPConfigStatus
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.18
Description	The AP configuration status.

## ruckusSZAPLocation

**TABLE 287** ruckusSZAPLocation

Object Name	ruckusSZAPLocation
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.19
Description	The AP location.

## ruckusSZAPGPSInfo

**TABLE 288** ruckusSZAPGPSInfo

Object Name	ruckusSZAPGPSInfo
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.20
Description	The GPS information.

## ruckusSZAPMeshRole

**TABLE 289** ruckusSZAPMeshRole

Object Name	ruckusSZAPMeshRole
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.21
Description	The AP mesh role.

## ruckusSZAPDescription

**TABLE 290** ruckusSZAPDescription

Object Name	ruckusSZAPDescription
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.22
Description	The AP description.

## ruckusSZAPRXBytes

**TABLE 291** ruckusSZAPRXBytes

Object Name	ruckusSZAPRXBytes
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.30
Description	The number of received bytes.

## ruckusSZAPTBytes

**TABLE 292** ruckusSZAPTBytes

Object Name	ruckusSZAPTBytes
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.31
Description	The number of transmitted bytes.

## ruckusSZAPIpsecSessionTime

**TABLE 293** ruckusSZAPIpsecSessionTime

Object Name	ruckusSZAPIpsecSessionTime
Parent Node	ruckusSZAPTable
Object Identifier	1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.50
Description	The IPsec session time in seconds.

## ruckusSZAPIpsecTXPkts

**TABLE 294** ruckusSZAPIpsecTXPkts

Object Name	ruckusSZAPIpsecTXPkts
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.55
Description	The number of packets transmitted in IPsec session.

## ruckusSZAPIpsecRXPkts

**TABLE 295** ruckusSZAPIpsecRXPkts

Object Name	ruckusSZAPIpsecRXPkts
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.56
Description	The number of packets received in IPsec session.

## ruckusSZAPIpsecTXBytes

**TABLE 296** ruckusSZAPIpsecTXBytes

Object Name	ruckusSZAPIpsecTXBytes
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.57
Description	The number of bytes transmitted n IPsec session.

## ruckusSZAPIpsecRXBytes

**TABLE 297** ruckusSZAPIpsecRXBytes

Object Name	ruckusSZAPIpsecRXBytes
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.58
Description	The number of bytes received in IPsec session.

## ruckusSZAPIpsecTXPktsDropped

**TABLE 298** ruckusSZAPIpsecTXPktsDropped

Object Name	ruckusSZAPIpsecTXPktsDropped
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.59
Description	The number of transmitted packets that were dropped in IPsec session.

## ruckusSZAPIpsecRXPktsDropped

**TABLE 299** ruckusSZAPIpsecRXPktsDropped

Object Name	ruckusSZAPIpsecRXPktsDropped
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.60
Description	The number of received packets that were dropped in IPsec session.

## ruckusSZAPIpsecTXIdleTime

**TABLE 300** ruckusSZAPIpsecTXIdleTime

Object Name	ruckusSZAPIpsecTXIdleTime
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.65
Description	The number of seconds since the last transmitted packet in IPsec session.

## ruckusSZAPIpsecRXIdleTime

**TABLE 301** ruckusSZAPIpsecRXIdleTime

Object Name	ruckusSZAPIpsecRXIdleTime
Parent Node	ruckusSZAPTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.1.1.2.2.1.66
Description	The number of seconds since the last received packet in IPsec session.

## Ruckus SZ Configuration WLAN Statistics

The following are the MIBs for WLAN configuration nodes.

### NOTE

SNMP set for ruckusSZConfigWLANTable supports only a few OIDs. Read-only indicates that the particular SNMP set will not be supported.

- [ruckusSZConfigWLANID](#) on page 159
- [ruckusSZConfigWLANSSID](#) on page 160
- [ruckusSZConfigWLANDescription](#) on page 160
- [ruckusSZConfigWLANName](#) on page 160
- [ruckusSZConfigWLANWLANServiceType](#) on page 160
- [ruckusSZConfigWLANAuthentication](#) on page 160
- [ruckusSZConfigWLANEncryption](#) on page 161
- [ruckusSZConfigWLANWEPKeyIndex](#) on page 161
- [ruckusSZConfigWLANWEPKey](#) on page 161
- [ruckusSZConfigWLANWPAcCipherType](#) on page 161
- [ruckusSZConfigWLANWPAKey](#) on page 161
- [ruckusSZConfigWLANWirelessClientIsolation](#) on page 162
- [ruckusSZConfigWLANZeroTActivation](#) on page 162
- [ruckusSZConfigWLANServicePriority](#) on page 162
- [ruckusSZConfigWLANAccountingUpdateInterval](#) on page 162
- [ruckusSZConfigWLANVlanID](#) on page 162
- [ruckusSZConfigWLANHideSSID](#) on page 163
- [ruckusSZConfigWLANMaxClientsPerAP](#) on page 163

## ruckusSZConfigWLANID

**TABLE 302** ruckusSZConfigWLANID

Object Name	ruckusSZConfigWLANID (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.1.1
Description	The wireless LAN (WLAN) identifier.

## ruckusSZConfigWLANSSID

**TABLE 303** ruckusSZConfigWLANSSID

Object Name	ruckusSZConfigWLANSSID (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.2
Description	SSID for the wireless LAN (WLAN).

## ruckusSZConfigWLANDescription

**TABLE 304** ruckusSZConfigWLANDescription

Object Name	ruckusSZConfigWLANDescription
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.3
Description	Description of the wireless LAN (WLAN).

## ruckusSZConfigWLANName

**TABLE 305** ruckusSZConfigWLANName

Object Name	ruckusSZConfigWLANName (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.4
Description	Name of the wireless LAN (WLAN).

## ruckusSZConfigWLANWLANServiceType

**TABLE 306** ruckusSZConfigWLANWLANServiceType

Object Name	ruckusSZConfigWLANWLANServiceType (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.8
Description	Type of service for the wireless LAN (WLAN).

## ruckusSZConfigWLANAuthentication

**TABLE 307** ruckusSZConfigWLANAuthentication

Object Name	ruckusSZConfigWLANAuthentication (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.10
Description	Authentication method specified for the wireless LAN (WLAN).

## ruckusSZConfigWLANEncryption

**TABLE 308** ruckusSZConfigWLANEncryption

Object Name	ruckusSZConfigWLANEncryption (read-only)
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.12
Description	Encryption method specified for the wireless LAN (WLAN).

## ruckusSZConfigWLANWEPKeyIndex

**TABLE 309** ruckusSZConfigWLANWEPKeyIndex

Object Name	ruckusSZConfigWLANWEPKeyIndex
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.15
Description	Specify the WEP key index for WEP encryption.

## ruckusSZConfigWLANWEPKey

**TABLE 310** ruckusSZConfigWLANWEPKey

Object Name	ruckusSZConfigWLANWEPKey
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.16
Description	Specify the passphrase for WEP encryption method.

## ruckusSZConfigWLANWPACipherType

**TABLE 311** ruckusSZConfigWLANWPACipherType

Object Name	ruckusSZConfigWLANWPACipherType
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.20
Description	Specify the cipher method for WPA encryption.

## ruckusSZConfigWLANWPAKey

**TABLE 312** ruckusSZConfigWLANWPAKey

Object Name	ruckusSZConfigWLANWPAKey
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.21
Description	Specify the passphrase for WPA encryption.

## ruckusSZConfigWLANWirelessClientIsolation

**TABLE 313** ruckusSZConfigWLANWirelessClientIsolation

Object Name	ruckusSZConfigWLANWirelessClientIsolation
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.28
Description	Specify the wireless client Isolation, where clients will be unable to communicate with each other or access any of the restricted subnet.

## ruckusSZConfigWLANZeroITActivation

**TABLE 314** ruckusSZConfigWLANZeroITActivation

Object Name	ruckusSZConfigWLANZeroITActivation
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.30
Description	Enable the Zero IT activation service for wireless LAN

## ruckusSZConfigWLANServicePriority

**TABLE 315** ruckusSZConfigWLANServicePriority

Object Name	ruckusSZConfigWLANServicePriority
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.32
Description	Specify the quality of service (QOS) priority for wireless LAN.

## ruckusSZConfigWLANAccountingUpdateInterval

**TABLE 316** ruckusSZConfigWLANAccountingUpdateInterval

Object Name	ruckusSZConfigWLANAccountingUpdateInterval
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.36
Description	Specify the interval in minutes for updating the accounting server.

## ruckusSZConfigWLANVlanID

**TABLE 317** ruckusSZConfigWLANVlanID

Object Name	ruckusSZConfigWLANVlanID
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.45
Description	Specify the VLAN identifier of WLAN. If the VLAN ID is 1packets from WLAN will be untagged.

## ruckusSZConfigWLANHideSSID

**TABLE 318** ruckusSZConfigWLANHideSSID

Object Name	ruckusSZConfigWLANHideSSID
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.1.50
Description	SSID will not be broadcasted by activating the hide tag.

## ruckusSZConfigWLANMaxClientsPerAP

**TABLE 319** ruckusSZConfigWLANMaxClientsPerAP

Object Name	ruckusSZConfigWLANMaxClientsPerAP
Parent Node	ruckusSZConfigWLANTable
Object Identifier	.1.3.6.1.4.1.25053.1.4.2.2.1.1.1.1.55
Description	Specify the number of client devices that the AP can service for wireless LAN.

# Ruckus SCG Client Information

The following are the MIBs for client information nodes (RUCKUS-CTRL-MIB). These MIBs indicate information on the user equipment's MAC address and status. Operators would need to append the user equipment's MAC address to the string length of 6 (decimal format) as index after each OID to get the required information.

For MAC address of C8:AA:7C:8E:67:C4, it must be translated to equivalent decimal value of 202.170.124.142.103.196 for the query.

For example, use the following command to get the status of the client (with MAC C8:AA:7C:8E:67:C4):

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-MIB::ruckusCtrlClientStatus.  
6.202.170.124.142.103.196
```

### NOTE

Length of the string index should always be 6. Read only indicates that the particular SNMP set will not be supported.

In the controller user interface using the Global SNMP configuration (**Configuration > System > SNMP Agent**) you can query client status using RUCKUS-CTRL-MIB.

- [ruckusCtrlClientMac](#) on page 163
- [ruckusCtrlClientStatus](#) on page 164

## ruckusCtrlClientMac

**TABLE 320** ruckusCtrlClientMac

Object Name	ruckusCtrlClientMac (read only)
Parent Node	ruckusCtrlClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.1
Description	MAC IP address of the user equipment

## ruckusCtrlClientStatus

**TABLE 321** ruckusCtrlClientStatus

Object Name	ruckusCtrlClientStatus (read only)
Parent Node	ruckusCtrlClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.20
Description	The client status is either: 1 Unauthorized 2 Authorized

# Ruckus AP MIB

---

- Ruckus Controller AP Group Table..... 165
- Ruckus Controller Summary AP Table..... 167
- Ruckus Controller AP Client Table..... 171
- Ruckus Controller AP Table..... 172
- Ruckus Controller Radio Table..... 189
- Ruckus Controller AP WLAN Table..... 202
- Ruckus Controller Client Table..... 212
- AP Wired Client Table..... 219
- Ruckus Wired Client Table..... 220

## Ruckus Controller AP Group Table

The following MIBs define the information for the controller AP Group table (**ruckusCtrlApGroupTable**) for users to easily retrieve the information for all AP groups. The index of the table is *ZoneId* and *ApGroupId*.



### CAUTION

**These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.**

### NOTE

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

To query:

- all AP groups in zone1, use the command:  

```
snmpwalk ruckusCtrlApGroupTable.zone1
```
- a specific apgroup1 in zone1, use the command:  

```
snmpwalk ruckusCtrlApGroupTable.zone1.apgroup1
```
- a specific apgroup1 in an unknown domain, use the below command:  

```
snmpwalk ruckusCtrlApGroupTable.all.apgroup1
```
- [ruckusCtrlApGroupEntry](#) on page 166
- [ruckusCtrlApGroupZoneId](#) on page 166
- [ruckusCtrlApApGroupId](#) on page 176
- [ruckusCtrlApApGroupName](#) on page 176
- [ruckusCtrlApGroupNumApConnected](#) on page 166
- [ruckusCtrlApGroupNumApDisconnected](#) on page 167

## ruckusCtrlApGroupEntry

**TABLE 322** ruckusCtrlApGroupEntry

Object Name	ruckusCtrlApGroupEntry
Parent Node	ruckusCtrlApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1
Description	The index to table is ApGroupId and Zoneld.

## ruckusCtrlApGroupZoneld

**TABLE 323** ruckusCtrlApGroupZoneld

Object Name	ruckusCtrlApGroupZoneld
Parent Node	ruckusCTRLApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.5.1.1
Description	The index is Zoneld.

## ruckusCtrlApGroupId

**TABLE 324** ruckusCtrlApGroupId

Object Name	ruckusCtrlApGroupId
Parent Node	ruckusCTRLApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.5.1.2
Description	The index is ApGroup Id.

## ruckusCtrlApGroupName

**TABLE 325** ruckusCtrlApGroupName

Object Name	ruckusCtrlApGroupName
Parent Node	ruckusCTRLApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.5.1.3
Description	Displays the name of the AP Group.

## ruckusCtrlApGroupNumApConnected

**TABLE 326** ruckusCtrlApGroupNumApConnected

Object Name	ruckusCtrlApGroupNumApConnected
Parent Node	ruckusCTRLApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.5.1.9
Description	Number of APs in the AP Group that are currently connected to the controller.

## ruckusCtrlApGroupNumApDisconnected

**TABLE 327** ruckusCtrlApGroupNumApDisconnected

Object Name	ruckusCtrlApGroupNumApDisconnected
Parent Node	ruckusCTRLApGroupTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.5.1.10
Description	Number of APs in the AP Group that are currently disconnected from the controller.

## Ruckus Controller Summary AP Table

The following MIBs define the information for the controller **SummaryAP** table (**ruckusCtrlSummaryApTable**) for users to easily access basic information of all the APs. The index of the table is *DomainId*, *ZoneId* and *ApGroupId* and *ApMac*. Using the *ApMac* in this table, users can go to AP table to get more details.



### CAUTION

These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.

### NOTE

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

To query:

- all APs in domain 1, use the command:

```
snmpwalk ruckusCtrlSummaryApTable.domain1
```

- all APs in a specific zone1 under domain1, use the command:

```
snmpwalk ruckusCtrlSummaryApTable.domain1.zone1
```

- all APs in a specific zone1 in an unknown domain, use the command:

```
snmpwalk ruckusCtrlSummaryApTable.all.zone1
```

- all information, use the command:

```
snmpwalk {option} ruckusCTRLSummaryApTable
```

- all ApMAC in domain1, use the command:

```
snmpwalk {option}ruckusCtrlSummryApMac.domain.{domain1 UUID}
```

- For a domain with UUID 87b593c6-50e7-4d57-87f0-2820bb3878ef, use the following command:

```
snmpwalk -mall -v2c -c public 172.17.50.103 RUCKUS-CTRL-  
MIB::ruckusCtrlSummaryApMac.domain.\'87b593c6-50e7- 4d57-87f0-2820bb3878ef\'
```

- The MIB browser should translate UUID 87b593c6-50e7-4d57-87f0- 2820bb3878ef into decimal form:

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.6.1.135.181.147.19  
8.80.231.77.87.135.240.40.32.187.56.120.239 where 1  
represents the input UUID as domain UUID  
  
135.181.147.198.80.231.77.87.135.240.40.32.187.56.120  
.239: UUID 87b593c6-50e7-4d57-87f0-2820bb3878ef in  
decimal form(16 numbers)
```

## Ruckus AP MIB

### Ruckus Controller Summary AP Table

- all ApMAC in zone1, use the command:

```
snmpwalk {option} ruckusCtrlSummaryApMac.zone.{zone1 UUID}
```

- For a zone with UUID 8f0c4245-4bc7-4f5a-8f76-a8137443833e, use the following command:

```
snmpwalk -mall -v2c -c public 172.17.50.103 RUCKUS-CTRL-  
MIB::ruckusCtrlSummaryApMac.zone.\'8f0c4245-4bc7- 4f5a-8f76-a8137443833e\'
```

- The MIB browser should translate UUID 8f0c4245-4bc7-4f5a-8f76- a8137443833e into decimal form:

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.6.2.143.12.66.69.7  
5.199.79.90.143.118.168.19.116.67.131.62 where 2  
represents the input UUID as zone UUID.  
  
143.12.66.69.75.199.79.90.143.118.168.19.116.67.131.6  
2: UUID 8f0c4245-4bc7-4f5a-8f76-a8137443833e in decimal  
form(16 numbers)
```

- all ApMAC in apgroup1, use the command:

```
snmpwalk {option}ruckusCtrlSummaryApMac.apgroup.{apgroup UUID}
```

- For ApGroup with UUID 84136003-bd53-4ca7-a19a-63254fcdfe2d, use the following command:

```
snmpwalk -mall -v2c -c public 172.17.50.103 RUCKUS-CTRL-  
MIB::ruckusCtrlSummaryApMac.apgroup.\'84136003-bd53- 4ca7-a19a-63254fcdfe2d\'
```

- The MIB browser should translate UUID 84136003-bd53-4ca7-a19a- 63254fcdfe2d into decimal form:

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.6.3.132.19.96.3.18  
9.83.76.167.161.154.99.37.79.205.254.45 where 3  
represents the input UUID as ApGroup UUID.  
  
132.19.96.3.189.83.76.167.161.154.99.37.79.205.254.45  
: UUID 84136003-bd53-4ca7-a19a-63254fcdfe2d in decimal  
form(16 numbers)
```

- [ruckusCtrlSummaryApEntry](#) on page 169
- [ruckusCtrlSummaryApIndexType](#) on page 169
- [ruckusCtrlSummaryApIndexUUID](#) on page 169
- [ruckusCtrlSummaryApDomainId](#) on page 169
- [ruckusCtrlSummaryApZoneId](#) on page 169
- [ruckusCtrlSummaryApApGroupId](#) on page 170
- [ruckusCtrlSummaryApMac](#) on page 170
- [ruckusCtrlSummaryApDomainName](#) on page 170
- [ruckusCtrlSummaryApZoneName](#) on page 170
- [ruckusCtrlSummaryApName](#) on page 171
- [ruckusCtrlSummaryApLocation](#) on page 171

## ruckusCtrlSummaryApEntry

**TABLE 328** ruckusCtrlSummaryApEntry

Object Name	ruckusCtrlSummaryApEntry
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.8.1
Description	The index to this table is: <ul style="list-style-type: none"> <li>ruckusCtrlSummaryApIndexType</li> <li>ruckusCtrlSummaryApIndexUUID</li> <li>ruckusCtrlSummaryApMacApGroupId</li> </ul>

## ruckusCtrlSummaryApIndexType

**TABLE 329** ruckusCtrlSummaryApIndexType

Object Name	ruckusCtrlSummaryApIndexType
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.8.1.1
Description	The UUID index type - domain(1), zone(2), apgroup(3) For example: snmpwalk ruckusCtrlSummaryApTable.domain.{uuid} for known DomainId snmpwalk ruckusCtrlSummaryApTable.zone.{uuid} for known ZoneId snmpwalk ruckusCtrlSummaryApTable.ApGroup.{uuid} for known ApGroupId

## ruckusCtrlSummaryApIndexUUID

**TABLE 330** ruckusCtrlSummaryApIndexUUID

Object Name	ruckusCtrlSummaryApIndexUUID
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.8.1.2
Description	UUID for query entry, which can be the UUID of domain, zone, or AP Group.

## ruckusCtrlSummaryApDomainId

**TABLE 331** ruckusCtrlSummaryApDomainId

Object Name	ruckusCtrlSummaryApDomainId
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.8.1.3
Description	The domain identifier.

## ruckusCtrlSummaryApZoneId

**TABLE 332** ruckusCtrlSummaryApZoneId

Object Name	ruckusCtrlSummaryApZoneId
Parent Node	ruckusCtrlSummaryApTable

**TABLE 332** ruckusCtrlSummaryApZoneId (continued)

Object Name	ruckusCtrlSummaryApZoneId
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.4
Description	The zone identifier.

## ruckusCtrlSummaryApApGroupId

**TABLE 333** ruckusCtrlSummaryApApGroupId

Object Name	ruckusCtrlSummaryApApGroupId
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.5
Description	The AP Group identifier.

## ruckusCtrlSummaryApMac

**TABLE 334** ruckusCtrlSummaryApMac

Object Name	ruckusCtrlSummaryApMac
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.6
Description	The AP MAC address.

## ruckusCtrlSummaryApDomainName

**TABLE 335** ruckusCtrlSummaryApDomainName

Object Name	ruckusCtrlSummaryApDomainName
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.11
Description	Displays the domain name.

## ruckusCtrlSummaryApZoneName

**TABLE 336** ruckusCtrlSummaryApZoneName

Object Name	ruckusCtrlSummaryApZoneName
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.12
Description	The AP zone name.

## ruckusCtrlSummaryApName

**TABLE 337** ruckusCtrlSummaryApName

Object Name	ruckusCtrlSummaryApName
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.17
Description	The name of the AP.

## ruckusCtrlSummaryApLocation

**TABLE 338** ruckusCtrlSummaryApLocation

Object Name	ruckusCtrlSummaryApLocation
Parent Node	ruckusCtrlSummaryApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.1.8.1.18
Description	The AP location.

# Ruckus Controller AP Client Table

The following MIBs define the information for the controller **Client** table (**ruckusCtrlApClientTable**) for users to easily access basic information of all the clients in a specific AP. Using the *ClientMac* in this table, users can go to Client table to get more details about this client. The index of the table is the *ApMac*.



### CAUTION

**These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.**

### NOTE

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

- [ruckusCtrlApClientEntry](#) on page 172
- [ruckusCtrlApClientApMac](#) on page 172
- [ruckusCtrlApClientMac](#) on page 172

To query:

- all clients in a specific ap1, the following command can be used:

```
snmpwalk ruckusCtrlApClientTable.ap1
```

- all information, use the command format:

```
snmpwalk {option} ruckusCTRLSummaryApTable
```

- all AP MAC in domain1, use the command format:

```
snmpwalk {option}ruckusCtrlSummryApMac.domain.{domain1 UUID}
```

- A MAC address of C8:AA:7C:8E:67:C4 must be translated to the equivalent decimal value of 202.170.124.142.103.196 for the query.

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-MIB::ruck- usCtrlApClientMac.6.202.170.124.142.103.196,
where the
length of the string index is always 6.
```

```
202.170.124.142.103.196: MAC Address C8:AA:7C:8E:67:C4
in decimal form
```

- The MIB browser should translate the MAC address into decimal form as:

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.9.1.6.6.202.170.124.14
2.103.196
```

```
200.170.124.142.103.196: MAC Address C8:AA:7C:8E:67:C4
in decimal form
```

## ruckusCtrlApClientEntry

**TABLE 339** ruckusCtrlApClientEntry

Object Name	ruckusCtrlApClientEntry
Parent Node	ruckusCtrlApClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.9.1
Description	The index to this table is ApMac.

## ruckusCtrlApClientApMac

**TABLE 340** ruckusCtrlApClientApMac

Object Name	ruckusCtrlApClientApMac
Parent Node	ruckusCtrlApClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.9.1.1
Description	The AP MAC address.

## ruckusCtrlApClientMac

**TABLE 341** ruckusCtrlApClientMac

Object Name	ruckusCtrlApClientMac
Parent Node	ruckusCtrlApClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.9.1.6
Description	The client MAC address.

# Ruckus Controller AP Table

The following MIBs define the information for the controller **AP** table (**ruckusCtrlApTable**) for users to easily access to all information of the AP. Using the ApMac in this table, users get more details about this AP. The index of the table is the *ApMac*.



**CAUTION**

These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.

**NOTE**

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

To get the information of an AP with MAC C8:AA:7C:8E:67:C4, use the command format:

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-MIB::ruck- usCtrlApMac.6.200.170.124.142.103.196 where the length of string index, is always 6.
```

```
200.170.124.142.103.196: MAC Address C8:AA:7C:8E:67:C4 in decimal form
```

- [ruckusCtrlApEntry](#) on page 175
- [ruckusCtrlApMac](#) on page 175
- [ruckusCtrlApDomainId](#) on page 175
- [ruckusCtrlApDomainName](#) on page 175
- [ruckusCtrlApZoneId](#) on page 175
- [ruckusCtrlApZoneName](#) on page 176
- [ruckusCtrlApApGroupId](#) on page 176
- [ruckusCtrlApApGroupName](#) on page 176
- [ruckusCtrlApIp](#) on page 176
- [ruckusCtrlApIpv6](#) on page 176
- [ruckusCtrlApNetmask](#) on page 177
- [ruckusCtrlApGateway](#) on page 177
- [ruckusCtrlApIpDnsSvr1](#) on page 177
- [ruckusCtrlApIpDnsSvr2](#) on page 177
- [ruckusCtrlApIpv6DnsSvr1](#) on page 177
- [ruckusCtrlApIpv6DnsSvr2](#) on page 178
- [ruckusCtrlApName](#) on page 178
- [ruckusCtrlApDescription](#) on page 178
- [ruckusCtrlApStatus](#) on page 178
- [ruckusCtrlApModel](#) on page 178
- [ruckusCtrlApSerialNumber](#) on page 179
- [ruckusCtrlApSwVersion](#) on page 179
- [ruckusCtrlApLocation](#) on page 179
- [ruckusCtrlApGpsInfo](#) on page 179
- [ruckusCtrlApTemperature](#) on page 179
- [ruckusCtrlApUptime](#) on page 180
- [ruckusCtrlApLastConfSyncTime](#) on page 180
- [ruckusCtrlApCpuUtilization](#) on page 180
- [ruckusCtrlApTotalMemory](#) on page 180

## Ruckus AP MIB

### Ruckus Controller AP Table

- [ruckusCtrlApFreeMemory](#) on page 180
- [ruckusCtrlApFreeStorage](#) on page 181
- [ruckusCtrlApEtherPortStatus](#) on page 181
- [ruckusCtrlApCableModemMac](#) on page 181
- [ruckusCtrlApCableModemSerialNumber](#) on page 181
- [ruckusCtrlApNumRadios](#) on page 182
- [ruckusCtrlApNumWlans](#) on page 182
- [ruckusCtrlApNumAssocClients](#) on page 182
- [ruckusCtrlApStatsRxBytes](#) on page 182
- [ruckusCtrlApStatsTxBytes](#) on page 182
- [ruckusCtrlApStatsRxDataBytes](#) on page 183
- [ruckusCtrlApStatsTxDataBytes](#) on page 183
- [ruckusCtrlApStatsRxPkts](#) on page 183
- [ruckusCtrlApStatsTxPkts](#) on page 183
- [ruckusCtrlApStatsRxDataPkts](#) on page 183
- [ruckusCtrlApStatsTxDataPkts](#) on page 184
- [ruckusCtrlApStatsRxErrorPkts](#) on page 184
- [ruckusCtrlApStatsTxErrorPkts](#) on page 184
- [ruckusCtrlApStatsRxDropPkts](#) on page 184
- [ruckusCtrlApStatsTxDropPkts](#) on page 184
- [ruckusCtrlApMeshRole](#) on page 185
- [ruckusCtrlApNumMeshHops](#) on page 185
- [ruckusCtrlApConnectScgCplp](#) on page 185
- [ruckusCtrlApConnectScgCplpv6](#) on page 185
- [ruckusCtrlApConnectScgDplp](#) on page 185
- [ruckusCtrlApConnectScgDplpv6](#) on page 186
- [ruckusCtrlApLanStatsRxBytes](#) on page 186
- [ruckusCtrlApLanStatsTxBytes](#) on page 186
- [ruckusCtrlApLanStatsRxPkts](#) on page 186
- [ruckusCtrlApLanStatsTxPkts](#) on page 186
- [ruckusCtrlApLanStatsRxErrorPkts](#) on page 187
- [ruckusCtrlApLanStatsTxErrorPkts](#) on page 187
- [ruckusCtrlApLanStatsRxDroppedPkts](#) on page 187
- [ruckusCtrlApLanStatsTxDroppedPkts](#) on page 187
- [ruckusCtrlApIpsecRxBytes](#) on page 187
- [ruckusCtrlApIpsecTxBytes](#) on page 188
- [ruckusCtrlApIpsecRxPkts](#) on page 188
- [ruckusCtrlApIpsecTxPkts](#) on page 188
- [ruckusCtrlApIpsecRxDropPkts](#) on page 188

- [ruckusCtrlApIpsecTxDropPkts](#) on page 188
- [ruckusCtrlApIpsecSessionTime](#) on page 189
- [ruckusCtrlApIpsecRxIdleTime](#) on page 189
- [ruckusCtrlApIpsecTxIdleTime](#) on page 189

## ruckusCtrlApEntry

**TABLE 342** ruckusCtrlApEntry

Object Name	ruckusCtrlApEntry
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1
Description	The index to this table is ApMac

## ruckusCtrlApMac

**TABLE 343** ruckusCtrlApMac

Object Name	ruckusCtrlApMac
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.1
Description	The AP MAC address.

## ruckusCtrlApDomainId

**TABLE 344** ruckusCtrlApDomainId

Object Name	ruckusCtrlApDomainId
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.2
Description	The root domain identifier (the domain under admin domain)

## ruckusCtrlApDomainName

**TABLE 345** ruckusCtrlApDomainName

Object Name	ruckusCtrlApDomainName
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.3
Description	Displays the domain name.

## ruckusCtrlApZoneId

**TABLE 346** ruckusCtrlApZoneId

Object Name	ruckusCtrlApZoneId
Parent Node	ruckusCtrlApTable

**TABLE 346** ruckusCtrlApZoneId (continued)

Object Name	ruckusCtrlApZoneId
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.4
Description	The zone UUID.

## ruckusCtrlApZoneName

**TABLE 347** ruckusCtrlApZoneName

Object Name	ruckusCtrlApZoneName
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.5
Description	Displays the zone name.

## ruckusCtrlApApGroupId

**TABLE 348** ruckusCtrlApApGroupId

Object Name	ruckusCtrlApApGroupId
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.6
Description	The AP Group UUID.

## ruckusCtrlApApGroupName

**TABLE 349** ruckusCtrlApApGroupName

Object Name	ruckusCtrlApApGroupName
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.7
Description	The AP Group name.

## ruckusCtrlApIp

**TABLE 350** ruckusCtrlApIp

Object Name	ruckusCtrlApIp
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.12
Description	The IP address.

## ruckusCtrlApIpv6

**TABLE 351** ruckusCtrlApIpv6

Object Name	ruckusCtrlApIpv6
Parent Node	ruckusCtrlApTable

**TABLE 351** ruckusCtrlApIpv6 (continued)

Object Name	ruckusCtrlApIpv6
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.13
Description	The IPv6 address.

## ruckusCtrlApNetmask

**TABLE 352** ruckusCtrlApNetmask

Object Name	ruckusCtrlApNetmask
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.14
Description	The netmask address.

## ruckusCtrlApGateway

**TABLE 353** ruckusCtrlApGateway

Object Name	ruckusCtrlApGateway
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.15
Description	The gateway server address.

## ruckusCtrlApIpdnsSvr1

**TABLE 354** ruckusCtrlApIpdnsSvr1

Object Name	ruckusCtrlApIpdnsSvr1
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.16
Description	The primary DNS server address.

## ruckusCtrlApIpdnsSvr2

**TABLE 355** ruckusCtrlApIpdnsSvr2

Object Name	ruckusCtrlApIpdnsSvr2
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.17
Description	The secondary DNS server address.

## ruckusCtrlApIpv6DnsSvr1

**TABLE 356** ruckusCtrlApIpv6DnsSvr1

Object Name	ruckusCtrlApIpv6DnsSvr1
Parent Node	ruckusCtrlApTable

**TABLE 356** ruckusCtrlApIpv6DnsSvr1 (continued)

Object Name	ruckusCtrlApIpv6DnsSvr1
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.22
Description	The primary DNS server IPv6 address.

## ruckusCtrlApIpv6DnsSvr2

**TABLE 357** ruckusCtrlApIpv6DnsSvr2

Object Name	ruckusCtrlApIpv6DnsSvr2
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.23
Description	The secondary DNS server IPv6 address.

## ruckusCtrlApName

**TABLE 358** ruckusCtrlApName

Object Name	ruckusCtrlApName
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.28
Description	Displays the AP name.

## ruckusCtrlApDescription

**TABLE 359** ruckusCtrlApDescription

Object Name	ruckusCtrlApDescription
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.29
Description	The AP description.

## ruckusCtrlApStatus

**TABLE 360** ruckusCtrlApStatus

Object Name	ruckusCtrlApStatus
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.30
Description	The AP status type, which is: 0: not available (busy or not running) 1: connected

## ruckusCtrlApModel

**TABLE 361** ruckusCtrlApModel

Object Name	ruckusCtrlApModel
Parent Node	ruckusCtrlApTable

**TABLE 361** ruckusCtrlApModel (continued)

Object Name	ruckusCtrlApModel
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.31
Description	The AP model type.

## ruckusCtrlApSerialNumber

**TABLE 362** ruckusCtrlApSerialNumber

Object Name	ruckusCtrlApSerialNumber
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.32
Description	The AP serial number.

## ruckusCtrlApSwVersion

**TABLE 363** ruckusCtrlApSwVersion

Object Name	ruckusCtrlApSwVersion
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.33
Description	The AP software version.

## ruckusCtrlApLocation

**TABLE 364** ruckusCtrlApLocation

Object Name	ruckusCtrlApLocation
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.34
Description	The AP location information.

## ruckusCtrlApGpsInfo

**TABLE 365** ruckusCtrlApGpsInfo

Object Name	ruckusCtrlApGpsInfo
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.35
Description	The AP GPS information.

## ruckusCtrlApTemperature

**TABLE 366** ruckusCtrlApTemperature

Object Name	ruckusCtrlApTemperature
Parent Node	ruckusCtrlApTable

**TABLE 366** ruckusCtrlApTemperature (continued)

Object Name	ruckusCtrlApTemperature
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.36
Description	The AP temperature information.

## ruckusCtrlApUptime

**TABLE 367** ruckusCtrlApUptime

Object Name	ruckusCtrlApUptime
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.41
Description	Number of minutes elapsed since the AP was last rebooted.

## ruckusCtrlApLastConfSyncTime

**TABLE 368** ruckusCtrlApLastConfSyncTime

Object Name	ruckusCtrlApLastConfSyncTime
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.45
Description	The last configuration synchronization displayed as time.

## ruckusCtrlApCpuUtilization

**TABLE 369** ruckusCtrlApCpuUtilization

Object Name	ruckusCtrlApCpuUtilization
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.50
Description	The percentage of CPU utilization.

## ruckusCtrlApTotalMemory

**TABLE 370** ruckusCtrlApTotalMemory

Object Name	ruckusCtrlApTotalMemory
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.51
Description	The total memory in KB.

## ruckusCtrlApFreeMemory

**TABLE 371** ruckusCtrlApFreeMemory

Object Name	ruckusCtrlApFreeMemory
Parent Node	ruckusCtrlApTable

**TABLE 371** ruckusCtrlApFreeMemory (continued)

Object Name	ruckusCtrlApFreeMemory
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.52
Description	Free memory in KB.

## ruckusCtrlApFreeStorage

**TABLE 372** ruckusCtrlApFreeStorage

Object Name	ruckusCtrlApFreeStorage
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.53
Description	Flash free memory in KB.

## ruckusCtrlApEtherPortStatus

**TABLE 373** ruckusCtrlApEtherPortStatus

Object Name	ruckusCtrlApEtherPortStatus
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.54
Description	AP Ethernet port physical link status as: 0: Down 1: Up

## ruckusCtrlApCableModemMac

**TABLE 374** ruckusCtrlApCableModemMac

Object Name	ruckusCtrlApCableModemMac
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.56
Description	The AP MAC address of the cable modem.

## ruckusCtrlApCableModemSerialNumber

**TABLE 375** ruckusCtrlApCableModemSerialNumber

Object Name	ruckusCtrlApCableModemSerialNumber
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.57
Description	Serial number of the AP MAC cable modem.

## ruckusCtrlApNumRadios

**TABLE 376** ruckusCtrlApNumRadios

Object Name	ruckusCtrlApNumRadios
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.62
Description	Total number of radios.

## ruckusCtrlApNumWlans

**TABLE 377** ruckusCtrlApNumWlans

Object Name	ruckusCtrlApNumWlans
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.63
Description	Total number of WLANs.

## ruckusCtrlApNumAssocClients

**TABLE 378** ruckusCtrlApNumAssocClients

Object Name	ruckusCtrlApNumAssocClients
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.65
Description	Number of clients associated with the AP.

## ruckusCtrlApStatsRxBytes

**TABLE 379** ruckusCtrlApStatsRxBytes

Object Name	ruckusCtrlApStatsRxBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.71
Description	The total number of received bytes.

## ruckusCtrlApStatsTxBytes

**TABLE 380** ruckusCtrlApStatsTxBytes

Object Name	ruckusCtrlApStatsTxBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.72
Description	The total number of transmitted bytes.

## ruckusCtrlApStatsRxDataBytes

**TABLE 381** ruckusCtrlApStatsRxDataBytes

Object Name	ruckusCtrlApStatsRxDataBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.73
Description	The total number of data packet bytes received.

## ruckusCtrlApStatsTxDataBytes

**TABLE 382** ruckusCtrlApStatsTxDataBytes

Object Name	ruckusCtrlApStatsTxDataBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.74
Description	The total number of data packet bytes transmitted.

## ruckusCtrlApStatsRxPkts

**TABLE 383** ruckusCtrlApStatsRxPkts

Object Name	ruckusCtrlApStatsRxPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.77
Description	The total number of packet counts received.

## ruckusCtrlApStatsTxPkts

**TABLE 384** ruckusCtrlApStatsTxPkts

Object Name	ruckusCtrlApStatsTxPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.78
Description	Total number of packets counts transmitted.

## ruckusCtrlApStatsRxDataPkts

**TABLE 385** ruckusCtrlApStatsRxDataPkts

Object Name	ruckusCtrlApStatsRxDataPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.79
Description	The total number of data packets counts received.

## ruckusCtrlApStatsTxDataPkts

**TABLE 386** ruckusCtrlApStatsTxDataPkts

Object Name	ruckusCtrlApStatsTxDataPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.80
Description	The total number of data packets counts transmitted.

## ruckusCtrlApStatsRxErrorPkts

**TABLE 387** ruckusCtrlApStatsRxErrorPkts

Object Name	ruckusCtrlApStatsRxErrorPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.81
Description	Error count of AP wireless received.

## ruckusCtrlApStatsTxErrorPkts

**TABLE 388** ruckusCtrlApStatsTxErrorPkts

Object Name	ruckusCtrlApStatsTxErrorPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.82
Description	Error count of AP wireless transmitted.

## ruckusCtrlApStatsRxDropPkts

**TABLE 389** ruckusCtrlApStatsRxDropPkts

Object Name	ruckusCtrlApStatsRxDropPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.83
Description	Dropped count of AP wireless received.

## ruckusCtrlApStatsTxDropPkts

**TABLE 390** ruckusCtrlApStatsTxDropPkts

Object Name	ruckusCtrlApStatsTxDropPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.84
Description	Dropped count of AP wireless transmitted.

## ruckusCtrlApMeshRole

**TABLE 391** ruckusCtrlApMeshRole

Object Name	ruckusCtrlApMeshRole
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.89
Description	<p>AP Mesh role:</p> <ul style="list-style-type: none"> <li>• 0: disable</li> <li>• 1: rap</li> <li>• 2: map</li> <li>• 3: emap</li> <li>• 4: mesh-is-down</li> <li>• 5: mesh-role-is-undefined</li> </ul>

## ruckusCtrlApNumMeshHops

**TABLE 392** ruckusCtrlApNumMeshHops

Object Name	ruckusCtrlApNumMeshHops
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.90
Description	The total number of mesh hops.

## ruckusCtrlApConnectScgCplp

**TABLE 393** ruckusCtrlApConnectScgCplp

Object Name	ruckusCtrlApConnectScgCplp
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.95
Description	The controller's control plane IP address that the AP connects.

## ruckusCtrlApConnectScgCplpv6

**TABLE 394** ruckusCtrlApConnectScgCplpv6

Object Name	ruckusCtrlApConnectScgCplpv6
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.96
Description	The controller's control plane IPv6 address that the AP connects.

## ruckusCtrlApConnectScgDplp

**TABLE 395** ruckusCtrlApConnectScgDplp

Object Name	ruckusCtrlApConnectScgDplp
Parent Node	ruckusCtrlApTable

**TABLE 395** ruckusCtrlApConnectScgDplp (continued)

Object Name	ruckusCtrlApConnectScgDplp
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.2.1.1.97
Description	The controller's data plane IP address that the AP connects.

## ruckusCtrlApConnectScgDplpv6

**TABLE 396** ruckusCtrlApConnectScgDplpv6

Object Name	ruckusCtrlApConnectScgDplpv6
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.2.1.1.98
Description	The controller's data plane IPv6 address that the AP connects.

## ruckusCtrlApLanStatsRxBytes

**TABLE 397** ruckusCtrlApLanStatsRxBytes

Object Name	ruckusCtrlApLanStatsRxBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.2.1.1.103
Description	The total number of bytes received on the LAN port.

## ruckusCtrlApLanStatsTxBytes

**TABLE 398** ruckusCtrlApLanStatsTxBytes

Object Name	ruckusCtrlApLanStatsTxBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.2.1.1.104
Description	The total number of bytes transmitted on the LAN port.

## ruckusCtrlApLanStatsRxPkts

**TABLE 399** ruckusCtrlApLanStatsRxPkts

Object Name	ruckusCtrlApLanStatsRxPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.2.1.1.105
Description	The total number of packets received on the LAN port.

## ruckusCtrlApLanStatsTxPkts

**TABLE 400** ruckusCtrlApLanStatsTxPkts

Object Name	ruckusCtrlApLanStatsTxPkts
Parent Node	ruckusCtrlApTable

**TABLE 400** ruckusCtrlApLanStatsTxPkts (continued)

Object Name	ruckusCtrlApLanStatsTxPkts
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.106
Description	The total number of packets transmitted on the LAN port.

## ruckusCtrlApLanStatsRxErrorPkts

**TABLE 401** ruckusCtrlApLanStatsRxErrorPkts

Object Name	ruckusCtrlApLanStatsRxErrorPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.107
Description	The total number of error packets received on the LAN port.

## ruckusCtrlApLanStatsTxErrorPkts

**TABLE 402** ruckusCtrlApLanStatsTxErrorPkts

Object Name	ruckusCtrlApLanStatsTxErrorPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.108
Description	The total number of error packets transmitted on the LAN port.

## ruckusCtrlApLanStatsRxDroppedPkts

**TABLE 403** ruckusCtrlApLanStatsRxDroppedPkts

Object Name	ruckusCtrlApLanStatsRxDroppedPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.115
Description	The total number of received packets dropped on LAN port.

## ruckusCtrlApLanStatsTxDroppedPkts

**TABLE 404** ruckusCtrlApLanStatsTxDroppedPkts

Object Name	ruckusCtrlApLanStatsTxDroppedPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.116
Description	The total number of transmitted packets dropped on LAN port.

## ruckusCtrlAPIpsecRxBytes

**TABLE 405** ruckusCtrlAPIpsecRxBytes

Object Name	ruckusCtrlAPIpsecRxBytes
Parent Node	ruckusCtrlApTable

**TABLE 405** ruckusCtrlAPIpsecRxBytes (continued)

Object Name	ruckusCtrlAPIpsecRxBytes
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.123
Description	The total number of IPsec bytes received.

## ruckusCtrlAPIpsecTxBytes

**TABLE 406** ruckusCtrlAPIpsecTxBytes

Object Name	ruckusCtrlAPIpsecTxBytes
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.124
Description	The total number of IPsec bytes transmitted.

## ruckusCtrlAPIpsecRxPkts

**TABLE 407** ruckusCtrlAPIpsecRxPkts

Object Name	ruckusCtrlAPIpsecRxPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.125
Description	The total number of IPsec packet received.

## ruckusCtrlAPIpsecTxPkts

**TABLE 408** ruckusCtrlAPIpsecTxPkts

Object Name	ruckusCtrlAPIpsecTxPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.126
Description	The total number of IPsec packet transmitted.

## ruckusCtrlAPIpsecRxDropPkts

**TABLE 409** ruckusCtrlAPIpsecRxDropPkts

Object Name	ruckusCtrlAPIpsecRxDropPkts
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.127
Description	The total number of IPsec received packets that dropped.

## ruckusCtrlAPIpsecTxDropPkts

**TABLE 410** ruckusCtrlAPIpsecTxDropPkts

Object Name	ruckusCtrlAPIpsecTxDropPkts
Parent Node	ruckusCtrlApTable

**TABLE 410** ruckusCtrlAPIpsecTxDropPkts (continued)

Object Name	ruckusCtrlAPIpsecTxDropPkts
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.128
Description	The total number of IPsec transmitted packets that dropped

## ruckusCtrlAPIpsecSessionTime

**TABLE 411** ruckusCtrlAPIpsecSessionTime

Object Name	ruckusCtrlAPIpsecSessionTime
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.129
Description	Session time of IPsec in seconds.

## ruckusCtrlAPIpsecRxIdleTime

**TABLE 412** ruckusCtrlAPIpsecRxIdleTime

Object Name	ruckusCtrlAPIpsecRxIdleTime
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.130
Description	Time of the last received packet in seconds.

## ruckusCtrlAPIpsecTxIdleTime

**TABLE 413** ruckusCtrlAPIpsecTxIdleTime

Object Name	ruckusCtrlAPIpsecTxIdleTime
Parent Node	ruckusCtrlApTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.1.1.131
Description	Time of the last transmitted packet in seconds.

# Ruckus Controller Radio Table

The following MIBs define the information for the controller AP Radio table (**ruckusCtrlApRadioTable**) for users to easily access all information of the AP radio in the AP. Using the ApMac in this table, users get more details about this AP. The index of the table is the *ApMac* and *RadioIndex*.



**CAUTION**

These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.

**NOTE**

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

A MAC address of C8:AA:7C:8E:67:C4 must be translated to the equivalent decimal value of 200.170.124.142.103.196 for the query.

For example:

- To get the radio index **1** of an AP with MAC C8:AA:7C:8E:67:C4, use the command format:

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-
MIB::ruckusCtrlApRadioApMac.6.200.170.124.142.103.196.1
```

where:

1: Radio index

6: Length of string index, which is always 6

```
200.170.124.142.103.196: MAC Address C8:AA:7C:8E:67:C4
in decimal form
```

- To get all Radio information of the AP with MAC C8:AA:7C:8E:67:C4, use the command format:

```
snmpwalk -v2c -c public <ip_addr> RUCKUS-CTRL-
MIB::ruckusCtrlApRadioApMac.6.200.170.124.142.103.196 where 6 is the length of string index.
```

```
200.170.124.142.103.196: MAC Address C8:AA:7C:8E:67:C4 in decimal form
```

- The MIB browser should also translate the MAC address into decimal form as:

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.9.1.6
.6.200.170.124.142.103.196.1
```

- [ruckusCtrlApRadioEntry](#) on page 191
- [ruckusCtrlApRadioApMac](#) on page 192
- [ruckusCtrlApRadioIndex](#) on page 192
- [ruckusCtrlApRadioNumWlans](#) on page 192
- [ruckusCtrlApRadioType](#) on page 192
- [ruckusCtrlApRadioChannelWidth](#) on page 193
- [ruckusCtrlApRadioChannel](#) on page 193
- [ruckusCtrlApRadioTxPower](#) on page 193
- [ruckusCtrlApRadioBeaconPeriod](#) on page 193
- [ruckusCtrlApRadioPowerMgmtEnable](#) on page 193
- [ruckusCtrlApRadioMeshEnable](#) on page 194
- [ruckusCtrlApRadioStatsRxAirtime](#) on page 194
- [ruckusCtrlApRadioStatsTxAirtime](#) on page 194
- [ruckusCtrlApRadioStatsBusyAirtime](#) on page 194
- [ruckusCtrlApRadioStatsTotalAirtime](#) on page 195
- [ruckusCtrlApRadioAntennaGain](#) on page 195
- [ruckusCtrlApRadioStatsSnr](#) on page 195
- [ruckusCtrlApRadioStatsNoiseFloor](#) on page 195
- [ruckusCtrlApRadioStatsNumAssocClients](#) on page 195
- [ruckusCtrlApRadioStatsNumAuthClients](#) on page 196
- [ruckusCtrlApRadioStatsNumMaxClients](#) on page 196
- [ruckusCtrlApRadioStatsPhyError](#) on page 196
- [ruckusCtrlApRadioStatsRxWepFail](#) on page 196

- [ruckusCtrlApRadioStatsRxDecryptCrcError](#) on page 196
- [ruckusCtrlApRadioStatsRxMicError](#) on page 197
- [ruckusCtrlApRadioStatsRxBytes](#) on page 197
- [ruckusCtrlApRadioStatsTxBytes](#) on page 197
- [ruckusCtrlApRadioStatsRxPkts](#) on page 197
- [ruckusCtrlApRadioStatsTxPkts](#) on page 197
- [ruckusCtrlApRadioStatsRxMcastPkts](#) on page 198
- [ruckusCtrlApRadioStatsTxMcastPkts](#) on page 198
- [ruckusCtrlApRadioStatsRxErrorPkts](#) on page 198
- [ruckusCtrlApRadioStatsTxErrorPkts](#) on page 198
- [ruckusCtrlApRadioStatsRxPktErrorRate](#) on page 198
- [ruckusCtrlApRadioStatsTxPktErrorRate](#) on page 199
- [ruckusCtrlApRadioStatsTxPktRetryRate](#) on page 199
- [ruckusCtrlApRadioStatsTxRetryPkts](#) on page 199
- [ruckusCtrlApRadioStatsRxDropPkts](#) on page 199
- [ruckusCtrlApRadioStatsTxDropPkts](#) on page 199
- [ruckusCtrlApRadioStatsNumAuthReqs](#) on page 200
- [ruckusCtrlApRadioStatsNumAuthResps](#) on page 200
- [ruckusCtrlApRadioStatsNumAuthSuccess](#) on page 200
- [ruckusCtrlApRadioStatsNumAuthFail](#) on page 200
- [ruckusCtrlApRadioStatsAuthFailRate](#) on page 200
- [ruckusCtrlApRadioStatsNumAssocReq](#) on page 201
- [ruckusCtrlApRadioStatsNumAssocResp](#) on page 201
- [ruckusCtrlApRadioStatsNumReassocReq](#) on page 201
- [ruckusCtrlApRadioStatsNumReassocResp](#) on page 201
- [ruckusCtrlApRadioStatsNumAssocSuccess](#) on page 201
- [ruckusCtrlApRadioStatsNumAssocFail](#) on page 202
- [ruckusCtrlApRadioStatsAssocSuccessRate](#) on page 202
- [ruckusCtrlApRadioStatsAssocFailRate](#) on page 202

## ruckusCtrlApRadioEntry

**TABLE 414** ruckusCtrlApRadioEntry

Object Name	ruckusCtrlApRadioEntry
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1
Description	The index to this table is ApMac and RadiIndex

## ruckusCtrlApRadioApMac

**TABLE 415** ruckusCtrlApRadioApMac

Object Name	ruckusCtrlApRadioApMac
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.1
Description	The AP MAC address.

## ruckusCtrlApRadioIndex

**TABLE 416** ruckusCtrlApRadioIndex

Object Name	ruckusCtrlApRadioApMac
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.2
Description	The index of the radio in the AP, which is: <ul style="list-style-type: none"> <li>• 0: 2.4G</li> <li>• 1: 5G</li> </ul>

## ruckusCtrlApRadioNumWlans

**TABLE 417** ruckusCtrlApRadioNumWlans

Object Name	ruckusCtrlApRadioNumWlans
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.7
Description	The number of WLANs in the radio.

## ruckusCtrlApRadioType

**TABLE 418** ruckusCtrlApRadioType

Object Name	ruckusCtrlApRadioType
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.8
Description	The radio modes: <ul style="list-style-type: none"> <li>1: ieee802dot11b</li> <li>2: ieee802dot11g</li> <li>3: ieee802dot11Mixed</li> <li>4: ieee802dot11a</li> <li>5: ieee802dot11ng</li> <li>6: ieee802dot11na</li> <li>7: ieee802dot11ac</li> </ul>

## ruckusCtrlApRadioChannelWidth

**TABLE 419** ruckusCtrlApRadioChannelWidth

Object Name	ruckusCtrlApRadioChannelWidth
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.9
Description	Radio channel width of 10/20/2040/40/80

## ruckusCtrlApRadioChannel

**TABLE 420** ruckusCtrlApRadioChannel

Object Name	ruckusCtrlApRadioChannel
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.10
Description	The channel number of this AP radio.

## ruckusCtrlApRadioTxPower

**TABLE 421** ruckusCtrlApRadioTxPower

Object Name	ruckusCtrlApRadioTxPower
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.11
Description	Specifies the transmit power of this AP radio.

## ruckusCtrlApRadioBeaconPeriod

**TABLE 422** ruckusCtrlApRadioBeaconPeriod

Object Name	ruckusCtrlApRadioBeaconPeriod
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.16
Description	The number of milli seconds that a station uses for scheduling beacon transmissions. This value is transmitted in beacon and probe response frames. <ul style="list-style-type: none"> <li>Range: (100 to 1000)</li> <li>Units: Milli seconds</li> </ul>

## ruckusCtrlApRadioPowerMgmtEnable

**TABLE 423** ruckusCtrlApRadioPowerMgmtEnable

Object Name	ruckusCtrlApRadioPowerMgmtEnable
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.23

**TABLE 423** ruckusCtrlApRadioPowerMgmtEnable (continued)

Object Name	ruckusCtrlApRadioPowerMgmtEnable
Description	Enabling the power management as: 0: No 1: Yes

## ruckusCtrlApRadioMeshEnable

**TABLE 424** ruckusCtrlApRadioMeshEnable

Object Name	ruckusCtrlApRadioMeshEnable
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.24
Description	Enabling the radio mesh as: 0: No 1: Yes

## ruckusCtrlApRadioStatsRxAirtime

**TABLE 425** ruckusCtrlApRadioStatsRxAirtime

Object Name	ruckusCtrlApRadioStatsRxAirtime
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.29
Description	AP radio's total airtime received in one second as per the channel utilization.

## ruckusCtrlApRadioStatsTxAirtime

**TABLE 426** ruckusCtrlApRadioStatsTxAirtime

Object Name	ruckusCtrlApRadioStatsTxAirtime
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.30
Description	AP radio's total airtime transmitted in one second as per the channel utilization.

## ruckusCtrlApRadioStatsBusyAirtime

**TABLE 427** ruckusCtrlApRadioStatsBusyAirtime

Object Name	ruckusCtrlApRadioStatsBusyAirtime
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.31
Description	AP radio's busy airtime in one second as per the channel utilization.

## ruckusCtrlApRadioStatsTotalAirtime

**TABLE 428** ruckusCtrlApRadioStatsTotalAirtime

Object Name	ruckusCtrlApRadioStatsTotalAirtime
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.32
Description	AP radio's total airtime.

## ruckusCtrlApRadioAntennaGain

**TABLE 429** ruckusCtrlApRadioAntennaGain

Object Name	ruckusCtrlApRadioAntennaGain
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.38
Description	AP radio's antenna gain.

## ruckusCtrlApRadioStatsSnr

**TABLE 430** ruckusCtrlApRadioStatsSnr

Object Name	ruckusCtrlApRadioStatsSnr
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.39
Description	AP radio's SNR ratio.

## ruckusCtrlApRadioStatsNoiseFloor

**TABLE 431** ruckusCtrlApRadioStatsNoiseFloor

Object Name	ruckusCtrlApRadioStatsNoiseFloor
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.40
Description	AP radio's noise floor.

## ruckusCtrlApRadioStatsNumAssocClients

**TABLE 432** ruckusCtrlApRadioStatsNumAssocClients

Object Name	ruckusCtrlApRadioStatsNumAssocClients
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.41
Description	Number of clients associated to this AP radio.

## ruckusCtrlApRadioStatsNumAuthClients

**TABLE 433**

Object Name	ruckusCtrlApRadioStatsNumAuthClients
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.42
Description	Number of clients authenticated to this AP radio.

## ruckusCtrlApRadioStatsNumMaxClients

**TABLE 434** ruckusCtrlApRadioStatsNumMaxClients

Object Name	ruckusCtrlApRadioStatsNumMaxClients
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.43
Description	Maximum number of stations allowed to this AP radio.

## ruckusCtrlApRadioStatsPhyError

**TABLE 435** ruckusCtrlApRadioStatsPhyError

Object Name	ruckusCtrlApRadioStatsPhyError
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.49
Description	Number of PHY errors that occurred in one second for this AP radio.

## ruckusCtrlApRadioStatsRxWepFail

**TABLE 436** ruckusCtrlApRadioStatsRxWepFail

Object Name	ruckusCtrlApRadioStatsRxWepFail
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.50
Description	The number of received WEP for this AP radio that failed.

## ruckusCtrlApRadioStatsRxDecryptCrcError

**TABLE 437** ruckusCtrlApRadioStatsRxDecryptCrcError

Object Name	ruckusCtrlApRadioStatsRxDecryptCrcError
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.51
Description	The number of received frames with decrypted CRC errors for this AP radio.

## ruckusCtrlApRadioStatsRxMicError

**TABLE 438** ruckusCtrlApRadioStatsRxMicError

Object Name	ruckusCtrlApRadioStatsRxMicError
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.52
Description	Number of received frames with MIC errors pertaining to this AP radio.

## ruckusCtrlApRadioStatsRxBytes

**TABLE 439** ruckusCtrlApRadioStatsRxBytes

Object Name	ruckusCtrlApRadioStatsRxBytes
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.57
Description	Total number of received radio bytes of this AP radio, including duplicate packets.

## ruckusCtrlApRadioStatsTxBytes

**TABLE 440** ruckusCtrlApRadioStatsTxBytes

Object Name	ruckusCtrlApRadioStatsTxBytes
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.58
Description	Total number of transmitted radio bytes of this AP radio, including SW retries.

## ruckusCtrlApRadioStatsRxPkts

**TABLE 441** ruckusCtrlApRadioStatsRxPkts

Object Name	ruckusCtrlApRadioStatsRxPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.59
Description	Total number of received radio packets of this AP radio. It contains retry/ duplicate values and 802.11 headers.

## ruckusCtrlApRadioStatsTxPkts

**TABLE 442** ruckusCtrlApRadioStatsTxPkts

Object Name	ruckusCtrlApRadioStatsTxPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.60
Description	Total number of transmitted radio packets of this AP radio. It contains retry/duplicate values and 802.11 headers.

## ruckusCtrlApRadioStatsRxMcastPkts

**TABLE 443** ruckusCtrlApRadioStatsRxMcastPkts

Object Name	ruckusCtrlApRadioStatsRxMcastPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.65
Description	Total number of received multi cast frames.

## ruckusCtrlApRadioStatsTxMcastPkts

**TABLE 444** ruckusCtrlApRadioStatsTxMcastPkts

Object Name	ruckusCtrlApRadioStatsTxMcastPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.66
Description	Total number of transmitted multi cast frames.

## ruckusCtrlApRadioStatsRxErrorPkts

**TABLE 445** ruckusCtrlApRadioStatsRxErrorPkts

Object Name	ruckusCtrlApRadioStatsRxErrorPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.67
Description	Total number of error packets received.

## ruckusCtrlApRadioStatsTxErrorPkts

**TABLE 446** ruckusCtrlApRadioStatsTxErrorPkts

Object Name	ruckusCtrlApRadioStatsTxErrorPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.68
Description	Total number of error packets transmitted.

## ruckusCtrlApRadioStatsRxPktErrorRate

**TABLE 447** ruckusCtrlApRadioStatsRxPktErrorRate

Object Name	ruckusCtrlApRadioStatsRxPktErrorRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.69
Description	Error rate on the total number of packets received.

## ruckusCtrlApRadioStatsTxPktErrorRate

**TABLE 448** ruckusCtrlApRadioStatsTxPktErrorRate

Object Name	ruckusCtrlApRadioStatsTxPktErrorRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.70
Description	Error rate on the total number of packets transmitted.

## ruckusCtrlApRadioStatsTxPktRetryRate

**TABLE 449** ruckusCtrlApRadioStatsTxPktRetryRate

Object Name	ruckusCtrlApRadioStatsTxPktRetryRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.71
Description	Percentage rate of retries on transmitted packets.

## ruckusCtrlApRadioStatsTxRetryPkts

**TABLE 450** ruckusCtrlApRadioStatsTxRetryPkts

Object Name	ruckusCtrlApRadioStatsTxRetryPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.73
Description	Total number of retries on transmitted packets.

## ruckusCtrlApRadioStatsRxDropPkts

**TABLE 451** ruckusCtrlApRadioStatsRxDropPkts

Object Name	ruckusCtrlApRadioStatsRxDropPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.76
Description	Total number of dropped packets received.

## ruckusCtrlApRadioStatsTxDropPkts

**TABLE 452** ruckusCtrlApRadioStatsTxDropPkts

Object Name	ruckusCtrlApRadioStatsTxDropPkts
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.77
Description	Total number of dropped packets transmitted.

## ruckusCtrlApRadioStatsNumAuthReqs

**TABLE 453** ruckusCtrlApRadioStatsNumAuthReqs

Object Name	ruckusCtrlApRadioStatsNumAuthReqs
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.82
Description	Total number of authenticated requests received.

## ruckusCtrlApRadioStatsNumAuthResps

**TABLE 454** ruckusCtrlApRadioStatsNumAuthResps

Object Name	ruckusCtrlApRadioStatsNumAuthResps
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.83
Description	Total number of authenticated responses sent.

## ruckusCtrlApRadioStatsNumAuthSuccess

**TABLE 455** ruckusCtrlApRadioStatsNumAuthSuccess

Object Name	ruckusCtrlApRadioStatsNumAuthSuccess
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.84
Description	Total number of successful authentications.

## ruckusCtrlApRadioStatsNumAuthFail

**TABLE 456** ruckusCtrlApRadioStatsNumAuthFail

Object Name	ruckusCtrlApRadioStatsNumAuthFail
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.85
Description	Total number of failed authentications.

## ruckusCtrlApRadioStatsAuthFailRate

**TABLE 457** ruckusCtrlApRadioStatsAuthFailRate

Object Name	ruckusCtrlApRadioStatsAuthFailRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.86
Description	Total number of failed connections - authentication and associated failure.

## ruckusCtrlApRadioStatsNumAssocReq

**TABLE 458** ruckusCtrlApRadioStatsNumAssocReq

Object Name	ruckusCtrlApRadioStatsNumAssocReq
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.87
Description	Total number of associated requests sent.

## ruckusCtrlApRadioStatsNumAssocResp

**TABLE 459** ruckusCtrlApRadioStatsNumAssocResp

Object Name	ruckusCtrlApRadioStatsNumAssocResp
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.88
Description	Total number of associated responses received.

## ruckusCtrlApRadioStatsNumReassocReq

**TABLE 460** ruckusCtrlApRadioStatsNumReassocReq

Object Name	ruckusCtrlApRadioStatsNumReassocReq
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.89
Description	Total number of re-associated requests sent.

## ruckusCtrlApRadioStatsNumReassocResp

**TABLE 461** ruckusCtrlApRadioStatsNumReassocResp

Object Name	ruckusCtrlApRadioStatsNumReassocResp
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.90
Description	Total number of re-associated responses received.

## ruckusCtrlApRadioStatsNumAssocSuccess

**TABLE 462** ruckusCtrlApRadioStatsNumAssocSuccess

Object Name	ruckusCtrlApRadioStatsNumAssocSuccess
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.91
Description	Total number of successful associations.

## ruckusCtrlApRadioStatsNumAssocFail

TABLE 463 ruckusCtrlApRadioStatsNumAssocFail

Object Name	ruckusCtrlApRadioStatsNumAssocFail
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.92
Description	Total number of failed associations.

## ruckusCtrlApRadioStatsAssocSuccessRate

TABLE 464 ruckusCtrlApRadioStatsAssocSuccessRate

Object Name	ruckusCtrlApRadioStatsAssocSuccessRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.94
Description	AP radio's station association success rate.

## ruckusCtrlApRadioStatsAssocFailRate

TABLE 465 ruckusCtrlApRadioStatsAssocFailRate

Object Name	ruckusCtrlApRadioStatsAssocFailRate
Parent Node	ruckusCtrlApRadioTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.3.1.95
Description	AP radio's station association failure rate.

# Ruckus Controller AP WLAN Table

The following MIBs define the information for the controller AP WLAN table (**ruckusCtrlApWlanTable**) for users to easily access all information of the WLAN to a specific radio of an AP. Using the *ApMac* in this table, users get more details about this AP. The index of the table is the *ApMac*, *RadioIndex* and *ApWlanBssid*.



### CAUTION

These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.

### NOTE

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

- [ruckusCtrlApWlanEntry](#) on page 203
- [ruckusCtrlApWlanApMac](#) on page 204
- [ruckusCtrlApWlanRadioIndex](#) on page 204
- [ruckusCtrlApWlanBssid](#) on page 204
- [ruckusCtrlApWlanAuthMethod](#) on page 204
- [ruckusCtrlApWlanEncryptMethod](#) on page 205
- [ruckusCtrlApWlanId](#) on page 205

- [ruckusCtrlApWlanName](#) on page 205
- [ruckusCtrlApWlanRadioChannel](#) on page 205
- [ruckusCtrlApWlanSsid](#) on page 205
- [ruckusCtrlApWlanVlanId](#) on page 206
- [ruckusCtrlApWlanRtsThreshold](#) on page 206
- [ruckusCtrlApWlanDownRateLimit](#) on page 206
- [ruckusCtrlApWlanUpRateLimit](#) on page 206
- [ruckusCtrlApWlanIsBcastDisable](#) on page 206
- [ruckusCtrlApWlanIsGuest](#) on page 207
- [ruckusCtrlApWlanIsTunnel](#) on page 207
- [ruckusCtrlApWlanStatsNumAssocClients](#) on page 207
- [ruckusCtrlApWlanStatsRxPkts](#) on page 207
- [ruckusCtrlApWlanStatsTxPkts](#) on page 207
- [ruckusCtrlApWlanStatsRxBytes](#) on page 208
- [ruckusCtrlApWlanStatsTxBytes](#) on page 208
- [ruckusCtrlApWlanStatsRxDataBytes](#) on page 208
- [ruckusCtrlApWlanStatsTxDataBytes](#) on page 208
- [ruckusCtrlApWlanStatsRxDataPkts](#) on page 208
- [ruckusCtrlApWlanStatsTxDataPkts](#) on page 209
- [ruckusCtrlApWlanStatsRxBcastDataPkts](#) on page 209
- [ruckusCtrlApWlanStatsTxBcastDataPkts](#) on page 209
- [ruckusCtrlApWlanStatsRxMcastDataPkts](#) on page 209
- [ruckusCtrlApWlanStatsTxMcastDataPkts](#) on page 209
- [ruckusCtrlApWlanStatsNumAssocReq](#) on page 210
- [ruckusCtrlApWlanStatsNumAssocResp](#) on page 210
- [ruckusCtrlApWlanStatsNumReassocReq](#) on page 210
- [ruckusCtrlApWlanStatsNumReassocResp](#) on page 210
- [ruckusCtrlApWlanStatsNumAuthReq](#) on page 210
- [ruckusCtrlApWlanStatsNumAuthResp](#) on page 211
- [ruckusCtrlApWlanStatsNumAuthSuccess](#) on page 211
- [ruckusCtrlApWlanStatsNumAuthFail](#) on page 211
- [ruckusCtrlApWlanStatsAuthFailRate](#) on page 211
- [ruckusCtrlApWlanStatsNumAssocFail](#) on page 211

## ruckusCtrlApWlanEntry

**TABLE 466** ruckusCtrlApWlanEntry

Object Name	ruckusCtrlApWlanEntry
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1

**TABLE 466** ruckusCtrlApWlanEntry (continued)

Object Name	ruckusCtrlApWlanEntry
Description	The index to this table is ApMac, RadiolIndex and ApWlanBssid

## ruckusCtrlApWlanApMac

**TABLE 467** ruckusCtrlApWlanApMac

Object Name	ruckusCtrlApWlanApMac
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.1
Description	The AP MAC address.

## ruckusCtrlApWlanRadiolIndex

**TABLE 468** ruckusCtrlApWlanRadiolIndex

Object Name	ruckusCtrlApWlanRadiolIndex
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.2
Description	The index of the radio: <ul style="list-style-type: none"> <li>• 0: 2.4G</li> <li>• 1: 5G</li> </ul>

## ruckusCtrlApWlanBssid

**TABLE 469** ruckusCtrlApWlanBssid

Object Name	ruckusCtrlApWlanBssid
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.3
Description	BSSID of the WLAN - AP MAC address for this WLAN.

## ruckusCtrlApWlanAuthMethod

**TABLE 470** ruckusCtrlApWlanAuthMethod

Object Name	ruckusCtrlApWlanAuthMethod
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.8
Description	Authentication method of the WLAN is: <ul style="list-style-type: none"> <li>• 1: open</li> <li>• 3: auto</li> <li>• 4: wpa-eap-802-1x</li> </ul>

## ruckusCtrlApWlanEncryptMethod

**TABLE 471** ruckusCtrlApWlanEncryptMethod

Object Name	ruckusCtrlApWlanEncryptMethod
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.9
Description	Encryption method of the WLAN is: <ul style="list-style-type: none"> <li>• 1: open</li> <li>• 2: wep</li> <li>• 3: wpa</li> </ul>

## ruckusCtrlApWlanId

**TABLE 472** ruckusCtrlApWlanId

Object Name	ruckusCtrlApWlanId
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.10
Description	Unique identifier (within zone) of this WLAN where the range is (0 to 65536)

## ruckusCtrlApWlanName

**TABLE 473** ruckusCtrlApWlanName

Object Name	ruckusCtrlApWlanName
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.11
Description	Displays the name of the WLAN.

## ruckusCtrlApWlanRadioChannel

**TABLE 474** ruckusCtrlApWlanRadioChannel

Object Name	ruckusCtrlApWlanRadioChannel
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.12
Description	Radio of the channel of this WLAN.

## ruckusCtrlApWlanSsid

**TABLE 475** ruckusCtrlApWlanSsid

Object Name	ruckusCtrlApWlanSsid
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.13
Description	SSID of this WLAN.

## ruckusCtrlApWlanVlanId

**TABLE 476** ruckusCtrlApWlanVlanId

Object Name	ruckusCtrlApWlanVlanId
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.14
Description	The VLAN identifier of this WLAN in the range (1 to 4094). If the VLAN ID is 1, packets from this WLAN will be untagged.

## ruckusCtrlApWlanRtsThreshold

**TABLE 477** ruckusCtrlApWlanRtsThreshold

Object Name	ruckusCtrlApWlanRtsThreshold
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.15
Description	This attribute indicates the threshold number of octets in an MPDU. The range is (256 to 2346). The default value is 2347.

## ruckusCtrlApWlanDownRateLimit

**TABLE 478** ruckusCtrlApWlanDownRateLimit

Object Name	ruckusCtrlApWlanDownRateLimit
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.19
Description	Down link rate limit of the WLAN in Kbps.

## ruckusCtrlApWlanUpRateLimit

**TABLE 479** ruckusCtrlApWlanUpRateLimit

Object Name	ruckusCtrlApWlanUpRateLimit
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.20
Description	UP link rate limit of the WLAN in Kbps.

## ruckusCtrlApWlanIsBcastDisable

**TABLE 480** ruckusCtrlApWlanIsBcastDisable

Object Name	ruckusCtrlApWlanIsBcastDisable
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.25
Description	To confirm if the SSID broadcast for this WLAN is disabled. Values are: <ul style="list-style-type: none"> <li>• 0: No</li> <li>• 1: Yes</li> </ul>

## ruckusCtrlApWlanIsGuest

**TABLE 481** ruckusCtrlApWlanIsGuest

Object Name	ruckusCtrlApWlanIsGuest
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.26
Description	To confirm if the WLAN connected is a guest. Values are: <ul style="list-style-type: none"> <li>0: No</li> <li>1: Yes</li> </ul>

## ruckusCtrlApWlanIsTunnel

**TABLE 482** ruckusCtrlApWlanIsTunnel

Object Name	ruckusCtrlApWlanIsTunnel
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.27
Description	To confirm if the tunnel is a WLAN. Values are: <ul style="list-style-type: none"> <li>0: No</li> <li>1: Yes</li> </ul>

## ruckusCtrlApWlanStatsNumAssocClients

**TABLE 483** ruckusCtrlApWlanStatsNumAssocClients

Object Name	ruckusCtrlApWlanStatsNumAssocClients
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.32
Description	Number of associated clients for this WLAN with an entry timestamp.

## ruckusCtrlApWlanStatsRxPkts

**TABLE 484** ruckusCtrlApWlanStatsRxPkts

Object Name	ruckusCtrlApWlanStatsRxPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.37
Description	Total number of received packets for this WLAN.

## ruckusCtrlApWlanStatsTxPkts

**TABLE 485** ruckusCtrlApWlanStatsTxPkts

Object Name	ruckusCtrlApWlanStatsTxPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.38
Description	Total number of transmitted packets for this WLAN.

## ruckusCtrlApWlanStatsRxBytes

**TABLE 486** ruckusCtrlApWlanStatsRxBytes

Object Name	ruckusCtrlApWlanStatsRxBytes
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.39
Description	Total number of received bytes of this WLAN. This counter does not include the Ether / VLAN header.

## ruckusCtrlApWlanStatsTxBytes

**TABLE 487** ruckusCtrlApWlanStatsTxBytes

Object Name	ruckusCtrlApWlanStatsTxBytes
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.40
Description	Total number of received bytes of this WLAN. This counter does not include the Ether / VLAN header.

## ruckusCtrlApWlanStatsRxDataBytes

**TABLE 488** ruckusCtrlApWlanStatsRxDataBytes

Object Name	ruckusCtrlApWlanStatsRxDataBytes
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.47
Description	Total number of data bytes received of this WLAN.

## ruckusCtrlApWlanStatsTxDataBytes

**TABLE 489** ruckusCtrlApWlanStatsTxDataBytes

Object Name	ruckusCtrlApWlanStatsTxDataBytes
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.48
Description	Total number of data bytes transmitted from this WLAN.

## ruckusCtrlApWlanStatsRxDataPkts

**TABLE 490** ruckusCtrlApWlanStatsRxDataPkts

Object Name	ruckusCtrlApWlanStatsRxDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.49
Description	Total number of data packets received.

## ruckusCtrlApWlanStatsTxDataPkts

**TABLE 491** ruckusCtrlApWlanStatsTxDataPkts

Object Name	ruckusCtrlApWlanStatsTxDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.50
Description	Total number of data packets transmitted.

## ruckusCtrlApWlanStatsRxBcastDataPkts

**TABLE 492** ruckusCtrlApWlanStatsRxBcastDataPkts

Object Name	ruckusCtrlApWlanStatsRxBcastDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.55
Description	Total number of broadcast data packets received.

## ruckusCtrlApWlanStatsTxBcastDataPkts

**TABLE 493** ruckusCtrlApWlanStatsTxBcastDataPkts

Object Name	ruckusCtrlApWlanStatsTxBcastDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.56
Description	Total number of broadcast data packets transmitted.

## ruckusCtrlApWlanStatsRxMcastDataPkts

**TABLE 494** ruckusCtrlApWlanStatsRxMcastDataPkts

Object Name	ruckusCtrlApWlanStatsRxMcastDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.57
Description	Total number of multicast data packets received.

## ruckusCtrlApWlanStatsTxMcastDataPkts

**TABLE 495** ruckusCtrlApWlanStatsTxMcastDataPkts

Object Name	ruckusCtrlApWlanStatsTxMcastDataPkts
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.58
Description	Total number of multicast data packets transmitted.

## ruckusCtrlApWlanStatsNumAssocReq

**TABLE 496** ruckusCtrlApWlanStatsNumAssocReq

Object Name	ruckusCtrlApWlanStatsNumAssocReq
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.78
Description	Total number of associated requests.

## ruckusCtrlApWlanStatsNumAssocResp

**TABLE 497** ruckusCtrlApWlanStatsNumAssocResp

Object Name	ruckusCtrlApWlanStatsNumAssocResp
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.79
Description	Total number of associated responses sent.

## ruckusCtrlApWlanStatsNumReassocReq

**TABLE 498** ruckusCtrlApWlanStatsNumReassocReq

Object Name	ruckusCtrlApWlanStatsNumReassocReq
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.80
Description	Total number of re-associated requests received

## ruckusCtrlApWlanStatsNumReassocResp

**TABLE 499** ruckusCtrlApWlanStatsNumReassocResp

Object Name	ruckusCtrlApWlanStatsNumReassocResp
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.81
Description	Total number of re-associated responses sent.

## ruckusCtrlApWlanStatsNumAuthReq

**TABLE 500** ruckusCtrlApWlanStatsNumAuthReq

Object Name	ruckusCtrlApWlanStatsNumAuthReq
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.89
Description	Total number of authentication requests received.

## ruckusCtrlApWlanStatsNumAuthResp

**TABLE 501** ruckusCtrlApWlanStatsNumAuthResp

Object Name	ruckusCtrlApWlanStatsNumAuthResp
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.90
Description	Total number of authentication responses sent.

## ruckusCtrlApWlanStatsNumAuthSuccess

**TABLE 502** ruckusCtrlApWlanStatsNumAuthSuccess

Object Name	ruckusCtrlApWlanStatsNumAuthSuccess
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.91
Description	Total number of successful authentications.

## ruckusCtrlApWlanStatsNumAuthFail

**TABLE 503** ruckusCtrlApWlanStatsNumAuthFail

Object Name	ruckusCtrlApWlanStatsNumAuthFail
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.92
Description	Total number of failed authentications.

## ruckusCtrlApWlanStatsAuthFailRate

**TABLE 504** ruckusCtrlApWlanStatsAuthFailRate

Object Name	ruckusCtrlApWlanStatsAuthFailRate
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.93
Description	Failed rate in percentage.

## ruckusCtrlApWlanStatsNumAssocFail

**TABLE 505** ruckusCtrlApWlanStatsNumAssocFail

Object Name	ruckusCtrlApWlanStatsNumAssocFail
Parent Node	ruckusCtrlApWlanTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.5.1.98
Description	Total number of associated failures.

## Ruckus Controller Client Table

The following MIBs define the information for the controller **Client** table (**ruckusCtrlClientTable**) for users to easily access information of a specific client.



### CAUTION

**These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.**

### NOTE

It is recommended to use Public API or GPB/MQTT to obtain similar information for monitoring purposes.

In addition, if a client has successfully roamed from AP1 to AP2, only the information in AP2 will be returned. Using the *ClientMac* in this table, users get more details about this AP.

The index of the table is the *ClientMac*.

A MAC address of C8:AA:7C:8E:67:C4, must be translated to the equivalent decimal value of 200.170.124.142.103.196 for the query.

For example:

To get MAC C8:AA:7C:8E:67:C4, use the command format:

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-MIB::ruck- usCtrlClientMac.6.200.170.124.142.103.196 where 6 is the length of the string index.
```

- [ruckusCtrlClientEntry](#) on page 213
- [ruckusCtrlClientMac](#) on page 213
- [ruckusCtrlClientIp](#) on page 213
- [ruckusCtrlClientIpv6](#) on page 213
- [ruckusCtrlClientApMac](#) on page 214
- [ruckusCtrlClientWlanBssid](#) on page 214
- [ruckusCtrlClientSsid](#) on page 214
- [ruckusCtrlClientRadioIndex](#) on page 214
- [ruckusCtrlClientRadioType](#) on page 214
- [ruckusCtrlClientRadioChannel](#) on page 215
- [ruckusCtrlClientUsername](#) on page 215
- [ruckusCtrlClientVlanId](#) on page 215
- [ruckusCtrlClientOsType](#) on page 215
- [ruckusCtrlClientStatus](#) on page 216
- [ruckusCtrlClientAuthMode](#) on page 216
- [ruckusCtrlClientStatsRssi](#) on page 216
- [ruckusCtrlClientStatsSnr](#) on page 216
- [ruckusCtrlClientStatsNoiseFloor](#) on page 216
- [ruckusCtrlClientStatsThroughput](#) on page 217
- [ruckusCtrlClientStatsRxDataBytes](#) on page 217
- [ruckusCtrlClientStatsTxDataBytes](#) on page 217
- [ruckusCtrlClientStatsRxDataPkts](#) on page 217

- [ruckusCtrlClientStatsTxDataPkts](#) on page 217
- [ruckusCtrlClientStatsTxAvgByteRate](#) on page 218
- [ruckusCtrlClientStatsTxRetry](#) on page 218
- [ruckusCtrlClientStatsRxError](#) on page 218
- [ruckusCtrlClientStatsTxError](#) on page 218
- [ruckusCtrlClientStatsTxRetryBytes](#) on page 218
- [ruckusCtrlClientStatsTxDropPkts](#) on page 219

## ruckusCtrlClientEntry

**TABLE 506** ruckusCtrlClientEntry

Object Name	ruckusCtrlClientEntry
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1
Description	The index to this table is ClientMac.

## ruckusCtrlClientMac

**TABLE 507** ruckusCtrlClientMac

Object Name	ruckusCtrlClientMac
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.1
Description	The MAC address of the user equipment.

## ruckusCtrlClientIp

**TABLE 508** ruckusCtrlClientIp

Object Name	ruckusCtrlClientIp
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.6
Description	The IP address of the user equipment.

## ruckusCtrlClientIpv6

**TABLE 509** ruckusCtrlClientIpv6

Object Name	ruckusCtrlClientIpv6
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.7
Description	The IPv6 address of the user equipment.

## ruckusCtrlClientApMac

**TABLE 510** ruckusCtrlClientApMac

Object Name	ruckusCtrlClientApMac
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.8
Description	The AP Mac address.

## ruckusCtrlClientWlanBssid

**TABLE 511** ruckusCtrlClientWlanBssid

Object Name	ruckusCtrlClientWlanBssid
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.9
Description	The BSSID of the WLAN.

## ruckusCtrlClientSsid

**TABLE 512** ruckusCtrlClientSsid

Object Name	ruckusCtrlClientSsid
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.10
Description	The SSID that the user equipment connects to.

## ruckusCtrlClientRadioIndex

**TABLE 513** ruckusCtrlClientRadioIndex

Object Name	ruckusCtrlClientRadioIndex
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.12
Description	The radio index of: <ul style="list-style-type: none"><li>• 0: 2.4G</li><li>• 1: 5G.</li></ul>

## ruckusCtrlClientRadioType

**TABLE 514** ruckusCtrlClientRadioType

Object Name	ruckusCtrlClientRadioType
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.13

**TABLE 514** ruckusCtrlClientRadioType (continued)

Object Name	ruckusCtrlClientRadioType
Description	The radio index: 1: ieee802dot11b  2: ieee802dot11g  3: ieee802dot11Mixed  4: ieee802dot11a  5: ieee802dot11ng  6: ieee802dot11na  7: ieee802dot11ac

## ruckusCtrlClientRadioChannel

**TABLE 515** ruckusCtrlClientRadioChannel

Object Name	ruckusCtrlClientRadioChannel
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.14
Description	The radio channel.

## ruckusCtrlClientUsername

**TABLE 516** ruckusCtrlClientUsername

Object Name	ruckusCtrlClientUsername
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.15
Description	The user name.

## ruckusCtrlClientVlanId

**TABLE 517** ruckusCtrlClientVlanId

Object Name	ruckusCtrlClientVlanId
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.18
Description	The VLAN identifier.

## ruckusCtrlClientOsType

**TABLE 518** ruckusCtrlClientOsType

Object Name	ruckusCtrlClientOsType
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.19
Description	The OS type of the user equipment.

## ruckusCtrlClientStatus

**TABLE 519** ruckusCtrlClientStatus

Object Name	ruckusCtrlClientStatus
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.20
Description	The authorized status of the client as: 1: unauthorized 2: authorized

## ruckusCtrlClientAuthMode

**TABLE 520** ruckusCtrlClientAuthMode

Object Name	ruckusCtrlClientAuthMode
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.29
Description	The authentication mode.

## ruckusCtrlClientStatsRssi

**TABLE 521** ruckusCtrlClientStatsRssi

Object Name	ruckusCtrlClientStatsRssi
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.41
Description	An estimate of the received signal power (strength), reported in dBm, at the AP for each received packet from a particular client.

## ruckusCtrlClientStatsSnr

**TABLE 522** ruckusCtrlClientStatsSnr

Object Name	ruckusCtrlClientStatsSnr
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.42
Description	An estimate of the received signal to noise ratio, reported in dB, at the AP for each received packet from a particular client. The SNR is rounded to the nearest dB.

## ruckusCtrlClientStatsNoiseFloor

**TABLE 523** ruckusCtrlClientStatsNoiseFloor

Object Name	ruckusCtrlClientStatsNoiseFloor
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.43

**TABLE 523** ruckusCtrlClientStatsNoiseFloor (continued)

Object Name	ruckusCtrlClientStatsNoiseFloor
Description	An estimate of the radio's thermal noise floor, reported in dBm, at the AP. The noise floor estimate is rounded to the nearest dB.

## ruckusCtrlClientStatsThroughput

**TABLE 524** ruckusCtrlClientStatsThroughput

Object Name	ruckusCtrlClientStatsThroughput
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.44
Description	An estimate of the saturated throughput of the AP towards a particular client.

## ruckusCtrlClientStatsRxDataBytes

**TABLE 525** ruckusCtrlClientStatsRxDataBytes

Object Name	ruckusCtrlClientStatsRxDataBytes
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.49
Description	Total number of data bytes that are successfully received.

## ruckusCtrlClientStatsTxDataBytes

**TABLE 526** ruckusCtrlClientStatsTxDataBytes

Object Name	ruckusCtrlClientStatsTxDataBytes
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.50
Description	Total number of bytes that are successfully transmitted.

## ruckusCtrlClientStatsRxDataPkts

**TABLE 527** ruckusCtrlClientStatsRxDataPkts

Object Name	ruckusCtrlClientStatsRxDataPkts
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.51
Description	Total number of data packets that are successfully received.

## ruckusCtrlClientStatsTxDataPkts

**TABLE 528** ruckusCtrlClientStatsTxDataPkts

Object Name	ruckusCtrlClientStatsTxDataPkts
Parent Node	ruckusCtrlClientTable

**TABLE 528** ruckusCtrlClientStatsTxDataPkts (continued)

Object Name	ruckusCtrlClientStatsTxDataPkts
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.52
Description	Total number of data packets that are successfully transmitted.

## ruckusCtrlClientStatsTxAvgByteRate

**TABLE 529** ruckusCtrlClientStatsTxAvgByteRate

Object Name	ruckusCtrlClientStatsTxAvgByteRate
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.56
Description	Average rate as percentage of transmitted bytes.

## ruckusCtrlClientStatsTxRetry

**TABLE 530** ruckusCtrlClientStatsTxRetry

Object Name	ruckusCtrlClientStatsTxRetry
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.57
Description	Total number retries while transmitting packets.

## ruckusCtrlClientStatsRxError

**TABLE 531** ruckusCtrlClientStatsRxError

Object Name	ruckusCtrlClientStatsRxError
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.58
Description	Total number of errors when receiving packets.

## ruckusCtrlClientStatsTxError

**TABLE 532** ruckusCtrlClientStatsTxError

Object Name	ruckusCtrlClientStatsTxError
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.59
Description	Total number of errors when transmitting packets.

## ruckusCtrlClientStatsTxRetryBytes

**TABLE 533** ruckusCtrlClientStatsTxRetryBytes

Object Name	ruckusCtrlClientStatsTxRetryBytes
Parent Node	ruckusCtrlClientTable

**TABLE 533** ruckusCtrlClientStatsTxRetryBytes (continued)

Object Name	ruckusCtrlClientStatsTxRetryBytes
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.61
Description	Total number of retries when transmitting bytes.

## ruckusCtrlClientStatsTxDropPkts

**TABLE 534** ruckusCtrlClientStatsTxDropPkts

Object Name	ruckusCtrlClientStatsTxDropPkts
Parent Node	ruckusCtrlClientTable
Object Identifier	1.3.6.1.4.1.25053.1.8.1.1.1.2.8.1.63
Description	Total number of transmitted packets that dropped.

## AP Wired Client Table

The following MIBs define the information for the controller **AP Wired Client (ruckusCtrlApWiredClientTable)** table for users to easily access information on all wired clients in a specific AP.

The index of the table is the *ApMac* and *WiredClientMac*.

To query all clients in a specific AP (ap1), use the command format:

```
snmpwalk ruckusCtrlApWiredClientMac.ap1
```

For MAC address of C8:AA:7C:8E:67:C4, it must be translated to equivalent decimal value of 202.170.124.142.103.196 for the query.

For example use the command format:

```
snmpget -v2c -c public <ip_addr>  
RUCKUS-CTRL-MIB::ruckusCtrlApWiredClientMac.6.202.170.124.142.103.196  
where 6 is the length of the string index
```

For MIB browser, it should translate the MAC address to the decimal form.

```
.1.3.6.1.4.1.25053.1.8.1.1.1.1.9.1.6.6.202.170.124.142.103.196
```

- [ruckusCTRLApWiredClientEntry](#) on page 219
- [ruckusCtrlApWiredClientApMac](#) on page 220
- [ruckusCtrlApWiredClientMac](#) on page 220

## ruckusCTRLApWiredClientEntry

**TABLE 535** ruckusCTRLApWiredClientEntry

Object Name	ruckusCTRLApWiredClientEntry
Parent Node	ruckusCtrlApWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.1.11.1
Description	The index to this table is: <ul style="list-style-type: none"> <li>• ruckusCtrlApWiredClientApMac</li> <li>• ruckusCtrlApWiredClientMac</li> </ul>

## ruckusCtrlApWiredClientApMac

TABLE 536 ruckusCtrlApWiredClientApMac

Object Name	ruckusCtrlApWiredClientApMac
Parent Node	ruckusCtrlApWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.11.1
Description	The AP MAC address.

## ruckusCtrlApWiredClientMac

TABLE 537 ruckusCtrlApWiredClientMac

Object Name	ruckusCtrlApWiredClientMac
Parent Node	ruckusCtrlApWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.11.1.6
Description	Wired client MAC address.

# Ruckus Wired Client Table

The following MIBs define the information for the controller **Wired Client (ruckusCtrlWiredClientTable)** table for users to easily access information of a specific wired client.

The index of the table is *WiredClientMac*. This table supports only *snmpget* when the user knows the wired UE's MAC, where the first index should be provided.

To query MAC address of C8:AA:7C:8E:67:C4, it must be translated to an equivalent decimal value of 200.170.124.142.103.196.

For example, to get information of the wired UE with MAC address of C8:AA:7C:8E:67:C4 use the command format:

```
snmpget -v2c -c public <ip_addr> RUCKUS-CTRL-MIB::ruckusCtrlWiredClientMac.6.200.170.124.142.103.196  
where 6 is the length of the string index
```

MAC Address C8:AA:7C:8E:67:C4 in decimal form is 200.170.124.142.103.196:

### NOTE

These tables are designed for debugging specific wired clients for a period of time. It is recommended that you do not use this for periodic and long time monitoring.

- [ruckusCTRLWiredClientEntry](#) on page 221
- [ruckusCtrlWiredClientMac](#) on page 221
- [ruckusCtrlWiredClientUserName](#) on page 221
- [ruckusCtrlWiredClientLanPort](#) on page 222
- [ruckusCtrlWiredClientVlanId](#) on page 222
- [ruckusCtrlWiredClientIp](#) on page 222
- [ruckusCtrlWiredClientIpv6](#) on page 222
- [ruckusCtrlWiredClientApMac](#) on page 222
- [ruckusCtrlWiredClientAuthStatus](#) on page 223
- [ruckusCtrlWiredClientRxFrames](#) on page 223

- [ruckusCtrlWiredClientTxFrames](#) on page 223
- [ruckusCtrlWiredClientRxBytes](#) on page 223
- [ruckusCtrlWiredClientTxBytes](#) on page 223
- [ruckusCtrlWiredClientRxUcastPkts](#) on page 224
- [ruckusCtrlWiredClientTxUcastPkts](#) on page 224
- [ruckusCtrlWiredClientRxMcastPkts](#) on page 224
- [ruckusCtrlWiredClientRxMcastLegacyPkts](#) on page 224
- [ruckusCtrlWiredClientRxMcastLegacyPkts](#) on page 224
- [ruckusCtrlWiredClientRxBcastPkts](#) on page 225
- [ruckusCtrlWiredClientTxBcastPkts](#) on page 225
- [ruckusCtrlWiredClientRxDroppedPkts](#) on page 225
- [ruckusCtrlWiredClientTxBcastPkts](#) on page 225
- [ruckusCtrlWiredClientRxEapolPkts](#) on page 225
- [ruckusCtrlWiredClientTxEapolPkts](#) on page 226

## ruckusCTRLWiredClientEntry

**TABLE 538** ruckusCTRLWiredClientEntry

Object Name	ruckusCTRLWiredClientEntry
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1
Description	The index to this table is WiredClientMac.

## ruckusCtrlWiredClientMac

**TABLE 539** ruckusCtrlWiredClientMac

Object Name	ruckusCtrlWiredClientMac
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.1
Description	The wired UE MAC Address

## ruckusCtrlWiredClientUserName

**TABLE 540** ruckusCtrlWiredClientUserName

Object Name	ruckusCtrlWiredClientUserName
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.3
Description	The wired UE user name.

## ruckusCtrlWiredClientLanPort

TABLE 541 ruckusCtrlWiredClientLanPort

Object Name	ruckusCtrlWiredClientLanPort
Parent Node	ruckusCtrlApClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.4
Description	The wired UE LAN port

## ruckusCtrlWiredClientVlanId

TABLE 542 ruckusCtrlWiredClientVlanId

Object Name	ruckusCtrlWiredClientVlanId
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.5
Description	VLAN identifier.

## ruckusCtrlWiredClientIp

TABLE 543 ruckusCtrlWiredClientIp

Object Name	ruckusCtrlWiredClientIp
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.7
Description	The wired UE IP address.

## ruckusCtrlWiredClientIpv6

TABLE 544 ruckusCtrlWiredClientIpv6

Object Name	ruckusCtrlWiredClientIpv6
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.7
Description	The wired UE IPV6 address.

## ruckusCtrlWiredClientApMac

TABLE 545 ruckusCtrlWiredClientApMac

Object Name	ruckusCtrlWiredClientApMac
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.8
Description	The AP MAC address of the wired client.

## ruckusCtrlWiredClientAuthStatus

**TABLE 546** ruckusCtrlWiredClientAuthStatus

Object Name	ruckusCtrlWiredClientAuthStatus
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.10
Description	The authorized status of the wired client: <ul style="list-style-type: none"> <li>unauthorized (1)</li> <li>authorized (2)</li> </ul>

## ruckusCtrlWiredClientRxFrames

**TABLE 547** ruckusCtrlWiredClientRxFrames

Object Name	ruckusCtrlWiredClientRxFrames
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.15
Description	The total received frames of the wired client.

## ruckusCtrlWiredClientTxFrames

**TABLE 548** ruckusCtrlWiredClientTxFrames

Object Name	ruckusCtrlWiredClientTxFrames
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.16
Description	The total transmitted frames of the wired client.

## ruckusCtrlWiredClientRxBytes

**TABLE 549** ruckusCtrlWiredClientRxBytes

Object Name	ruckusCtrlWiredClientUserName
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.17
Description	The total received bytes of the wired client.

## ruckusCtrlWiredClientTxBytes

**TABLE 550** ruckusCtrlWiredClientTxBytes

Object Name	ruckusCtrlWiredClientTxBytes
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.18
Description	The total transmitted bytes of the wired client.

## ruckusCtrlWiredClientRxUcastPkts

**TABLE 551** ruckusCtrlWiredClientRxUcastPkts

Object Name	ruckusCtrlWiredClientRxUcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.23
Description	The number of received unicast packets of the wired client

## ruckusCtrlWiredClientTxUcastPkts

**TABLE 552** ruckusCtrlWiredClientTxUcastPkts

Object Name	ruckusCtrlWiredClientTxUcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.24
Description	The number of transmitted unicast packets of the wired client.

## ruckusCtrlWiredClientRxMcastPkts

**TABLE 553** ruckusCtrlWiredClientRxMcastPkts

Object Name	ruckusCtrlWiredClientRxMcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.25
Description	The number of multicast packets received of the wired client.

## ruckusCtrlWiredClientTxMcastPkts

**TABLE 554** ruckusCtrlWiredClientTxMcastPkts

Object Name	ruckusCtrlWiredClientTxMcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.26
Description	The number of multicast packets transmitted of the wired client.

## ruckusCtrlWiredClientRxMcastLegacyPkts

**TABLE 555** ruckusCtrlWiredClientRxMcastLegacyPkts

Object Name	ruckusCtrlWiredClientRxMcastLegacyPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.27
Description	The total number of multicast legacy packets of the wired client.

## ruckusCtrlWiredClientRxBcastPkts

**TABLE 556** ruckusCtrlWiredClientRxBcastPkts

Object Name	ruckusCtrlWiredClientRxBcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.28
Description	The number of broadcast packets received of the wired client.

## ruckusCtrlWiredClientTxBcastPkts

**TABLE 557** ruckusCtrlWiredClientTxBcastPkts

Object Name	ruckusCtrlWiredClientTxBcastPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.29
Description	The number of broadcast packets transmitted of the wired client.

## ruckusCtrlWiredClientRxDroppedPkts

**TABLE 558** ruckusCtrlWiredClientRxDroppedPkts

Object Name	ruckusCtrlWiredClientRxDroppedPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.34
Description	The number of dropped frames received.

## ruckusCtrlWiredClientTxDroppedPkts

**TABLE 559** ruckusCtrlWiredClientTxDroppedPkts

Object Name	ruckusCtrlWiredClientTxDroppedPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.35
Description	The number of transmitted dropped frames.

## ruckusCtrlWiredClientRxEapolPkts

**TABLE 560** ruckusCtrlWiredClientRxEapolPkts

Object Name	ruckusCtrlWiredClientRxEapolPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.2.15.1.36
Description	The number of EAPOL (Extensible Authentication Protocol (EAP) over LAN (EAPoL)) packets received.

## ruckusCtrlWiredClientTxEapolPkts

**TABLE 561** ruckusCtrlWiredClientTxEapolPkts

Object Name	ruckusCtrlWiredClientTxEapolPkts
Parent Node	ruckusCtrlWiredClientTable
Object Identifier	.1.3.6.1.4.1.25053.1.8.1.1.1.2.15.1.37
Description	The number of EAPOL packets transmitted.

# Ruckus IPv6 MIB

- IP-FORWARD-MIB..... 227
- IP-MIB..... 229
- TCP-MIB..... 253
- UDP-MIB..... 254
- IPV6-MIB..... 254

The following standard MIB OIDs which supported IPv6 will now be able to use IPv6 address to query SNMP MIB:

## IP-FORWARD-MIB

### inetCidrRouteTable

Following are the objects related to IP-FORWARD-MIB::inetCidrRouteTable:

- [inetCidrRouteIfIndex](#) on page 227
- [inetCidrRouteType](#) on page 227
- [inetCidrRouteProto](#) on page 228
- [inetCidrRouteAge](#) on page 228
- [inetCidrRouteNextHopAS](#) on page 228
- [inetCidrRouteMetric1](#) on page 228
- [inetCidrRouteMetric2](#) on page 228
- [inetCidrRouteMetric3](#) on page 228
- [inetCidrRouteMetric4](#) on page 229
- [inetCidrRouteMetric5](#) on page 229
- [inetCidrRouteStatus](#) on page 229

### *inetCidrRouteIfIndex*

**TABLE 562** inetCidrRouteIfIndex

Object Name	inetCidrRouteIfIndex
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.7

### *inetCidrRouteType*

**TABLE 563** inetCidrRouteType

Object Name	inetCidrRouteType
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.8

### *inetCidrRouteProto*

**TABLE 564** inetCidrRouteProto

Object Name	inetCidrRouteProto
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.9

### *inetCidrRouteAge*

**TABLE 565** inetCidrRouteAge

Object Name	inetCidrRouteAge
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.10

### *inetCidrRouteNextHopAS*

**TABLE 566** inetCidrRouteNextHopAS

Object Name	inetCidrRouteNextHopAS
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.11

### *inetCidrRouteMetric1*

**TABLE 567** inetCidrRouteMetric1

Object Name	inetCidrRouteMetric1
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.12

### *inetCidrRouteMetric2*

**TABLE 568** inetCidrRouteMetric2

Object Name	inetCidrRouteMetric2
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.13

### *inetCidrRouteMetric3*

**TABLE 569** inetCidrRouteMetric3

Object Name	inetCidrRouteMetric3
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.14

### *inetCidrRouteMetric4*

**TABLE 570** inetCidrRouteMetric4

Object Name	inetCidrRouteMetric4
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.15

### *inetCidrRouteMetric5*

**TABLE 571** inetCidrRouteMetric5

Object Name	inetCidrRouteMetric5
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.16

### *inetCidrRouteStatus*

**TABLE 572** inetCidrRouteStatus

Object Name	inetCidrRouteStatus
Parent Node	inetCidrRouteTable
Object Identifier	.1.3.6.1.2.1.4.24.7.1.17

## IP-MIB

Following are the objects related to IP-MIB:

- [ipv6IpForwarding](#) on page 229
- [ipv6IpDefaultHopLimit](#) on page 229
- [ipv6InterfaceTableLastChange](#) on page 230

### *ipv6IpForwarding*

**TABLE 573** ipv6IpForwarding

Object Name	ipv6IpForwarding
Object Identifier	.1.3.6.1.2.1.4.25

### *ipv6IpDefaultHopLimit*

**TABLE 574** ipv6IpDefaultHopLimit

Object Name	ipv6IpDefaultHopLimit
Object Identifier	.1.3.6.1.2.1.4.26

## ipv6InterfaceTableLastChange

TABLE 575 ipv6InterfaceTableLastChange

Object Name	ipv6InterfaceTableLastChange
Object Identifier	.1.3.6.1.2.1.4.29

## ipv6InterfaceTable

Following are the objects related to IP-MIB::ipv6InterfaceTable:

- [ipv6InterfaceReasmMaxSize](#) on page 230
- [ipv6InterfaceIdentifier](#) on page 230
- [ipv6InterfaceEnableStatus](#) on page 230
- [ipv6InterfaceReachableTime](#) on page 230
- [ipv6InterfaceRetransmitTime](#) on page 231
- [ipv6InterfaceForwarding](#) on page 231

## ipv6InterfaceReasmMaxSize

TABLE 576 ipv6InterfaceReasmMaxSize

Object Name	ipv6InterfaceReasmMaxSize
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.2

## ipv6InterfaceIdentifier

TABLE 577 ipv6InterfaceIdentifier

Object Name	ipv6InterfaceIdentifier
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.3

## ipv6InterfaceEnableStatus

TABLE 578 ipv6InterfaceEnableStatus

Object Name	ipv6InterfaceEnableStatus
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.5

## ipv6InterfaceReachableTime

TABLE 579 ipv6InterfaceReachableTime

Object Name	ipv6InterfaceReachableTime
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.6

## ipv6InterfaceRetransmitTime

**TABLE 580** ipv6InterfaceRetransmitTime

Object Name	ipv6InterfaceRetransmitTime
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.7

## ipv6InterfaceForwarding

**TABLE 581** ipv6InterfaceForwarding

Object Name	ipv6InterfaceForwarding
Parent Node	ipv6InterfaceTable
Object Identifier	.1.3.6.1.2.1.4.30.1.8

## ipSystemStatsTable

Following are the objects related to IP-MIB::ipSystemStatsTable:

Object	Object	Object
<a href="#">ipSystemStatsInReceives</a> on page 231	<a href="#">ipSystemStatsHCInReceives</a> on page 232	<a href="#">ipSystemStatsInOctets</a> on page 232
<a href="#">ipSystemStatsHCInOctets</a> on page 232	<a href="#">ipSystemStatsInHdrErrors</a> on page 232	<a href="#">ipSystemStatsInNoRoutes</a> on page 232
<a href="#">ipSystemStatsInAddrErrors</a> on page 232	<a href="#">ipSystemStatsInUnknownProtos</a> on page 233	<a href="#">ipSystemStatsInTruncatedPkts</a> on page 233
<a href="#">ipSystemStatsInForwDatagrams</a> on page 233	<a href="#">ipSystemStatsHCInForwDatagrams</a> on page 233	<a href="#">ipSystemStatsReasmReqds</a> on page 233
<a href="#">ipSystemStatsReasmOKs</a> on page 233	<a href="#">ipSystemStatsReasmFails</a> on page 234	<a href="#">ipSystemStatsInDiscards</a> on page 234
<a href="#">ipSystemStatsInDelivers</a> on page 234	<a href="#">ipSystemStatsHCInDelivers</a> on page 234	<a href="#">ipSystemStatsOutRequests</a> on page 234
<a href="#">ipSystemStatsHCOutRequests</a> on page 234	<a href="#">ipSystemStatsOutNoRoutes</a> on page 235	<a href="#">ipSystemStatsOutForwDatagrams</a> on page 235
<a href="#">ipSystemStatsHCOutForwDatagrams</a> on page 235	<a href="#">ipSystemStatsOutDiscards</a> on page 235	<a href="#">ipSystemStatsOutFragReqds</a> on page 235
<a href="#">ipSystemStatsOutFragOKs</a> on page 235	<a href="#">ipSystemStatsOutFragFails</a> on page 236	<a href="#">ipSystemStatsOutFragCreates</a> on page 236
<a href="#">ipSystemStatsOutTransmits</a> on page 236	<a href="#">ipSystemStatsHCOutTransmits</a> on page 236	<a href="#">ipSystemStatsOutOctets</a> on page 236
<a href="#">ipSystemStatsHCOutOctets</a> on page 236	<a href="#">ipSystemStatsInMcastPkts</a> on page 237	<a href="#">ipSystemStatsHCInMcastPkts</a> on page 237
<a href="#">ipSystemStatsInMcastOctets</a> on page 237	<a href="#">ipSystemStatsHCInMcastOctets</a> on page 237	<a href="#">ipSystemStatsOutMcastPkts</a> on page 237
<a href="#">ipSystemStatsHCOutMcastPkts</a> on page 237	<a href="#">ipSystemStatsOutMcastOctets</a> on page 238	<a href="#">ipSystemStatsHCOutMcastOctets</a> on page 238
<a href="#">ipSystemStatsDiscontinuityTime</a> on page 238	<a href="#">ipSystemStatsRefreshRate</a> on page 238	

## ipSystemStatsInReceives

**TABLE 582** ipSystemStatsInReceives

Object Name	ipSystemStatsInReceives
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.3

### *ipSystemStatsHCInReceives*

**TABLE 583** ipSystemStatsHCInReceives

Object Name	ipSystemStatsHCInReceives
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.4

### *ipSystemStatsInOctets*

**TABLE 584** ipSystemStatsInOctets

Object Name	ipSystemStatsInOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.5

### *ipSystemStatsHCInOctets*

**TABLE 585** ipSystemStatsHCInOctets

Object Name	ipSystemStatsHCInOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.6

### *ipSystemStatsInHdrErrors*

**TABLE 586** ipSystemStatsInHdrErrors

Object Name	ipSystemStatsInHdrErrors
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.7

### *ipSystemStatsInNoRoutes*

**TABLE 587** ipSystemStatsInNoRoutes

Object Name	ipSystemStatsInNoRoutes
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.8

### *ipSystemStatsInAddrErrors*

**TABLE 588** ipSystemStatsInAddrErrors

Object Name	ipSystemStatsInAddrErrors
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.9

### *ipSystemStatsInUnknownProtos*

**TABLE 589** ipSystemStatsInUnknownProtos

Object Name	ipSystemStatsInUnknownProtos
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.10

### *ipSystemStatsInTruncatedPkts*

**TABLE 590** ipSystemStatsInTruncatedPkts

Object Name	ipSystemStatsInTruncatedPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.11

### *ipSystemStatsInForwDatagrams*

**TABLE 591** ipSystemStatsInForwDatagrams

Object Name	ipSystemStatsInForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.12

### *ipSystemStatsHCInForwDatagrams*

**TABLE 592** ipSystemStatsHCInForwDatagrams

Object Name	ipSystemStatsHCInForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.13

### *ipSystemStatsReasmReqds*

**TABLE 593** ipSystemStatsReasmReqds

Object Name	ipSystemStatsReasmReqds
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.14

### *ipSystemStatsReasmOKs*

**TABLE 594** ipSystemStatsReasmOKs

Object Name	ipSystemStatsReasmOKs
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.15

### *ipSystemStatsReasmFails*

**TABLE 595** ipSystemStatsReasmFails

Object Name	ipSystemStatsReasmFails
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.16

### *ipSystemStatsInDiscards*

**TABLE 596** ipSystemStatsInDiscards

Object Name	ipSystemStatsInDiscards
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.17

### *ipSystemStatsInDelivers*

**TABLE 597** ipSystemStatsInDelivers

Object Name	ipSystemStatsInDelivers
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.18

### *ipSystemStatsHCInDelivers*

**TABLE 598** ipSystemStatsHCInDelivers

Object Name	ipSystemStatsHCInDelivers
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.19

### *ipSystemStatsOutRequests*

**TABLE 599** ipSystemStatsOutRequests

Object Name	ipSystemStatsOutRequests
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.20

### *ipSystemStatsHCOutRequests*

**TABLE 600** ipSystemStatsHCOutRequests

Object Name	ipSystemStatsHCOutRequests
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.21

### *ipSystemStatsOutNoRoutes*

**TABLE 601** ipSystemStatsOutNoRoutes

Object Name	ipSystemStatsOutNoRoutes
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.22

### *ipSystemStatsOutForwDatagrams*

**TABLE 602** ipSystemStatsOutForwDatagrams

Object Name	ipSystemStatsOutForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.23

### *ipSystemStatsHCOutForwDatagrams*

**TABLE 603** ipSystemStatsHCOutForwDatagrams

Object Name	ipSystemStatsHCOutForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.24

### *ipSystemStatsOutDiscards*

**TABLE 604** ipSystemStatsOutDiscards

Object Name	ipSystemStatsOutDiscards
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.25

### *ipSystemStatsOutFragReqs*

**TABLE 605** ipSystemStatsOutFragReqs

Object Name	ipSystemStatsOutFragReqs
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.26

### *ipSystemStatsOutFragOKs*

**TABLE 606** ipSystemStatsOutFragOKs

Object Name	ipSystemStatsOutFragOKs
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.27

### *ipSystemStatsOutFragFails*

**TABLE 607** ipSystemStatsOutFragFails

Object Name	ipSystemStatsOutFragFails
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.28

### *ipSystemStatsOutFragCreates*

**TABLE 608** ipSystemStatsOutFragCreates

Object Name	ipSystemStatsOutFragCreates
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.29

### *ipSystemStatsOutTransmits*

**TABLE 609** ipSystemStatsOutTransmits

Object Name	ipSystemStatsOutTransmits
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.30

### *ipSystemStatsHCOutTransmits*

**TABLE 610** ipSystemStatsHCOutTransmits

Object Name	ipSystemStatsHCOutTransmits
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.31

### *ipSystemStatsOutOctets*

**TABLE 611** ipSystemStatsOutOctets

Object Name	ipSystemStatsOutOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.32

### *ipSystemStatsHCOutOctets*

**TABLE 612** ipSystemStatsHCOutOctets

Object Name	ipSystemStatsHCOutOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.33

### *ipSystemStatsInMcastPkts*

**TABLE 613** ipSystemStatsInMcastPkts

Object Name	ipSystemStatsInMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.34

### *ipSystemStatsHCInMcastPkts*

**TABLE 614** ipSystemStatsHCInMcastPkts

Object Name	ipSystemStatsHCInMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.35

### *ipSystemStatsInMcastOctets*

**TABLE 615** ipSystemStatsInMcastOctets

Object Name	ipSystemStatsInMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.36

### *ipSystemStatsHCInMcastOctets*

**TABLE 616** ipSystemStatsHCInMcastOctets

Object Name	ipSystemStatsHCInMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.37

### *ipSystemStatsOutMcastPkts*

**TABLE 617** ipSystemStatsOutMcastPkts

Object Name	ipSystemStatsOutMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.38

### *ipSystemStatsHCOutMcastPkts*

**TABLE 618** ipSystemStatsHCOutMcastPkts

Object Name	ipSystemStatsHCOutMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.39

### *ipSystemStatsOutMcastOctets*

**TABLE 619** ipSystemStatsOutMcastOctets

Object Name	ipSystemStatsOutMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.40

### *ipSystemStatsHCOutMcastOctets*

**TABLE 620** ipSystemStatsHCOutMcastOctets

Object Name	ipSystemStatsHCOutMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.41

### *ipSystemStatsDiscontinuityTime*

**TABLE 621** ipSystemStatsDiscontinuityTime

Object Name	ipSystemStatsDiscontinuityTime
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.46

### *ipSystemStatsRefreshRate*

**TABLE 622** ipSystemStatsRefreshRate

Object Name	ipSystemStatsRefreshRate
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.1.1.47

## **ipIfStatsTable**

Following are the objects related to IP-MIB::ipIfStatsTable:

Object	Object	Object
<a href="#">ipIfStatsInReceives</a> on page 239	<a href="#">ipIfStatsHCInReceives</a> on page 239	<a href="#">ipIfStatsInOctets</a> on page 239
<a href="#">ipIfStatsHCInOctets</a> on page 239	<a href="#">ipIfStatsInHdrErrors</a> on page 239	<a href="#">ipIfStatsInNoRoutes</a> on page 240
<a href="#">ipIfStatsInAddrErrors</a> on page 240	<a href="#">ipIfStatsInUnknownProtos</a> on page 240	<a href="#">ipIfStatsInTruncatedPkts</a> on page 240
<a href="#">ipIfStatsInForwDatagrams</a> on page 240	<a href="#">ipIfStatsHCInForwDatagrams</a> on page 240	<a href="#">ipIfStatsReasmReqds</a> on page 241
<a href="#">ipIfStatsReasmOKs</a> on page 241	<a href="#">ipIfStatsReasmFails</a> on page 241	<a href="#">ipIfStatsInDiscards</a> on page 241
<a href="#">ipIfStatsInDelivers</a> on page 241	<a href="#">ipIfStatsHCInDelivers</a> on page 241	<a href="#">ipIfStatsOutRequests</a> on page 242
<a href="#">ipIfStatsHCOutRequests</a> on page 242	<a href="#">ipIfStatsOutForwDatagrams</a> on page 242	<a href="#">ipIfStatsHCOutForwDatagrams</a> on page 242
<a href="#">ipIfStatsOutDiscards</a> on page 242	<a href="#">ipIfStatsOutFragReqds</a> on page 242	<a href="#">ipIfStatsOutFragOKs</a> on page 243
<a href="#">ipIfStatsOutFragFails</a> on page 243	<a href="#">ipIfStatsOutFragCreates</a> on page 243	<a href="#">ipIfStatsOutTransmits</a> on page 243
<a href="#">ipIfStatsHCOutTransmits</a> on page 243	<a href="#">ipIfStatsOutOctets</a> on page 243	<a href="#">ipIfStatsHCOutOctets</a> on page 244
<a href="#">ipIfStatsInMcastPkts</a> on page 244	<a href="#">ipIfStatsHCInMcastPkts</a> on page 244	<a href="#">ipIfStatsInMcastOctets</a> on page 244

Object	Object	Object
<a href="#">ipIfStatsHCInMcastOctets</a> on page 244	<a href="#">ipIfStatsOutMcastPkts</a> on page 244	<a href="#">ipIfStatsHCOutMcastPkts</a> on page 245
<a href="#">ipIfStatsOutMcastOctets</a> on page 245	<a href="#">ipIfStatsHCOutMcastOctets</a> on page 245	<a href="#">ipIfStatsDiscontinuityTime</a> on page 245
<a href="#">ipIfStatsRefreshRate</a> on page 245		

### *ipIfStatsInReceives*

**TABLE 623** ipIfStatsInReceives

Object Name	ipIfStatsInReceives
Parent Node	ipIfStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.3

### *ipIfStatsHCInReceives*

**TABLE 624** ipIfStatsHCInReceives

Object Name	ipIfStatsHCInReceives
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.4

### *ipIfStatsInOctets*

**TABLE 625** ipIfStatsInOctets

Object Name	ipIfStatsInOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.5

### *ipIfStatsHCInOctets*

**TABLE 626** ipIfStatsHCInOctets

Object Name	ipIfStatsHCInOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.6

### *ipIfStatsInHdrErrors*

**TABLE 627** ipIfStatsInHdrErrors

Object Name	ipIfStatsInHdrErrors
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.7

### *ipIfStatsInNoRoutes*

**TABLE 628** ipIfStatsInNoRoutes

Object Name	ipIfStatsInNoRoutes
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.8

### *ipIfStatsInAddrErrors*

**TABLE 629** ipIfStatsInAddrErrors

Object Name	ipIfStatsInAddrErrors
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.9

### *ipIfStatsInUnknownProtos*

**TABLE 630** ipIfStatsInUnknownProtos

Object Name	ipIfStatsInUnknownProtos
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.10

### *ipIfStatsInTruncatedPkts*

**TABLE 631** ipIfStatsInTruncatedPkts

Object Name	ipIfStatsInTruncatedPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.11

### *ipIfStatsInForwDatagrams*

**TABLE 632** ipIfStatsInForwDatagrams

Object Name	ipIfStatsInForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.12

### *ipIfStatsHCInForwDatagrams*

**TABLE 633** ipIfStatsHCInForwDatagrams

Object Name	ipIfStatsHCInForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.13

### *ipIfStatsReasmReqds*

**TABLE 634** ipIfStatsReasmReqds

Object Name	ipIfStatsReasmReqds
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.14

### *ipIfStatsReasmOKs*

**TABLE 635** ipIfStatsReasmOKs

Object Name	ipIfStatsReasmOKs
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.15

### *ipIfStatsReasmFails*

**TABLE 636** ipIfStatsReasmFails

Object Name	ipIfStatsReasmFails
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.16

### *ipIfStatsInDiscards*

**TABLE 637** ipIfStatsInDiscards

Object Name	ipIfStatsInDiscards
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.17

### *ipIfStatsInDelivers*

**TABLE 638** ipIfStatsInDelivers

Object Name	ipIfStatsInDelivers
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.18

### *ipIfStatsHCInDelivers*

**TABLE 639** ipIfStatsHCInDelivers

Object Name	ipIfStatsHCInDelivers
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.19

### *ipIfStatsOutRequests*

**TABLE 640** ipIfStatsOutRequests

Object Name	ipIfStatsOutRequests
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.20

### *ipIfStatsHCOutRequests*

**TABLE 641** ipIfStatsHCOutRequests

Object Name	ipIfStatsHCOutRequests
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.21

### *ipIfStatsOutForwDatagrams*

**TABLE 642** ipIfStatsOutForwDatagrams

Object Name	ipIfStatsOutForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.23

### *ipIfStatsHCOutForwDatagrams*

**TABLE 643** ipIfStatsHCOutForwDatagrams

Object Name	ipIfStatsHCOutForwDatagrams
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.24

### *ipIfStatsOutDiscards*

**TABLE 644** ipIfStatsOutDiscards

Object Name	ipIfStatsOutDiscards
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.25

### *ipIfStatsOutFragReqds*

**TABLE 645** ipIfStatsOutFragReqds

Object Name	ipIfStatsOutFragReqds
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.26

### *ipIfStatsOutFragOKs*

**TABLE 646** ipIfStatsOutFragOKs

Object Name	ipIfStatsOutFragOKs
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.27

### *ipIfStatsOutFragFails*

**TABLE 647** ipIfStatsOutFragFails

Object Name	ipIfStatsOutFragFails
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.28

### *ipIfStatsOutFragCreates*

**TABLE 648** ipIfStatsOutFragCreates

Object Name	ipIfStatsOutFragCreates
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.29

### *ipIfStatsOutTransmits*

**TABLE 649** ipIfStatsOutTransmits

Object Name	ipIfStatsOutTransmits
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.30

### *ipIfStatsHCOutTransmits*

**TABLE 650** ipIfStatsHCOutTransmits

Object Name	ipIfStatsHCOutTransmits
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.31

### *ipIfStatsOutOctets*

**TABLE 651** ipIfStatsOutOctets

Object Name	ipIfStatsOutOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.32

### *ipIfStatsHCOctets*

**TABLE 652** ipIfStatsHCOctets

Object Name	ipIfStatsHCOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.33

### *ipIfStatsInMcastPkts*

**TABLE 653** ipIfStatsInMcastPkts

Object Name	ipIfStatsInMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.34

### *ipIfStatsHCInMcastPkts*

**TABLE 654** ipIfStatsHCInMcastPkts

Object Name	ipIfStatsHCInMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.35

### *ipIfStatsInMcastOctets*

**TABLE 655** ipIfStatsInMcastOctets

Object Name	ipIfStatsInMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.36

### *ipIfStatsHCInMcastOctets*

**TABLE 656** ipIfStatsHCInMcastOctets

Object Name	ipIfStatsHCInMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.37

### *ipIfStatsOutMcastPkts*

**TABLE 657** ipIfStatsOutMcastPkts

Object Name	ipIfStatsOutMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.38

### *ipIfStatsHCOutMcastPkts*

**TABLE 658** ipIfStatsHCOutMcastPkts

Object Name	ipIfStatsHCOutMcastPkts
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.39

### *ipIfStatsOutMcastOctets*

**TABLE 659** ipIfStatsOutMcastOctets

Object Name	ipIfStatsOutMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.40

### *ipIfStatsHCOutMcastOctets*

**TABLE 660** ipIfStatsHCOutMcastOctets

Object Name	ipIfStatsHCOutMcastOctets
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.41

### *ipIfStatsDiscontinuityTime*

**TABLE 661** ipIfStatsDiscontinuityTime

Object Name	ipIfStatsDiscontinuityTime
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.46

### *ipIfStatsRefreshRate*

**TABLE 662** ipIfStatsRefreshRate

Object Name	ipIfStatsRefreshRate
Parent Node	ipSystemStatsTable
Object Identifier	.1.3.6.1.2.1.4.31.3.1.47

## ipAddressPrefixTable

Following are the objects related to IP-MIB::ipAddressPrefixTable:

- [ipAddressPrefixOrigin](#) on page 246
- [ipAddressPrefixOnLinkFlag](#) on page 246
- [ipAddressPrefixAutonomousFlag](#) on page 246
- [ipAddressPrefixAdvPreferredLifetime](#) on page 246
- [ipAddressPrefixAdvValidLifetime](#) on page 246

### *ipAddressPrefixOrigin*

**TABLE 663** ipAddressPrefixOrigin

Object Name	ipAddressPrefixOrigin
Parent Node	ipAddressPrefixTable
Object Identifier	.1.3.6.1.2.1.4.32.1.5

### *ipAddressPrefixOnLinkFlag*

**TABLE 664** ipAddressPrefixOnLinkFlag

Object Name	ipAddressPrefixOnLinkFlag
Parent Node	ipAddressPrefixTable
Object Identifier	.1.3.6.1.2.1.4.32.1.6

### *ipAddressPrefixAutonomousFlag*

**TABLE 665** ipAddressPrefixAutonomousFlag

Object Name	ipAddressPrefixAutonomousFlag
Parent Node	ipAddressPrefixTable
Object Identifier	.1.3.6.1.2.1.4.32.1.7

### *ipAddressPrefixAdvPreferredLifetime*

**TABLE 666** ipAddressPrefixAdvPreferredLifetime

Object Name	ipAddressPrefixAdvPreferredLifetime
Parent Node	ipAddressPrefixTable
Object Identifier	.1.3.6.1.2.1.4.32.1.8

### *ipAddressPrefixAdvValidLifetime*

**TABLE 667** ipAddressPrefixAdvValidLifetime

Object Name	ipAddressPrefixAdvValidLifetime
Parent Node	ipAddressPrefixTable
Object Identifier	.1.3.6.1.2.1.4.32.1.9

## **ipAddressTable**

Following are the objects related to IP-MIB::ipAddressTable:

- [ipAddressIfIndex](#) on page 247
- [ipAddressType](#) on page 247
- [ipAddressPrefix](#) on page 247
- [ipAddressOrigin](#) on page 247
- [ipAddressStatus](#) on page 247

- [ipAddressCreated](#) on page 248
- [ipAddressLastChanged](#) on page 248
- [ipAddressRowStatus](#) on page 248
- [ipAddressStorageType](#) on page 248

### *ipAddressIndex*

**TABLE 668** ipAddressIndex

Object Name	ipAddressIndex
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.3

### *ipAddressType*

**TABLE 669** ipAddressType

Object Name	ipAddressType
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.4

### *ipAddressPrefix*

**TABLE 670** ipAddressPrefix

Object Name	ipAddressPrefix
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.5

### *ipAddressOrigin*

**TABLE 671** ipAddressOrigin

Object Name	ipAddressOrigin
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.6

### *ipAddressStatus*

**TABLE 672** ipAddressStatus

Object Name	ipAddressStatus
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.7

## *ipAddressCreated*

**TABLE 673** ipAddressCreated

Object Name	ipAddressCreated
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.8

## *ipAddressLastChanged*

**TABLE 674** ipAddressLastChanged

Object Name	ipAddressLastChanged
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.9

## *ipAddressRowStatus*

**TABLE 675** ipAddressRowStatus

Object Name	ipAddressRowStatus
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.10

## *ipAddressStorageType*

**TABLE 676** ipAddressStorageType

Object Name	ipAddressStorageType
Parent Node	ipAddressTable
Object Identifier	.1.3.6.1.2.1.4.34.1.11

## **ipNetToPhysicalTable**

Following are the objects related to IP-MIB::ipNetToPhysicalTable:

- [ipNetToPhysicalPhysAddress](#) on page 248
- [ipNetToPhysicalLastUpdated](#) on page 249
- [ipNetToPhysicalRowStatus](#) on page 249
- [ipNetToPhysicalState](#) on page 249
- [ipNetToPhysicalType](#) on page 249

## *ipNetToPhysicalPhysAddress*

**TABLE 677** ipNetToPhysicalPhysAddress

Object Name	ipNetToPhysicalPhysAddress
Parent Node	ipNetToPhysicalTable
Object Identifier	.1.3.6.1.2.1.4.35.1.4

### *ipNetToPhysicalLastUpdated*

**TABLE 678** ipNetToPhysicalLastUpdated

Object Name	ipNetToPhysicalLastUpdated
Parent Node	ipNetToPhysicalTable
Object Identifier	.1.3.6.1.2.1.4.35.1.5

### *ipNetToPhysicalRowStatus*

**TABLE 679** ipNetToPhysicalRowStatus

Object Name	ipNetToPhysicalRowStatus
Parent Node	ipNetToPhysicalTable
Object Identifier	.1.3.6.1.2.1.4.35.1.6

### *ipNetToPhysicalState*

**TABLE 680** ipNetToPhysicalState

Object Name	ipNetToPhysicalState
Parent Node	ipNetToPhysicalTable
Object Identifier	.1.3.6.1.2.1.4.35.1.7

### *ipNetToPhysicalType*

**TABLE 681** ipNetToPhysicalType

Object Name	ipNetToPhysicalType
Parent Node	ipNetToPhysicalTable
Object Identifier	.1.3.6.1.2.1.4.35.1.8

## **ipv6ScopeZoneIndexTable**

Following are the objects related to IP-MIB::ipv6ScopeZoneIndexTable:

- [ipv6ScopeZoneIndexLinkLocal](#) on page 250
- [ipv6ScopeZoneIndex3](#) on page 250
- [ipv6ScopeZoneIndexAdminLocal](#) on page 250
- [ipv6ScopeZoneIndexSiteLocal](#) on page 250
- [ipv6ScopeZoneIndex6](#) on page 250
- [ipv6ScopeZoneIndex7](#) on page 250
- [ipv6ScopeZoneIndexOrganizationLocal](#) on page 251
- [ipv6ScopeZoneIndex9](#) on page 251
- [ipv6ScopeZoneIndexA](#) on page 251
- [ipv6ScopeZoneIndexB](#) on page 251
- [ipv6ScopeZoneIndexC](#) on page 251
- [ipv6ScopeZoneIndexD](#) on page 251

### *ipv6ScopeZoneIndexLinkLocal*

**TABLE 682** ipv6ScopeZoneIndexLinkLocal

Object Name	ipv6ScopeZoneIndexLinkLocal
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.2

### *ipv6ScopeZoneIndex3*

**TABLE 683** ipv6ScopeZoneIndex3

Object Name	ipv6ScopeZoneIndex3
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.3

### *ipv6ScopeZoneIndexAdminLocal*

**TABLE 684** ipv6ScopeZoneIndexAdminLocal

Object Name	ipv6ScopeZoneIndexAdminLocal
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.4

### *ipv6ScopeZoneIndexSiteLocal*

**TABLE 685** ipv6ScopeZoneIndexSiteLocal

Object Name	ipv6ScopeZoneIndexSiteLocal
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.5

### *ipv6ScopeZoneIndex6*

**TABLE 686** ipv6ScopeZoneIndex6

Object Name	ipv6ScopeZoneIndex6
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.6

### *ipv6ScopeZoneIndex7*

**TABLE 687** ipv6ScopeZoneIndex7

Object Name	ipv6ScopeZoneIndex7
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.7

### *ipv6ScopeZoneIndexOrganizationLocal*

**TABLE 688** ipv6ScopeZoneIndexOrganizationLocal

Object Name	ipv6ScopeZoneIndexOrganizationLocal
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.8

### *ipv6ScopeZoneIndex9*

**TABLE 689** ipv6ScopeZoneIndex9

Object Name	ipv6ScopeZoneIndex9
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.9

### *ipv6ScopeZoneIndexA*

**TABLE 690** ipv6ScopeZoneIndexA

Object Name	ipv6ScopeZoneIndexA
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.10

### *ipv6ScopeZoneIndexB*

**TABLE 691** ipv6ScopeZoneIndexB

Object Name	ipv6ScopeZoneIndexB
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.11

### *ipv6ScopeZoneIndexC*

**TABLE 692** ipv6ScopeZoneIndexC

Object Name	ipv6ScopeZoneIndexC
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.12

### *ipv6ScopeZoneIndexD*

**TABLE 693** ipv6ScopeZoneIndexD

Object Name	ipv6ScopeZoneIndexD
Parent Node	ipv6ScopeZoneIndexTable
Object Identifier	.1.3.6.1.2.1.4.36.1.13

## icmpStatsTable

Following are the objects related to IP-MIB::icmpStatsTable:

- [icmpStatsInMsgs](#) on page 252
- [icmpStatsInErrors](#) on page 252
- [icmpStatsOutMsgs](#) on page 252
- [icmpStatsOutErrors](#) on page 252

### icmpStatsInMsgs

**TABLE 694** icmpStatsInMsgs

Object Name	icmpStatsInMsgs
Parent Node	icmpStatsTable
Object Identifier	.1.3.6.1.2.1.5.29.1.2

### icmpStatsInErrors

**TABLE 695** icmpStatsInErrors

Object Name	icmpStatsInErrors
Parent Node	icmpStatsTable
Object Identifier	.1.3.6.1.2.1.5.29.1.3

### icmpStatsOutMsgs

**TABLE 696** icmpStatsOutMsgs

Object Name	icmpStatsOutMsgs
Parent Node	icmpStatsTable
Object Identifier	.1.3.6.1.2.1.5.29.1.4

### icmpStatsOutErrors

**TABLE 697** icmpStatsOutErrors

Object Name	icmpStatsOutErrors
Parent Node	icmpStatsTable
Object Identifier	.1.3.6.1.2.1.5.29.1.5

## icmpMsgStatsTable

Following are the objects related to IP-MIB::icmpMsgStatsTable:

- [icmpMsgStatsInPkts](#) on page 253
- [icmpMsgStatsOutPkts](#) on page 253

### *icmpMsgStatsInPkts*

**TABLE 698** icmpMsgStatsInPkts

Object Name	icmpMsgStatsInPkts
Parent Node	icmpMsgStatsTable
Object Identifier	.1.3.6.1.2.1.5.30.1.3

### *icmpMsgStatsOutPkts*

**TABLE 699** icmpMsgStatsOutPkts

Object Name	icmpMsgStatsOutPkts
Parent Node	icmpMsgStatsTable
Object Identifier	.1.3.6.1.2.1.5.30.1.4

## TCP-MIB

### *tcpListenerTable*

Object(s) related to TCP-MIB::tcpListenerTable:

- [tcpListenerProcess](#) on page 253

### *tcpListenerProcess*

**TABLE 700** tcpListenerProcess

Object Name	tcpListenerProcess
Parent Node	tcpListenerTable
Object Identifier	.1.3.6.1.2.1.6.20.1.4

### *tcpConnectionTable*

Following are the objects related to TCP-MIB::tcpConnectionTable:

- [tcpConnectionState](#) on page 253
- [tcpConnectionProcess](#) on page 254

### *tcpConnectionState*

**TABLE 701** tcpConnectionState

Object Name	tcpConnectionState
Parent Node	tcpConnectionTable
Object Identifier	.1.3.6.1.2.1.6.19.1.7

## *tcpConnectionProcess*

**TABLE 702** tcpConnectionProcess

Object Name	tcpConnectionProcess
Parent Node	tcpConnectionTable
Object Identifier	.1.3.6.1.2.1.6.19.1.8

# UDP-MIB

## *udpEndpointTable*

Object(s) related to UDP-MIB::udpEndpointTable:

- [udpEndpointProcess](#) on page 254

## *udpEndpointProcess*

**TABLE 703** udpEndpointProcess

Object Name	udpEndpointProcess
Parent Node	udpEndpointTable
Object Identifier	.1.3.6.1.2.1.7.7.1.8

# IPV6-MIB

Following are the objects related to IPV6-MIB:

- [ipv6Forwarding](#) on page 254
- [ipv6DefaultHopLimit](#) on page 254
- [ipv6Interfaces](#) on page 255

## *ipv6Forwarding*

**TABLE 704** ipv6Forwarding

Object Name	ipv6Forwarding
Object Identifier	.1.3.6.1.2.1.55.1.1

## *ipv6DefaultHopLimit*

**TABLE 705** ipv6DefaultHopLimit

Object Name	ipv6DefaultHopLimit
Object Identifier	.1.3.6.1.2.1.55.1.2

## ipv6Interfaces

**TABLE 706** ipv6Interfaces

Object Name	ipv6Interfaces
Object Identifier	.1.3.6.1.2.1.55.1.3

## ipv6IfTable

Following are the objects related to IPV6-MIB::ipv6IfTable:

- [ipv6IfDescr](#) on page 255
- [ipv6IfLowerLayer](#) on page 255
- [ipv6IfPhysicalAddress](#) on page 255
- [ipv6IfPhysicalAddress](#) on page 255
- [ipv6IfAdminStatus](#) on page 256
- [ipv6IfOperStatus](#) on page 256

## ipv6IfDescr

**TABLE 707** ipv6IfDescr

Object Name	ipv6IfDescr
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.2

## ipv6IfLowerLayer

**TABLE 708** ipv6IfLowerLayer

Object Name	ipv6IfLowerLayer
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.3

## ipv6IfPhysicalAddress

**TABLE 709** ipv6IfPhysicalAddress

Object Name	ipv6IfPhysicalAddress
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.4

## ipv6IfPhysicalAddress

**TABLE 710** ipv6IfPhysicalAddress

Object Name	ipv6IfPhysicalAddress
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.8

### *ipv6IfAdminStatus*

**TABLE 711** ipv6IfAdminStatus

Object Name	ipv6IfAdminStatus
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.9

### *ipv6IfOperStatus*

**TABLE 712** ipv6IfOperStatus

Object Name	ipv6IfOperStatus
Parent Node	ipv6IfTable
Object Identifier	.1.3.6.1.2.1.55.1.5.1.10

# SmartZone Event Traps

- [ruckusSZSystemMiscEventTrap](#)..... 257
- [ruckusSZAPMiscEventTrap](#)..... 258
- [ruckusSZClientMiscEventTrap](#)..... 258

## ruckusSZSystemMiscEventTrap

- Object Name - [ruckusSZSystemMiscEventTrap](#) on page 47
- Object Identifier - 1.3.6.1.4.1.25053.2.11.1.1

Event	Event	Event
0:Unknown	508:dpIPChanged	509:dpChangeControlBlade
516:dpPktPoolLow	517:dpPktPoolCriticalLow	518:dpPktPoolRecover
519:dpCoreDead	520:dpProcessRestart	618:dpDhcpRelayNoResp
619:dpDhcpRelayFailOver	623:dpDhcpRelayRespRecovery	725:scgLBSStartLocationService
727:scgLBSsentControllerInfo	728:scgLBSRcvdMgmtRequest	729:scgLBSsendAPIInfoByVenueReport
730:scgLBSsendVenuesReport	731:scgLBSsendClientInfo	732:scgLBSFwdPassiveCalReq
733:scgLBSFwdPassiveFFReq	734:scgLBSRcvdUnrecognizedRequest	770:planeLoadingRebalancingSucceeded
771:planeLoadingRebalancingFailed	801:clusterCreatedSuccess	819:clusterUpgradeStart
823:nodeIPChanged	827:ntpTimeSynched	830:clusterUploadStart
834:removeNodeStarted	837:resyncNTPTime	838:diskUsageExceed
844:clusterInitiatedMovingAp	848:clusterUploadAPFirmwareStart	849:clusterUploadAPFirmwareSuccess
850:clusterUploadAPFirmwareFailed	851:clusterAddAPFirmwareStart	852:clusterAddAPFirmwareSuccess
853:clusterAddAPFirmwareFailed	854:clusterNameChanged	970:ftpTransfer
980:fileUpload	981:mailSendSuccess	982:mailSendFailed
983:smsSendSuccess	984:smsSendFailed	1007:cfgUpdSuccess
1012:incorrectFlatFileCfg	1209:c2dCfgFailed	1237:delAllSess
1254:licenseImported	1255:licenseGoingToExpire	1256:apConnectionTerminatedDueToInsufficient License
1300:rateLimitThresholdSurpassed	1301:rateLimitThresholdRestored	1641:dmRcvdAAA
1642:dmNackSntAAA	1643:dmSntNAS	1644:dmNackRcvdNAS
1645:coaRcvdAAA	1646:coaNackSntAAA	1647:coaSentNas
1648:coaNakRcvdNas	1649:coaAuthorizeOnlyAccessReject	1650:coaRWSGMWGSGNotifFailure
1651:authFailedOverToSecondary	1652:authFallbackToPrimary	1751:racADLDAPSuccess
1752:racADLDAPFail	1753:racADLDAPBindFail	1754:racLDAPFailToFindPassword
1755:racADNPSFail	1756:racADNPSFailToAuthenticate	2001:zdAPMigrating
2002:zdAPMigrated	2003:zdAPRejected	2501:nodeIPv6Added
2502:nodeIPv6Deleted	2004:zdAPMigrationFailed	3001:cassandraError
7001:tooManyUsers	7002:tooManyDevices	

## ruckusSZAPMiscEventTrap

- Object Name - [ruckusSZAPMiscEventTrap](#) on page 51
- Object Identifier -.1.3.6.1.4.1.25053.2.11.1.20

Event	Event	Event
108:apFirmwareApplying	109:apConfApplying	116:apIllegalToChangeCountryCode
180:genericRogueAPDetected	304:apIPChanged	306:apChannelChanged
307:apCountryCodeChanged	308:apDfsRadarEvent	311:apChangeControlBlade
315:apTaggedAsCritical	317:apBrownout	319:smartMonitorTurnOffWLAN
320:apCLBLimitReached	321:apCLBLimitRecovered	322:apWLANStateChanged
323:apCapacityReached	324:apCapacityRecovered	405:emapDlinkConnectWithMap
406:emapDlinkDisconnectWithMap	407:emapUlinkConnectWithMap	408:emapUlinkDisconnectWithMap
411:mapDisconnected	412:mapDlinkConnected	413:mapDlinkConnectWithMap
414:mapDlinkDisconnectWithMap	416:rmapDlinkConnectWithMap	417:mapUlinkConnectToMap
418:mapUlinkDisconnectToMap	419:mapUlinkConnectToRap	420:mapUlinkConnectToMap
421:meshStateUpdateToMap	422:meshStateUpdateToMapNoChannel	423:meshStateUpdateToRap
424:meshStateUpdateToRapNoChannel	425:mapDlinkConnectWithMap	426:mapDlinkDisconnectWithMap
427:rapDlinkDisconnectWithMap	705:apLBSStartLocationService	706:apLBSStopLocationService
707:apLBSRcvdPassiveCalReq	708:apLBSRcvdPassiveFFReq	709:apLBSRcvdUnrecognizedRequest
1021:zoneCfgPrepareFailed	1022: apCfgGenFailed	1023:cfgGenSkippedDueToEolAp

## ruckusSZClientMiscEventTrap

- Object Name - [ruckusSZClientMiscEventTrap](#) on page 83
- Object Identifier -.1.3.6.1.4.1.25053.2.11.1.100

Event	Event	Event
201:clientAuthFailure	202:clientJoin	203:clientJoinFailure
204:clientDisconnect	205:clientInactivityTimeout	206:clientAuthorization
207:clientAuthorizationFailure	208:clientSessionExpiration	209:clientRoaming
210:clientSessionLogout	218:smartRoamDisconnect	219:clientBlockByDeviceType
220:clientGracePeriod	221:onboardingRegistrationSuccess	222:onboardingRegistrationFailure
223:remediationSuccess	224:remediationFailure	225:forceDHCPDisconnect
226:wdsDeviceJoin	227:wdsDeviceLeave	

# Frequently Asked Questions

---

- Timeout ..... 259
- SNMP Reports ..... 260
- Difference in SNMP Data..... 260
- Modifying SNMP HostName..... 261
- Determining the Timeout Value ..... 261
- Determining the Query Interval..... 261
- Determining the Query Interval for AP Related Tables..... 261

## Timeout

Why does a *Timeout No Response* occur during a full SNMP MIB walk?

1. **Scenario 1** : When querying full MIBs

Following are the solutions to resolve the timeout issue.

- a. Increase the timeout value of the SNMP client tools. Always try to increase the timeout value of the SNMP MIB browser or SNMP CLI commands based on the number of APs and UEs on the controller (SmartZone).
- b. Do a snmpwalk for a specified table. Otherwise, it is likely that SNMP will focus on the standard table *tcpConnTable*, which collects all the TCP connections of the controller. The table size could be large based on the large number of APs or UEs associated to a controller .

2. **Scenario 2** : When querying AP related table for controllers with large number of APs and UEs

Following are the solutions to resolve the timeout issue.

- a. Increase the interval of the query scripts or tools to make sure there is only one SNMP client tool to query the controller at a time. Adjust the query interval of the query scripts or tools by the loading of the controller. Otherwise, SNMP daemon takes longer to complete all queries. It is recommended that you do not run multiple queries at the same time.
- b. Do not use MIB browser to monitor the APs. Most MIB browsers can only provide snmpwalk which is not an efficient for querying large volume of data and are unable to store large volumes of data.
- c. Increase the timeout value of the SNMP client tools. Always try to increase the timeout value of the SNMP MIB browser or SNMP CLI commands based on the number of APs and UEs on the controller.
- d. Get the table index by using snmpwalk and use snmpget to get multiple entries of same index at a time.

1. Step 1 - Use a script to query the index of the table using snmpwalk as seen in the below example.

```
Example:  
snmpwalk <options> <IP> <table index 1 OID>snmpwalk <options> <IP> <table index 2 OID>
```

2. Step 2 - Use a script to query multiple table entries for same index at a time using snmpget as seen in the below example.

```
Example:  
snmpget <options> <IP> <table entry 1 OID>.index1 <table entry 2 OID>.index1 ...  
<table entry N OID>.index1
```

## SNMP Reports

Why is the response time slow when querying for SNMP reports ?

If the controller is busy collecting data for other tables and if the time taken is longer than the timeout setting for SNMP reports, then the SNMP client tool displays the *Timeout No Response* error.

Following are the solutions for the response time being slow.

1. Increase the interval of the query scripts or tools to make sure there is only one SNMP client tool to query the controller at a time. Adjust the query interval of the query scripts or tools by the loading of the controller. Otherwise, SNMP daemon takes longer to complete all queries. It is recommended that you do not run multiple queries at the same time.
2. Do not use MIB browser to monitor the APs. Most MIB browsers can only provide snmpwalk which is not an efficient for querying large volume of data and are unable to store large volumes of data.
3. Increase the timeout value of the SNMP client tools. Always try to increase the timeout value of the SNMP MIB browser or SNMP CLI commands based on the number of APs and UEs on the controller.
4. Get the table index by using snmpwalk and use snmpget to get multiple entries of same index at a time.
  - a. Step 1 - Use a script to query the index of the table using snmpwalk as seen in the below example.

```
Example:  
snmpwalk <options> <IP> <table index 1 OID>snmpwalk <options> <IP> <table index 2 OID>
```

- b. Step 2 - Use a script to query multiple table entries for same index at a time using snmpget as seen in the below example.

```
Example:  
snmpget <options> <IP> <table entry 1 OID>.index1 <table entry 2 OID>.index1 ...  
<table entry N OID>.index1
```

## Difference in SNMP Data

Why is there a difference between the SNMP reports and the web interface display?

- **Scenario 1:** Memory, disk space, and CPU usages are different from the web interface display.

The following are the reasons for this difference to occur.

Standard MIBs provide Linux level resource status. It is different from *usable resource* of the system.

The web interface shows the logically resource of the system, which is different from the physical status. Currently, it does not show in the Ruckus private MIBs.

- **Scenario 2:** Statistical data is different from the web interface display.

The following are the reasons for this difference to occur.

Most of the SNMP tables use cache mechanism.

SNMP daemon retains the data between 30 to 300 seconds.

There is a delayed response time from APs or UEs in reporting their statistical data.

## Modifying SNMP HostName

Why cannot the SNMP hostname be modified through SNMPSET ?

Ruckus does not support setting the hostname through SNMP MIB. This is a read-only for all controller platforms. Use the CLI mode to modify the hostname.

## Determining the Timeout Value

How to determine the minimum timeout value for a full MIB tree?

The minimum timeout value should be long to complete the *TCP-MIB::tcpConnectionTable* and *RUCKUS-SCG-CONFIG-WLAN-MIB::ruckusSCGConfigWLANTable* which is the bottle neck. An elapsed time results in a timeout response.

To determine this value, use the SNMP daemon, which caches the data in this table. Query this table within the cached timeout to get the value.

For example, in an environment with 10,000 APs and 1,000 WLANs, the values are:

MIB Table	Minimum Timeout
RUCKUS-SCG-CONFIG-WLAN-MIB::ruckusSCGConfigWLANTable	25+ seconds
TCP-MIB::tcpConnectionTable	14+ seconds

### NOTE

The exact value should be tested in your own environments.

## Determining the Query Interval

How to determine the query interval for a full MIB tree?

The exact value depends on too many factors such as network topology, congestion, and traffic. The precise to determine the query interval is by recording the longest time and adding some buffer time to complete a full MIB walk.

## Determining the Query Interval for AP Related Tables

How to determine the query interval for AP related tables ?

Use snmpwalk to get an OID of the AP related table to determine the time to complete the snmpwalk for a single OID.

### 1. Scenario 1 : Using simple snmpwalk

If you are unable to write your own script as suggested in [Timeout](#) on page 259 the approximate time for an OID may be between the range of 1 to 4 minutes per seconds. This is based on lab environments tested in Ruckus.

The efficiency is improved in 3.6.1 as:

a: For 1,000 APs the minimum time is 54 seconds (< 1 minute) for a full table

b: For 10,000 APs the minimum time is 203 seconds (< 2 minutes) for a full table.

For example, in an environment with 10,000 APs and 1000 WLANs, the values are:

## Frequently Asked Questions

### Determining the Query Interval for AP Related Tables

MIB Table	SNMPWalk Elapsed Time	Comment
RUCKUS-SCG-WLAN-MIB::ruckusWLANTable	41 seconds	
RUCKUS-SCG-WLAN-MIB::ruckusSCGWLANTable	42 seconds	
RUCKUS-SCG-WLAN-MIB::ruckusWLANAPTable	203 seconds	
RUCKUS-SCG-WLAN-MIB::ruckusSCGAPTable	107 seconds	
RUCKUS-SCG-CONFIG-WLAN-MIB::ruckusSCGConfigWLANTable	50 seconds	Timeout should be set as 25+ seconds.

#### **NOTE**

The exact value should be tested in your own environments.

COMMScope®  
**RUCKUS**®

© 2020 CommScope, Inc. All rights reserved.  
350 West Java Dr., Sunnyvale, CA 94089 USA  
<https://www.commscope.com>