



Ruckus Wireless™ SPoT™ Release 4.4.1 and vSPoT Release 3.4.1

Release Notes

Part Number: 800-71473-001 Rev A
Published: 02 March 2017

www.ruckuswireless.com

Contents

| | |
|--|----|
| Copyright Notice and Proprietary Information..... | 3 |
| Release Information | |
| Supported Controllers..... | 4 |
| Supported Access Point Models..... | 5 |
| vSPoT Release Information..... | 6 |
| New Features | |
| Enhancements | 8 |
| Resolved Issues | |
| Caveats, Limitations and Known Issues | |
| Upgrading to a New Version | |
| Key Features..... | 11 |
| Full Upgrade..... | 13 |
| vSPoT on VMware Upgrade from Version 3.x to Latest..... | 14 |
| vSPoT on VMware Upgrade Version 2.4.x to 3.x (Latest)..... | 17 |
| vSPoT on AWS Upgrade..... | 32 |
| Sub Sections to Upgrade Procedure | |
| Enabling SSH Access..... | 39 |
| Accessing vSPoT using AWS CLI..... | 41 |
| Deleting vSPoT on AWS..... | 42 |

Copyright Notice and Proprietary Information

Copyright 2017. Ruckus Wireless, Inc. All rights reserved.

No part of this documentation may be used, reproduced, transmitted, or translated, in any form or by any means, electronic, mechanical, manual, optical, or otherwise, without prior written permission of Ruckus Wireless, Inc. ("Ruckus"), or as expressly provided by under license from Ruckus.

Destination Control Statement

Technical data contained in this publication may be subject to the export control laws of the United States of America. Disclosure to nationals of other countries contrary to United States law is prohibited. It is the reader's responsibility to determine the applicable regulations and to comply with them.

Disclaimer

THIS DOCUMENTATION AND ALL INFORMATION CONTAINED HEREIN ("MATERIAL") IS PROVIDED FOR GENERAL INFORMATION PURPOSES ONLY. RUCKUS AND ITS LICENSORS MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THE MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT AND FITNESS FOR A PARTICULAR PURPOSE, OR THAT THE MATERIAL IS ERROR-FREE, ACCURATE OR RELIABLE. RUCKUS RESERVES THE RIGHT TO MAKE CHANGES OR UPDATES TO THE MATERIAL AT ANY TIME.

Limitation of Liability

IN NO EVENT SHALL RUCKUS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, OR DAMAGES FOR LOSS OF PROFITS, REVENUE, DATA OR USE, INCURRED BY YOU OR ANY THIRD PARTY, WHETHER IN AN ACTION IN CONTRACT OR TORT, ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIAL.

Trademarks

Ruckus Wireless, Ruckus, the bark logo, BeamFlex, ChannelFly, Dynamic PSK, FlexMaster, Simply Better Wireless, SmartCell, SmartMesh, SmartZone, Unleashed, ZoneDirector and ZoneFlex are trademarks of Ruckus Wireless, Inc. in the United States and other countries. All other product or company names may be trademarks of their respective owners.

Release Information

This section contains release information for SPoT 4.4.1 and vSPoT 3.4.1.

Introduction

This document provides release information on the Ruckus SmartPositioning Technology (SPoT), release 4.4.1 and virtual SPoT (vSPoT) release 3.4.1.

SPoT/vSPoT requires a Ruckus Wireless ZoneDirector or SmartZone wireless LAN controller to communicate between the SPoT location server and the access points.

Please refer to the ZoneDirector, SmartZone and Access Point Release Notes for information on Ruckus controllers and access points.

Most documents are available in PDF format from the Ruckus Support portal:
<https://support.ruckuswireless.com/>

Supported Controllers

This SPoT release supports ZoneDirector and SmartZone controllers.

The list is as follows:

- ZoneDirector 9.8 and above (ZD 1100, 1200, 3000, 5000)
- SmartZone 3.0 and above (SZ 100, SCG 200, vSZ)

NOTE To manage multiple vSPoT venues on a single ZoneDirector controller, use firmware 9.12.2 and above. This will allow the controller to manage multiple vSPoT Venue IDs using a single IP.

NOTE To manage multiple vSPoT venues on a single SmartZone controller, use firmware 3.1.1 patch 1 and above. This will allow the controller to manage multiple vSPoT Venue IDs using a single IP.

Supported Access Point Models

This SPoT release supports ZoneFlex and SmartZone Access Points.

Supported Access Point Models

This supported ZoneFlex and SmartZone Access Points are as follows:

- H500
- R300
- R500
- R600
- R700
- R710
- R310
- T300
- T301n
- T301s
- SC8800-S
- SC8800-S-AC
- ZF7025
- ZF7055
- ZF7321
- ZF7321-U
- ZF7341
- ZF7343
- ZF7351
- ZF7351-U
- ZF7352
- ZF7363
- ZF7363-U
- ZF7372
- ZF7372-E
- ZF7441
- ZF7761-CM
- ZF7762
- ZF7762-AC
- ZF7762-S
- ZF7762-S-AC
- ZF7762-T
- ZF7781CM
- ZF7782
- ZF7782-E
- ZF7782-N

Release Information

vSPoT Release Information

- ZF7782-S
- ZF7962
- ZF7982

NOTE SPoT support on the 5 GHz radio of 802.11ac APs is available as of ZoneDirector firmware version 9.10 and SmartZone version 3.x

vSPoT Release Information

The following table maps the vSPoT release numbers to the corresponding cloud SPoT releases.

Table 1: Supported Devices and Operating System

| vSPoT Release | SPoT Release |
|---------------|--------------|
| 1.0 | 2.0 |
| 1.0.1 | 2.0 |
| 1.1.0 | 2.1 |
| 1.2 | 2.2 |
| 1.3.1 | 2.3.1 |
| 1.4 | 2.4 |
| 1.5 | 2.5 |
| 1.6 | 2.6 |
| 1.7 | 2.7 |
| 1.7.1 | 2.7.1 |
| 1.8 | 2.8 |
| 2.0 | 3.0 |
| 2.3.4 | 3.3.4 |
| 2.3.7 | 3.3.7 |
| 2.4.0 | 3.4.0 |
| 2.4.2 | 3.4.2 |
| 2.4.3 | 3.4.3 |
| 2.4.4 | 3.4.4 |
| 3.0.0 | 4.0.0 |
| 3.1.3 | 4.1.3 |

| vSPoT Release | SPoT Release |
|----------------------|---------------------|
| 3.1.7 | 4.1.7 |
| 3.2.0 | 4.2.0 |
| 3.3.0 | 4.3.0 |
| 3.4.0 | 4.4.0 |
| 3.4.1 | 4.4.1 |

New Features

This section lists the new features and enhancements in this release.

- **None**

Enhancements

This section describes the enhancements for this release.

System

- Upgraded current gems used in rk-system and rk-venue source code for running SPoT/vSPoT.
- Upgraded technology stack:
 - ruby-2.2.6
 - redis-3.2.8
 - mongodb-3.2.12
 - mosquito-1.4.10-3.1.

Venue

- **None**

vSPoT

- Upgraded base CentOS 7 image to 7.3-1611
- Upgraded to Vagrant 1.9.0 with Oracle Virtualbox 5.1.14

Resolved Issues

This section contains the list of resolved issues.

- Resolved an issue of map upload failure due to missing *nginx* temporary directory.

Caveats, Limitations and Known Issues

This section lists the caveats, limitations and known issues in this release, along with workarounds if applicable.

- **None**

Upgrading to a New Version

This chapter lists important information that you must be aware of when upgrading vSPoT.

- [Key Features](#) on page 11
- [Full Upgrade](#) on page 13

NOTE A full HOST OS upgrade is required for vSPoT 3.2 since it includes changes related to CentOS7 based docker container with systemd support. System commands to start and stop application data services is different for systemd in comparison to previous vSPoT versions.

Key Features

The following is the distinction between the two upgrade procedures.

Full Upgrade

NOTE Full upgrade refers to [vSPoT on VMware Upgrade from Version 3.x to Latest](#) on page 14, [vSPoT on VMware Upgrade Version 2.4.x to 3.x \(Latest\)](#) on page 17 or [vSPoT on AWS Upgrade](#) on page 32

- Provides better security since it contains host operating system improvements and security updates
- Provides a more atomic upgrade since the host operating system and application containers are built and tested together as part of the release process
- Easier for VMware administrators

Rolling Upgrade

NOTE If you are upgrading to vSPoT 3.x from vSPoT 2.4.0 or earlier versions, Ruckus Wireless highly recommends that you do a full upgrade to take advantage of the security and performance improvements to the Host OS.

NOTE vSPoT upgrades from version 3.x onwards can be performed via rolling upgrades.

- Decreased downtime during the upgrade procedure since there is no switch to virtual disks or having to restart the VM. This saves an enormous amount of downtime
- Easier upgrade procedure since access and storage configuration of VMware is not required
- Decreased manual configuration since networking and NTP server configuration is persisted within the VM, therefore this does not require reconfiguration

Upgrading to a New Version

Key Features

- Easier for Linux administrators

Full Upgrade

The following is the upgrade procedure based on the installation type.

CAUTION! In order to upgrade to vSPoT version 3.x, you need to first ensure that the existing vSPoT is on version 2.4.0 and above. If your vSPoT version is below 2.4.0, you **cannot directly upgrade** to vSPoT 3.x. Do refer to *vSPoT 2.4.4 Installation Guide* on the support website (<https://support.ruckuswireless.com>) to **first** upgrade to vSPoT 2.4.4 before upgrading to 3.x.

1. [vSPoT on VMware Upgrade from Version 3.x to Latest](#) on page 14
2. [vSPoT on VMware Upgrade Version 2.4.x to 3.x \(Latest\)](#) on page 17
3. [vSPoT on AWS Upgrade](#) on page 32

vSPoT on VMware Upgrade from Version 3.x to Latest

The following is the procedure for a full upgrade of vSPoT from version 3.x to the latest version.

1. Log in to the vSphere Client:
 - a. Launch an instance of VMWare vSphere Client (e.g. Windows VMWare vSphere Client).
 - b. In the VMWare vSphere Client, enter the IP Address (or Hostname) and administrative credentials to login to your instance of ESXi server running the source and target vSPoT instances where you want to migrate the data storage volume.
2. Copy the AP MAC addresses seen on the Access Points page (navigate to **SPoT Admin Portal > Access Points**), in order to retain a backup of all the AP MAC addresses.
3. Power Off Source and Target vSPoT instances:

NOTE As an example, the source instance is vSPoT 3.0.0 and the target instance is vSPoT 3.2.

- a. On the left panel, expand the list of installed VM instances, and locate the source and target vSPoT instances that will be swapping data storage volumes.
 - b. Right click on each and **Power-Off** each instance successively (shortcut: **Ctrl-E**).
4. Detach source vSPoT instance data storage volume:
 - a. Once both source and target instances have been Powered Off, navigate to the source VM instance (note the name of the source vSPoT instance - this will be used to relocate and mount the storage from the source to the target vSPoT instance in later steps). Right-click and choose the '**Edit Settings...**' menu item.
 - b. On the child window that appears, on the left panel, locate and identify the item under the 'Hardware' column, named '**Hard disk 3**', and click to select it.
 - c. From the same child window, with the 'Hard disk 3' item selected, locate the '**Remove**' button at the top of the left panel of the child window.

CAUTION! On **Removal Options** displayed on the right panel, select '**Remove from virtual machine**' **ONLY**. (Do Not use the other option, as this would wipe out the data and therefore make it impossible to migrate the data volume to the new target instance.)

- d. Notice that the 'Hard disk 3' item is struck out and the 'Summary' column indicates it as 'Removed'; Click '**OK**' at the bottom right hand corner of the child window to proceed.
5. Remove target vSPoT instance data storage volume:

- a. From the list of VM instances on the parent window left panel, locate the target vSPoT instance item, and select and right click on the **'Edit Settings...'** menu item.
 - b. Repeat Steps (3b) to (3d) above but for the target vSPoT instance, and click **'OK'** to end the disk removal process, so that the data storage volume to be attached may take its place.
6. Attach source vSPoT instance data storage volume to target vSPoT instance:
- a. From the list of VM instances on the parent window left panel, again locate the target vSPoT instance item, right-click and select the **'Edit Settings...'** menu item.
 - b. On the 'Virtual Machine Properties' child window, now locate and click the **'Add...'** button at the top of the left panel of the child window.
 - c. On the new 'Add Hardware' child window, select the **'Hard Disk'** item in the middle panel of this child window and click on the **'Next'** button located at the bottom of this child window.
 - d. In the 'Select a Disk' option under the 'Add Hardware' child window, select the option **'Use an existing virtual disk - Reuse a previously configured virtual disk'** in the 'Disk' option, then click on the **'Next'** button located at the bottom of this child window.
 - e. On the 'Select Existing Disk' option under the 'Add Hardware' child window, click on the **'Browse...'** button next to the 'Disk File Path' text entry field.
 - f. From the new Windows file explorer dialog, locate and select the **'Datastores'** file type that was created for your ESXi server, (e.g. esxi-local-storage-1), select the item, then click **'Open'**.
 - g. From the expanded list in the 'Browse Datastores' dialog, scroll to and locate the 'Name' identical to your source vSPoT instance that you recorded in Step (3a) above (e.g. *vSPoT2-3.0.0-build-543_vmx*), and select the item, then click **'Open'**.
 - h. From the refreshed 'Browse Datastores' dialog, locate and select the item ending with **'_vmx_2.vmdk'**, and click **'OK'**.
 - i. Back in the parent **'Add Hardware'** -> **'Select Existing Disk'** child window, notice the filled out 'Disk File Path' file based on your selections from the above steps, then click the **'Next'** button.
 - j. On the **'Add Hardware'** -> **'Advanced Options'** child window, right side panel, locate the **'Virtual Device Node'** section, and select the item directly beneath the 'SCSI (0:1) Hard disk 2' item (e.g. **'SCSI (0:2)'**), then click the **'Next'** button.
 - k. Review the **'Add Hardware'** -> **'Ready to Complete'** -> **'Options'** summary information, and click the **'Finish'** button to complete the data storage volume transfer action, OR, click **'Back'** to alter/edit any previously entered values/choices, OR, click **'Cancel'** to ABORT the operation.
 - l. Finally, click the **'OK'** button at the bottom right-hand corner of the **'Virtual Machine Properties'** window to finish the VM settings changes applied/changed/aborted.

Upgrading to a New Version

Full Upgrade

Power On your target vSPoT instance VM and verify the data volume migration action has successfully completed.

7. Verify successful upgrade.
 - a. Verify that the web service is running.
 - b. View and validate application state from *http://<vSPoT VM IP>:8443*.
 - c. Check the application version (example, latest version), and login to the vSPoT administration dashboard using a valid user account and admin account.
8. Verify admin and analytics dashboards.
 - a. From the Admin pages, validate the data presence of radio maps, access points, venues, etc.
 - b. From the analytics page, verify real-time and historical data (heat maps and daily visit counts)

vSPoT on VMware Upgrade Version 2.4.x to 3.x (Latest)

The following is the procedure to upgrade a vSPoT deployment from version 2.4.x to vSPoT 3.x (latest).

NOTE This upgrade process will result in application downtime due to the need for migrating data across different and incompatible storage engines. During the migration process, vSPoT should not be running, otherwise data could be lost during migration.

CAUTION! In order to upgrade to vSPoT version 3.x, you need to first ensure that the existing vSPoT is on version 2.4.0 and above. If your vSPoT version is below 2.4.x, you **cannot directly upgrade** to vSPoT 3.x. Do refer to *vSPoT 2.4.4 Installation Guide* on the support website (<https://support.ruckuswireless.com>) to **first** upgrade to vSPoT 2.4.4 before upgrading to 3.x.

Prerequisites

- You are required to open port 22 of your vSPoT host operating system (Host OS) on a public facing IP address.

Upgrade Procedure

The upgrade procedure has the following list of instructions.

NOTE Ruckus Wireless recommends that you follow the procedure for a successful upgrade.

Backup the Current vSPoT


This section describes the procedure to backup the current vSPoT.

1. Login to the vSPoT vCenter
2. Using the VMWare ESXi web interface navigate to select **Virtual Machines > VMware** instance for a backup.

Figure 1: Selecting Virtual Machine Instance


Upgrading to a New Version

Full Upgrade

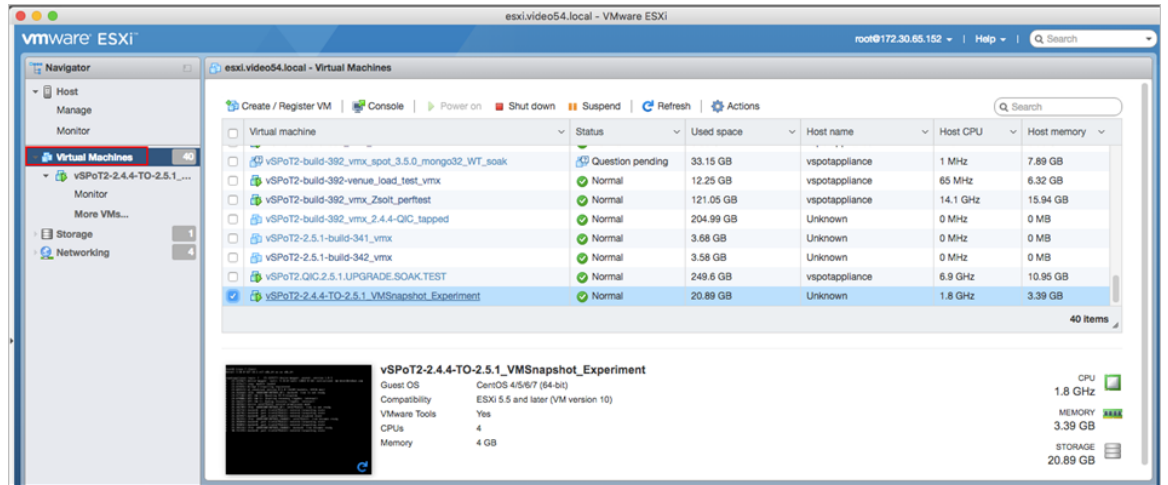

3. Ensure that your shared storage mounted for vCenter or ESXi has sufficient disk space for the snapshot backup. If vSPoT is using around 1TB, ensure you have at least 1TB additional free storage space for the snapshot backup.
4. In the tab menu navigate to select **Actions > Snapshots > Take snapshot**

Figure 2: Selecting the Snapshot Option

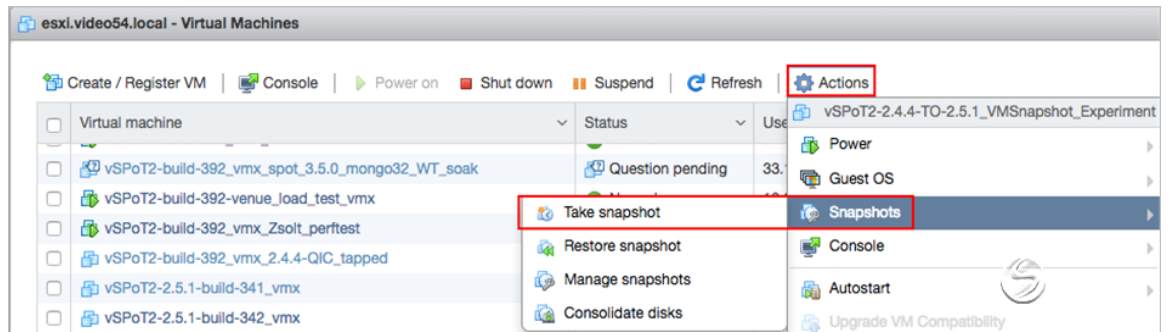

5. Enter a name for snapshot backup.

For example, `vSPoT-2.4.4-VMSnapshotBackup-04Jul2016_1450`.

Also, select the option, *Quiesce guest file system (needs VMware tools installed)*.

Figure 3: Snapshot Name

Take snapshot for vSPoT2-2.4.4-TO-2.5.1_VMSnapshot_Experiment

Name: vSPoT-2.4.4-VMSnapshotBackup-04Jul2016_1450

Description:

Snapshot the virtual machine's memory.

Quiesce guest file system (needs VMware tools installed).

Take snapshot Cancel

6. Click on the **Take snapshot** button to complete the snapshot.
7. Check the **Recent tasks** tab at the bottom panel to ensure that the snapshot is complete. This could potentially be a long running task from 5 minutes to around 30 minutes depending on the size of your Vmdk, mounted storage, storage type and performance.

Figure 4: Check Status of Snapshot

Upgrading to a New Version

Full Upgrade


The screenshot displays the vSphere Web Client interface for a host named 'esxi.video54.local'. The main area shows a list of virtual machines with columns for 'Virtual machine', 'Status', 'Used space', 'Host name', 'Host CPU', and 'Host memory'. The selected VM is 'vSPoT2-2.4.4-TO-2.5.1_VMSnapshot_Experiment', which is in a 'Normal' status and has used 20.89 GB of space. Below the list, the configuration for this VM is shown, including Guest OS (CentOS 4/5/6/7 (64-bit)), Compatibility (ESXi 5.5 and later), VMware Tools (Yes), CPUs (4), and Memory (4 GB). On the right, resource usage is shown: CPU at 1.8 GHz, MEMORY at 3.39 GB, and STORAGE at 20.89 GB.

The 'Recent tasks' table at the bottom shows the following entry:

| Task | Target | Initiator | Queued | Started | Result | Completed |
|-----------------|------------------------------|-----------|---------------------|---------------------|------------------------|---------------------|
| Create Snapshot | vSPoT2-2.4.4-TO-2.5.1_VMS... | root | 07/04/2016 14:54:03 | 07/04/2016 14:54:03 | Completed successfully | 07/04/2016 14:56:13 |

8. Check that your created snapshot is visible in the list of snapshots by navigating to Actions > Snapshots > Manage snapshots. You should be able to see your created snapshot in the list pop-up window.

Figure 5: Created Snapshot

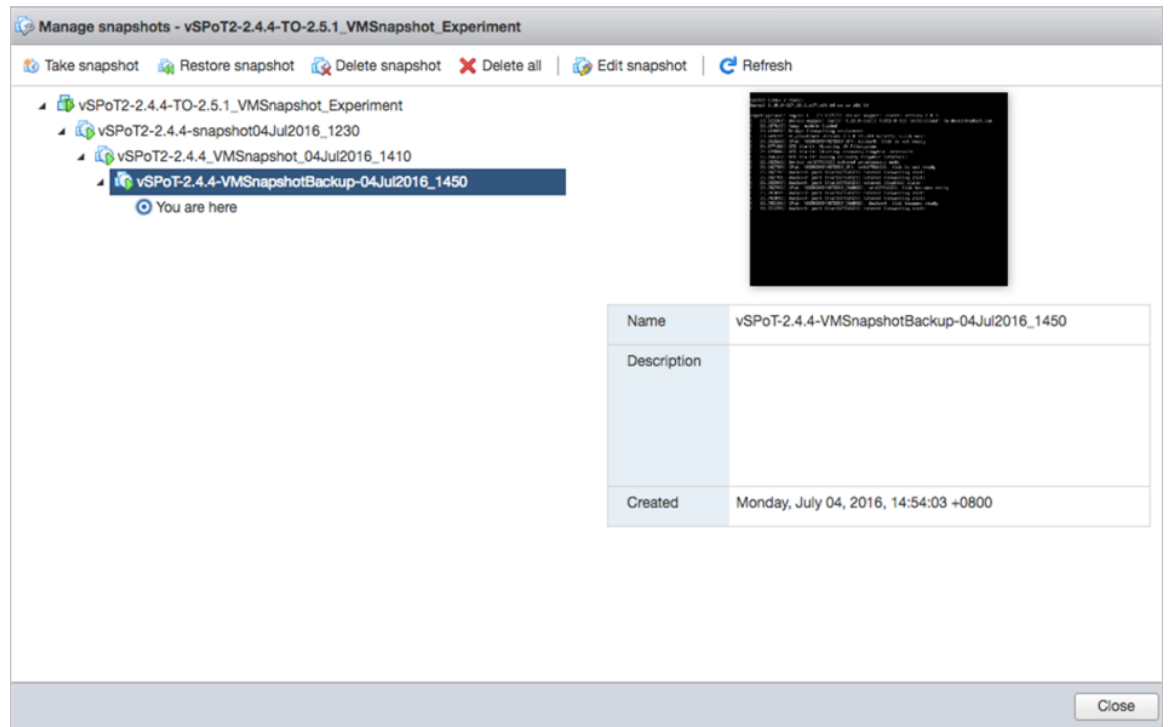

In the event that you need to restore a previous snapshot, follow the [Procedure to Restore VMWare Snapshots \(Optional\)](#) on page 30

Venue Identifiers

After a successful backup of the vSPoT instance, ensure you have an updated list of Venue identifiers. This is required during migration.

Download vSPoT 3.x

Download the latest vSPoT build version 3.x (example [-vSPoT-3.2.0-build-985.tar](#)) from the support site (<https://support.ruckuswireless.com>)

Stop VM Server Running vSPoT

Stop the existing VM server running vSPoT version 2.4.4 by running the following CLI commands.

1. SSH to the vSPoT host operating system and to the vSPoT docker container.

NOTE Refer to [SSH Key Based Authentication](#) if you have not yet configured SSH access.

```
ssh admin@<vspot_host_os_public_ip>  
admin@vspotappliance:~$ spot enter
```

2. Shut down all the running services other than Mongod server.

NOTE Keep the Mongod server process up and running.

```
root@vspot:~# stop rk-venue
root@vspot:~# stop rescue
root@vspot:~# service nginx stop
```

3. Exit from the docker container and return to the vSPoT host operating system (Host OS).

Backup the MongoDB

Backup the MongoDB data directory and clean the existing MongoDB data directory contents with the following steps.

1. From vSPoT Host OS, enter the container and download the scripts *vspot_venue_dump.sh* and *vspot_venue_restore.sh* from Ruckus vSPoT AWS S3 migration_scripts, and give the scripts execution rights.

```
admin@vspotappliance:~$ spot enter
root@vspot:~# wget -O /storage/vspot_venue_dump.sh
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/vspot_venue_dump.sh
root@vspot:~# wget -O /storage/vspot_venue_restore.sh
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/vspot_venue_restore.sh
root@vspot:~# wget -O /usr/bin/mongodump32
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/mongodump32
root@vspot:~# chmod +x
/storage/{vspot_venue_dump.sh,vspot_venue_restore.sh}
/usr/bin/mongodump32
```

2. Backup the MongoDB data for a specified venue (example *rksg-dev*) by using the below procedure.

NOTE If you have more than one venue to migrate, repeat this step for each venue as per your list of [Venue Identifiers](#) on page 21.

```
root@vspot:~# bash /storage/vspot_venue_dump.sh rksg-dev
--full-dump
```

```
Response:
THIS SCRIPT MUST BE RUN IN vSPoT docker container!
IT IS MEANT TO DO A vSPoT MongoDB and radio maps dump for
a vSPoT data migration purpose!
+ '[' '!' -f /etc/envvars ']'
+ source /etc/envvars
```

```
Creating /storage/venue_dump/dump_mongo and
/storage/venue_dump/dump_radio_maps directories ...
```

```
DONE.

Proceed to dump groups ...
+ /usr/bin/mongodump32 --gzip --port 27017 --db
rk-system_production --query '{\'_id\':
ObjectId("562677639180054fd7000002")}' --collection groups
--out /storage/venue_dump/dump_mongo
2016-07-26T14:52:43.841+0800    writing
rk-system_production.groups to
2016-07-26T14:52:43.843+0800    done dumping
rk-system_production.groups (1 document)

DONE.

Proceed to dump venue rksg-dev ...
+ /usr/bin/mongodump32 --gzip --port 27017 --db
rk-system_production --query '{\'_id\':
\'rksg-dev\'}' --collection venues --out
/storage/venue_dump/dump_mongo
2016-07-26T14:52:43.862+0800    writing
rk-system_production.venues to
2016-07-26T14:52:43.863+0800    done dumping
rk-system_production.venues (1 document)

DONE.

Proceed to dump venue rksg-dev access_points ...
2016-07-26T15:09:20.821+0800
rk-system_production.impressions 28173377
2016-07-26T15:09:21.962+0800
rk-system_production.impressions 28285371
2016-07-26T15:09:21.963+0800    done dumping
rk-system_production.impressions (28285371 documents)

DONE.

Analytics data dump completed DONE.

Copying radio maps for rksg-dev into
/storage/venue_dump/dump_radio_maps ...
+ cp -rpfv /opt/spot/system/private/venues/rksg-dev
/storage/venue_dump/dump_radio_maps
`/opt/spot/system/private/venues/rksg-dev' ->
`/storage/venue_dump/dump_radio_maps/rksg-dev'
`/opt/spot/system/private/venues/rksg-dev/foreground_maps'
_
`/storage/venue_dump/dump_radio_maps/rksg-dev/foreground_maps'

DONE.
+ cd /storage/venue_dump

Creating gzip tarball at /storage/rksg-dev_dump.tar.gz of
above mongodumps and radio maps ...
```

```
+ tar -zcvf /storage/rksg-dev_dump.tar.gz dump_mongo
dump_radio_maps
dump_mongo/
dump_mongo/rk-system_production/
dump_mongo/rk-system_production/groups.metadata.json.gz

dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_6.png
dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_3.png
dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_6_annotated.png

DONE.
Deleting mongodumps and radio maps dump temp dir
/storage/venue_dump ...
+ rm -rf /storage/venue_dump
+ ls -alrth /storage/rksg-dev_dump.tar.gz
-rw-r--r-- 1 root root 919M Jul 26 15:10
/storage/rksg-dev_dump.tar.gz

ALL DONE.
```

3. Verify the existence of non-empty archive file.

```
root@vspot:~#ls -lah /storage/rksg-dev_dump.tar.gz
```

Remove Redis Append Only File (AOF)

Upgraded version of vSPoT does not use Redis AOF.

1. This must be removed to prevent data corruption during Redis server startup by executing the following command:

```
admin@vspotappliance:~$ sudo rm -f
/storage/redis/data/rk_venue.aof
```

2. Exit and return to the vSPoT Host OS.

Prepare the Existing MongoDB Data Directories

Prepare existing MongoDB data directories by executing the following commands.

1. From vSPoT Host OS, enter vSPoT docker container and stop the MongoDB server process.

```
admin@vspotappliance:~$ spot enter
root@vspot:~# service mongod stop
```

2. Prepare a new MongoDB data directory from the vSPoT docker container and a new working directory.

```
root@vspot:~# mv /storage/mongo /storage/mongo24
root@vspot:~# mkdir -p /storage/mongo/{data,log}
root@vspot:~# chown mongod:mongod -R /storage/mongo
```


3. Exit back to vSPoT Host OS and shut down vSPoT docker container.

```
admin@vspotappliance:~$ spot stop 244
```

Detach Storage from vSPoT

From vSphere user interface, detach the storage volume for the current VM running vSPoT version 2.4.4.

CAUTION! Do not delete the detached storage volume.

Install and Import the vSPoT 3.x VM Image

Install and import the VMDK image into your existing vSphere.

The procedure is similar to that described in [vSPoT on VMware Upgrade from Version 3.x to Latest](#) on page 14 but keep in mind that this installation is for vSPoT 3.x.

Attach Storage to vSPoT

From vSphere user interface, attach the storage volume to the current VM running the installed vSPoT 3.x.

Start vSPoT 3.x

Start the vSPoT 3.x VM after the storage volume has been successfully attached.

Migrate Data to New Storage Engine Format

Migrate MongoDB data to be compatible with the new storage engine used in vSPoT 3.x by following the below procedure.

1. Check vSPoT 3.x docker container is running by running the command:

```
admin@vspotappliance:~$ spot list
```

```
admin@vspotappliance:~$ spot list
CONTAINER ID    IMAGE                                     COMMAND                                CREATED        STATUS
847391fb7cfb    registry.internal.ruckuslbs.com/ruckus/vspot:3.2.0-999  "/sbin/init"                          2 weeks ago   Up 18 hours   0.0
```

```
admin@vspotappliance:~$ spot enter
```

2. Shut down all the running services other than Mongod server.

```
root@vspot:~# systemctl stop rk-venue.target
root@vspot:~# systemctl stop resque.target
root@vspot:~# service nginx stop
root@vspot:~# service redis-rk_venue stop
root@vspot:~# service redis-rk_system stop
root@vspot:~# service mosquito stop
```

3. Check that all processes that was stopped in the above step have been terminated

```
#The following should not return any lines
```

```
root@vspot:~# ps -ef | grep -E 'ruby|redis|mosquitto|nginx'
| grep -v grep

# If any process is returned, repeat the commands to shutdown
the respective process.
```

Restore the Data

Restore the MongoDB data with the following steps.

1. Enter the Docker container

```
admin@vspotappliance:~$ spot enter
```

2. Run the data restore script to first restore the MongoDB data, then subsequently create database indexes.

NOTE This may take a long time to complete, based on the migration data set.

```
root@vspot:~# bash /storage/vspot_venue_restore.sh
/storage/rksg-dev_dump.tar.gz
```

NOTE If you had previously exported more than one venue, you will need to repeat this data restore step for each venues as per your list of [venue identifiers](#).

Response

```
> THIS SCRIPT MUST BE RUN IN vSPoT docker container!
> .
> ONLY A MongoDB and radio maps restore from a valid vSPoT
venue dump will be performed from
/storage/rksg-dev_dump.tar.gz file.
> .
> ADDITIONAL MONGODB DATA CHANGES MUST BE PERFORMED FOR AN
AWS SPoT to vSPoT data restoration!
> .
> .
> Deleting any previous /storage/venue_dump dir and
contents...
> + rm -rf /storage/venue_dump
> .
> DONE.
> + cd /storage
> + '[' -f /storage/rksg-dev_dump.tar.gz ']'
> + mkdir -p /storage/venue_dump
> .
> Exploding /storage/rksg-dev_dump.tar.gz into
/storage/venue_dump ...
> + tar -zxvf /storage/rksg-dev_dump.tar.gz -C
/storage/venue_dump
> dump_mongo/
```

```
> dump_mongo/rk-system_production/
> dump_mongo/rk-system_production/groups.metadata.json.gz
> dump_mongo/rk-system_production/visits.metadata.json.gz
> dump_mongo/rk-system_production/locations.bson.gz
> .
> .
> dump_mongo/rk-system_production/groups.bson.gz
>
dump_mongo/rk-system_production/access_points.metadata.json.gz
> dump_radio_maps/
> dump_radio_maps/rksg-dev/
> dump_radio_maps/rksg-dev/foreground_maps/
>
dump_radio_maps/rksg-dev/foreground_maps/pPEVNY51Jtutq2vW8Yxq2w.png
>
dump_radio_maps/rksg-dev/foreground_maps/hjiaM6CtqdqMBLb96YkxqA.jpg
> .
> .
>
dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_6_annotated.png
> .
> DONE.
> .
> Restoring DB data dump ...
> + mongorestore --gzip --port 27017 --noIndexRestore
/storage/venue_dump/dump_mongo
> 2016-07-26T16:11:54.938+0800      building a list of dbs
and collections to restore from
/storage/venue_dump/dump_mongo dir
> 2016-07-26T16:11:54.940+0800      reading metadata for
rk-system_production.visits from
/storage/venue_dump/dump_mongo/rk-system_production/visits.metadata.json.gz
> .
> .
> 2016-07-26T16:26:54.940+0800      [#####]
rk-system_production.visits  4.2 GB/393.5 MB
(1100.9%)
> 2016-07-26T16:26:54.940+0800      [#####]
rk-system_production.impressions  7.4 GB/267.1 MB
(2848.0%)
> 2016-07-26T16:26:54.940+0800
> 2016-07-26T16:26:57.356+0800      [#####]
rk-system_production.impressions  7.4 GB/267.1 MB
(2853.7%)
> 2016-07-26T16:26:57.356+0800      no indexes to restore
> 2016-07-26T16:26:57.356+0800      finished restoring
rk-system_production.impressions (28285371 documents)
> 2016-07-26T16:26:57.939+0800      [#####]
rk-system_production.visits  4.2 GB/393.5 MB  (1104.0%)
> .
> .
> 2016-07-26T16:48:15.702+0800      [#####]
rk-system_production.visits  7.9 GB/393.5 MB  (2062.0%)
```

Upgrading to a New Version

Full Upgrade

```
> 2016-07-26T16:48:15.702+0800    no indexes to restore
> 2016-07-26T16:48:15.702+0800    finished restoring
rk-system_production.visits (28138897 documents)
> 2016-07-26T16:48:15.702+0800    done
> .
> DONE.
> + cd /opt/spot/system
> .
> Create indexes for Analytics DB ...
> + bundle exec rake mi:create_indexes
> Run options: --seed 10490
> # Running:
> .
> Finished in 0.002529s, 0.0000 runs/s, 0.0000 assertions/s.
> 0 runs, 0 assertions, 0 failures, 0 errors, 0 skips
> .
> DONE.
> .
> Restoring radio maps dump ...
> + cp -rpfv /storage/venue_dump/dump_radio_maps/rksg-dev
/opt/spot/system/private/venues/
>
`/storage/venue_dump/dump_radio_maps/rksg-dev/foreground_maps/xIhaFqAniklXPImRYldewg.png'
->
`/opt/spot/system/private/venues/rksg-dev/foreground_maps/xIhaFqAniklXPImRYldewg.png'
> .
> .
>
`/storage/venue_dump/dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/venue.svg'
->
`/opt/spot/system/private/venues/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/venue.svg'
>
`/storage/venue_dump/dump_radio_maps/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_3_inside.png'
->
`/opt/spot/system/private/venues/rksg-dev/radio_maps/56383dbb3d6ae907d7000012/floor_3_insi
de.png'
> .
> DONE.
> .
> ALL DONE.
root@vspot:~#
```

Verify Successful Migration

Start the required services for verification.

```
root@vspot:~# service mosquitto start
root@vspot:~# service redis-rk_venue start
root@vspot:~# service redis-rk_system start
root@vspot:~# service nginx start
```

View and validate application state from <http://<vSPoT VM IP>:8443>. Check the application version, and its ability to login to vSPoT version 3.x administration dashboard using a valid user account and admin account.

Start Data Services

Start the data services and background services.

```
root@vspot:~# systemctl start rk-venue.target  
root@vspot:~# systemctl start resque.target
```

NOTE This will begin to receive live data from the access points.

From the Admin pages, validate the data presence of radio maps, access points, venues, etc. From the analytics page, verify real-time and historical data (heat maps and daily visit counts).

Clean Directories and Backup Snapshots

After successfully migrating to vSPoT version 3.x follow the below procedure

1. Clean the earlier database directory by running the below command.

```
admin@vspotappliance:~$ sudo rm -fr /storage/mongo24
```

2. Exit to vSPoT Host OS and from VMWare vCenter web interface.
3. You may want to delete or cleanup your VMWare snapshots after you have ascertained that the upgrade is successful. You may no longer need to revert to the previous version of vSPoT VM.

Re-Import vSPoT License File


Re-import the vSPoT license to get the full working license purchased for your vSPoT instance.

Procedure to Restore VMWare Snapshots (Optional)

Follow the below procedure to restore the vSPoT backup.

1. Login to the vSPoT vCenter.
2. Using the VMWare ESXi web interface navigate to select **Virtual Machines > VMware** backup instance for restoration. Ensure that the backup is a good valid working snapshot.
3. In the tab menu navigate to select **Actions > Snapshots > Restore snapshot**.

Figure 6: Selecting Restore Snapshot Option

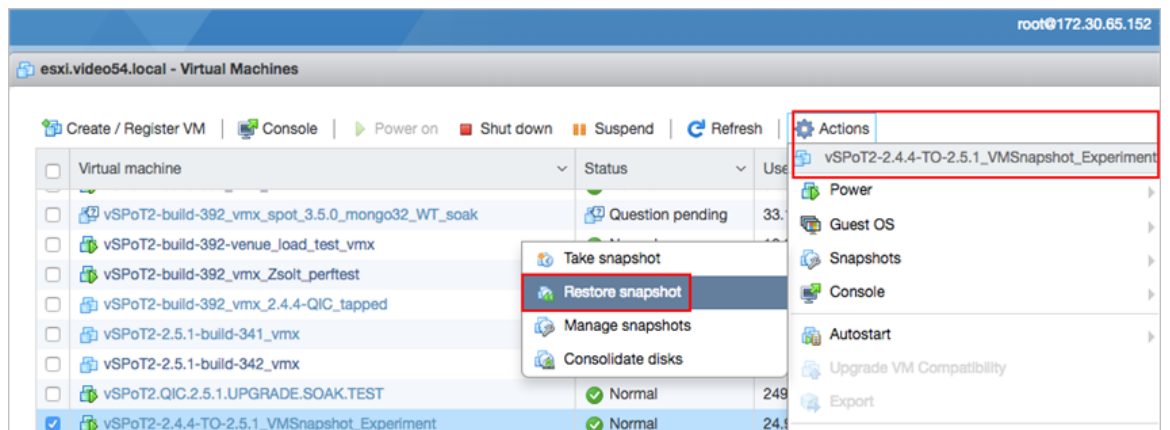

4. To start the restore click the **Restore** button in the pop-up confirmation window.
5. Check the state of the snapshot restoration from the **Recent tasks** panel at the bottom panel. Your vSPoT restored instance should be up and running on successful completion.

Figure 7: View the Restored Snapshot

Upgrading to a New Version

Full Upgrade

The screenshot shows the VMware ESXi interface for host 'esxi.video54.local'. The top navigation bar includes 'root@172.30.65.152', 'Help', and a search bar. Below the navigation bar, the 'Virtual Machines' section displays a table of VMs. The selected VM, 'vSPoT2-2.4.4-TO-2.5.1_VMSnapshot_Experiment', is highlighted in blue. Below the table, the VM's configuration is shown, including Guest OS (CentOS 4/5/6/7), Compatibility (ESXi 5.5 and later), VMware Tools (Yes), CPUs (4), Memory (4 GB), and Host name (vspotappliance). The 'Recent Tasks' section at the bottom shows a list of tasks, including 'Revert To Current Snapshot' which is currently running at 96% completion.

| Virtual machine | Status | Used space | Host name | Host CPU | Host memory |
|--|------------------|-----------------|-----------------------|---------------|----------------|
| vSPoT2-build-392_vmox_spot_3.5.0_mongo32_WT_soak | Question pending | 33.15 GB | vspotappliance | 3 MHz | 7.89 GB |
| vSPoT2-build-392-venue_load_test_vmox | Normal | 12.25 GB | vspotappliance | 68 MHz | 6.32 GB |
| vSPoT2-build-392_vmox_Zsoif_perftest | Normal | 121.05 GB | vspotappliance | 15.5 GHz | 15.94 GB |
| vSPoT2-build-392_vmox_2.4.4-QIC_tapped | Normal | 204.99 GB | Unknown | 0 MHz | 0 MB |
| vSPoT2-2.5.1-build-341_vmox | Normal | 3.68 GB | Unknown | 0 MHz | 0 MB |
| vSPoT2-2.5.1-build-342_vmox | Normal | 3.58 GB | Unknown | 0 MHz | 0 MB |
| vSPoT2.QIC.2.5.1.UPGRADE.SOAK.TEST | Normal | 249.6 GB | vspotappliance | 6.9 GHz | 11.91 GB |
| vSPoT2-2.4.4-TO-2.5.1_VMSnapshot_Experiment | Normal | 24.99 GB | vspotappliance | 24 MHz | 3.48 GB |

| Task | Target | Initiator | Queued | Started | Result | Completed |
|-----------------------------|-------------------------------|-------------|---------------------|---------------------|------------------------|---------------------|
| Revert To Current Snapshot | vSPoT2-2.4.4-TO-2.5.1_VMS... | root | 07/04/2016 15:36:08 | 07/04/2016 15:36:08 | Running... 96% | |
| Acquire Cim Services Ticket | esxi.video54.local | VC Internal | 07/04/2016 15:34:42 | 07/04/2016 15:34:42 | Completed successfully | 07/04/2016 15:34:42 |
| Destroy | coreos_production_vmware_s... | root | 07/04/2016 15:30:20 | 07/04/2016 15:30:20 | Completed successfully | 07/04/2016 15:30:21 |
| Destroy | coreos_production_vmware_s... | root | 07/04/2016 15:30:02 | 07/04/2016 15:30:02 | Completed successfully | 07/04/2016 15:30:04 |

vSPoT on AWS Upgrade

Virtual SPoT in AWS can be upgraded with the following steps for version 2.4.4 to 3.x latest.

CAUTION! This upgrade process will result in application downtime due to the need for data migration across different and incompatible storage engines. During the migration process, vSPoT should not be running, otherwise data could be lost during migration.

Prerequisite

You are required to get full administration access to AWS billing account and management console.

Upgrade Procedure


The following are the steps for upgrading vSPoT in AWS for version 2.4.4 to 3.x.

Backup the Current vSPoT

This section describes the procedure to backup the current vSPoT.

1. Login to the AWS EC2 management console and obtain the identifier **INSTANCE ID** of your vSPoT instance, which is in the format *i-ffffff*.
2. Navigate to **Elastic Block Store > Volumes** to search for volumes using the identifier **INSTANCE ID** obtained in Step 1. In this example, the identifier is *i-baf7cda2*.

Figure 8: Create Snapshot

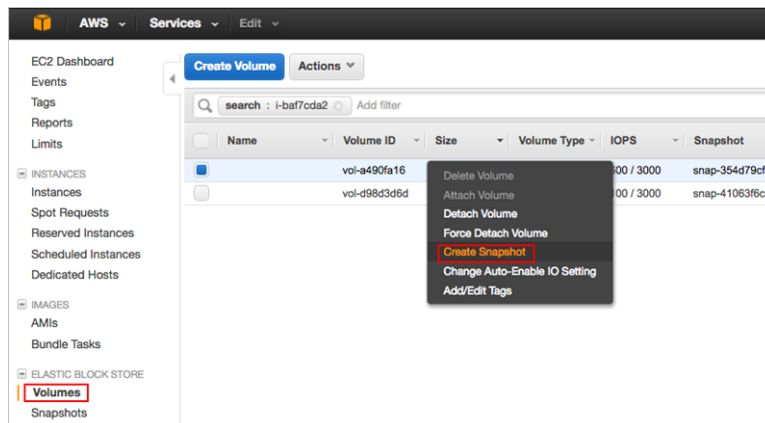

3. Select the vSPoT instance and right-click to select **Create Snapshot**.
4. After snapshot creation is triggered, the process will run in the background. You can proceed to the next step.

Venue Identifiers

After a successful backup of the vSPoT instance, ensure you have an updated list of Venue identifiers. This is required during migration.

Download vSPoT 3.x Template

Download the latest **Ruckus vSPoT Software Release** template for AWS from (<https://support.ruckuswireless.com>)

Figure 9: Download Details

Software Image Download for vSPoT 3.2.0
The software is now available for download from the AWS website:

1. Click 'releases'
2. Click 'vspot-3.2.0'
3. Download the VM Image: <https://s3.amazonaws.com/ruckuslbs-vspot/releases/vSPoT-3.2.0/vSPoT-3.2.0-build-985.tar>
4. The .md5 file that contains the checksum: <https://s3.amazonaws.com/ruckuslbs-vspot/releases/vSPoT-3.2.0/vSPoT-3.2.0-build-985.md5>

NOTE: There will not be a container image released for vSPoT 3.2.0 as this release requires a full upgrade for the Host OS

Stop vSPoT Server

Stop the existing server running vSPoT version 2.4.4 by using the following CLI commands.

NOTE Ensure you have the IP address and SSH private key file for accessing your AWS EC2 instance.

1. Refer to [Accessing vSPoT using AWS CLI](#) on page 41 to login using SSH to the vSPoT AWS EC2 instance host operating system (Host OS). Enter the vSPoT docker container.

```
ssh centos@IP_ADDR -i $SSH_PRIVATE_KEY_FILE
centos@ip-addr:~$ spot enter
```

2. Shut down all the running services other than Mongod server.

```
root@vspot:~# stop rk-venue
root@vspot:~# stop resque
root@vspot:~# service nginx stop
```

Backup the MongoDB

Backup the MongoDB data directory and clean the existing MongoDB data directory contents with the following steps.

1. From the vSPoT docker container, download the Ruckus vSPoT AWS S3 migration scripts, and give it execution rights..

```
admin@vspotappliance:~$ spot enter
root@vspot:~# wget -O /storage/vspot_venue_dump.sh
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/vspot_venue_dump.sh
root@vspot:~# wget -O /storage/vspot_venue_restore.sh
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/vspot_venue_restore.sh
root@vspot:~# wget -O /usr/bin/mongodump32
https://s3-us-west-2.amazonaws.com/ruckuslbs/public/vspot/mongodump32
root@vspot:~# chmod +x
/storage/{vspot_venue_dump.sh,vspot_venue_restore.sh}
/usr/bin/mongodump32
```

2. Backup the MongoDB data for a specified venue (example *rksg-dev*) by using the below procedure.

NOTE If you have more than one venue to migrate, repeat this step for each venue as per your list of [Venue Identifiers](#) on page 21.

```
root@vspot:~# bash /storage/vspot_venue_dump.sh rksg-dev
--full-dump
```

3. Verify the existence of non-empty archive file.

```
root@vspot:~#ls -lah /storage/rksg-dev_dump.tar.gz
```

Remove Redis Append Only File (AOF)

Upgraded version of vSPoT does not use Redis AOF.

1. This must be removed to prevent data corruption during Redis server startup by executing the following command:

```
root@vspot:~# rm -f /storage/redis/data/rk_venue.aof
```

Prepare the Existing MongoDB Data Directories

Prepare existing MongoDB data directories by executing the following commands.

1. From vSPoT Host OS, enter vSPoT docker container and stop the MongoDB server process.

```
admin@vspotappliance:~$ spot enter
root@vspot:~# service mongod stop
```

2. Prepare a new MongoDB data directory from the vSPoT docker container and a new working directory.

```
root@vspot:~# mv /storage/mongo /storage/mongo24
root@vspot:~# mkdir -p /storage/mongo/{data,log}
root@vspot:~# chown mongod:mongod -R /storage/mongo
```

3. Exit back to vSPoT Host OS and shut down vSPoT docker container.

```
admin@vspotappliance:~$ spot stop 244
```

Remove vSPoT 2.4.4. Stack Template

CAUTION! Do not delete the detached storage volume from AWS EC2 management console.

1. Refer to [Deleting vSPoT on AWS](#) on page 42 to remove the vSPoT 2.4.4 stack. This will also detach the storage volume. Do make a note of the storage volume identifier for later use.

Create a new EC2 Instance with vSPoT 3.x Stack Template

To create a new EC2 instance:

1. Refer to [Automated Setup using CloudFormation](#) to install vSPoT 3.x using the vSPoT 3.x stack template downloaded . You will also need to specify the StorageVolumelfield as seen in the figure below. The identifier is in the format of `vol-ffffff` or `vol-ffffffffffffff`.

Select Template

Select the template that describes the stack that you want to create. A stack is a group of related resources that you manage as a single unit.

Design a template Use AWS CloudFormation Designer to create or modify an existing template. [Learn more.](#)

Choose a template A template is a JSON-formatted text file that describes your stack's resources and their properties. [Learn more.](#)

Select a sample template
 Upload a template to Amazon S3
 No file chosen

Specify an Amazon S3 template URL
 [View in Designer](#)

Figure 10: Specifying Options in the Template

Migrate Data to New Storage Engine Format

Migrate MongoDB data to be compatible with the new storage engine used in vSPoT 3.x by following the below procedure.

1. Check vSPoT 3.x docker container is running by running the command:

```
centos@ip-addr:~$ spot list
```

2. Shut down all the running services other than Mongod server.

```
centos@ip-addr:~# spot enter
root@vspot:~# systemctl stop rk-venue.target
root@vspot:~# systemctl stop resque.target
root@vspot:~# service nginx stop
root@vspot:~# service redis-rk_venue stop
root@vspot:~# service redis-rk_system stop
root@vspot:~# service mosquitto stop
```

3. Check that all processes that was stopped in the above step have been terminated.

```
root@vspot:~# ps -ef | grep -E 'ruby|redis|mosquitto|nginx'
| grep -v grep
```

NOTE If any process is returned, repeat the commands to shutdown the processes.

Restore the Data

Restore the MongoDB data with the following steps.

1. Run the data restore script to first restore the MongoDB data, then subsequently create database indexes.

NOTE This may take a long time to complete, based on the migration data set.

```
root@vspot:~# bash /storage/vspot_venue_restore.sh
/storage/rksg-dev_dump.tar.gz
```

NOTE If you had previously exported more than one venue, you will need to repeat this data restore step for each venues as per your list of [venue identifiers](#).

Verify Successful Migration

Start the required services for verification.

```
root@vspot:~# service mosquitto start
root@vspot:~# service redis-rk_venue start
```

```
root@vspot:~# service redis-rk_system start
root@vspot:~# service nginx start
```

View and validate application state from <http://<vSPoT VM IP>:8443>. Check the application version, and its ability to login to vSPoT version 3.x administration dashboard using a valid user account and admin account.

Start Data Services

Start the data services and background services.

```
root@vspot:~# systemctl start rk-venue.target
root@vspot:~# systemctl start resque.target
```

NOTE This will begin to receive live data from the access points.

From the Admin pages, validate the data presence of radio maps, access points, venues, etc. From the analytics page, verify real-time and historical data (heat maps and daily visit counts).

Clean Directories and Backup Snapshots

After successfully migrating to vSPoT version 3.x follow the below procedure.

1. Clean the earlier database directory by running the below command.

```
admin@vspotappliance:~$ sudo rm -fr /storage/mongo24
```

2. Exit from the SSH terminal session.
3. You may want to delete or cleanup your EC2 EBS snapshots after you have ascertained that the upgrade is successful and you may no longer need to revert to the previous version of vSPoT VM.

Re-Import vSPoT License File

Re-import the vSPoT license to get the full working license purchased for your vSPoT instance.

Upgrading to a New Version

Full Upgrade

Sub Sections to Upgrade Procedure

Enabling SSH Access

The options in this section help you enable remote SSH access on logging to the vSPoT CLI console.

- SSH key based authentication
- Enabling password based authentication

SSH Key Based Authentication

This is a preferred and secure option. Execute the following CLI commands for enabling SSH access.

1. After logging in to vSPoT CLI, create the SSH directory in the administrator's home directory.

```
admin@vspotappliance:~$ mkdir -p ~/.ssh
```

2. Obtain the SSH public key for your local machine. If you do not have a SSH public key, generate it by following Step 1 of the below reference.

```
https://www.centos.org/docs/5/html/5.2/Deployment\_Guide/s3-openssh-rsa-keys-v2.html
```

3. Add your local machine's SSH public key to your vSPoT instance's SSH *authorized_keys* file. This can be done in either of the following two ways:

Example 1: Copy your local machine's SSH public key into the vSPoT instance

```
admin@vspotappliance:~$ echo 'ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQBAQCjfxGGdeNsqTPPWdI6Iext/
DhZ5GrewC6yh6HZAYjlgDamdZebbAvzIwWvWJjxsOGHkhdf5eY9qG1KdZih
WVOTaM1oKkrUSshAEEPQnYUBa/nF3J3q4nIX4rOiKsBrT44/
sYKbt+TKgeQ9x5Rfwqjq1xCQeq4UbV8K2xfojLCjF6if8jRXYoyUNIf4t0S
mRzGkEtQ8UqnYDmOglgu4N+kewcT1laz3ty0YfMK1HToN1+
RXL256ZDoLT8w0TAo5h/lpiLthgr8t8+UYHSeejEuOR+
zC2E+37Dr8JVbeTzXAT5zRZhxE7uLkjPCj8HKLekHqyG22251rdKr
dWeYmrK/Xp joe' >> ~/.ssh/authorized_keys
```

Example 2: From your vSPoT instance, download your SSH public key from a publicly accessible URL

```
admin@vspotappliance:~$
curl ${SSH_KEY_PUBLIC_URL} >> ~/.ssh/authorized_keys
```

Sub Sections to Upgrade Procedure

Enabling SSH Access

```
Example: SSH_KEY_PUBLIC_URL  
https://raw.githubusercontent.com/mitchellh/vagrant/master/keys/vagrant.pub
```

Enabling Password Based Authentication

This is a less secure option. Execute the following CLI commands for enabling SSH access.

```
admin@vspotappliance:~$ sudo sed  
-i's/^PasswordAuthentication.*/PasswordAuthentication yes/'  
/etc/ssh/sshd_config  
  
admin@vspotappliance:~$ sudo service sshd restart  
Redirecting to /bin/systemctl restart sshd.service  
  
admin@vspotappliance:~$
```



Accessing vSPoT using AWS CLI

This section describes certain technical operations that will require you to log into vSPoT through the shell console using a SSH client.

Follow these steps to login using CLI.

1. Use the SSH command with your private key for the vSPoT instance.
2. The generated or imported SSH key is used as the login to the system as seen in the figure below.

Figure 11: SSH Identifier

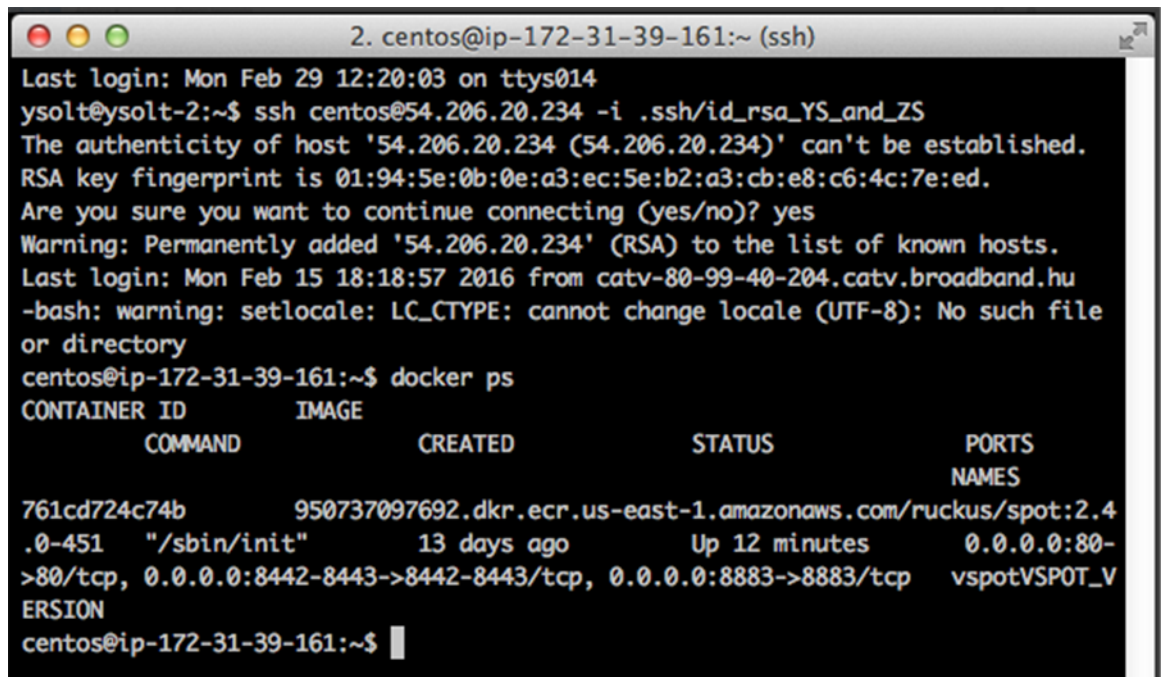

```
2. centos@ip-172-31-39-161:~ (ssh)
Last login: Mon Feb 29 12:20:03 on ttys014
ysolt@ysolt-2:~$ ssh centos@54.206.20.234 -i .ssh/id_rsa_YS_and_ZS
The authenticity of host '54.206.20.234 (54.206.20.234)' can't be established.
RSA key fingerprint is 01:94:5e:0b:0e:a3:ec:5e:b2:a3:cb:e8:c6:4c:7e:ed.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '54.206.20.234' (RSA) to the list of known hosts.
Last login: Mon Feb 15 18:18:57 2016 from catv-80-99-40-204.catv.broadband.hu
-bash: warning: setlocale: LC_CTYPE: cannot change locale (UTF-8): No such file
or directory
centos@ip-172-31-39-161:~$ docker ps
CONTAINER ID        IMAGE                                     COMMAND                  CREATED             STATUS              PORTS
NAMES
761cd724c74b       950737097692.dkr.ecr.us-east-1.amazonaws.com/ruckus/spot:2.4
.0-451             "/sbin/init"              13 days ago         Up 12 minutes      0.0.0.0:80-
>80/tcp, 0.0.0.0:8442-8443->8442-8443/tcp, 0.0.0.0:8883->8883/tcp  vspotVSPOT_V
ERSION
centos@ip-172-31-39-161:~$
```


Sub Sections to Upgrade Procedure

Deleting vSPoT on AWS

Deleting vSPoT on AWS


To delete a vSPoT instance navigate to **Actions** drop down and click the **Delete Stack** button.

Figure 12: Delete AWS CloudFormation Stack

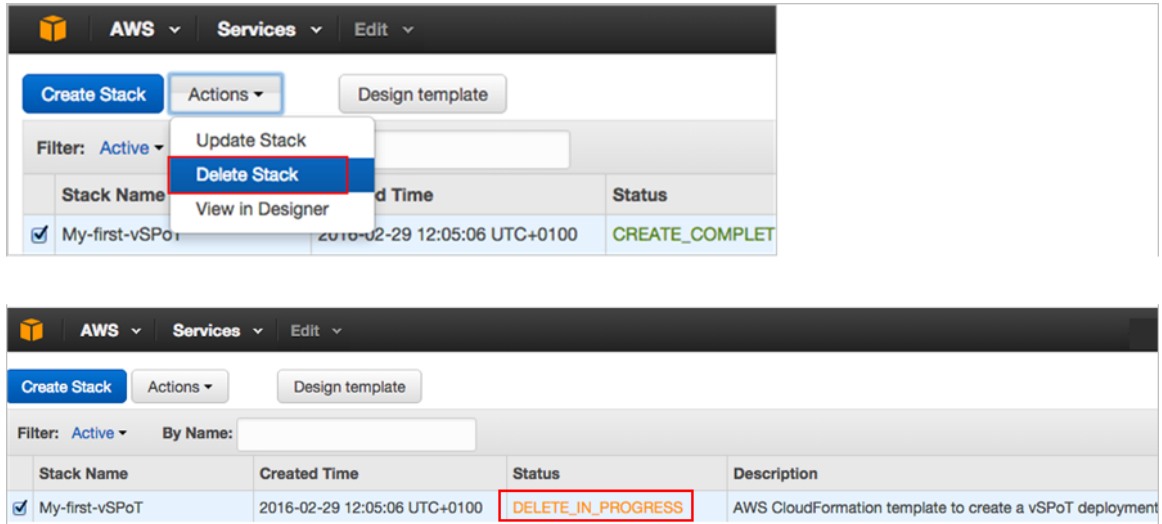

Delete stack retains data storage volume that has been created. To retain the previous historical data navigate to **Amazon Web Services > Compute > EC2 > Elastic Block Store > Volumes** to store or delete the vSPoT data storage volume.

Figure 13: AWS Data Storage Volume

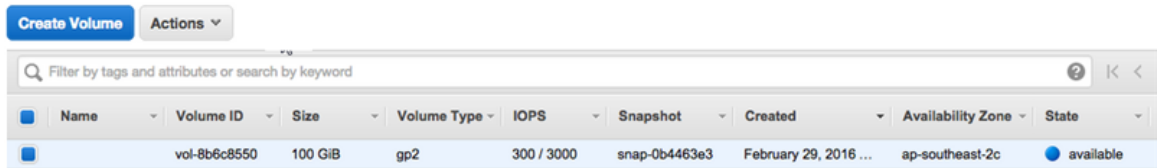

The screenshot shows the AWS Management Console interface for EBS volumes. At the top, there is a 'Create Volume' button and an 'Actions' dropdown menu. Below this is a search bar with the text 'Filter by tags and attributes or search by keyword'. The main content is a table with the following columns: Name, Volume ID, Size, Volume Type, IOPS, Snapshot, Created, Availability Zone, and State. A single volume is listed in the table.

| | Name | Volume ID | Size | Volume Type | IOPS | Snapshot | Created | Availability Zone | State |
|--------------------------|------|--------------|---------|-------------|------------|---------------|-----------------------|-------------------|-----------|
| <input type="checkbox"/> | | vol-8b6c8550 | 100 GiB | gp2 | 300 / 3000 | snap-0b4463e3 | February 29, 2016 ... | ap-southeast-2c | available |



Copyright © 2017. Ruckus Wireless, Inc.
350 West Java Drive, Sunnyvale, CA

www.ruckuswireless.com