

# Cloudpath Enrollment System Third-Party Authentication Configuration Guide, 5.9

**Supporting Cloudpath Software Release 5.9**

# Copyright, Trademark and Proprietary Rights Information

© 2021 CommScope, Inc. All rights reserved.

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc. and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

## Export Restrictions

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

*These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.*

## Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, COMMSCOPE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. CommScope does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. CommScope does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise. As a condition of your use of the Materials, you warrant to CommScope that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

## Limitation of Liability

IN NO EVENT SHALL COMMSCOPE, COMMSCOPE AFFILIATES, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIERS, LICENSORS AND THIRD PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF COMMSCOPE HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

## Trademarks

ARRIS, the ARRIS logo, COMMSCOPE, RUCKUS, RUCKUS WIRELESS, the Ruckus logo, the Big Dog design, BEAMFLEX, CHANNELFLY, FASTIRON, ICX, SMARTCELL and UNLEASHED are trademarks of CommScope, Inc. and/or its affiliates. Wi-Fi Alliance, Wi-Fi, the Wi-Fi logo, Wi-Fi Certified, the Wi-Fi CERTIFIED logo, Wi-Fi Protected Access, the Wi-Fi Protected Setup logo, Wi-Fi Protected Setup, Wi-Fi Multimedia and WPA2 and WMM are trademarks or registered trademarks of Wi-Fi Alliance. All other trademarks are the property of their respective owners.

# Contents

---

<b>Using Facebook for Third-Party Authentication.....</b>	<b>5</b>
Setting Up the Facebook Application.....	5
What You Need To Set Up the Facebook Application.....	5
Creating the New Facebook App.....	5
Setting Up Cloudpath for Facebook Authentication.....	5
What You Need to Configure Cloudpath for Facebook.....	5
How to Add Facebook Authentication to the Workflow.....	6
User Experience for Facebook Authentication .....	8
<b>Using LinkedIn for Third-Party Authentication.....</b>	<b>9</b>
Setting Up the LinkedIn Application.....	9
What You Need To Set Up The LinkedIn Application.....	9
How to Set Up the LinkedIn App.....	9
Setting Up Cloudpath for LinkedIn Authentication.....	20
What You Need to Configure Cloudpath for LinkedIn.....	20
How to Add LinkedIn Authentication to the Workflow.....	20
User Experience for LinkedIn Authentication.....	22
<b>Using Google for Third-Party Authentication.....</b>	<b>25</b>
Setting Up the Google Application.....	25
What You Need To Set Up The Google Application.....	25
Creating the Google Web Application Project.....	25
Setting Up Cloudpath for Google Authentication.....	26
What You Need to Configure Cloudpath for Google.....	26
How to Add Google Authentication to the Workflow.....	26
User Experience for Google Authentication.....	28
<b>Using Google LDAP Client as an Authentication Server.....</b>	<b>31</b>
Prerequisites.....	31
Configuration Steps.....	31
Testing.....	36
Next Steps.....	37



# Using Facebook for Third-Party Authentication

---

- [Setting Up the Facebook Application.....](#) 5
- [Setting Up Cloudpath for Facebook Authentication.....](#) 5

## Setting Up the Facebook Application

Before configuring Cloudpath for Facebook authentication, you must set up the Facebook application.

### What You Need To Set Up the Facebook Application

- Facebook login credentials
- Name and Namespace for your application
- Display Name for your application
- Domain and Website URL for your application

### Creating the New Facebook App

The steps given here are only very high-level to inform you what information you will need to collect from your Facebook project that is needed on the Cloudpath UI-side configuration. You need to refer to your Facebook developer's documentation for all the information about creating your application.

1. Go to <http://developer.facebook.com>
2. Log in using your Facebook credentials.
3. Follow the instructions in the developer's manuals on how to create a website application.
4. During the process, you need to create an App ID.
5. Later in the process, you can go to the dashboard, where both the App ID and the App Secret are shown. Be sure to write down these values because you will need them during the Cloudpath configuration process.
6. Continue the configuration process in the Basic Settings area. You will need to add a Website platform.
7. For site URL and Valid OAuth Redirect URI, obtain this information from the Cloudpath workflow process in the Cloudpath UI. When you choose the "Authenticate to a third party" step and click **Next**, scroll down to the "Facebook" section and click the "Facebook Supported?" checkbox.

## Setting Up Cloudpath for Facebook Authentication

After the Facebook application is set up, you configure an authentication step in Cloudpath to prompt the user for the Facebook credentials.

### What You Need to Configure Cloudpath for Facebook

- Facebook App ID
- Facebook App Secret
- (Optional) Scope parameters, Event ID, and Liked Page ID for your Facebook application

## How to Add Facebook Authentication to the Workflow

1. Create an enrollment workflow for third-party authentication.
2. Add an enrollment step that prompts the user to authenticate through a third-party source.
3. Select **Create a new configuration**.

The **Third-Party Authentication Setup** page allows you to specify which third-party sources are allowed as well as API information related to those sources.

4. Enter the **Name** and **Description** of this configuration.

**FIGURE 1** Cloudpath Third-Party Authentication Setup

**Third-Party Authentication Setup**


1 Display Name:

1 Description:

**Facebook Configuration**

1 Facebook Supported?

Instructions: The Facebook Developer's Console is available at <https://developers.facebook.com>. Within My Apps, create a new app for a website, and Create App ID. You will need the App ID and App Secret.



1 App ID:

1 Secret:

1 Scope:

1 Event ID:

1 Liked Page ID:

1 Redirect URL:

Facebook will need a Website "Site URL," to redirect to. This must be the full enrollment URL, + "facebook", such as <https://test01.cloudpath.net/enroll/RegistrationTest?facebook>.

Based on the current deployment locations, the Site URL should be one of <https://test01.cloudpath.net/enroll/RegistrationTest?ProductionFacebook>.

**Google Configuration**

1 Google Supported?

**LinkedIn Configuration**

1 LinkedIn Supported?

**Custom OAuth 2.0**

1 Custom OAuth 2.0 Configuration


5. In the Facebook Configuration section, check the **Facebook Supported?** box and complete the following fields:
- **App ID** - The **App ID** from the Facebook application you just created.
  - **Secret** - The **App Secret** from the Facebook application you just created.
  - Optional settings:
    - **Scope** - A comma separated list of permission names that allows the application to read or write additional data (such as email or user\_group) from the Facebook application. If scope is left blank, you can only obtain the **Facebook profile ID, URL, and Name**.
    - **Event ID** and **Liked Page ID** - Allows the application to provide additional information about the user. The **Scope** must include **user\_likes** to use **Liked Page ID**, and **user\_events** to use **Event ID**. Adding a user\_event (or user\_likes) in the Scope allows you to create a filter in the workflow based on whether a user is in the user\_event (or user\_likes) group. See the Identity Information in the Enrollment Record to view the User Groups.

**NOTE**

To obtain the **Event ID** or **Page ID**, right-click on the FB page or event and **View Page Source**, then search for the string **event\_id** or **page\_id**.

6. Click **Save**. The Facebook authentication step is added to your enrollment workflow.

**FIGURE 2** Workflow with Facebook Authentication

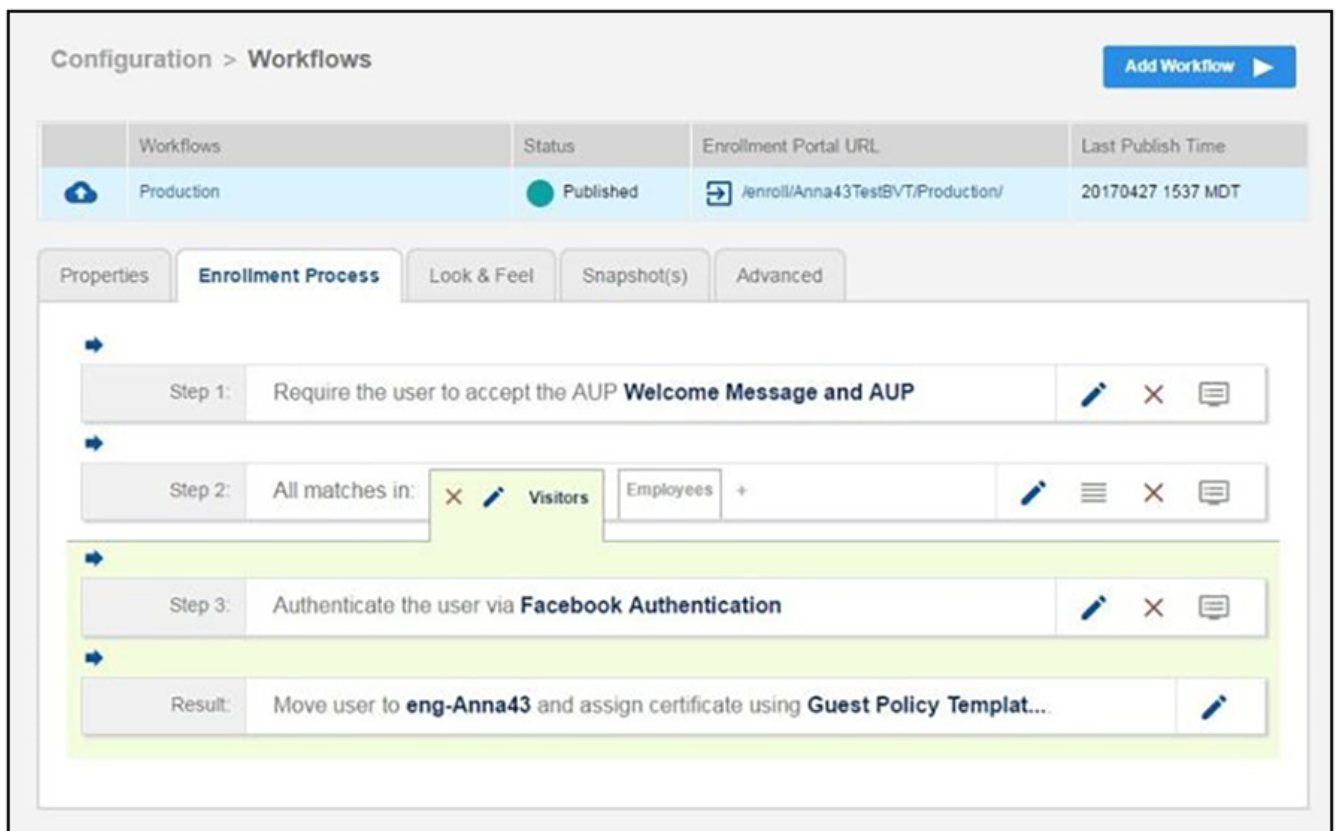

## User Experience for Facebook Authentication

During the enrollment process, the user is prompted to authenticate using their Facebook credentials.

- If the user is logged into Facebook, the enrollment continues.
- If the user is not logged into Facebook, they are prompted to log in, and after a successful authentication, redirected back to Cloudpath to continue with the enrollment process.

**FIGURE 3** Authenticate Using Facebook





# Using LinkedIn for Third-Party Authentication

---

- [Setting Up the LinkedIn Application](#)..... 9
- [Setting Up Cloudpath for LinkedIn Authentication](#)..... 20

## Setting Up the LinkedIn Application

Before configuring Cloudpath for LinkedIn authentication, you must set up the LinkedIn application.

### What You Need To Set Up The LinkedIn Application


- LinkedIn login credentials
- Name and Description for your application
- Verification of company URL with your application. This is required to create OAuth 2.0 "scopes," which define what your application can do on a user's behalf. This process is described in [How to Set Up the LinkedIn App](#) on page 9.
- JavaScript API Domain

### How to Set Up the LinkedIn App

1. Navigate to <http://developer.linkedin.com>.
2. Sign in to your LinkedIn account.
3. Click **Create app**.


- The **Create an app** page displays. The top part of that page is shown below:

FIGURE 4 "Create an app" Screen on LinkedIn Developers Site

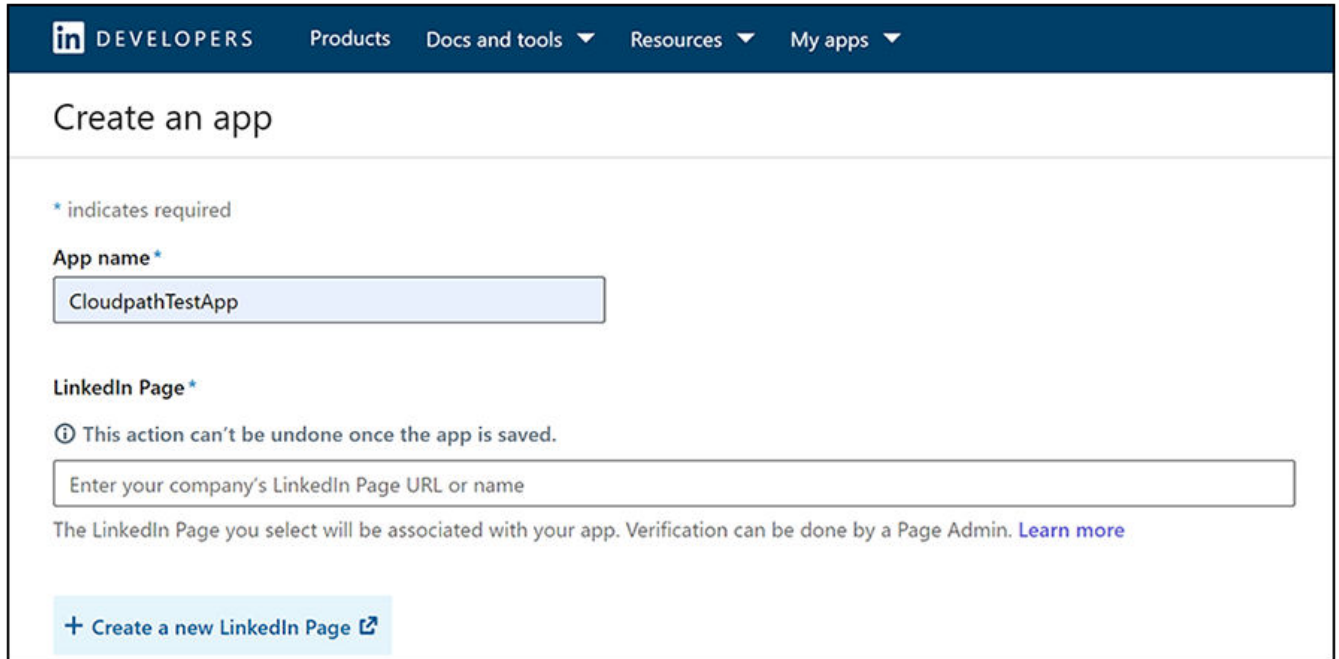

- Enter the name of your application, then click **+ Create a new LinkedIn Page** to enter information about your company. The following screen is displayed.

FIGURE 5 Creating a LinkedIn Page for Your Company

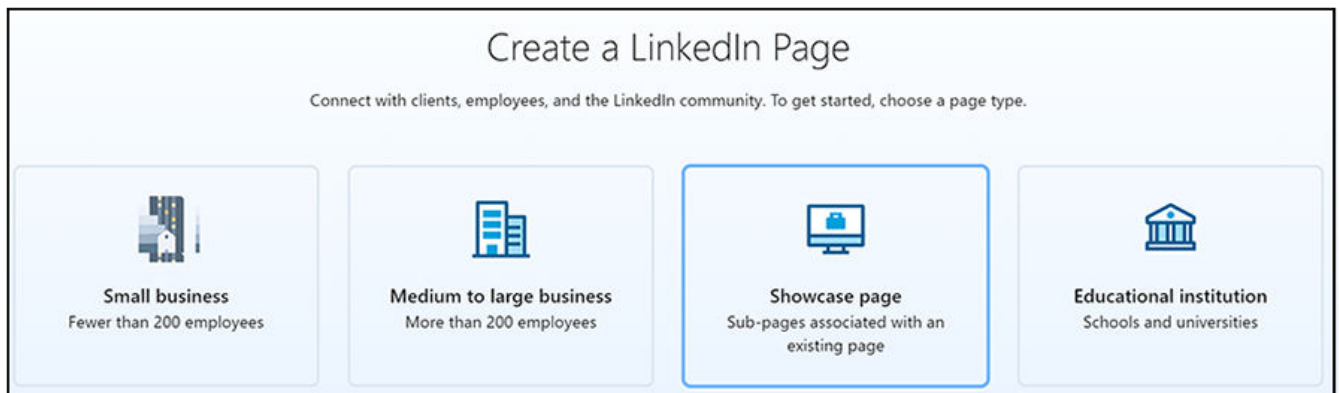

- Click on the applicable button for your business; the example below shows the screens for a "Small business."

**FIGURE 6** Identity Information for Your Company: Top Portion of Screen

\* indicates required

**Page identity**

Name\*

JeffOauthTest1 Company

LinkedIn public URL\*

linkedin.com/company/ jeffoauthtest1-company

Website

Begin with http:// or https:// or www.

This is a link to your external website.

**Page preview**

COMMSCOPE RUCKUS

JeffOauthTest1 Company

Automotive

Tagline

- Name: Enter the name of your company.
- LinkedIn public URL: This field will be generated based on what you enter in the "Name" field.
- Website: This field is optional.

**FIGURE 7** Identity Information for Your Company: Middle Portion of Screen

**Company details**

Industry\*

Automotive

Company size\*

2-10 employees

Company type\*


Self-employed

Select the applicable options from the drop-down lists.

FIGURE 8 Identity Information for Your Company: Bottom Portion of Screen

**Profile details**

Logo

 cplogo.PNG PNG 7kb ✕  
**Upload complete**

300 x 300px recommended. JPGs, JPEGs, and PNGs supported.

Tagline ?

Example: A family-run accounting firm that promises you won't lose sleep over filing your taxes.

I verify that I am an authorized representative of this organization and have the right to act on its behalf in the creation and management of this page. The organization and I agree to the additional [terms](#) for Pages.

**Create page**

- Logo: Upload a logo if desired.
- Tagline: Enter a tagline if desired.
- Verification checkbox: Read and check this box in order to proceed.

Click **Create page**.

7. Click on the tab in your browser that has the original "Create an app" page that you already started.


**FIGURE 9** Returning to "Create an App" Page: Top Portion of Screen

The screenshot shows the top portion of the "Create an app" page. At the top left, there is a heading "Create an app". Below it, a note states "\* indicates required". The "App name\*" field contains the text "CloudpathTestApp". The "LinkedIn Page\*" section includes a warning icon and text: "This action can't be undone once the app is saved." Below this is a dropdown menu showing a selection for "JeffOauthTest1 Company" with a subtext "Automotive; 1-10 employees" and a close button (X). A note below the dropdown reads: "The LinkedIn Page you select will be associated with your app. Verification can be done by a Page Admin. [Learn more](#)". The "Privacy policy URL" field is empty, with a placeholder text "Begin with http:// or https://".

- App name: The name of the application you created is displayed.
- LinkedIn Page: Start typing the name of your application, then select it.
- Privacy policy URL: Optional field.

FIGURE 10 Returning to "Create an App" Page: Bottom Portion of Screen

**App logo\***  
This is the logo displayed to users when they authorize with your app



Square image recommended. At least one dimension should be at least 100px.

---


**Legal agreement**  
When you develop on our platform, you are agreeing to be bound by our [API Terms of Use](#).

I have read and agree to these terms

Upload your logo, check the legal agreement, then click **Create app**.

The application is created, and you are returned to a screen that provides the information you just configured. The screen that is displayed is shown below in two parts:

FIGURE 11 Application Created: Top Portion of Screen


 **CloudpathTestApp**  
Client ID: 77jrtq111pdyi4 | Created: Mar 31, 2021


[Settings](#) [Auth](#) [Products](#) [Analytics](#) [Team members](#)

---

**App settings**

**Company:**

 **JeffOauthTest1 Company**  
Automotive; 1-10 employees


 This app is not verified as being associated with this company.  
[Learn more](#)

**Managing settings for your app**  
Here, you can adjust your application settings.

**App logo and privacy policy URL**  
The app logo and privacy policy URL entered will be shown to each user when your app requests access to their LinkedIn member data.


**Widgets**  
If your app uses widgets you are required to add the domains where your widget is hosted. LinkedIn will validate and whitelist these domains.

FIGURE 12 Application Created: Bottom Portion of Screen

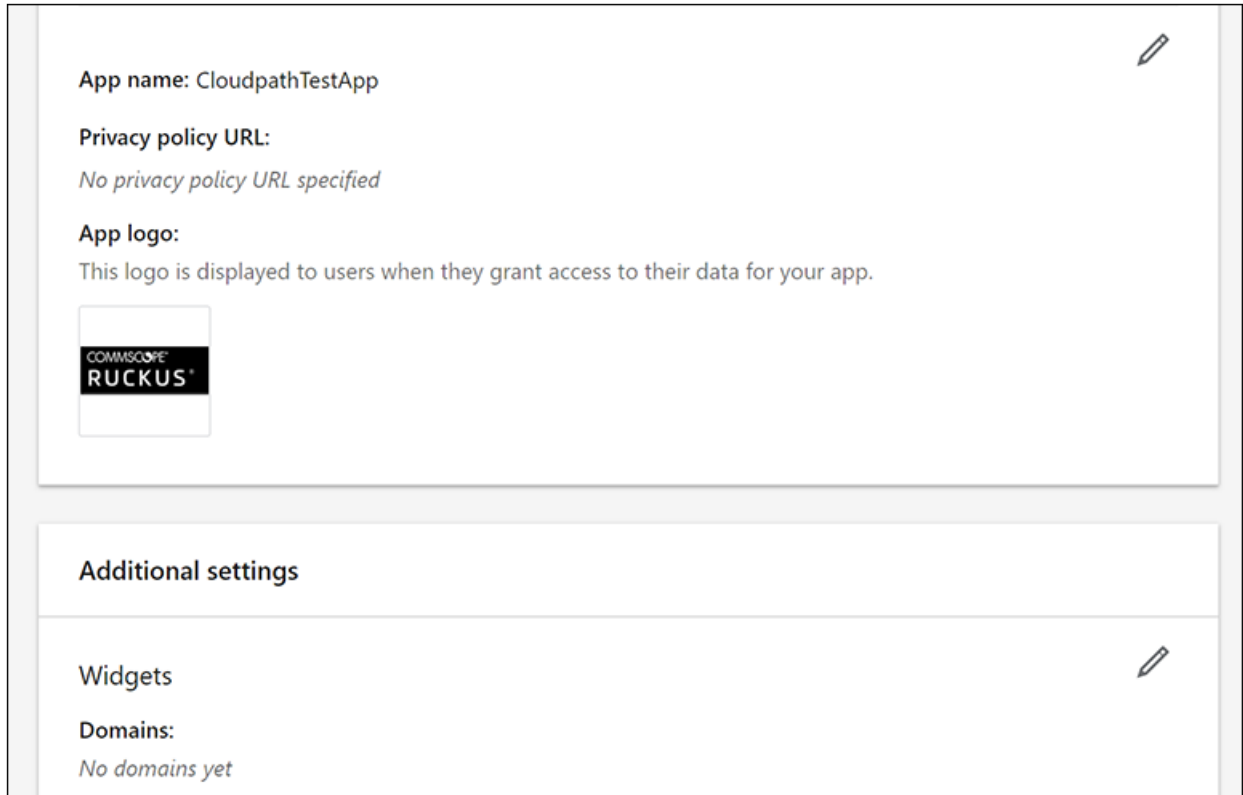

8. To verify your company with your application, click the **Verify** button (see Figure 11). The following screen is displayed.


FIGURE 13 Verifying Your Company

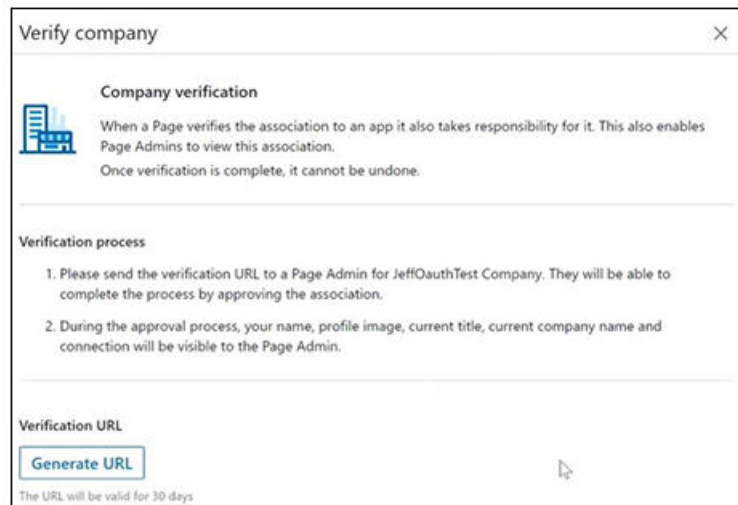

## Using LinkedIn for Third-Party Authentication Setting Up the LinkedIn Application


9. Click the **Generate URL** button. The URL is generated, as shown in the following screen.

**FIGURE 14** Using the Verification URL

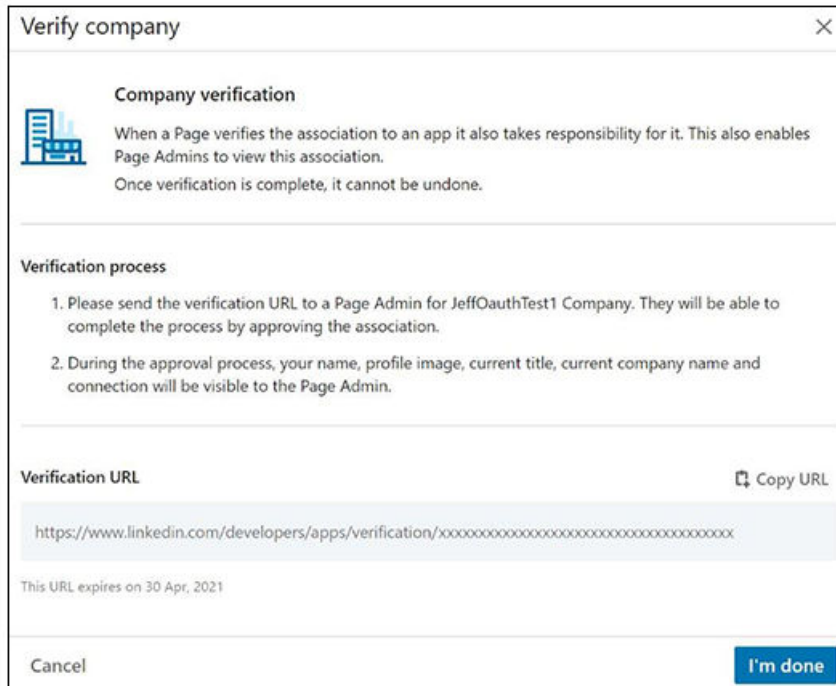

10. Copy the URL (and click **I'm done**.)
11. Paste the URL into a new tab on your browser (and click on the highlighted link as you paste it into the browser). You will receive the following screen, which shows the example company "JeffOAuthTest1 Company" created earlier.


**FIGURE 15** Pasting the URL Into a Browser to Verify the Company

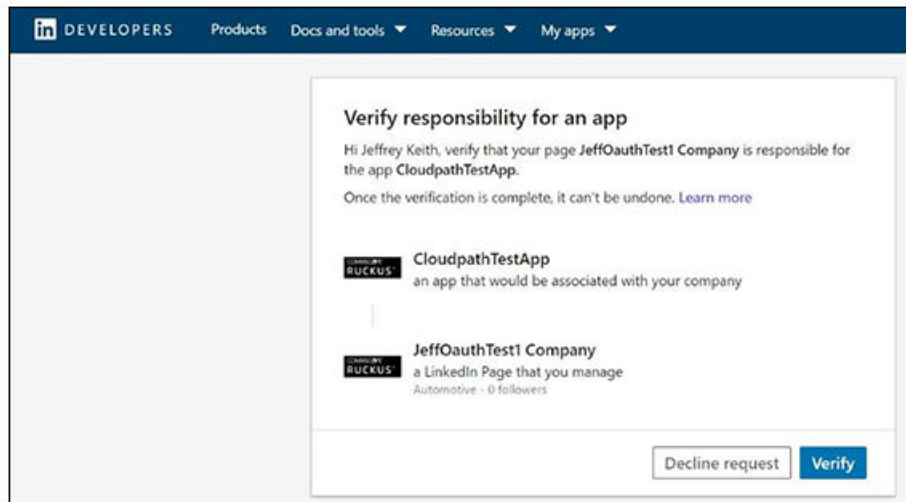




12. Click **Verify**. A successful verification will yield the following screen.

**FIGURE 16** Verification Successful

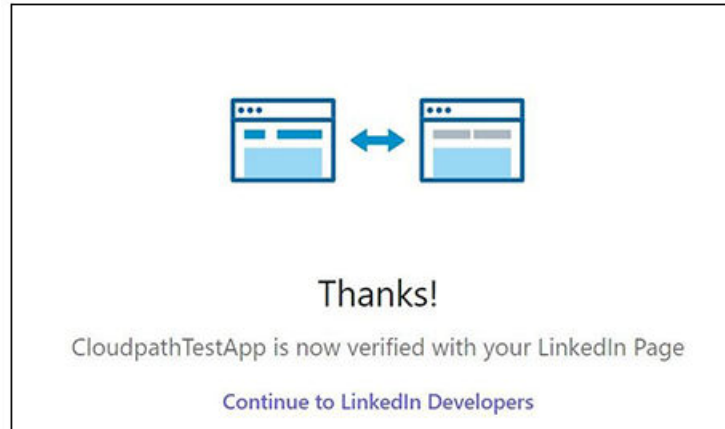

13. From the Developer's page, click on the **Products** tab, then sign in with LinkedIn.

**FIGURE 17** Signing in With LinkedIn from the Products Tab of Developer's Page

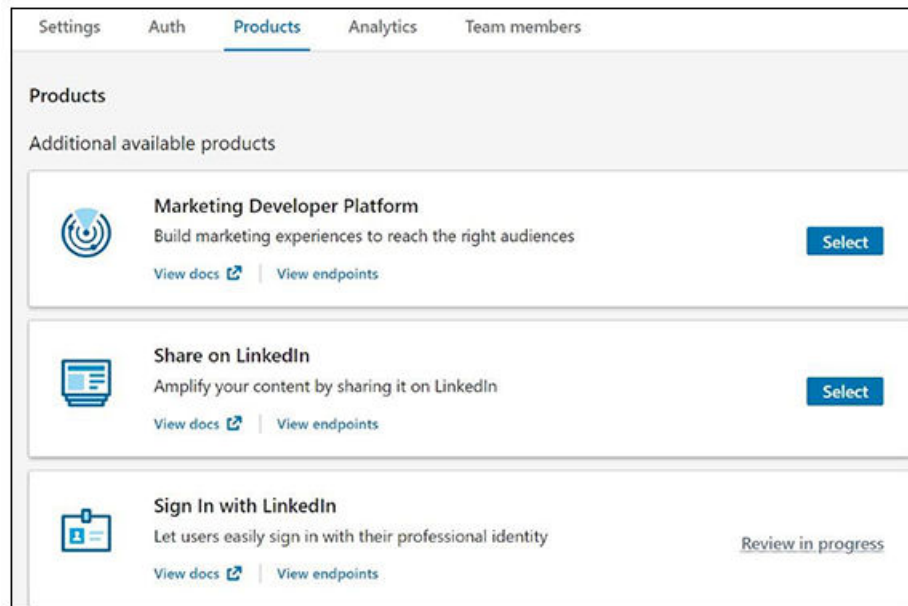

**NOTE**

You can refresh the page after a few minutes to check if the review has completed. You will also receive an email notification once you application has been verified as being associated with your company. Once verification is successful, the "Sign in with LinkedIn" step adds the "r\_emailaddress" and "r\_liteprofile" scopes to the OAuth 2.0 scopes (as shown in [Figure 20](#)). These scopes allow the Oauth integration to use the primary e-mail address associated with the LinkedIn account as well as the person's name and photo. Without these scopes being successfully added, the Oauth integration fails.

**Using LinkedIn for Third-Party Authentication**  
Setting Up the LinkedIn Application


14. On the Developer's page, go to the **Settings** tab, then scroll down to the "Widgets" area, use the pencil icon to add your domain, and click **Update**.

**FIGURE 18** Adding Your Domain to Widgets




15. Click the **Auth** tab of the Developer's screen. An example figure is shown below in two parts:

**FIGURE 19** Auth Tab Settings of Newly Created Application - Top Part of Screen

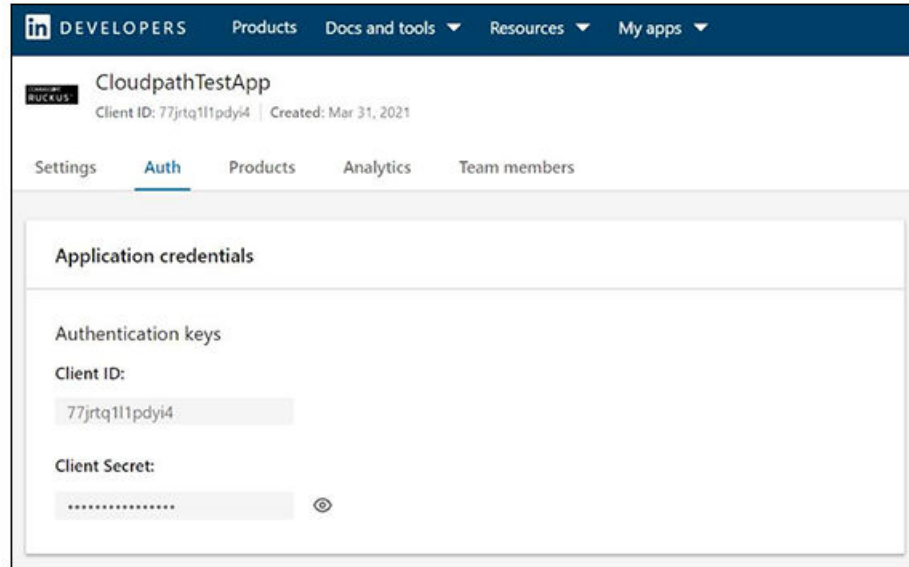

**FIGURE 20** Auth Tab Settings of Newly Created Application - Bottom Part of Screen

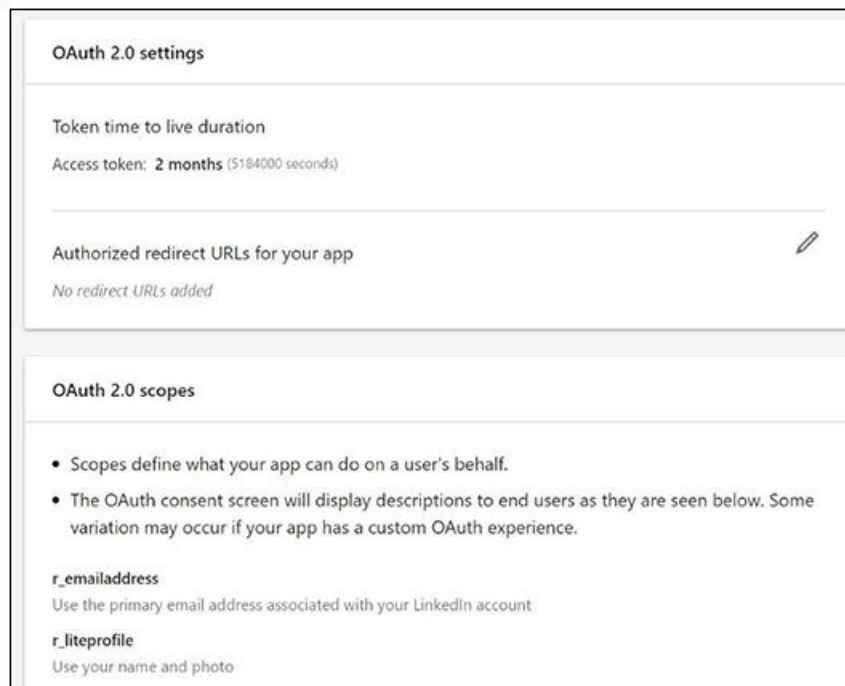

16. In the OAuth 2.0 settings section, use the pencil icon to enter the Redirect URLs.

**NOTE**

These must be acceptable Redirect URLs and must include the full enrollment URL + "/linkedin". An example is: `https://jeff243.cloudpath.net/enroll/JackTest/Production/linkedin`.

You obtain the "Redirect URL" during workflow creation when you add a step to "Authenticate to a third party." For more information, refer to [How to Add LinkedIn Authentication to the Workflow](#) on page 20. (Figure 22 on page 21 shows the Redirect URL, which appears once you have checked the "LinkedIn Supported?" box when adding the third-party authentication step.)

You can add multiple URLs.

The following figure shows the Redirect URL section after adding a URL:

**FIGURE 21** Redirect URL Added to LinkedIn Configuration



17. Click **Update** to save configuration changes to your application.

Make a note of your **Client ID** and **Client Secret** from [Figure 19](#). You need this information to set up the LinkedIn authentication within Cloudpath.

## Setting Up Cloudpath for LinkedIn Authentication

After the LinkedIn application is set up, you configure an authentication step in Cloudpath to prompt the user for the LinkedIn credentials.

### What You Need to Configure Cloudpath for LinkedIn

- LinkedIn application Client ID (API Key in previous versions)
- LinkedIn application Client Secret (Secret Key in previous versions)


### How to Add LinkedIn Authentication to the Workflow

You can add a step to the enrollment workflow to authenticate a user by using the LinkedIn application.

1. Create an enrollment workflow for third-party authentication.
2. Add an enrollment step that prompts the user to authenticate through a third-party source. The **Third-Party Authentication Setup** page allows you to specify which third-party sources are allowed as well as API information related to those sources.
3. Place the authentication step after the **User Type** option.
4. Enter the **Name** and **Description** of this configuration.

5. Scroll down to the **LinkedIn Configuration** section, and check the **LinkedIn Supported?** box.

**FIGURE 22** Cloudpath Third-Party Authentication Setup for LinkedIn

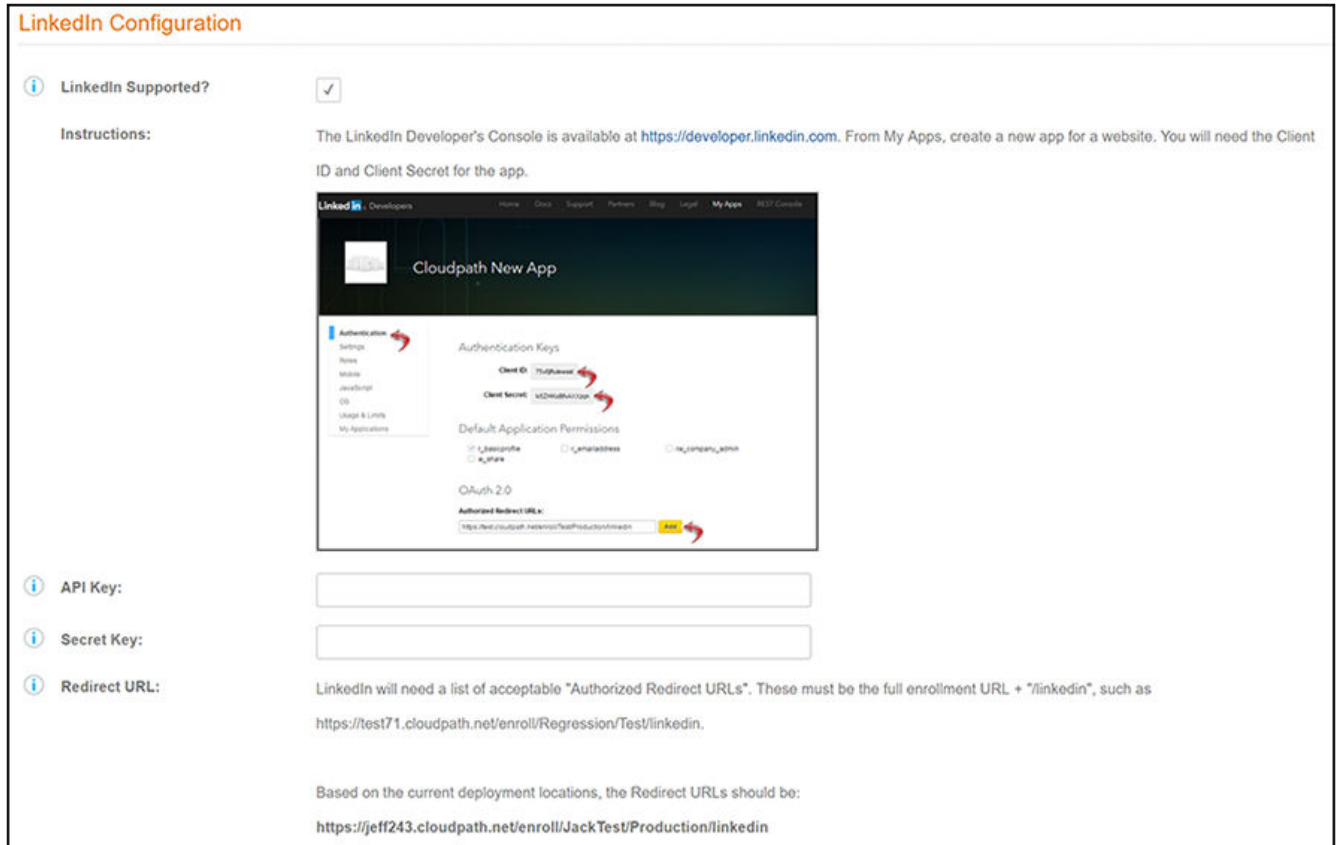

6. In the API Key field, enter the Client ID from the LinkedIn Auth Tab Settings of Newly Created Application screen (refer to [Figure 19](#) on page 19).
7. In the Secret Key field, enter the Client Secret from the LinkedIn Auth Tab Settings of Newly Created Application screen (refer to [Figure 19](#) on page 19).

## Using LinkedIn for Third-Party Authentication

### Setting Up Cloudpath for LinkedIn Authentication

8. Click **Save**. The LinkedIn authentication step is added to your enrollment workflow.

**FIGURE 23** Cloudpath Workflow With LinkedIn Step Added

The screenshot displays the 'Configuration > Workflows' interface. At the top right, there is an 'Add Workflow' button. Below it is a table with the following data:

Workflows	Status	Enrollment Portal URL	Last Publish Time
Production	Published	/enroll/Anna43TestBVT/Production/	20170427 1540 MDT

Below the table are tabs for 'Properties', 'Enrollment Process', 'Look & Feel', 'Snapshot(s)', and 'Advanced'. The 'Enrollment Process' tab is active, showing a workflow with four steps:


- Step 1: Require the user to accept the AUP **Welcome Message and AUP**
- Step 2: All matches in: **Visitors** Employees +
- Step 3: Authenticate the user via **LinkedIn Authentication**
- Result: Move user to **eng-Anna43** and assign certificate using **Guest Policy Templat...**

The Step 3 and Result sections are highlighted in a light green background.

## User Experience for LinkedIn Authentication

When a user attempts to gain access to your network, they receive the LinkedIn authentication prompt during the enrollment process.

FIGURE 24 User Prompt for LinkedIn Authentication

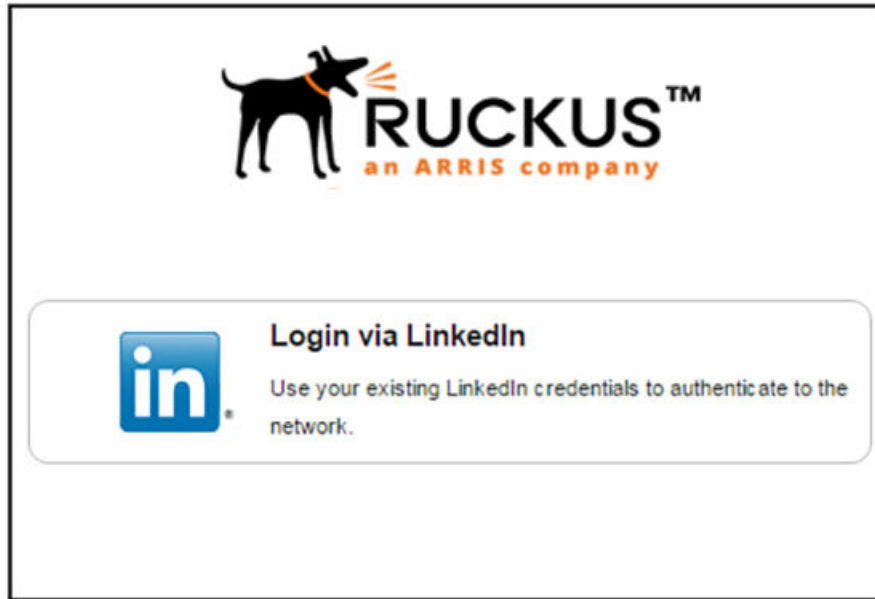

After authenticating the user with their LinkedIn credentials, Cloudpath continues with the enrollment process and moves the user to the secure network.





# Using Google for Third-Party Authentication

---

- [Setting Up the Google Application.....](#) 25
- [Setting Up Cloudpath for Google Authentication.....](#) 26

## Setting Up the Google Application

Before configuring Cloudpath for Google authentication, you must set up the Google application.

### What You Need To Set Up The Google Application

- Google login credentials
- Branding information for your application
- Redirect URL for your application

### Creating the Google Web Application Project

The steps given here are only very high-level to inform you what information you will need to collect from your Google project that is needed on the Cloudpath UI-side configuration. You need to refer to your Google developer's documentation for all the information about creating your application.

1. Go to <https://console.developers.google.com>.
2. Sign in to your Google account.
3. Create and name your API web-application project.
4. During creation of your application, you may see a field called "Authorized Javascript origins." Leave this field blank.
5. When you get to the "Authorized redirect URIs" field, the entry must be in this format: `#{ENROLLER_URL}/enroll/google/`, where `#{ENROLLER_URL}` is the external URL to which the user is redirected. For multiple redirect URLs, enter one path on each line.

#### NOTE

To obtain the Redirect URI, when you are creating a workflow and you choose the "Authenticate to a third party" step and click **Next**, scroll down to the "Google" section and click the "Google Supported ?" checkbox. The redirect URI appears.


## Using Google for Third-Party Authentication

### Setting Up Cloudpath for Google Authentication

- At some point during the process, you will be notified of the following information that you need to take note of because you will need this information for Cloudpath configuration:
  - client ID
  - client Secret

An example of one screen that provides you with this information is the following:

**FIGURE 25** Client ID and Client Secret for Google Application

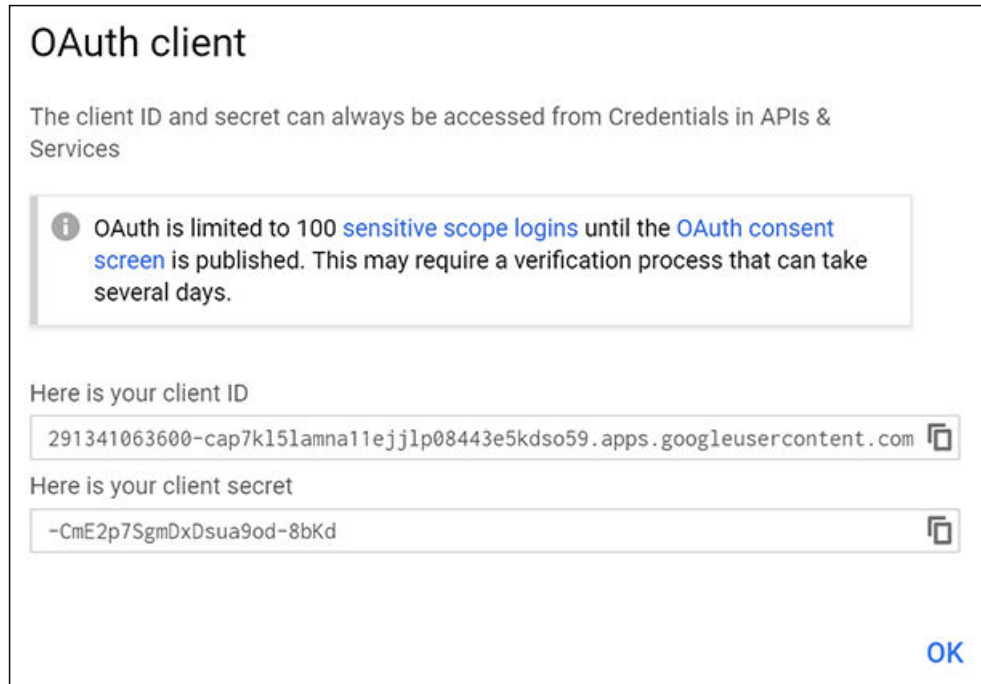

## Setting Up Cloudpath for Google Authentication

After the Google application is set up, you configure an authentication step in Cloudpath to prompt the user for the Google credentials.

### What You Need to Configure Cloudpath for Google

- Google application Client ID
- Google application Client Secret

### How to Add Google Authentication to the Workflow

- Create an enrollment workflow for third-party authentication.
- Add an enrollment step that prompts the user to authenticate through a third-party source.

3. Select **Create a new configuration**.

The **Third-Party Authentication Setup** page allows you to specify which third-party sources are allowed as well as API information related to those sources.

4. Enter the **Name** and **Description** of this configuration.

**FIGURE 26** Google Third-Party Authentication Setup

**Third-Party Authentication Setup**

**Display Name:**

**Description:**

**Facebook Configuration**

**Facebook Supported?**

**Google Configuration**

**Google Supported?**

**Instructions:** The Google Developer's Console is available at <https://console.developers.google.com>. Within the desired project, locate API & Auth→Credentials and create a client ID for a web application.

**Client ID:**

**Client Secret:**

**Redirect URIs:** Google will need a list of acceptable Redirect URIs. These must be the full enrollment URL + "google", such as <https://test71.cloudpath.net/enroll/Regression/Test/google>. Multiple URIs may be specified, with one per line.

Based on the current deployment locations, the Redirect URIs should be:  
<https://anna43.cloudpath.net/enroll/Anna43TestBVT/Production/google>

**LinkedIn Configuration**

**LinkedIn Supported?**

**Custom OAuth 2.0 Configuration**

5. In the Google Configuration section, check the **Google Supported?** box.
6. Read the instructions for creating a client key. Be sure that the URI in the Google application matches the instructions on this page.
7. Enter the **Client ID** and **Client Secret** from the Google application.


Note: These entries must match what is specified in the Google application.

## Using Google for Third-Party Authentication

### Setting Up Cloudpath for Google Authentication

8. Click **Save**. The Google authentication step is added to your enrollment workflow.

**FIGURE 27** Cloudpath Workflow

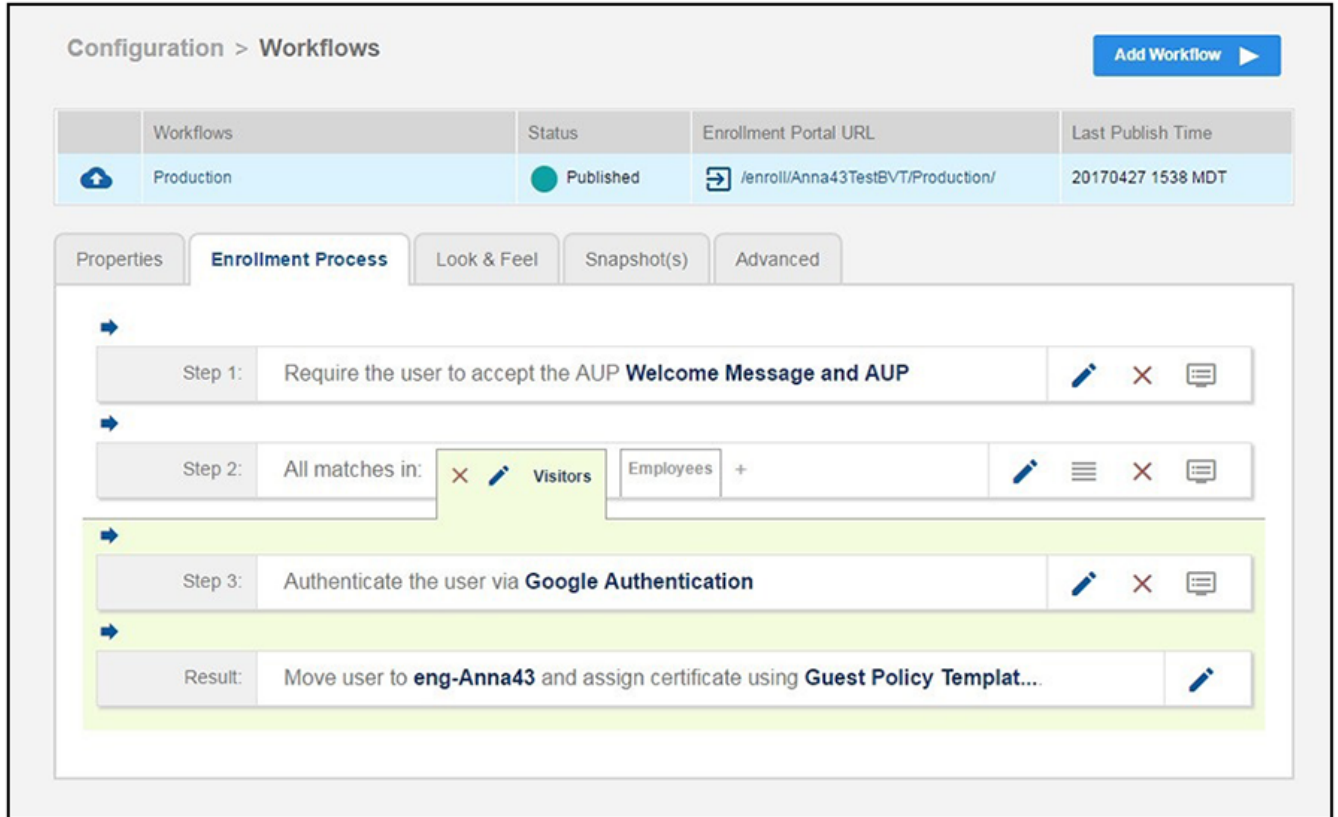

The screenshot displays the 'Configuration > Workflows' interface. At the top right, there is an 'Add Workflow' button. Below it is a table with the following data:

Workflows	Status	Enrollment Portal URL	Last Publish Time
Production	Published	/enroll/Anna43TestBVT/Production/	20170427 1538 MDT


Below the table are tabs for 'Properties', 'Enrollment Process', 'Look & Feel', 'Snapshot(s)', and 'Advanced'. The 'Enrollment Process' tab is active, showing a workflow with four steps:

- Step 1: Require the user to accept the AUP **Welcome Message and AUP**
- Step 2: All matches in: **Visitors**, **Employees**
- Step 3: Authenticate the user via **Google Authentication**
- Result: Move user to **eng-Anna43** and assign certificate using **Guest Policy Templat...**

## User Experience for Google Authentication

When a user attempts to gain access to your network, they receive the Google authentication prompt during the enrollment process.

FIGURE 28 User Prompt for Google Authentication

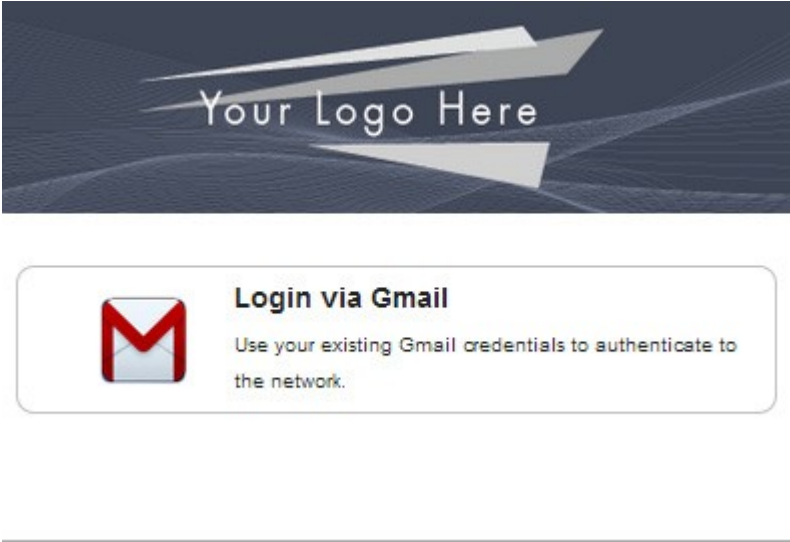

After authenticating the user with their Gmail credentials, Cloudpath continues with the enrollment process and moves the user to the secure network.



# Using Google LDAP Client as an Authentication Server

---

If you use G Suite to manage your users with Google Directory, you can use Google LDAP as an authentication server for onboarding users to your Cloudpath Enrollment System.

## Prerequisites

Before you begin any configuration on the Cloudpath UI, be sure you have the following:

- Google LDAP client with access permissions as follows:
  - Specify the LDAP client access level for verifying user credentials. When a user tries to sign in to the application, this setting specifies which organizational units the LDAP client can access to verify a user's credentials. Users who not part of one of the selected organizational units cannot sign in to the application.
  - Specify the LDAP client access level for reading user information. This setting specifies the organizational units that the LDAP client can access to retrieve additional user information.
  - Specify whether the LDAP client can read group information. This setting specifies whether the LDAP client can read group details and check a user's group memberships for purposes such as a user's role in the application.
- Google LDAP client certificate zip file (which contains both the public and private keys). The certificate is used for encryption by the LDAP service provider.
- (Optional) Access credentials from Google LDAP client: If you will require Cloudpath to use the "Binding Username" and "Binding Password" fields ([Figure 29](#)) in addition to the certificate to connect to the secure LDAP service you must generate access credentials.

### NOTE

Refer to your G Suite LDAP documentation for information about setting up Google LDAP clients.

## Configuration Steps

Follow these steps to configure the Google LDAP authentication server in the Cloudpath UI:

### NOTE

Because access credentials are optional, the configuration steps below do not include using the applicable fields: Binding Username, Binding Password, and Lookup Bind Credentials.

1. Go to **Configuration > Authentication Servers**, and click **Add Server**.
2. In the next screen, where you select the type of Authentication server, scroll down and select the "Connect to LDAP" button, then fill in the LDAP Host and DN fields as shown in the example below:

FIGURE 29 Connect to LDAP Selection

**Connect to LDAP**  
Select this option to enable end-users to authenticate via LDAP (or LDAPs).

**Required LDAP Information**

- LDAP Host**: ldaps://ldap.google.com \*
- DN**: dc=cloudpath,dc=net \*
- Bind Username:**: [ex. uid=bob,cn=users,dc=test,dc=cloudpath,dc=local]
- Bind Password:**
- Lookup Bind Credentials:**: User
- Search Filter:**: (&(objectClass=person)(uid={0}))

- Connect to LDAP: ldaps://ldap.google.com

**NOTE**

ldaps://ldap.google.com is always the LDAP host name for G Suite LDAP client

- DN: The distinguished name of the domain
3. If you are not using binding, leave the Bind Username and Bind Password fields empty, then click **Save**. The new LDAP server ("Jack Test LDAP") is now added to the list of authorization servers, as shown in the example below:

FIGURE 30 LDAP Authentication Server Added

**Configuration > Authentication Servers** Add Server

>	Server 1:	LDAP server <b>Jack Test LDAP</b>		
>	Server 2:	SAML Identity Provider (IdP) <b>Jack Test SAML</b>		
>	Server 3:	OAuth server <b>LinkedIn, Facebook, or Gmail</b>		
>	Server 4:	Active Directory server <b>Jack Test AD</b>		



4. Enter edit mode for the newly created LDAP server by clicking the pencil icon to the right of the server name.
5. In the ensuing Modify Authentication Servers screen, check the TLS Client Certificate box. When you check this box, the screen allows you to upload the certificate using the "Define Certificate" button, as shown at the bottom of the following illustration:

**FIGURE 31** Checking the TLS Client Certificate Button

**Connect to LDAP**  
Select this option to enable end-users to authenticate via LDAP (or LDAPs).

**Required LDAP Information**


Reference Name:	Jack Test LDAP *
<i>i</i> LDAP Host	ldaps://ldap.google.com *
<i>i</i> DN	dc=cloudpath,dc=net *
<i>i</i> Bind Username:	[ex. uid=bob,cn=users,dc=test,dc=cloudpath,dc=local]
<i>i</i> Bind Password:	
<i>i</i> Lookup Bind Credentials:	User ▾
<i>i</i> Search Filter:	{&(objectClass=person)(uid={0})}
<i>i</i> TLS Client Certificate	<input checked="" type="checkbox"/>

No certificate defined - Press 'Define Certificate' button below.

Actions: [Define Certificate](#)


6. Click "Define Certificate" to invoke the following screen, where you select the source of your certificate:

FIGURE 32 Selecting the Certificate Source

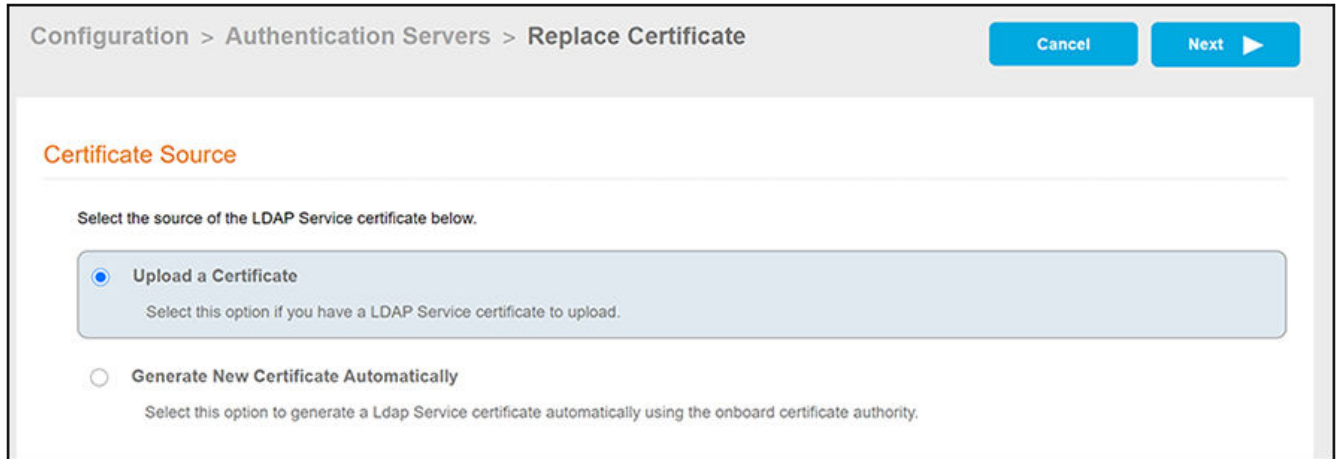

7. With the "Upload a Certificate" button selected, click **Next**. The following screen appears:

FIGURE 33 Screen for Uploading Certificates

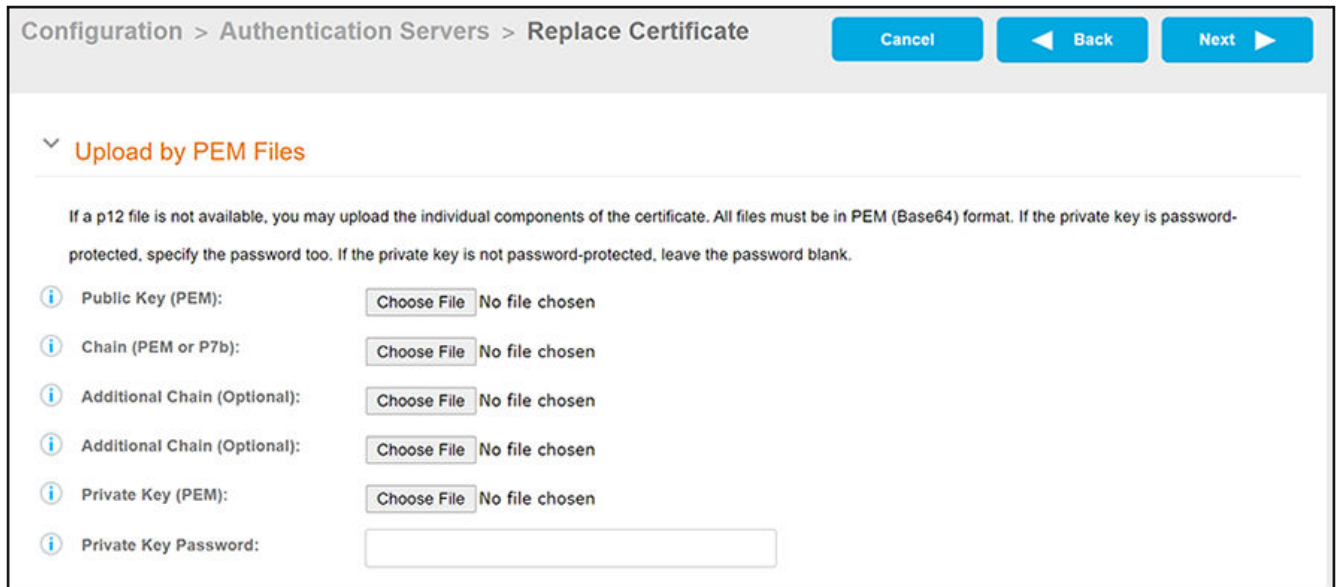

8. Using the Public Key (PEM) field, click **Choose File** to upload your certificate (a .crt file).
9. Using the Private Key (PEM) field, click **Choose File** to upload your private key (a .key file). The screen should now appear as follows:


FIGURE 34 Screen After Certificate Files Are Added

The screenshot shows a configuration window titled "Configuration > Authentication Servers > Replace Certificate". At the top right, there are three buttons: "Cancel", "Back", and "Next". Below the title bar, there is a section header "Upload by PEM Files" with a dropdown arrow. A paragraph of text explains: "If a p12 file is not available, you may upload the individual components of the certificate. All files must be in PEM (Base64) format. If the private key is password-protected, specify the password too. If the private key is not password-protected, leave the password blank." Below this text are six rows of input fields, each with an information icon (i) on the left. The first row is "Public Key (PEM):" with a "Choose File" button and the text "Google\_2023\_...08\_1523.crt". The second row is "Chain (PEM or P7b):" with a "Choose File" button and "No file chosen". The third row is "Additional Chain (Optional):" with a "Choose File" button and "No file chosen". The fourth row is "Additional Chain (Optional):" with a "Choose File" button and "No file chosen". The fifth row is "Private Key (PEM):" with a "Choose File" button and "Google\_2023\_...08\_1523.key". The sixth row is "Private Key Password:" with an empty text input field.

10. Click **Next**. A message indicating success of the certificate upload briefly appears, and you are returned to the LDAP Configuration screen.



FIGURE 36 Testing Server Connection

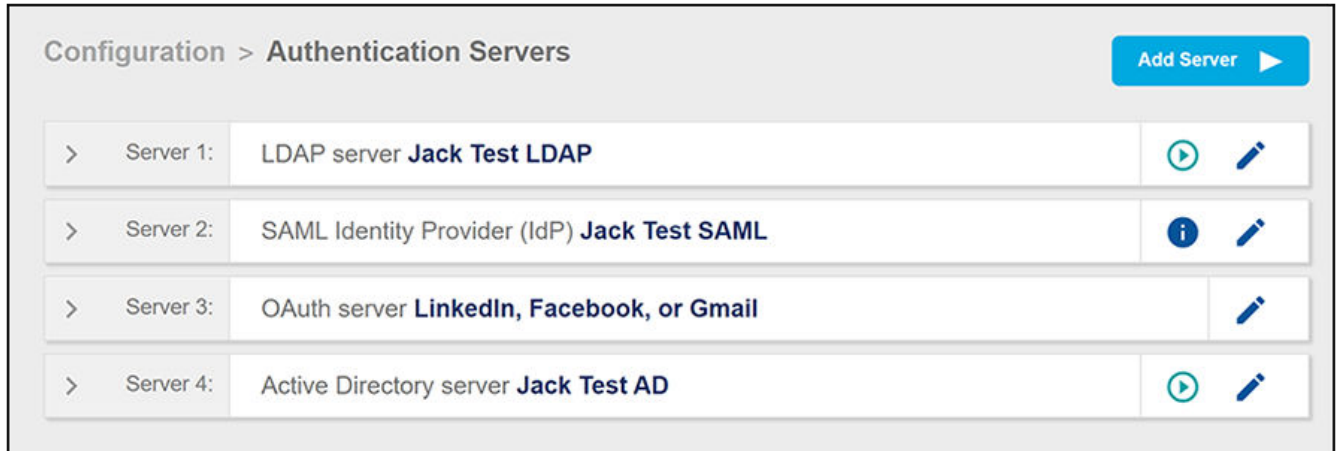

2. Enter a valid Google G Suite LDAP client username and password, then click **Continue**. If the connection is good, a message will indicate successful authentication.

**NOTE**

If the connection test fails, be sure that the Binding Username and Binding Password fields are empty (if you are not using binding) in the LDAP configuration screen.

## Next Steps

You can include the LDAP authentication server in a workflow. For more information about workflows, refer to the *Cloudpath ES Deployment Administration Guide*.

