

# RUCKUS Unleashed 200.12 Command Line Interface Reference Guide

**Supporting Unleashed 200.12**

# Copyright, Trademark and Proprietary Rights Information

© 2022 CommScope, Inc. All rights reserved.

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc. and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

## Export Restrictions

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

*These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.*

## Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, COMMSCOPE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. CommScope does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. CommScope does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise. As a condition of your use of the Materials, you warrant to CommScope that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

## Limitation of Liability

IN NO EVENT SHALL COMMSCOPE, COMMSCOPE AFFILIATES, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIERS, LICENSORS AND THIRD PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF COMMSCOPE HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

## Trademarks

ARRIS, the ARRIS logo, COMMSCOPE, RUCKUS, RUCKUS WIRELESS, the Ruckus logo, the Big Dog design, BEAMFLEX, CHANNELFLY, FASTIRON, ICX, SMARTCELL and UNLEASHED are trademarks of CommScope, Inc. and/or its affiliates. Wi-Fi Alliance, Wi-Fi, the Wi-Fi logo, Wi-Fi Certified, the Wi-Fi CERTIFIED logo, Wi-Fi Protected Access, the Wi-Fi Protected Setup logo, Wi-Fi Protected Setup, Wi-Fi Multimedia and WPA2 and WMM are trademarks or registered trademarks of Wi-Fi Alliance. All other trademarks are the property of their respective owners.

# Contents

---

<b>Preface</b> .....	<b>23</b>
Contacting RUCKUS Customer Services and Support.....	23
What Support Do I Need?.....	23
Open a Case.....	23
Self-Service Resources.....	24
Document Feedback.....	24
RUCKUS Product Documentation Resources.....	24
Online Training Resources.....	24
Document Conventions.....	25
Notes, Cautions, and Safety Warnings.....	25
Command Syntax Conventions.....	25
<b>About This Guide</b> .....	<b>27</b>
Introduction.....	27
What's New in this Release.....	27
<b>Understanding the Unleashed Command Line Interface</b> .....	<b>29</b>
Introduction.....	29
Accessing the Command Line Interface.....	29
Requirements.....	29
Step 1: Connecting the Administrative Computer to Unleashed.....	29
Step 2: Start and Configure the SSH Client.....	29
Step 3: Log Into the CLI.....	32
Unleashed CLI Setup Wizard.....	33
Using the ? Command.....	36
Using the Help Command.....	36
Top-Level Commands.....	36
disable.....	37
ping.....	37
reboot.....	37
shutdown.....	38
set-factory.....	38
data-privacy.....	38
config.....	39
logo.....	39
debug.....	40
reset radius-statistics.....	40
session-timeout.....	41
ap-mode.....	42
easyDpl-get-status .....	43
easyDpl-disable.....	44
url-filtering-expire-timeout.....	44
url-filtering-license-server.....	44
<b>Viewing Current Configuration</b> .....	<b>45</b>
Show Commands Overview.....	46
Show AAA Commands.....	47
show aaa all .....	47

show aaa name .....	48
Show DHCP Commands.....	49
show dhcp all.....	49
show dhcp name.....	49
Show Access Point Commands.....	51
show ap all.....	51
show ap devname.....	52
show ap mac.....	53
Show AP Group Commands.....	56
show ap-group all.....	56
show ap-group name.....	57
Show AP Policy Commands.....	59
show ap-policy.....	59
Show System Configuration Commands.....	60
show config.....	60
Show Performance Commands.....	62
show performance.....	62
show performance ap-radio2-4 .....	62
show performance ap-radio5.....	62
show performance station.....	63
Show System Information Commands.....	65
show sysinfo.....	65
Show Ethernet Info Commands.....	66
show ethinfo.....	66
Show Technical Support Commands.....	67
show techsupport.....	67
Show Management ACL Commands.....	68
show mgmt-acl all.....	68
show mgmt-acl name.....	68
Show Static Route Commands.....	69
show static-route all.....	69
show static-route name.....	69
Show WLAN Commands.....	70
show wlan.....	70
Show WLAN Group Commands.....	72
show wlan-group all.....	72
show wlan-group name.....	72
Show L2 Access Control List Commands.....	74
show l2acl all.....	74
show l2acl name.....	74
Show Allowlist Commands.....	76
show allowlist all.....	76
show allowlist name.....	76
Show L3 Access Control List Commands.....	78
show l3acl all.....	78
show l3acl name.....	78
Show Hotspot Commands.....	79
show hotspot all.....	79
show hotspot name.....	80
Show Guest Policy Commands.....	81

show guest-access-service.....	81
Show Hotspot 2.0 Operator Commands.....	82
show hs20op.....	82
Show Hotspot 2.0 Service Provider Commands.....	83
show hs20sp.....	83
Show Role Commands.....	84
show role all.....	84
show role name.....	84
Show User Commands.....	86
show user all.....	86
show user name.....	86
Show Currently Active Clients Commands.....	88
show current-active-clients all.....	88
show current-active-clients mac.....	89
Show Mesh Commands.....	90
show mesh info.....	90
show mesh topology.....	90
Show Dynamic PSK Commands.....	92
show dynamic-psks.....	92
Show Guest Pass Commands.....	93
show guest-passes.....	93
show guest-access-generation.....	94
show portal-auth-generation.....	95
Show Rogue Device Commands.....	96
show rogue-devices.....	96
Show Events and Activities Commands.....	97
show events-activities.....	97
Show Alarm Commands.....	98
show alarm.....	98
Show License Commands.....	99
show license.....	99
Show Application Policy Commands.....	100
show app-policy.....	101
show user-app-ip.....	101
show user-app-port.....	101
show wificalling.....	102
Syntax Description.....	102
Example.....	102
show url-filtering.....	102
Syntax Description.....	103
Example.....	103
Show Session-Timeout Commands.....	105
show session-timeout.....	105
Show Active Wired Client Commands.....	106
show active-wired-client all.....	106
show active-wired-client mac.....	106
Show RADIUS Statistics Commands.....	107
show radius-statistics.....	107
reset radius-statistics.....	107
Show Load Balancing Commands.....	109

show load-balance.....	109
Show Station Rename Commands.....	109
show sta-rename.....	109
Show Station Favorite Commands.....	109
show sta-favorite.....	110
<b>Configuring Master Settings.....</b>	<b>111</b>
Configuration Commands Overview.....	112
General Config Commands.....	112
help.....	112
history.....	112
abort.....	112
end.....	112
exit.....	112
quit.....	113
Configure Context Show Commands.....	114
show aaa.....	114
show dhcp.....	114
show admin.....	114
show mgmt-acl.....	114
show static-route.....	114
show ap.....	114
show l2acl.....	114
show l3acl.....	114
show allowlist.....	115
show prece.....	115
show dvcpvy.....	115
show user-app-ip.....	115
show user-app-port.....	116
show user-app-port.....	116
show url-filtering.....	117
show wificalling.....	117
show load-balancing.....	117
show wlan.....	117
show wlan-group.....	118
show role.....	118
show user.....	118
show hotspot.....	118
show guest-access-service.....	118
show guest-access-generation.....	118
show portal-auth-generation.....	119
show ap-group.....	119
show usb-software.....	119
show location-services.....	119
show sta-rename.....	119
show sta-favorite.....	119
show hs20op.....	120
show hs20sp.....	121
show mdnsproxyrule.....	121
show mdnsproxy.....	121
show bonjour-policy.....	121

show bonjour-fencing.....	121
Configure AAA Server Commands.....	122
aaa.....	122
Configure DHCP Server Commands.....	125
dhcp.....	125
no dhcp.....	125
show.....	126
name.....	126
description.....	126
first.....	126
second.....	126
no second.....	126
Configure Admin Commands.....	127
admin.....	127
name.....	127
name password.....	127
show.....	129
Configure Access Points Commands.....	130
ap.....	130
no ap.....	130
devname.....	131
no devname.....	131
bonjour-gateway.....	131
no bonjour-gateway.....	131
description.....	132
no description.....	132
gps.....	132
no gps.....	133
location.....	133
no location.....	133
group.....	133
ip.....	134
usb-software.....	135
no usb-software.....	135
no usb-software-override.....	135
status-leds.....	135
no status-leds-override.....	136
status-lacp.....	136
no status-lacp-override.....	136
usb-port.....	136
no usb-port-override.....	137
poe-out.....	137
no poe-out-override.....	137
external-antenna.....	137
no external-antenna-override.....	138
spectra-analysis 2.4GHz.....	138
spectra-analysis 5GHz.....	138
internal-heater.....	138
no internal-heater-override.....	139
cband-channels.....	139

no cband-channels-override.....	139
cband-license.....	139
no cband-license-override.....	140
radio-band.....	140
no radio-band-override.....	140
venue-name.....	140
no venue-name.....	141
lldp.....	141
no lldp-override.....	142
power-mode.....	142
no power-mode-override.....	143
802.3af-txchain.....	143
no 802.3af-txchain-override.....	143
Radio 2.4/5 GHz Commands.....	144
radio.....	144
no radio.....	145
show.....	146
Mesh Commands.....	148
mesh mode.....	148
mesh uplink-selection.....	149
maxhops.....	149
AP Port Setting Commands.....	150
port-setting.....	150
abort.....	152
end.....	152
exit.....	152
quit.....	152
show.....	152
lan.....	153
no lan.....	154
lan uplink.....	154
lan untag.....	155
lan member.....	155
lan opt82.....	156
lan tunnel.....	157
lan guest-vlan.....	158
lan dvlan enabled.....	158
lan dvlan disabled.....	158
lan dot1x.....	158
dot1x authsvr.....	159
dot1x acctsvr.....	159
dot1x mac-auth-bypass.....	160
dot1x supplicant username.....	160
dot1x supplicant password.....	160
dot1x supplicant mac.....	161
Configure AP Policy Commands.....	162
ap-policy.....	162
preferred-master.....	162
no preferred-master.....	163
master-focus-controller.....	163



no master-focus-controller.....	163
show.....	163
Configure AP Group Commands.....	165
ap-group.....	165
no ap-group.....	165
exit.....	166
abort.....	166
quit.....	166
show.....	166
description.....	166
no description.....	166
wlan add.....	167
wlan del.....	167
member add.....	168
member mac move-to.....	168
Configure Location Based Service Commands.....	170
mesh mode.....	171
channelflyoff.....	172
Radio 2.4/5 GHz Commands.....	175
QoS Commands (AP).....	182
Model-Specific Commands.....	183
Model-Specific Port Settings.....	190
LLDP Commands.....	202
Bonjour Fencing Commands.....	206
Configure Hotspot Redirect Settings.....	208
hotspot_redirect_https.....	208
no hotspot_redirect_https.....	208
no blocked-client.....	208
Configure Layer 2 Access Control Commands.....	209
acl.....	209
no acl.....	209
abort.....	210
end.....	210
exit.....	210
quit.....	210
show.....	210
name.....	211
description.....	211
add-mac.....	212
mode allow.....	212
mode deny.....	212
del-mac.....	213
Configure Layer 3 Access Control Commands.....	214
l3acl.....	214
no l3acl.....	214
abort.....	215
end.....	215
exit.....	215
quit.....	215
show.....	215

name.....	216
description.....	216
mode allow.....	217
mode deny.....	217
rule-order.....	218
no rule-order.....	220
Layer 3 Access Control Rule Commands.....	221
Configure Precedence Policy Commands.....	225
prece.....	225
no prece.....	225
end.....	225
exit.....	225
quit.....	226
name.....	226
description.....	226
show.....	226
Configure Precedence Policy Rule Commands.....	227
Configure Device Policy Commands.....	229
dvpcy.....	229
no dvpcy.....	230
rule.....	230
Configure Application Policy Commands.....	232
app-policy.....	232
no app-policy.....	232
description.....	233
show.....	233
Configure Application Policy Rules.....	234
Configuring User-Defined Applications.....	236
Configuring User-Defined Applications Based on Port Mapping.....	238
Configure Wi-Fi Calling Settings.....	239
wificalling.....	239
no wificalling.....	239
description.....	240
no description.....	240
priority.....	240
epdg domain.....	240
no epdg domain.....	241
show.....	241
Configure URL Filtering Settings.....	242
url-filtering.....	242
no url-filtering.....	242
description.....	243
filtering-level.....	243
blocked-category.....	243
create-blocklist.....	243
delete-blocklist.....	244
create-allowlist.....	244
delete-allowlist.....	244
google-safe-search.....	244
no google-safe-search.....	245

google-ip.....	245
youtube-safe-search.....	245
no youtube-safe-search.....	245
youtube-ip.....	246
bing-safe-search.....	246
no bing-safe-search.....	246
bing-ip.....	246
show.....	247
Configure Allowlist Commands.....	248
allowlist.....	248
no allowlist.....	248
name.....	248
description.....	248
auto_discover.....	248
Configuring Allowlist Rules.....	249
Configure Band Balancing Commands.....	250
band-balancing.....	250
Configure Load Balancing Commands.....	252
load-balancing.....	252
adj-threshold.....	252
weak-bypass.....	253
strong-bypass.....	253
act-threshold.....	254
new-trigger.....	254
headroom.....	255
disable wifi0.....	255
disable wifi1.....	255
enable wifi0.....	255
enable wifi1.....	256
show.....	256
Configure STP Commands.....	257
stp.....	257
no stp.....	257
Configure System Commands.....	258
system.....	258
dot11-country-code.....	258
internet-check.....	259
hostname.....	261
Interface Commands.....	262
system-timezone.....	265
userdefined-timezone.....	265
system-dst.....	266
no system-dst.....	266
userdefined-dst.....	266
no userdefined-dst.....	266
ftp-anon.....	267
ftp.....	267
mgmt-if.....	267
Unleashed-Multi-Site-Manager.....	268
northbound.....	270

ntp.....	271
SNMPv2 Commands.....	273
SNMPv3 Commands.....	277
Syslog Settings Commands.....	281
Management Access Control List Commands.....	286
QoS Commands.....	288
tunnel-mtu.....	291
bonjour.....	291
telnetd.....	292
snmp-trap.....	293
login-warning.....	294
event-log-level.....	295
show URL-Filtering-License.....	296
show internet.....	296
show internet-check.....	296
support-entitle.....	298
URL-Filtering-License-Renew.....	298
session-stats-resv.....	298
arc-data-transmission.....	299
session-limit-unauth-stats.....	300
eapol-no-retry.....	301
master-protect.....	303
generate-token.....	306
gateway-mode.....	306
show.....	308
Configure UPNP Settings.....	310
upnp.....	310
no upnp.....	310
Configure Zero-IT Settings.....	311
zero-it.....	311
zero-it-auth-server.....	311
Configure Dynamic PSK Expiration.....	312
dynamic-psk-expiration.....	312
Configure WLAN Settings Commands.....	313
wlan.....	313
abort.....	313
end.....	313
exit.....	313
quit.....	313
description.....	314
called-station-id-type.....	314
ssid.....	314
beacon-interval.....	315
wlan-bind.....	316
mgmt-tx-rate.....	316
name.....	316
type.....	317
open.....	318
zero-it-activation.....	320
Configure Dynamic PSK Commands.....	322

mac none.....	325
mac owe.....	326
dot1x.....	326
bgscan.....	328
client-isolation.....	328
allowlist.....	329
load-balancing.....	329
band-balancing.....	330
send-eap-failure.....	330
pap-authenticator.....	331
nasid-type.....	331
priority low.....	332
priority high.....	332
web-auth.....	332
grace-period.....	333
acct-server.....	334
inactivity-timeout.....	335
web-auth-timeout.....	335
vlan.....	336
dynamic-vlan.....	336
mcast-filter.....	337
hide-ssid.....	337
ofdm-only.....	338
admission-control.....	338
transient-client-management.....	339
min-client-rssi.....	340
bss-minrate.....	341
dtim-period.....	342
directed-threshold.....	344
dhcp-relay.....	345
smart-roam.....	345
force-dhcp.....	345
sta-info-extraction.....	346
max-clients.....	346
802dot11d.....	347
arc.....	347
apply-arc-policy.....	348
wifi-calling.....	348
url-filtering.....	349
sae-anti-clogging-threshold.....	350
roaming-acct-interim-update.....	350
rate-limit.....	350
acl.....	352
mac-addr-format.....	353
qos classification.....	354
disable-dgaf.....	355
proxy-arp.....	355
80211w-pmf.....	356
ignor-unauth-stats.....	356
ft-roaming.....	356

rrm-neigh-report.....	356
https-redirectation.....	357
client-flow-log.....	357
client-connect-log.....	357
bypasscna.....	358
show.....	358
wifi6.....	360
service.....	361
guess-friendly-key.....	361
Configure WLAN Group Commands.....	363
wlan-group.....	363
no wlan-group.....	363
abort.....	364
end.....	364
exit.....	365
quit.....	365
name.....	366
description.....	366
wlan.....	367
no wlan.....	367
wlan vlan override none.....	368
wlan vlan override tag.....	368
show.....	369
Configure Role Commands.....	370
role.....	370
no role.....	370
abort.....	371
end.....	371
exit.....	371
quit.....	372
name.....	372
description.....	373
group-attributes.....	373
wlan-allowed.....	374
specify-wlan-access.....	374
guest-pass-generation.....	375
admin.....	376
access-ctrl.....	377
dvc-type-allowed.....	377
specify-dvc-policy.....	378
rate-limit uplink.....	378
rate-limit uplink downlink.....	378
no rate-limit.....	378
apply-arc-policy.....	379
url-filtering.....	380
show.....	380
Configure User Commands.....	382
user.....	382
no user.....	382
abort.....	383

end.....	383
exit.....	383
quit.....	384
user-name.....	384
full-name.....	385
password.....	385
role.....	386
show.....	386
Configure Guest Access Commands.....	388
guest-access.....	388
no guest-access.....	388
abort.....	388
end.....	388
exit.....	388
quit.....	388
guest-access-force-https-redirectio.....	389
no guest-access-force-https-redirectio.....	390
guest-access-guestpass-effective.....	391
name.....	391
self-service.....	391
no self-service.....	391
guestpass-duration.....	391
guestpass-reauth.....	391
no guestpass-reauth.....	392
guestpass-share-number.....	392
guestpass-sponsor.....	392
no guestpass-sponsor.....	392
guestpass-sponsor-auth-server.....	392
guestpass-sponsor-number.....	392
guestpass-notification.....	392
guestpass-terms-and-conditions.....	393
no guestpass-terms-and-conditions.....	393
onboarding.....	393
no onboarding.....	393
no authentication.....	393
authentication guest-pass-and-social-login.....	394
authentication only-social-login.....	395
term-of-use.....	395
no term-of-use.....	395
redirect.....	396
welcome-text.....	396
walled-garden.....	397
no walled-garden.....	397
social-media-login.....	397
show.....	400
Configure Web Auth Settings.....	401
web-portal-force-https-redirectio.....	402
no web-portal-force-https-redirectio.....	403
portal-auth-force-dns-server.....	404
no portal_auth-force-dns-server.....	405

guest-access-auth-server.....	406
Configuring Guest Access Restriction Rules.....	407
no restrict-access-order.....	407
restrict-access-order.....	408
show.....	408
order.....	409
description.....	409
type allow.....	409
type deny.....	410
destination address.....	410
destination port.....	411
protocol.....	411
Configure Hotspot Commands.....	413
hotspot.....	413
no hotspot.....	413
abort.....	414
end.....	414
exit.....	414
quit.....	415
show.....	415
name.....	416
smartclient.....	416
no smartclient.....	417
login-page.....	417
start-page.....	418
no session-timeout.....	418
session-timeout.....	419
no grace-period.....	419
grace-period.....	419
auth-server local.....	420
auth-server name.....	420
auth-server name no-mac-bypass.....	421
auth-server name mac-bypass.....	421
auth-server name mac-bypass mac-addr-format.....	422
acct-server.....	422
no acct-server.....	423
acct-server interim-update.....	423
client-isolation.....	424
allowlist.....	424
location-id.....	425
location-name.....	425
walled-garden.....	425
no walled-garden.....	426
Configuring Hotspot Restricted Access Rules.....	427
restrict-access-order.....	427
no restrict-access-order.....	428
Hotspot Access Restriction Commands.....	429
end.....	429
exit.....	429
show.....	429



order.....	430
description.....	430
type allow.....	431
type deny.....	431
destination address.....	432
destination port.....	432
protocol.....	432
intrusion-prevention.....	433
no intrusion-prevention.....	433
Configure Hotspot 2.0 Commands.....	434
hs20op.....	434
no hs20op.....	434
Configure Hotspot 2.0 Operator Settings.....	435
hs20sp.....	444
no hs20sp.....	444
Configure Hotspot 2.0 Service Provider Settings.....	445
nai-realm.....	446
name.....	447
encoding.....	447
eap-method.....	447
eap-method eap-mthd.....	447
eap-method auth-info.....	448
Configure Mesh Commands.....	451
mesh.....	451
abort.....	451
end.....	451
exit.....	451
quit.....	451
show.....	451
ssid.....	452
passphrase.....	452
hops-warn-threshold.....	453
no detect-hops.....	453
fan-out-threshold.....	454
no detect-fanout.....	454
beacon-interval.....	454
mgmt-tx-rate.....	455
mesh-uplink-selection static.....	455
mesh-uplink-selection dynamic.....	456
mesh-radio-option.....	457
zero-touch-mesh.....	458
no zero-touch-mesh.....	459
zt-mesh-serial.....	460
no zt-mesh-serial.....	461
Configure Alarm Commands.....	462
alarm.....	462
no alarm.....	462
abort.....	462
end.....	462
exit.....	463

quit.....	463
e-mail.....	463
show.....	463
Configure Alarm-Event Settings.....	465
alarm-event.....	465
event.....	465
no event.....	467
Configure Services Commands.....	469
abort.....	469
end.....	469
exit.....	469
quit.....	470
auto-channel-background-scanning.....	470
auto-adjust-ap-power radio-2.4.....	474
auto-adjust-ap-power radio-5.....	475
auto-adjust-ap-channel radio-2.4.....	476
auto-adjust-ap-channel radio-5.....	476
raps.....	477
no raps.....	477
channelfly.....	478
no channelfly.....	478
background-scan.....	479
no background-scan.....	479
background-scan low-threshold.....	480
aeroscout-detection.....	481
no aeroscout-detection.....	481
ekahau.....	481
no ekahau.....	482
pif.....	482
no pif.....	483
show.....	483
Configure WIPS Commands.....	485
wips.....	485
Configure Email Server Commands.....	487
email-server.....	487
from.....	488
enable.....	489
no enable.....	489
smtp-server-name.....	489
smtp-server-port.....	490
smtp-auth-name.....	490
smtp-auth-password.....	491
smtp-wait-time.....	491
tls-smtp-encryption.....	491
no tls-smtp-encryption.....	492
Configure SMS Server Commands.....	493
sms-server.....	493
no sms-server.....	494
country-code.....	494
sns.....	495

Syntax Description.....	495
Defaults.....	495
Example.....	495
Configure Station Rename Commands.....	495
sta-rename.....	496
Configure Favorite Station Commands.....	496
sta-favorite.....	497
Configure mDNS (Bonjour) Commands.....	498
mdnsproxy.....	498
no mdnsproxy.....	498
mdnsproxyrule.....	498
no mdnsproxyrule.....	498
Configure Bonjour Policy.....	499
Configure Bonjour Fencing Policy.....	501
Configure Reportd Commands.....	502
reportd.....	502
upload-debug.....	505
no upload-debug.....	506
<b>Using Debug Commands.....</b>	<b>507</b>
Debug Commands Overview.....	507
General Debug Commands.....	507
help.....	507
list-all.....	507
history.....	507
quit.....	507
apfw_upgrade.....	507
restore.....	509
delete-station.....	509
restart-ap.....	510
wlaninfo.....	510
show.....	512
save_debug_info.....	512
remote_ap_cli.....	513
save-config.....	514
emfd-malloc-stats.....	514
save-config-as-default .....	515
speedflex.....	516
support-tls.....	517
ssh-icx.....	519
Show Commands.....	520
show ap.....	520
show station.....	522
show logs.....	523
show tls.....	523
show save-config-as-default.....	523
show speedflex.....	523
show remote-troubleshooting.....	524
ps.....	524
show configuration_change_log.....	526
Accessing a Remote AP CLI.....	527

remote_ap_cli.....	527
Working with Debug Logs and Log Settings.....	529
logs all.....	529
no logs all.....	529
logs comp sys-mgmt.....	530
no logs comp sys-mgmt.....	530
logs comp mesh.....	530
no logs comp mesh.....	530
logs comp web-auth.....	531
no logs comp web-auth.....	531
logs comp rf-mgmt.....	531
no logs comp rf-mgmt.....	531
logs comp radius.....	531
no logs comp radius.....	531
logs comp hotspot-srv.....	531
no logs comp hotspot-srv.....	531
logs comp aps.....	531
no logs comp aps.....	531
logs comp net-mgmt.....	531
no logs comp net-mgmt.....	532
logs comp 802.1x.....	532
no logs comp 802.1x.....	532
logs comp web-svr.....	532
no logs comp web-svr.....	532
logs comp 802.11.....	532
no logs comp 802.11.....	532
logs comp dvlan.....	532
no logs comp dvlan.....	532
logs comp smart-redundancy.....	532
no logs comp smart-redundancy.....	532
logs comp bonjour-gateway.....	533
no logs comp bonjour-gateway.....	533
logs comp mdnsd.....	533
no logs comp mdnsd.....	533
logs comp client-association.....	533
no logs comp client-association.....	533
logs mac.....	533
no logs mac.....	534
logs winbind.....	534
logs level.....	534
logs play.....	535
no logs play.....	535
support-tls.....	536
no support-tls.....	536
configuration_change_log.....	536
no configuration_change_log.....	537
Remote Troubleshooting.....	538
remote-troubleshooting server.....	538
remote-troubleshooting start.....	538
remote-troubleshooting stop.....	538

radius-stats-wlan.....	539
radius-stats-authsvr.....	539
AP Core Dump Collection.....	540
collect_ap_coredump.....	540
no collect_ap_coredump.....	540
Script Execution.....	542
script.....	542
quit.....	542
list.....	542
del.....	543
info.....	543
exec.....	543
<b>Accessing the AP-Mode CLI.....</b>	<b>545</b>
Accessing the AP Mode CLI from the Unleashed CLI.....	545
Configure LTE Commands.....	545
Configure OpenVPN Commands.....	547
Configure LACP Support Commands.....	547
support.....	549



# Preface

---

• Contacting RUCKUS Customer Services and Support.....	23
• Document Feedback.....	24
• RUCKUS Product Documentation Resources.....	24
• Online Training Resources.....	24
• Document Conventions.....	25
• Command Syntax Conventions.....	25

## Contacting RUCKUS Customer Services and Support

The Customer Services and Support (CSS) organization is available to provide assistance to customers with active warranties on their RUCKUS products, and customers and partners with active support contracts.

For product support information and details on contacting the Support Team, go directly to the RUCKUS Support Portal using <https://support.ruckuswireless.com>, or go to <https://www.commscope.com/ruckus> and select **Support**.

### What Support Do I Need?

Technical issues are usually described in terms of priority (or severity). To determine if you need to call and open a case or access the self-service resources, use the following criteria:

- Priority 1 (P1)—Critical. Network or service is down and business is impacted. No known workaround. Go to the **Open a Case** section.
- Priority 2 (P2)—High. Network or service is impacted, but not down. Business impact may be high. Workaround may be available. Go to the **Open a Case** section.
- Priority 3 (P3)—Medium. Network or service is moderately impacted, but most business remains functional. Go to the **Self-Service Resources** section.
- Priority 4 (P4)—Low. Requests for information, product documentation, or product enhancements. Go to the **Self-Service Resources** section.

### Open a Case

When your entire network is down (P1), or severely impacted (P2), call the appropriate telephone number listed below to get help:

- Continental United States: 1-855-782-5871
- Canada: 1-855-782-5871
- Europe, Middle East, Africa, Central and South America, and Asia Pacific, toll-free numbers are available at <https://support.ruckuswireless.com/contact-us> and Live Chat is also available.
- Worldwide toll number for our support organization. Phone charges will apply: +1-650-265-0903

We suggest that you keep a physical note of the appropriate support number in case you have an entire network outage.

## Self-Service Resources

The RUCKUS Support Portal at <https://support.ruckuswireless.com> offers a number of tools to help you to research and resolve problems with your RUCKUS products, including:

- Technical Documentation—<https://support.ruckuswireless.com/documents>
- Community Forums—<https://forums.ruckuswireless.com/>
- Knowledge Base Articles—<https://support.ruckuswireless.com/answers>
- Software Downloads and Release Notes—[https://support.ruckuswireless.com/#products\\_grid](https://support.ruckuswireless.com/#products_grid)
- Security Bulletins—<https://support.ruckuswireless.com/security>

Using these resources will help you to resolve some issues, and will provide TAC with additional data from your troubleshooting analysis if you still require assistance through a support case or RMA. If you still require help, open and manage your case at [https://support.ruckuswireless.com/case\\_management](https://support.ruckuswireless.com/case_management).

## Document Feedback

RUCKUS is interested in improving its documentation and welcomes your comments and suggestions.

You can email your comments to RUCKUS at [#Ruckus-Docs@commscope.com](mailto:#Ruckus-Docs@commscope.com).

When contacting us, include the following information:

- Document title and release number
- Document part number (on the cover page)
- Page number (if appropriate)

For example:

- RUCKUS SmartZone Upgrade Guide, Release 5.0
- Part number: 800-71850-001 Rev A
- Page 7

## RUCKUS Product Documentation Resources

Visit the RUCKUS website to locate related documentation for your product and additional RUCKUS resources.

Release Notes and other user documentation are available at <https://support.ruckuswireless.com/documents>. You can locate the documentation by product or perform a text search. Access to Release Notes requires an active support contract and a RUCKUS Support Portal user account. Other technical documentation content is available without logging in to the RUCKUS Support Portal.

White papers, data sheets, and other product documentation are available at <https://www.commscope.com/ruckus>.

## Online Training Resources

To access a variety of online RUCKUS training modules, including free introductory courses to wireless networking essentials, site surveys, and products, visit the RUCKUS Training Portal at <https://commscopeuniversity.myabsorb.com/>. The registration is a two-step process described in this [video](#). You create a CommScope account and then register for, and request access for, CommScope University.



# Document Conventions

The following table lists the text conventions that are used throughout this guide.

**TABLE 1** Text Conventions

Convention	Description	Example
monospace	Identifies command syntax examples	<code>device(config)# interface ethernet 1/1/6</code>
<b>bold</b>	User interface (UI) components such as screen or page names, keyboard keys, software buttons, and field names	On the <b>Start</b> menu, click <b>All Programs</b> .
<i>italics</i>	Publication titles	Refer to the <i>RUCKUS Small Cell Release Notes</i> for more information.

## Notes, Cautions, and Safety Warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

### NOTE

A NOTE provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

### ATTENTION

An ATTENTION statement indicates some information that you must read before continuing with the current action or task.



### CAUTION

A CAUTION statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.



### DANGER

A DANGER statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.

## Command Syntax Conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

Convention	Description
<b>bold text</b>	Identifies command names, keywords, and command options.
<i>italic text</i>	Identifies a variable.
[ ]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{x  y  z}	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, for example, passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member[member...]</i> .
\	Indicates a "soft" line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.



# About This Guide

- Introduction.....27
- What's New in this Release..... 27

## Introduction

The *RUCKUS Unleashed CLI Reference Guide* contains the syntax and commands for configuring and managing Unleashed from a command line interface.

This guide is written for service operators and system administrators who are responsible for managing, configuring, and troubleshooting RUCKUS devices. Consequently, it assumes a basic working knowledge of local area networking, wireless networking, and wireless devices.

### NOTE

If release notes are shipped with your product and the information there differs from the information in this guide, follow the instructions in the release notes.

Most user guides and release notes are available in Adobe Acrobat Reader Portable Document Format (PDF) or HTML on the RUCKUS Support Web site at

<https://support.ruckuswireless.com/documents>.

## What's New in this Release

The following table lists the changes in CLI commands for Unleashed 200.12 MR1 (Rev C).

New	Old	Change
Configure active and standby WLANs from the CLI wizard	Configure active WLAN from the CLI wizard	Updated in 200.12 MR1.
gateway-mode	None	New in 200.12 MR1.

The following table lists the changes in CLI commands for Unleashed 200.12 (Rev B).

New	Old	Change
None	radio 2.4 11n-only Auto	Deprecated
None	radio 2.4 11n-only N-only	Deprecated
None	no radio 2.4 11n-only-override	Deprecated
None	radio 5 11n-only Auto	Deprecated
None	radio 5 11n-only N-only	Deprecated
None	no radio 5 11n-only-override	Deprecated

The following table lists the changes in CLI commands between this release (200.12) and the previous release (200.11).

New	Old	Change
wlan add	None	New in 200.12.

## About This Guide

### What's New in this Release

New	Old	Change
wlan del	None	New in 200.12.
member add	None	New in 200.12.
member mac move-to system-default	None	New in 200.12.
member mac move-to ap-group	None	New in 200.12.
service	None	New in 200.12.
no service	None	New in 200.12.
guess-friendly-key	None	New in 200.12.
no guess-friendly-key	None	New in 200.12.
social-media-login google NUMBER WORD WORD	social-media-login google WORD WORD	Introducing new parameter <NUMBER> for redirection method.
external-antenna [ 2.4G   5G ] [ enable   disable]	external-antenna [ 2.4G   5G ] [ enable   disable] [ gain NUMBER ] cable-loss NUMBER [ 2-antennas   3-antennas ]	Parameters updated.
allowlist	whitelist	Keyword updated.
no allowlist	no whitelist	Keyword updated.
allowlist name	whitelist name	Keyword updated.
create-blocklist	create-blacklist	Keyword updated.
delete-blocklist	delete-blacklist	Keyword updated.
create-allowlist	create-whitelist	Keyword updated.
delete-allowlist	delete-whitelist	Keyword updated.
show allowlist all	show whitelist all	Keyword updated.
show allowlist name	show whitelist name	Keyword updated.
show allowlist	show whitelist	Keyword updated.

# Understanding the Unleashed Command Line Interface

---

- Introduction..... 29
- Accessing the Command Line Interface..... 29
- Unleashed CLI Setup Wizard..... 33
- Using the ? Command..... 36
- Using the Help Command..... 36
- Top-Level Commands..... 36

## Introduction

The Ruckus Unleashed Command Line Interface (CLI) is a software tool that allows you to configure and manage your Unleashed network - including the Unleashed Master AP and all currently managed member APs - using CLI commands.

Using the command line interface, you can configure Unleashed Master AP system settings, access points, wireless networks and client connection settings, or view current status information for each component of your Ruckus Unleashed wireless network. Each command performs a specific action for configuring device settings or returning information about the status of a specific device feature.

## Accessing the Command Line Interface

This section describes the requirements and the procedure for accessing the Unleashed CLI.

### NOTE

The Unleashed CLI supports a maximum of 8 simultaneous SSH sessions, and a maximum 4 sessions from the same IP address.

## Requirements

To access the Unleashed CLI, you will need the following:

- A computer that you will designate as the admin computer
- A network connection to the Unleashed Master AP
- An SSH (secure shell) client such as PuTTY

## Step 1: Connecting the Administrative Computer to Unleashed

The Unleashed Command Line Interface can be accessed in one of two ways:

- [Using an Ethernet Connection](#) on page 30
- [Using a Serial Connection](#) on page 30

## Step 2: Start and Configure the SSH Client

Before starting this procedure, make sure that your SSH client is already installed on the administrative computer.

## Understanding the Unleashed Command Line Interface

### Accessing the Command Line Interface

#### NOTE

The following procedure uses PuTTY, a free and open source Telnet/SSH client, for accessing the Unleashed CLI. If you are using a different Telnet/SSH client, the procedure may be slightly different (although the connection settings should be the same). For more information on PuTTY, visit [www.putty.org](http://www.putty.org).

### Using an Ethernet Connection


1. Ensure that Unleashed's IP address is reachable from the administrative computer. In factory default state, Unleashed's IP address is **192.168.0.1**.
2. Continue to "Step 2: Start and Configure the SSH Client".

### Using a Serial Connection

To start and configure the SSH client:


1. Start PuTTY. The PuTTY Configuration dialog box appears, showing the **Session** screen.
2. In **Connection type**, select **Serial** if you are connecting via serial cable.

**FIGURE 1** Select Serial as the connection type

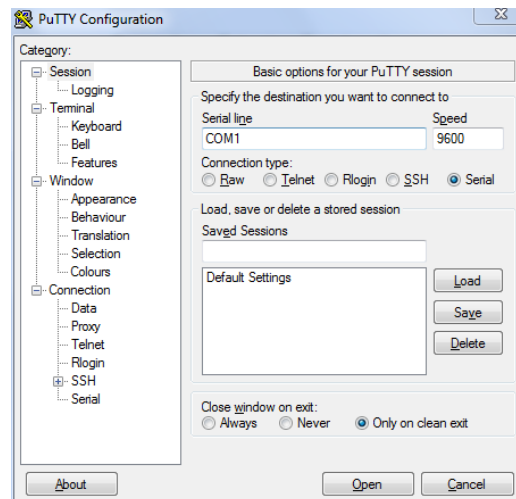


- Under **Category**, click **Connection > Serial**. The serial connection options appear on the right side of the dialog box, displaying PuTTY's default serial connection settings.

FIGURE 2 PuTTY's default serial connection settings

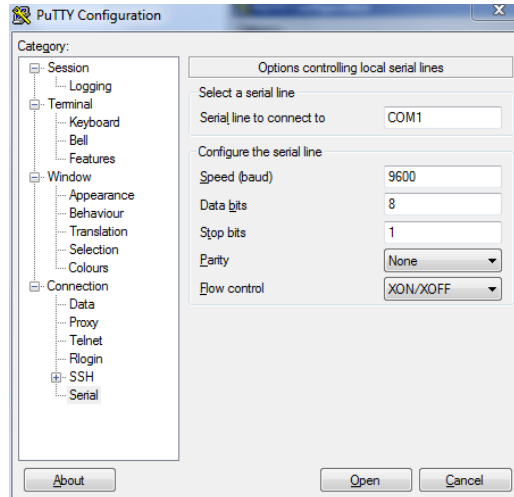


- Configure the serial connection settings as follows:
  - Serial line to connect to:** Type the COM port name to which you connected the RS-232 cable.
  - Bits per second:** 115200
  - Data bits:** 8
  - Stop bits:** 1
  - Parity:** None
  - Flow control:** None

FIGURE 3 PuTTY's serial connection settings for connecting to Unleashed

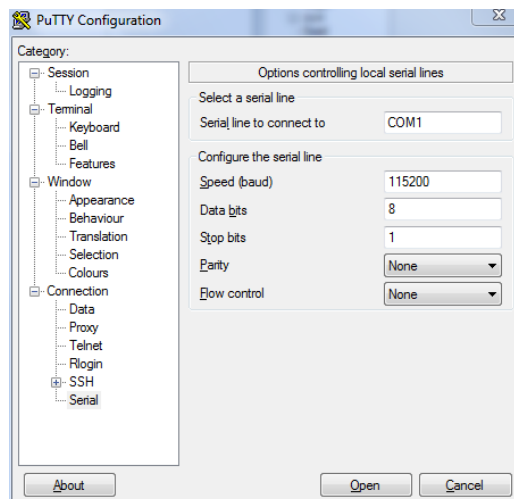

5. Click **Open**. The PuTTY console appears and displays the login prompt.

**FIGURE 4** The PuTTY console displaying the login prompt

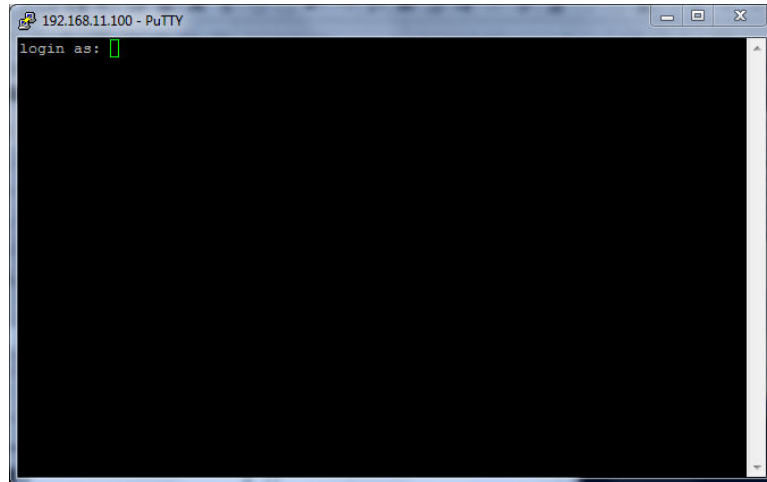

You have completed configuring the Telnet/SSH client to connect to Unleashed.

### Step 3: Log Into the CLI

1. At the **login as** prompt, press **<Enter>** once.
2. At the **Please login** prompt, enter the login name (default: **admin**), and then press **<Enter>**.
3. At the **Password** prompt, enter the login password (default: **admin**), and then press **<Enter>**. The Unleashed CLI welcome message and the `ruckus>` prompt appears.

You are now logged into the Unleashed CLI as a user with limited privileges. As a user with limited privileges, you can view a history of commands that were previously executed and ping a device. If you want to run more commands, you can switch to privileged mode by entering `enable` at the root prompt.

To view a list of commands that are available at the root level, enter `help` or `?`.

#### NOTE

You can tell if you are logged into the CLI in limited or privileged mode by looking at the ruckus prompt. If you are in limited mode, the prompt appears as `ruckus>` (with a **greater than sign**). If you are in privileged mode, the prompt appears as `ruckus#` (with a **pound sign**).

To enable privileged mode when another user session is enabled, use the `<force>` option with the `enable` command to force disconnect of the previous user session. (i.e., **enable force**).



# Unleashed CLI Setup Wizard

The CLI setup wizard allows you to quickly configure your controller with basic settings using a short series of CLI commands.

To perform Unleashed setup using CLI commands, use the following procedure:

1. When the Unleashed AP is in factory default state, associate to the "Configure.Me-xxxxx" WLAN and connect to the Unleashed CLI using SSH (default address: **unleashed.ruckuswireless.com** or **10.154.231.125**), and log in using the default user name and password:

- Please login: **super**
- Password: **sp-admin**

The Unleashed CLI Wizard Configuration tool starts automatically.

2. Follow the instructions in the setup wizard to configure your Unleashed Master AP. The following are two examples.

## Configure Unleashed AP in Bridge Mode - Easy Deployment Installation

```
Would you like to start the Setup Wizard? [yes/no]: yes

Enter the way of installation:

1. easy-deployment installation.(Warning: The configuration costs about 15 seconds to store in system, and
in flash empase the device may be damaged if power-off. So please avoid rebooting device after 60 seconds
if network is reachable)

2. local wizard

please enter 1 or 2:
2

Enter Administrative User Name (32 characters max) [admin]:
admin
Enter Administrator Password (4-32 characters):
*****
Re-enter Administrator Password (4-32 characters):
*****

Enter System Name (32 characters max) [Ruckus-Unleashed]:
Unleashed

Enter Country Code (or 'help' to show the list) [US]: US

Enable Mesh [yes/NO]? no

Enable Gateway Mode [yes/NO]? no

Enter WAN IP type [1]:
1: DHCP Mode;
2: Manual Mode;
1

Enable WLANs [YES/no]? yes

Enter Wireless LAN (ESSID, 1-32 characters) [Ruckus-Wireless 1]:
Unleashed-SSID
Is it an Open WLAN [yes/NO]? no
Enter the WPA2 Passphrase (8-63 characters): *****
Re-enter the WPA2 Passphrase (8-63 characters):
*****

Please review the following settings:
System Name= Unleashed
Administrator Name= admin
Country Code= US
Mesh Supported= Disable
Gateway Mode Supported= Disable
```

## Understanding the Unleashed Command Line Interface

### Unleashed CLI Setup Wizard

```
IPv4 Mode=                DHCP
WLAN ESSID=               Unleashed-SSID
Wireless Authentication=  WPA2_PSK
```

Done with the Setup Wizard [yes/no]? **yes**

Save the configuration ...

It will take a few minutes to complete, do not power off the AP! This AP will reboot automatically.

Welcome to Ruckus Unleashed Network Command Line Interface  
ruckus>

### Configure Unleashed AP in Bridge Mode - Local Wizard

Would you like to start the Setup Wizard? [yes/no]: y

Enter the way of installation:

1. easy-deployment installation. (Warning: The configuration costs about 15 seconds to store in system, and in flash emplace the device may be damaged if power-off. So please avoid rebooting device after 60 seconds if network is reachable)

2. local wizard

please enter 1 or 2:

1

Enter System Name (32 characters max) [Ruckus-Unleashed]:

System name is set as [Ruckus-Unleashed]

Enter the umm server ip or host (63 characters max):umm\_server

Enter the tag (16 characters limited, only number, alphabet, underscores(\_), period(.), hyphens(-), at(@) characters are allowed ):

Easy-deployment is running now. It will take a few minutes

Welcome to Ruckus Unleashed Network Command Line Interface

### Configure Unleashed AP in Gateway Mode

Please login: **super**  
Password: **\*\*\*\*\***

Welcome to Ruckus Wireless Unleashed CLI Setup Wizard

Would you like to start the Setup Wizard? [yes/no]: **yes**

Enter Administrative User Name (32 characters max) [admin]:

**admin**

Enter Administrator Password (4-32 characters):

**\*\*\*\*\***

Re-enter Administrator Password (4-32 characters):

**\*\*\*\*\***

Enter System Name (32 characters max) [Ruckus-Unleashed]:

**Unleashed-Gateway**

Enter Country Code (or 'help' to show the list) [US]: **US**

Enable Mesh [yes/NO]? **no**

```
Enable Gateway Mode [yes/NO]? yes

Enter AP R720 WAN Port:
  1: port1, eth0, UP:
  2: port2, eth1, DOWN:
1

Enter WAN IP type [1]:
  1: DHCP Mode;
  2: Manual Mode;
  3: PPPoE Mode;
1

// if H350, H550 AP
Enable standby WAN port [yes/NO]? y
Enter AP H350 Standby WAN Port:
  1: port1, eth0, UP (Primary WAN):
  2: port2, eth1, UP:
2
Enter standby WAN IP type [1]:
  1: DHCP Mode;
  2: Manual Mode;
2
Enter IP Address: 10.223.55.88
Enter IP Mask:    255.255.255.0
Enter Gateway:   10.223.55.254
Enter Primary DNS Server: 10.10.10.190
Enter Secondary DNS Server: 10.10.10.105
Enter LAN & WLAN IP Address [10.106.0.1]:
192.168.1.1
Enter LAN & WLAN IP Netmask [255.255.0.0]:
255.255.255.0
Enter Client Starting IP Address [10.106.0.2]:
192.168.1.2
Enter Client Ending IP Address [10.106.7.209]:
192.168.1.200

Enter Lease Time [2]:
  1: 6 hours;
  2: 12 hours;
  3: 1 day;
  4: 2 days;
  5: 1 week;
  6: 2 weeks;
1

Enable WLANs [YES/no]? yes

Enter Wireless LAN (ESSID, 1-32 characters) [Ruckus-Wireless 1]:
Unleashed-SSID
Is it an Open WLAN [yes/NO]? no
Enter the WPA2 Passphrase (8-63 characters):
*****
Re-enter the WPA2 Passphrase (8-63 characters):
*****

Please review the following settings:
System Name=                Unleashed-Gateway
Administrator Name=         admin
Country Code=               US
Mesh Supported=             Disable
Gateway Mode Supported=     Enable
WAN Port=                   port1 eth0 UP
IPv4 Mode=                  DHCP
LAN Port IPv4 Address Info= 192.168.1.1/255.255.255.0
Client Starting IPv4=       192.168.1.2
Client Ending IPv4=         192.168.1.200
Lease Time=                  6 hours
WLAN ESSID=                 Unleashed-SSID
Wireless Authentication=    WPA2_PSK
```

## Understanding the Unleashed Command Line Interface

### Using the ? Command

```
Done with the Setup Wizard [yes/no]? yes
```

```
Save the configuration ...
```

It will take a few minutes to complete, do not power off the AP! This AP will reboot automatically.

```
Welcome to Ruckus Unleashed Network Command Line Interface  
ruckus>
```

## Using the ? Command

To display a brief list of commands that are available within a specific context, use the **?** command.

### Example

```
ruckus(config)# admin  
ruckus(config-admin)# ?  
  help          Shows available commands.  
  history       Shows a list of previously run commands.  
  abort        Exits the config-admin context without saving changes.  
  end          Saves changes, and then exits the config-admin context.  
  exit         Saves changes, and then exits the config-admin context.  
  quit         Exits the config-admin context without saving changes.  
  name <WORD> Sets the admin name.  
  no           Contains commands that can be executed from within the context.  
  auth-server <WORD> Enables administrator authentication with a remote server and sets the authentication server to the specified address.  
  show         Displays administrative settings.  
ruckus(config-admin)#
```

## Using the Help Command

To display all commands that the Ruckus Wireless CLI supports, use the **help** command.

### NOTE

Entering the help command into the CLI prints a long list of commands on the screen. If you only want to view the commands that are available from within a specific context, use the **?** command. See *Using the ? Command* above for more information.

## Top-Level Commands

The following table lists the top-level CLI commands available in privileged mode.

exit	End the CLI session.
help	Show available commands.
quit	End the CLI session.
history	Show a list of previously run commands.
disable	Disable privileged commands.
ping <IP-ADDR/ DOMAIN-NAME>	Send ICMP echo packets to an IP address or domain name.
reboot	Reboot the Master.

shutdown	Shut down Unleashed, to power on Unleashed again, press the power.
set-factory	Reset the Master to factory defaults.
switch-ap	Reset the Master to factory defaults.
config	Enter the config context.
logo	Configure Ruckus logo. Options are "logo nodog" and "logo default."
debug	Enter the debug context.
show	Display system options and settings.
reset	Reset RADIUS statistics commands.
session-timeout <NUMBER>	Set the CLI session timeout.
ap-mode	Run AP CLI (set/get) in Master AP

## disable

To disable privileged commands, use the following command:

**disable**

### Example

```
ruckus# disable
ruckus>
```

## ping

To send ICMP echo packets to an IP address or domain name, use the following command:

**ping <IP-ADDR/DOMAIN-NAME>**

### Example

```
ruckus> ping google.com
PING google.com (172.217.6.142): 56 data bytes
64 bytes from 172.217.6.142: seq=0 ttl=56 time=40.252 ms
64 bytes from 172.217.6.142: seq=1 ttl=56 time=33.652 ms
64 bytes from 172.217.6.142: seq=2 ttl=56 time=32.560 ms

--- google.com ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 32.560/35.488/40.252 ms
ruckus>
```

## reboot

To reboot the controller, use the following command:

**reboot**

### Example

```
ruckus# reboot
ruckus#
```

## Understanding the Unleashed Command Line Interface

### Top-Level Commands

## shutdown

To shut down the controller, use the following command:

### shutdown

Use this command to shut down ZoneDirector. To power on ZoneDirector again, press the power button. When the Status LED is lit steadily, you can then reconnect to the CLI.

### Example

```
ruckus# shutdown
ruckus#
```

## set-factory

To reset the controller to factory default settings, use the following command:

### set-factory

### Example

```
ruckus# set-factory
ruckus#
```

## data-privacy

To execute data privacy PII (personally identifiable information) commands, use the following command:

### data-privacy

### Example

```
ruckus# data-privacy
You have all rights in this mode.
ruckus (data-privacy) #
  help                Shows available commands.
  history             Shows a list of previously run commands.
  abort              Exits current context without saving changes.
  end                Saves changes, and then exits the current context.
  exit               Saves changes, and then exits the current context.
  quit              Exits current context without saving changes.
  show               Shows settings.
  search <MAC>       Search PII Data by device MAC.
  delete <MAC>       Delete PII Data by device MAC.
  ftpurl <FTP Url>  Enter the FTP URL like
                    ftp://[username:password@]serverip[:port][/]subdirectory/
ruckus (data-privacy) #
```

## search

To Search PII Data by device MAC, use the following command:

### search <MAC>

### Example

```
ruckus(data-privacy)# search 00:01:02:03:04:05  
Please input ftp url first  
ruckus(data-privacy)#
```

### delete

To delete PII data by device MAC, use the following command:

**delete <MAC>**

### Example

```
ruckus(data-privacy)# delete 00:01:02:03:04:05  
Please input ftp url first  
ruckus(data-privacy)#
```

### ftputl

To configure the FTP URL for data privacy, use the following command:

**ftputl <FTP Url>**

Enter the FTP URL in the following format:

ftp://[username:password@]serverip[:port][subdirectory/]

### Example

```
ruckus(data-privacy)# ftputl ftp://admin:admin@192.168.40.10:443/ftp  
FTP server is not reachable or wrong ftp url ftp://admin:admin@192.168.40.10:443/ftp  
ruckus(data-privacy)#
```

### config

To enter the config context and configure the controller, use the following command:

**config**

### Example

```
ruckus# config  
You have all rights in this mode.  
ruckus(config)#
```

### logo

To enable or disable suppression of the Ruckus dog logo, use the following command:

**logo [nodog|default]**

### Example

```
ruckus# logo nodog  
ln: /etc/airespider-images/oem/logo.png: File exists
```

## Understanding the Unleashed Command Line Interface

### Top-Level Commands

```
ruckus# logo default
ln: /etc/airespider-images/oem/logo.png: File exists
ruckus#
```

## debug

To enter the debug context to manage system debug options, use the following command:

**debug**

### Example

```
ruckus# debug
You have all rights in this mode.
ruckus(debug) #
```

## reset radius-statistics

To reset controller RADIUS statistics, use the following command:

**reset radius-statistics [server-all | server-name <WORD> | wlan-all | wlan-name <NAME>**

### Example

```
ruckus# reset radius-statistics wlan-all
Reset all WLANs RADIUS statistics successfully
ruckus#
```



## session-timeout

To configure the session timeout, use the following command:

### Syntax

```
session-timeout <NUMBER>
```

### Command Default

30 minutes

### Examples

```
ruckus# session-timeout 30  
The command was executed successfully.  
ruckus#
```

## ap-mode

To go to the local AP's CLI from the Master's CLI, use the following command:

### Syntax

**ap-mode**

### Examples

```
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)#
```

## easyDpl-get-status

Get easy-deployment running status.

### Example

```
ruckus# easyDpl-get-status  
The easy deployment status is: IDEL  
ruckus#
```

## easyDpl-disable

Debug command. This command stops easy-deployment and disables tr069 function.

### NOTE

This command is for debugging use only. It may cause mechanism chaos when easy-deployment is enabled after prepare image is complete. The recommended way to disable this feature is through the web interface.

## url-filtering-expire-timeout

To set the URL filtering expiration timeout, use the following command.

**url-filtering-expire-timeout** <NUMBER> | **url-filtering-oneday-timeout** <NUMBER> | **url-filtering-30day-timeout** <NUMBER> | **url-filtering-60day-timeout** <NUMBER>

### Example

```
ruckus# url-filtering-expire-timeout 30
The command was executed successfully.
ruckus#
```

## url-filtering-license-server

To set the URL filtering license server type, use the following command.

**url-filtering-license-server***[official|test]*

### Example

```
ruckus# url-filtering-license-server official
The command was executed successfully.
ruckus#
```

# Viewing Current Configuration

---

- Show Commands Overview.....46
- Show AAA Commands.....47
- Show DHCP Commands.....49
- Show Access Point Commands.....51
- Show AP Group Commands.....56
- Show AP Policy Commands.....59
- Show System Configuration Commands.....60
- Show Performance Commands.....62
- Show System Information Commands.....65
- Show Ethernet Info Commands.....66
- Show Technical Support Commands.....67
- Show Management ACL Commands.....68
- Show Static Route Commands.....69
- Show WLAN Commands.....70
- Show WLAN Group Commands.....72
- Show L2 Access Control List Commands.....74
- Show Allowlist Commands.....76
- Show L3 Access Control List Commands.....78
- Show Hotspot Commands.....79
- Show Guest Policy Commands.....81
- Show Hotspot 2.0 Operator Commands.....82
- Show Hotspot 2.0 Service Provider Commands.....83
- Show Role Commands.....84
- Show User Commands.....86
- Show Currently Active Clients Commands.....88
- Show Mesh Commands.....90
- Show Dynamic PSK Commands.....92
- Show Guest Pass Commands.....93
- show guest-access-generation.....94
- show portal-auth-generation.....95
- Show Rogue Device Commands.....96
- Show Events and Activities Commands.....97
- Show Alarm Commands.....98
- Show License Commands.....99
- Show Application Policy Commands.....100
- show wificalling.....102
- show url-filtering.....102
- Show Session-Timeout Commands.....105
- Show Active Wired Client Commands.....106
- Show RADIUS Statistics Commands.....107
- Show Load Balancing Commands.....109
- Show Station Rename Commands.....109
- Show Station Favorite Commands.....109

## Show Commands Overview

Show commands display the controller's current configuration and status information, such as system status and system configuration settings, along with the status and configurations of the controller's WLAN services, users, roles, AAA servers, access points, connected clients, AP groups and WLAN groups, etc.

Monitor commands allow the administrator to enter monitoring mode to view status and configuration changes as they occur.

# Show AAA Commands

Use the **show aaa** commands to display information about the authentication, authorization and accounting servers (AAA) servers that have been added to the controller.

## show aaa all

To display a list of all AAA servers that have been added to the controller, use the following command:

```
show aaa all all
```

### Syntax Description

<b>show</b>	Display AAA server information
<b>aaa</b>	Display AAA server information
<b>all</b>	All AAA servers

### Defaults

None.

### Example

```
ruckus# show aaa all
AAA:
ID:
1:

Name= Local Database
Type= Local

2:
Name= Guest Accounts
Type= Guest

3:
Name= RADIUS Accounting
Type= RADIUS Accounting server
Primary RADIUS Accounting:
IP Address= 192.168.11.7
Port= 1813
Secret= secret
Secondary RADIUS Accounting:
Status= Disabled

4:
Name= Ruckus RADIUS
Type= RADIUS server
Auth Method=
Primary RADIUS:
IP Address= 192.168.11.99
Port= 1812
Secret= secret
Secondary RADIUS:
Status= Disabled
```

## Viewing Current Configuration

### Show AAA Commands

```
5:
Name= Ruckus AD
Type= Active Directory
IP Address= 192.168.11.17
Port= 389
Windows Domain Name= domain.ruckuswireless.com
Global Catalog= Disabled
Admin DN=domain
Admin Password=password

ruckus#
```

## show aaa name

To display information about a specific AAA server that has been added to the controller, use the following command:

```
show aaa name WORD
```

### Syntax Description

<b>show</b>	Display information
<b>aaa name</b>	Display information about the specified AAA server name
<b>WORD</b>	Name of the AAA server

### Defaults

None.

### Example

```
ruckus# show aaa name "Ruckus RADIUS"
AAA:
ID:
4:
Name= Ruckus RADIUS
Type= RADIUS server
Auth Method=
Primary RADIUS:
IP Address= 192.168.11.99
Port= 1812
Secret= secret
Secondary RADIUS:
Status= Disabled

ruckus#
```



## Show DHCP Commands

Use the **show dhcp** commands to display the current settings for any DHCP servers configured for DHCP relay agent use.

### show dhcp all

To display a list of all DHCP servers that have been configured on the controller, use the following command:

```
show dhcp all
```

#### Syntax Description

<b>show</b>	Display information
<b>dhcp</b>	Display information about the specified DHCP server name
<b>all</b>	Display a list of all DHCP servers

#### Defaults

None.

#### Example

```
ruckus# show dhcp all
DHCP servers for DHCP relay agent:
  ID:
  1:
    Name= DHCP Server 1
    Description=
    IP Address= 192.168.11.1
    IP Address=

ruckus#
```

### show dhcp name

To display a list of all DHCP servers that have been configured on the controller, use the following command:

```
show dhcp name WORD
```

#### Syntax Description

<b>show</b>	Display information
<b>dhcp</b>	Display information about the specified DHCP server name
<b>name</b>	Display the DHCP server specified

## Viewing Current Configuration

### Show DHCP Commands

*WORD*

Name of the DHCP server

## Defaults

None.

## Example

```
ruckus# show dhcp name "DHCP Server 1"
DHCP servers for DHCP relay agent:
  ID:
  1:
    Name= DHCP Server 1
    Description=
    IP Address= 192.168.11.1
    IP Address=
ruckus#
```

# Show Access Point Commands

Use the **show ap** commands to display the current settings of managed devices, including their network address settings, device names, radio settings, and others.

## show ap all

To display a summary of all devices that have been approved, use the following command:

```
show ap all
```

### Syntax Description

<b>show</b>	Display information
<b>ap</b>	Show device information
<b>all</b>	All devices that have been approved by the controller

### Defaults

None.

### Example

```
ruckus# show ap all
AP:
  ID:
    1:
      MAC Address= d4:c1:9e:35:c9:40
      Model= r610
      Approved= Yes
      Device Name= Ruckus-Unleashed
      Device Role= Master
      Description=
      Location=
      GPS=
      CERT = Normal
      Bonjour-policy=
      Bonjour-fencing=
      Group Name= System Default
      Channel Range:
        A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
        B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
      Radio a/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
        WLAN Group Name= Default
        Call Admission Control= OFF
        Protection Mode= Auto
      Radio b/g/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
```

## Viewing Current Configuration

### Show Access Point Commands

```
WLAN Group Name= Default
Call Admission Control= OFF
Protection Mode= 2
Override global ap-model port configuration= No
Network Setting:
  Protocol mode= IPv4-Only
  Device IP Settings= DHCP
  IP Address= 192.168.0.13
  Netmask= 255.255.255.0
  Gateway= 192.168.0.1
  Primary DNS Server= 66.90.130.101
  Secondary DNS Server= 216.82.201.11
Mesh:
  Status= Disabled
LLDP:
  Status = Use Parent Setting
LAN Port:
  0:
    Interface= eth0
    Dot1x= None
    LogicalLink= Up
    PhysicalLink= Up 1000Mbps full
    Label= 10/100/1000 PoE Port1
  1:
    Interface= eth1
    Dot1x= None
    LogicalLink= Down
    PhysicalLink= Down
    Label= 10/100/1000 Port2
PoE Mode= Auto
802.3af PoE Tx. chain= 2
```

ruckus#

## show ap devname

To display information about a specific device using its device name, use the following command:

```
show ap devname WORD
```

### Syntax Description

**show**

Display information

**ap devname**

Show information about the specified device name

**WORD**

The name of the device

### Defaults

None.

### Example

```
ruckus# show ap devname Ruckus-Unleashed
AP:
  ID:
    1:
```

```
MAC Address= d4:c1:9e:35:c9:40
Model= r610
Approved= Yes
Device Name= Ruckus-Unleashed
Device Role= Master
Description=
Location=
GPS=
CERT = Normal
Bonjour-policy=
Bonjour-fencing=
Group Name= System Default
Channel Range:
  A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
  B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
Radio a/n:
  Channelization= Auto
  Channel= Auto
  WLAN Services enabled= Yes
  Tx. Power= Auto
  WLAN Group Name= Default
  Call Admission Control= OFF
  Protection Mode= Auto
Radio b/g/n:
  Channelization= Auto
  Channel= Auto
  WLAN Services enabled= Yes
  Tx. Power= Auto
  WLAN Group Name= Default
  Call Admission Control= OFF
  Protection Mode= 2
Override global ap-model port configuration= No
Network Setting:
  Protocol mode= IPv4-Only
  Device IP Settings= DHCP
  IP Address= 192.168.0.13
  Netmask= 255.255.255.0
  Gateway= 192.168.0.1
  Primary DNS Server= 66.90.130.101
  Secondary DNS Server= 216.82.201.11
Mesh:
  Status= Disabled
LLDP:
  Status = Use Parent Setting
LAN Port:
  0:
    Interface= eth0
    Dot1x= None
    LogicalLink= Up
    PhysicalLink= Up 1000Mbps full
    Label= 10/100/1000 PoE Port1
  1:
    Interface= eth1
    Dot1x= None
    LogicalLink= Down
    PhysicalLink= Down
    Label= 10/100/1000 Port2
PoE Mode= Auto
802.3af PoE Tx. chain= 2
```

ruckus#

## show ap mac

To search for the device that matches the specified MAC address, use the following command:

```
show ap mac MAC
```

## Viewing Current Configuration

### Show Access Point Commands

## Syntax Description

<b>show</b>	Display information
<b>ap mac</b>	Display information about the device with the specified MAC address
<b>MAC</b>	The MAC address of the device

## Defaults

None.

## Example

```
ruckus# show ap mac d4:c1:9e:35:c9:40
AP:
  ID:
    1:
      MAC Address= d4:c1:9e:35:c9:40
      Model= r610
      Approved= Yes
      Device Name= Ruckus-Unleashed
      Device Role= Master
      Description=
      Location=
      GPS=
      CERT = Normal
      Bonjour-policy=
      Bonjour-fencing=
      Group Name= System Default
      Channel Range:
        A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
        B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
      Radio a/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
        WLAN Group Name= Default
        Call Admission Control= OFF
        Protection Mode= Auto
      Radio b/g/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
        WLAN Group Name= Default
        Call Admission Control= OFF
        Protection Mode= 2
      Override global ap-model port configuration= No
      Network Setting:
        Protocol mode= IPv4-Only
        Device IP Settings= DHCP
        IP Address= 192.168.0.13
        Netmask= 255.255.255.0
        Gateway= 192.168.0.1
        Primary DNS Server= 66.90.130.101
        Secondary DNS Server= 216.82.201.11
      Mesh:
        Status= Disabled
      LLDP:
        Status = Use Parent Setting
      LAN Port:
```

```
0:
  Interface= eth0
  Dot1x= None
  LogicalLink= Up
  PhysicalLink= Up 1000Mbps full
  Label= 10/100/1000 PoE Port1
1:
  Interface= eth1
  Dot1x= None
  LogicalLink= Down
  PhysicalLink= Down
  Label= 10/100/1000 Port2
PoE Mode= Auto
802.3af PoE Tx. chain= 2

Channel stats:
  Available= 1,2,3,4,5,6,7,8,9,10,11
  Block=
  Available= 36,40,44,48,149,153,157,161
  Block= 165
ruckus#
```

## Show AP Group Commands

Use the show **ap-group** commands to display Access Point Group settings.

### show ap-group all

To display all AP groups and their settings (including the default AP group), use the following command:

```
show ap-group all
```

#### Syntax Description

**show**

Display information

**ap-group**

Display access point group information

**all**

All AP groups

#### Defaults

None.

#### Example

```
ruckus# show ap-group all
APGROUP:
  ID:
  1:
  Name= System Default
  Description= System default group for Access Points
  Radio 11bgn:
  Channelization= Auto
  Channel= Auto
  Enable auto channel selection which select from 1,6,11= Yes
  Tx. Power= Auto
  11N only Mode= Auto
  WLAN Group= Default
  Radio 11an:
  Channelization= Auto
  Channel= Auto
  Tx. Power= Auto
  11N only Mode= Auto
  WLAN Group= Default
  Members:
  MAC= 04:4f:aa:0c:b1:00
  MAC= 00:24:82:3f:14:60
  MAC= 74:91:1a:2b:ff:a0

APGROUP:
  ID:
  2:
  Name= ap group 2
  Description=
  Radio 11bgn:
  Channelization= Auto
  Channel= Auto
  Enable auto channel selection which select from 1,6,11= Yes
  Tx. Power= Auto
```



```
11N only Mode= Auto
WLAN Group= Default
Radio 11an:
Channelization= Auto
Channel= Auto
Tx. Power= Auto
11N only Mode= Auto
WLAN Group= Default
Members:

APGROUP:
ID:
3:
Name= ap group 1
Description=
Radio 11bgn:
Channelization= Auto
Channel= Auto
Enable auto channel selection which select from 1,6,11= Yes
Tx. Power= Auto
11N only Mode= Auto
WLAN Group= Default
Radio 11an:
Channelization= Auto
Channel= Auto
Tx. Power= Auto
11N only Mode= Auto
WLAN Group= Default
Members:

ruckus#
```

## show ap-group name

To display details about a specific AP group, use the following command:

```
show ap-group name WORD
```

### Syntax Description

<b>show</b>	Display information
<b>ap-group name</b>	Display information about the AP group with the specified name
<b>WORD</b>	The name of the AP group

### Defaults

None.

### Example

```
ruckus# show ap-group name "System Default"
APGROUP:
ID:
1:
Name= System Default
Description= System default group for Access Points
Radio 11bgn:
```

## Viewing Current Configuration

### Show AP Group Commands

```
Channelization= Auto
Channel= Auto
Enable auto channel selection which select from 1,6,11= Yes
Tx. Power= Auto
11N only Mode= Auto
WLAN Group= Default
Radio 11an:
Channelization= Auto
Channel= Auto
Tx. Power= Auto
11N only Mode= Auto
WLAN Group= Default
Members:
MAC= 04:4f:aa:0c:b1:00
MAC= 00:24:82:3f:14:60
MAC= 74:91:1a:2b:ff:a0
```

```
ruckus#
```

## Show AP Policy Commands

Use the **show ap-policy** command to display global access point policies that have been configured on the controller.

### show ap-policy

```
show ap-policy
```

#### Example

```
ruckus# show ap-policy
  Automatically approve all join requests from APs= Enabled
  Limited Unleashed Discovery:
    Status= Disabled
  Management VLAN:
    Status= Keep AP's setting
  Auto Recovery= 30 minutes
ruckus#
```

## Viewing Current Configuration

### Show System Configuration Commands

# Show System Configuration Commands

Use the **show config** commands to display the controller's system configuration settings.

## show config

To display the current system configuration settings, including network addressing, management VLAN, country code, logging, AAA servers, WLAN services, WLAN groups, AP list, SNMP, and ACLs, etc., use the following command:

```
show config
```

### Syntax Description

#### show

Display information

#### config

Display system configuration settings

### Defaults

None.

### Example

```
ruckus# show config
Protocol Mode= IPv4-Only
Device IP Address:
  Mode= Manual
  IP Address= 192.168.40.100
  Netmask= 255.255.255.0
  Gateway Address= 192.168.40.1
  Primary DNS= 192.168.40.1
  Secondary DNS=

Management VLAN:
  VLAN ID= 1

Country Code:
  Code= United States

Identity:
  Name= Ruckus

NTP:
  Status= Enabled
  Address= ntp.ruckuswireless.com

Log:
  Status= Disabled
  Address= 192.168.3.10
  Facility= local0
  Priority= emerg
  AP Facility= local0
  AP Priority= emerg

Tunnel MTU:
  Tunnel MTU= 1500

Bonjour Service:
  Status= Disabled
```

```
Telnet Server:
  Status= Disabled

FTP Server:
  Status= Enabled
  Anonymous Status= Enabled

FlexMaster:
  Status= Disabled
  Address=
  Interval= 15

AAA:
  ID:
    1:
      Name= Local Database
      Type= Local

    2:
      Name= Guest Accounts
      Type= Guest
  ...
  ...
ruckus#
```

## Show Performance Commands

Use the **show performance** commands to display performance details on an AP radio or client station.

### show performance

Use the following command to display performance details:

```
show performance
```

### show performance ap-radio2-4

Use the following command to display performance details for the AP's 2.4 GHz radio.

```
show performance ap-radio2-4
```

### Syntax Description

<b>show</b>	Display information
<b>performance</b>	Display performance information
<b>ap-radio-2-4</b>	Display AP 2.4 GHz radio performance
<b>mac MAC</b>	The MAC address of the AP

### Defaults

None.

### Example

```
ruckus# show performance ap-radio2-4 mac c4:10:8a:1f:d1:f0
AP performance:
  1:
    Radio b/g/n:
    MAC Address= c4:10:8a:1f:d1:f0
    Estimated Capacity= 9930
    Downlink= 67
    Uplink= 0
    RF pollution= 11
    Associated clients= 1
    Other APs= 0

ruckus#
```

### show performance ap-radio5

Use the following command to display performance details for the AP's 5 GHz radio:

```
show performance ap-radio5 mac MAC
```

## Syntax Description

### **show performance**

Display performance information

### **ap-radio-5**

Display AP 5 GHz radio performance

### **mac MAC**

The MAC address of the AP

## Defaults

None.

## Example

```
ruckus# show performance ap-radio5 mac c4:10:8a:1f:d1:f0
AP performance:
  1:
    Radio a/n:
    MAC Address= c4:10:8a:1f:d1:f0
    Estimated Capacity= 20891
    Downlink= 77
    Uplink= 2
    RF pollution= 3
    Associated clients= 1
    Other APs= 0

ruckus#
```

## show performance station

Use the following command to display performance details for a connected client/station:

**show performance station mac MAC**

## Syntax Description

### **show performance**

Display performance information

### **station**

Display station performance

### **mac MAC**

The MAC address of the station

## Defaults

None.

## Example

```
ruckus# show performance station mac 00:22:fb:ad:1b:2e
Station performance:
  MAC Address= 00:22:fb:ad:1b:2e
```

**Viewing Current Configuration**  
Show Performance Commands

```
Estimated Capacity= 61401  
Downlink= 76  
Uplink= 18  
ruckus#
```



# Show System Information Commands

Use the **show sysinfo** commands to display the controller's system information.

## show sysinfo

To display an overview of the system status, including system, devices, usage summary, user activities, system activities, access points, and support information, use the following command:

```
show sysinfo
```

### Syntax Description

**show**

Display information

**sysinfo**

Display an overview of various system statuses

### Defaults

None.

### Example

```
ruckus# show sysinfo
System Overview:
  Name= ZoneDirector
  IP Address= 192.168.0.6
  IPv6 Address= fc00::2
  MAC Address= f8:e7:1e:3a:4c:20
  Uptime= 5d 19h 12m
  Model= ZD1200
  Licensed APs= 5
  Serial Number= 951608000220
  Version= 10.4.0.0 build 7

Devices Overview:
  Number of APs= 4
  Number of Client Devices= 6
  Number of Rogue Devices= 28

Usage Summary:
Usage of 1 hr:
  Max. Concurrent Users= 6
  Bytes Transmitted= 148.58M
  Number of Rogue Devices= 28
Usage of 24 hr:
  Max. Concurrent Users= 6
  Bytes Transmitted= 137.91G
  Number of Rogue Devices= 54

Memory Utilization:
  Used Bytes= 91528(kB)
  Used Percentage= 5%
  Free Bytes= 1857716(kB)
  Free Percentage= 95%

ruckus#
```

## Show Ethernet Info Commands

Use the **show ethinfo** command to display current system Ethernet status.

### show ethinfo

```
show ethinfo
```

#### Syntax Description

**show**

Display information

**ethinfo**

Display the current system Ethernet status

#### Defaults

None.

#### Example

```
ruckus# show ethinfo
System Ethernet Overview:
  Port 0:
    Interface= eth0
    MAC Address= f8:e7:1e:3a:4c:20
    Physical Link= up
    Speed= 1000Mbps
  Port 1:
    Interface= eth1
    MAC Address= f8:e7:1e:3a:4c:21
    Physical Link= down
    Speed= 100Mbps

ruckus#
```

# Show Technical Support Commands

Use the following commands to display information that Ruckus Wireless may need when providing technical support.

## show techsupport

To display system information required by Technical Support, use the following command:

```
show techsupport
```

### Syntax Description

**show**

Display information

**techsupport**

Display information about the controller that may be required by Ruckus Wireless Technical Support

### Defaults

None.

### Example

```
ruckus# show techsupport
System Overview:
  Name= Ruckus-Unleashed
  IP Address= 192.168.0.14
  MAC Address= d4:c1:9e:35:c9:40
  Uptime= 1d 1h 40m
  Model= R610
  Licensed APs= 128
  Serial Number= 941849001125
  Version= 200.9.10.4 build 110

Devices Overview:
  Number of APs= 1
  Number of Client Devices= 4
  Number of Rogue Devices= 24

Usage Summary:
  Usage of 1 hr:
    Max. Concurrent Users= 4
    Bytes Transmitted= 104.95M
    Number of Rogue Devices= 24
  Usage of 24 hr:
    Max. Concurrent Users= 5
    Bytes Transmitted= 8.27G
    Number of Rogue Devices= 38

Memory Utilization:
  Used Bytes= 202408(kB)
  Used Percentage= 43%
  Free Bytes= 268564(kB)
  Free Percentage= 57%

...
...

ruckus#
```

## Show Management ACL Commands

Use the **show mgmt-acl** commands to display information about the management access control lists configured on the controller.

### show mgmt-acl all

To display all management ACLs that have been configured on the controller, use the following command:

```
show mgmt-acl all
```

### show mgmt-acl name

To display information about a specific management ACL, use the following command:

```
show mgmt-acl name NAME
```

## Show Static Route Commands

Use the **static-route** commands to display information about static routes configured on the controller.

### show static-route all

To display all static route information, use the following command:

```
show static-route all
```

### show static-route name

```
show static-route name NAME
```

## Show WLAN Commands

Use the following commands to display information about available WLANs on the controller.

### show wlan

To display all available WLAN services (SSIDs), use the following command:

```
show wlan [all|name<WORD>]
```

### Syntax Description

<b>show</b>	Display information
<b>wlan</b>	Display WLAN services (SSIDs) settings
<b>all</b>	Display all WLAN services
<b>name &lt;WORD&gt;</b>	Display the named WLAN only

### Defaults

None.

### Example

```
ruckus# show wlan all
WLAN Service:
ID:
  1:
    NAME = Ruckus1
    Tx. Rate of Management Frame(2.4GHz) = 2.0Mbps
    Tx. Rate of Management Frame(5GHz)   = 6.0Mbps
    Beacon Interval = 100ms
    SSID = Ruckus1
    Description = Ruckus1
    Type = Standard Usage
    Authentication = open
    Encryption = wpa2
    Algorithm = aes
    Passphrase = secretpassphrasegoeshere
    FT Roaming = Disabled
    802.11k Neighbor report = Disabled
    Web Authentication = Disabled
    Authentication Server = Disabled
    Accounting Server = Disabled
    Called-Station-Id type = wlan-bssid
    Tunnel Mode = Disabled
    DHCP relay = Disabled
    Max. Clients = 100
    Isolation per AP = Disabled
    Isolation across AP = Disabled
    Zero-IT Activation = Enabled
    Load Balancing = Disabled
    Band Balancing = Disabled
    Wifi6 = Enabled
```

```
Service = Enabled
Dynamic PSK = Enabled
Dynamic PSK Passphrase Length =
Dynamic PSK Expire Time = unlimited
Dynamic PSK Validity Period =
Limit Dynamic PSK = Disabled
Auto-Proxy configuration:
  Status = Disabled
Inactivity Timeout:
  Status = Disabled
VLAN-ID = 1
Dynamic VLAN = Disabled
Closed System = Disabled
Https Redirection = Disabled
OFDM-Only State = Disabled
Multicast Filter State = Disabled
802.11d State = Disabled
Force DHCP State = Disabled
Force DHCP Timeout = 0
DHCP Option82:
  Status = Disabled
  Option82 sub-Option1 = Disabled
  Option82 sub-Option2 = Disabled
  Option82 sub-Option150 = Disabled
  Option82 sub-Option151 = Disabled
Ignore unauthorized client statistic = Disabled
STA Info Extraction State = Enabled
BSS Minrate = Disabled
DTIM period = 1
Directed MC/BC Threshold = 5
Call Admission Control State = Disabled
PMK Cache Timeout= 720 minutes
PMK Cache for Reconnect= Enabled
NAS-ID Type= wlan-bssid
Roaming Acct-Interim-Update= Disabled
PAP Message Authenticator = Enabled
Send EAP-Failure = Disabled
L2/MAC = No ACLS
L3/L4/IP Address = No ACLS
L3/L4/IPv6 Address = No ACLS
Precedence = No ACLS
Proxy ARP = Disabled
Device Policy = No ACLS
Vlan Pool = No Pools
Role based Access Control Policy = Disabled
SmartRoam = Disabled Roam-factor = 1
Allow List = No ACLS
Application Recognition & Control = Disabled
Apply ARC Policy = NO POLICY
Wlan Bind = all
Client Flow Data Logging = Disabled
Client Connection Data = Disabled
```

ruckus#

## Show WLAN Group Commands

Use the following commands to display information about the WLAN groups that exist on the controller.

### show wlan-group all

To display a list of existing WLAN groups, use the following command:

```
show wlan-group all
```

#### Syntax Description

**show**

Display information

**wlan-group**

Display information about the specified WLAN group

**all**

Show all WLAN groups

#### Defaults

None.

#### Example

```
ruckus# show wlan-group all
WLAN Group:
ID:
1:
Name= Default
Description= Default WLANs for Access Points
WLAN Service:
WLAN1:
NAME= Ruckus1
VLAN=
WLAN2:
NAME= Ruckus2
VLAN=

2:
Name= Guest WLAN Group
Description= 1st floor APs only
WLAN Service:
WLAN1:
NAME= Ruckus-Guest
VLAN=

ruckus#
```

### show wlan-group name

To display information about the specified WLAN group name, use the following command:

```
show wlan-group name WORD
```



## Syntax Description

<b>show</b>	Display information
<b>wlan-group name</b>	Display information about the specified WLAN group name
<b>WORD</b>	The name of the WLAN group

## Defaults

None.

## Example

```
ruckus# show wlan-group name Default
WLAN Group:
ID:
1:
Name= Default
Description= Default WLANs for Access Points
WLAN Service:
WLAN1:
NAME= Ruckus1
VLAN=
WLAN2:
NAME= Ruckus2
VLAN=

ruckus#
```

## Show L2 Access Control List Commands

Use the **show l2acl** commands to display Layer 2 access control list rules that have been added to the controller.

### show l2acl all

To display all Layer 2 access control list (ACL) rules that have been added to the controller and their settings, use the following command:

```
show l2acl all
```

#### Syntax Description

<b>show</b>	Display information
<b>l2acl</b>	Display L2 ACL information
<b>all</b>	All L2 ACL

#### Defaults

None.

#### Example

```
ruckus# show l2acl all
L2/MAC ACL:
ID:
1:
Name= System
Description= System
Restriction: Deny only the stations listed below
Stations:
2:
Name= blocked-sta-list
Description=
Restriction: Deny only the stations listed below
Stations:
```

### show l2acl name

To display the settings of a specific L2 ACL rule that has been added to the controller, use the following command:

```
show l2acl name WORD
```

#### Syntax Description

<b>show</b>	Display information
<b>l2acl</b>	Display L2 ACL information

**name** Display information about the specified L2 ACL rule name

**WORD**  
Name of the L2 ACL rule

### Defaults

None.

### Example

```
ruckus# show l2acl name 1
L2/MAC ACL:
ID:
2:
Name= 1
Description=
Restriction: Deny only the stations listed below
Stations:
MAC Address= 00:33:22:45:34:88
```

## Show Allowlist Commands

Use the **show allowlist** commands to display client isolation allowlists that have been added to the controller.

### show allowlist all

To display all allowlists that have been added to the controller and their settings, use the following command:

```
show allowlist all
```

#### Syntax Description

**show**

Display information

**allowlist**

Display allowlist information

**all**

All allowlists

#### Defaults

None.

#### Example

```
ruckus# show allowlist all
Allow Lists:
  ID:
  1:
    Name= printer allowlist
    Description= printer
    Rules:
      1:
        Description= printer
        MAC = 12:34:56:78:90:00
        IP Address = 192.168.4.10
```

```
ruckus#
```

### show allowlist name

To display a specified allowlist that has been added to the controller by name, use the following command:

```
show allowlist name WORD
```

#### Syntax Description

**show**

Display information

**allowlist**

Display allowlist information

**name WORD**  
Specify the name of the allowlist

## Defaults

None.

## Example

```
ruckus# show allowlist name "printer allowlist"
Allow Lists:
  ID:
    1:
      Name= printer allowlist
      Description= printer
      Rules:
        1:
          Description= printer
          MAC = 12:34:56:78:90:00
          IP Address = 192.168.4.10

ruckus#
```

## Show L3 Access Control List Commands

Use the **show l3acl** commands to display Layer 3 access control list rules that have been added to the controller.

### show l3acl all

To display all Layer 3 access control list (ACL) rules that have been added to the controller and their settings, use the following command:

```
show l3acl all
```

### show l3acl name

To display the settings of a specific L3 ACL rule that has been added to the controller, use the following command:

```
show l3acl name WORD
```

# Show Hotspot Commands

Use the **show hotspot** commands to display the controller's hotspot configuration settings.

## show hotspot all

To display a list of all hotspot services that have been created on the controller, use the following command:

```
show hotspot all
```

### Syntax Description

<b>show</b>	Display information
<b>hotspot</b>	Display hotspot information
<b>all</b>	All available hotspots

### Defaults

None.

### Example

```
ruckus# show hotspot all
Hotspot:
  ID:
  1:
    Name= Hotspot 1
    WISPr Smart Client Support:
      Status= None
    Login Page Url= http://192.168.1.12/login.htm
    Start Page= redirect to the URL that the user intends to visit
    Session Timeout:
      Status= Disabled
    Grace Period:
      Status= Disabled
    Intrusion Prevention= Enabled
    Authentication Server= Local Database
    Accounting Server:
      Status= Disabled
    Isolation per AP = Disabled
    Isolation across AP = Disabled
    Allow List = No ACLS
    Location ID=
    Location Name=
    Walled Garden 1= 1.1.1.1
    IPv4 Rules:

    IPv6 Rules:

ruckus#
```

## Viewing Current Configuration

### Show Hotspot Commands

## show hotspot name

To display information about the specific hotspot service, use the following command:

```
show hotspot name WORD
```

If the hotspot name includes a space, you must put the name in quotation marks (for example, "hotspot name").

### Syntax Description

#### show

Display information

#### hotspot name

Display hotspot information

#### WORD

The name of the hotspot

### Defaults

None.

### Example

```
ruckus# show hotspot name "Hotspot 1"
Hotspot:
  ID:
    1:
      Name= Hotspot 1
      WISPr Smart Client Support:
        Status= None
      Login Page Url= http://192.168.1.12/login.htm
      Start Page= redirect to the URL that the user intends to visit
      Session Timeout:
        Status= Disabled
      Grace Period:
        Status= Disabled
      Intrusion Prevention= Enabled
      Authentication Server= Local Database
      Accounting Server:
        Status= Disabled
      Isolation per AP = Disabled
      Isolation across AP = Disabled
      Allow List = No ACLS
      Location ID=
      Location Name=
      Walled Garden 1= 1.1.1.1
      IPv4 Rules:

      IPv6 Rules:

ruckus#
```



# Show Guest Policy Commands

Use the following commands to display guest access services.

## show guest-access-service

To display a list of guest access services or a specific service, use the following command:

```
show guest-access-service [ all | name WORD ]
```

### Example

```
ruckus# show guest-access all
Guest Access:
  Name = guestpolicy1
  Onboarding Portal:
    Aspect = Guest pass and ZeroIT
  Authentication:
    Mode = Use Guest Pass and Social login authentication
  Title = hello
  Terms of Use:
    Status = Disabled
  Redirection:
    Mode = To the URL that the user intends to visit
  Restricted Subnet Access:
    Rules:
      1:
        Description=
        Type= Deny
        Destination Address= local
        Destination Port= Any
        Protocol= Any
      2:
        Description=
        Type= Deny
        Destination Address= 10.0.0.0/8
        Destination Port= Any
        Protocol= Any
      3:
        Description=
        Type= Deny
        Destination Address= 172.16.0.0/12
        Destination Port= Any
        Protocol= Any
      4:
        Description=
        Type= Deny
        Destination Address= 192.168.0.0/16
        Destination Port= Any
        Protocol= Any

  Restricted IPv6 Access:
    Rules:
      1:
        Description=
        Type= Deny
        Destination Address= local
        Destination Port= Any
        Protocol= Any
        ICMPv6 Type= Any

ruckus#
```

## Viewing Current Configuration

### Show Hotspot 2.0 Operator Commands

# Show Hotspot 2.0 Operator Commands

Use the following commands to display Hotspot 2.0 Operators.

## show hs20op

To display a list of Hotspot 2.0 operators, use the following command:

```
show hs20op [all|name WORD]
```

### Example

```
ruckus# show hs20op all
```

# Show Hotspot 2.0 Service Provider Commands

Use the following commands to display Hotspot 2.0 Service Providers.

## show hs20sp

To display a list of Hotspot 2.0 service providers, use the following command:

**show hs20sp** [all|name WORD]

### Example

```
ruckus# show hs20sp all
```

## Show Role Commands

Use the **show role** commands to display details about roles that have been created on the controller.

### show role all

To display a list of all roles that have been created, use the following command:

```
show role all
```

#### Syntax Description

<b>show</b>	Display information
<b>role</b>	Display role information
<b>all</b>	All roles that have been created

#### Defaults

None.

#### Example

```
ruckus# show role all
Role:
  ID:
    1:
      Name= Default
      Description= Allow Access to All WLANs
      Group Attributes=
      Guest Pass Generation= Allowed
      Unleashed Administration:
        Status= Disallowed
      Allow All WLANs:
        Mode= Allow access to all WLANs
        Access Control Policy= Disallowed

ruckus#
```

### show role name

To display information about the specific role, use the following command:

```
show role name WORD
```

#### Syntax Description

<b>show</b>	Display information
-------------	---------------------

**role name**

Display role information

**WORD**

The name of the role

**Defaults**

None.

**Example**

```
ruckus# show role name Default
Role:
ID:
  1:
    Name= Default
    Description= Allow Access to All WLANs
    Group Attributes=
    Guest Pass Generation= Allowed
    Unleashed Administration:
      Status= Disallowed
    Allow All WLANs:
      Mode= Allow access to all WLANs
    Access Control Policy= Disallowed

ruckus#
```

## Show User Commands

Use the **show user** commands to display details about user accounts that exist on the controller.

### show user all

To display a list of all existing user accounts, use the following command:

```
show user all
```

#### Syntax Description

<b>show</b>	Display information
<b>user</b>	Display user information
<b>all</b>	All existing user accounts

#### Defaults

None.

#### Example

```
ruckus# show user all
User:
ID:
1:
User Name= test22
Full Name= test11
Password= test1234
Role= Default
```

### show user name

To display information about the specific user, use the following command:

```
show user name user_name
```

#### Syntax Description

<b>show</b>	Display information
<b>user name</b>	Display user information
<b>WORD</b>	The name of the user

## Defaults

None.

## Example

```
ruckus# show user name test22
User:
ID:
1:
User Name= test22
Full Name= test11
Password= test1234
Role= Default
```

## Show Currently Active Clients Commands

Use the **show current-active-clients** commands to display a list of wireless clients that are associated with the APs that the controller manages.

### show current-active-clients all

To display a list of all existing user accounts, use the following command:

```
show current-active-clients all
```

#### Syntax Description

**show**

Display information

**current-active-clients**

Display currently active wireless clients

**all**

All active wireless clients

#### Defaults

None.

#### Example

```
ruckus# show current-active-clients all
Current Active Clients:
Clients:
Mac Address= 00:22:fb:5c:e2:32
User/IP= 172.18.30.2
User/IPv6=
Access Point= 04:4f:aa:13:30:f0
BSSID= 04:4f:aa:13:30:fa
Connect Since=2011/03/01 02:48:22
Auth Method= OPEN
WLAN= 11jojoe
VLAN= None
Channel= 6
Radio= 802.
Signal= 0
Status= Authorized

Last 300 Events/Activities:
Activity:
Date/Time= 2011/03/01 02:49:05
Severity= Low
User=
Activities= User[00:22:fb:5c:e2:32] joins WLAN[11jojoe] from AP[04:4f:aa:13:30:f0]
Activity:
Date/Time= 2011/03/01 02:48:22
Severity= Low
User=
Activities= User[00:22:fb:5c:e2:32] joins WLAN[11jojoe] from AP[04:4f:aa:13:30:f0]
...
...
ruckus#
```



## show current-active-clients mac

To display information about the specific active client, use the following command:

```
show current-active-clients mac MAC
```

### Syntax Description

**show**  
Display information

**current-active-clients mac**  
Display currently active wireless clients

**MAC**  
The MAC address of the wireless client

### Defaults

None.

### Example

```
ruckus# show current-active-clients mac 6c:62:6d:1b:e3:00
Current Active Clients:
Clients:
Mac Address= 6c:62:6d:1b:e3:00
User/IP= 192.168.11.11
User/IPv6=
Access Point= 04:4f:aa:0c:b1:00
BSSID= 04:4f:aa:0c:b1:08
Connect Since=2012/01/10 06:22:44
Auth Method= OPEN
WLAN= Ruckus1
VLAN= None
Channel= 6
Radio= 802.11gn
Signal= 53
Status= Authorized
Received from client= 20746 pkts / 6274531 bytes
Transmitted to client= 25777 pkts / 6714433 bytes
Tx. drops due to retry failure= 1 pkts

Last 300 Events/Activities:
Activity:
Date/Time= 2012/01/10 06:22:44
Severity= Low
User=
Activities= User[6c:62:6d:1b:e3:00]> joins WLAN[Ruckus1] from AP[7962 - MAP@04:4f:aa:0c:b1:00]
Activity:
Date/Time= 2012/01/09 18:52:28
Severity= Low
User=
Activities= User[6c:62:6d:1b:e3:00]disconnects from WLAN[Ruckus1] at AP[7363 - RAP@00:24:82:3f:14:60]
Activity:
Date/Time= 2012/01/08 06:08:52
Severity= Low
User=
Activities= AP[7363 - RAP@00:24:82:3f:14:60] radio [11g/n] detects User[6c:62:6d:1b:e3:00] in
WLAN[Ruckus1] roams from AP[7962 - MAP@04:4f:aa:0c:b1:00]
...
...
ruckus#
```

## Show Mesh Commands

Use the **show mesh** commands to display the controller's mesh network configuration and topology.

### show mesh info

To display a list of mesh information, use the following command:

```
show mesh info
```

#### Syntax Description

<b>show</b>	Display information
<b>mesh</b>	Display mesh network information
<b>info</b>	Show mesh information

#### Defaults

None.

#### Example

```
ruckus# show mesh info
Mesh Settings:
  Mesh Status= Enabled
  Mesh Name (ESSID)= Mesh-951608000220
  Mesh Passphrase= bzj9Y0kEpkxOPzPXyKqLrJHZSAAntfaTm7Ebh6qps24PFpcc5MtClijGGwFZBG
  Mesh Radio Option= 5G
  Mesh Uplink Selection Algorithm = default(static)
  Mesh Hop Detection:
    Status= Disabled
  Mesh Downlinks Detection:
    Status= Disabled
  Tx. Rate of Management Frame= 2Mbps
  Beacon Interval= 200ms
  Zero-Touch-Mesh status= Enabled
Zero Touch Mesh Pre-Approved Serial Number List:
serial number = 921802014959, approved = 0, time = 0, id = 1
serial number = 441e981cf0d0, approved = 0, time = 0, id = 2
serial number = 4f1e681cf3f0, approved = 0, time = 0, id = 3
serial number = c41e781bd7c0, approved = 0, time = 0, id = 4

ruckus#
```

### show mesh topology

To display the topology of existing mesh networks, use the following command:

```
show mesh topology
```

## Syntax Description

<b>show</b>	Display information
<b>mesh</b>	Display mesh network information
<b>topology</b>	Show mesh topology

## Defaults

None.

## Example

```
ruckus# show mesh topology
Mesh Topology(Mesh-951608000220):
  Root Access Points= d4:c1:9e:35:c9:50
  Signal (dB) Downlink= / Uplink=
  Description=
  Channel= 36 (11ac)
  IP Address= 192.168.0.3
  Mesh Access Points= 44:1e:98:1b:f0:d0
  Signal (dB) Downlink= 44 / Uplink= 36
  Description=
  Channel= 36
  IP Address= 192.168.0.10

ruckus#
```

## Show Dynamic PSK Commands

Use the **show dynamic-psks** commands to display information about Dynamic PSKs that have been generated. Use the following command:

### show dynamic-psks

```
show dynamic-psks
```

#### Syntax Description

**show**

Display information

**dynamic-psks**

Display dynamic PSKs that have been generated

#### Defaults

None.

#### Example

```
ruckus# show dynamic-psks
Generated Dynamic PSKs:
DPSK:
User= BatchDPSK_User_1
Mac Address= 00:00:00:00:00:00
Created= 2011/03/01 03:30:01
Expired= Unlimited
DPSK:
User= BatchDPSK_User_2
Mac Address= 00:00:00:00:00:00
Created= 2011/03/01 03:30:02
Expired= Unlimited
DPSK:
User= DPSK-User-2
Mac Address= 00:11:22:33:44:55
Created= 2011/03/01 03:30:47
Expired= Unlimited
```

# Show Guest Pass Commands

Use the **show guest-passes** commands to display information about guest passes that have been generated. Use the following command:

```
show guest-passes
```

## show guest-passes

```
show guest-passes
```

### Syntax Description

**show**

Display information

**guest-passes**

Display guest passes that have been generated

### Defaults

None.

### Example

```
ruckus# show guest-passes
Generated Guest Passes:
ID:
Guest Name= John Doe
Remarks=
Expires= 2012/01/11 08:32:15
Re-auth=
Creator= ruckus
Sharable= No
Wlan= Ruckus-Guest

ruckus#
```

**Viewing Current Configuration**  
show guest-access-generation

## show guest-access-generation

Display generation information for guest access.

### Examples

```
ruckus# show guest-access-generation
  Authentication Server: radius1
  Force HTTPS Redirection: Disabled
ruckus#
```

## show portal-auth-generation

Display generation information for portal authentication.

### Examples

```
ruckus# ruckus# show portal-auth-generation
Force DNS server: 192.168.40.10
ruckus#
```

## Show Rogue Device Commands

Use the **show rogue-devices** commands to display information about rogue devices that the controller has detected on the network. Use the following command.

### show rogue-devices

```
show rogue-devices
```

#### Syntax Description

**show**

Display information

**rogue-devices**

Display rogues devices that have been detected on the network

#### Defaults

None.

#### Example

```
ruckus# show rogue-devices
Current Active Rogue Devices:
Rogue Devices:
Mac Address= 00:25:c4:52:1c:a1
Channel= 6
Radio= 802.11bg
Type= AP
Encryption= Open
SSID= V54-HOME001
Last Detected= 2011/03/01 02:03:43

Known/Recognized Rogue Devices:
```



# Show Events and Activities Commands

Use the **show events-activities** commands to display information events and network activities that have been recorded by the controller. Use the following command:

## show events-activities

```
show events-activities
```

### Syntax Description

**show**

Display information

**events-activities**

Display a list of events and activities records by the controller

### Defaults

None.

### Example

```
ruckus# show events-activities
ruckus# show events-activities
Last 300 Events/Activities:
Activity:
Date/Time= 2012/01/10 08:33:17
Severity= Low
User=
Activities= Admin[ruckus] logs in from [192.168.11.7]
Activity:
Date/Time= 2012/01/10 08:32:00
Severity= Low
User=
Activities= WLAN[Ruckus-Guest] with BSSID[04:4f:aa:4c:b1:08] configuration has been updated on radio
[11g/n] of AP[7962 - MAP@04:4f:aa:0c:b1:00]
Activity:
Date/Time= 2012/01/10 08:32:00
Severity= Low
User=
...
...
```

## Show Alarm Commands

Use the **show alarm** commands to display alarms that have been generated by the controller. Use the following command:

### show alarm

```
show alarm
```

### Syntax Description

**show**

Display information

**alarm**

Display a list of alarms that have been generated by the controller

### Defaults

None.

### Example

```
ruckus# show alarm
Last 300 Alarms:
  Alarms:
    Date/Time= 2013/03/27 15:36:59
    Name= AP Lost Contact
    Severity= High
    Activities= Lost contact with AP[7372 - MAP@c0:c5:20:3b:91:f0]
  Alarms:
    Date/Time= 2013/03/18 14:44:21
    Name= ZD warm restart
    Severity= Medium
    Activities= System warm restarted with [user reboot].
  ...
  ...
ruckus#
```

# Show License Commands

Use the **show license** commands to display the controller's license information, including the model number, the maximum number of APs that it can support, and the maximum number of wireless clients that managed APs can support. Use the following command:

## show license

```
show license
```

### Syntax Description

**show**

Display information

**license**

Display the controller's license information

### Defaults

None.

### Example

```
ruckus# show license
License:
  Model= ZD1112
  Max. AP Number= 12
  Max. Client Number= 1250
ruckus#
```

## Show Application Policy Commands

Use the following commands to display application policies, user-defined applications and application port-mapping settings.

## show app-policy

**show app-policy**

### Syntax Description

**show**

Display information

**app-policy**

Display application policies

### Defaults

None.

### Example

```
ruckus# show app-policy
Application Policy:
  ID:
ruckus#
```

## show user-app-ip

**show user-app-ip**

### Syntax Description

**show**

Display information

**license**

Display IP-based user defined applications

### Defaults

None.

### Example

```
ruckus# show user-app-ip
User defined application hasn't been found.
ruckus#
```

## show user-app-port

**show user-app-port**

## Viewing Current Configuration

show wificalling

### Syntax Description

#### show

Display information

#### license

Display port-based user defined applications

### Defaults

None.

### Example

```
ruckus# show user-app-port
Application based on port hasn't been found.
ruckus#
```

## show wificalling

### Syntax Description

#### show

Display information.

#### wificalling

Display the current Wi-Fi Calling settings.

### Example

```
ruckus# show wificalling
 1:
   WIFI Calling Carrier Name: AT&T
   WIFI Calling Description: AT&T
   WIFI Calling Priority: 3
     WIFI Calling Domains: internal.att.com
     WIFI Calling IP address:129.192.166.10
 2:
   WIFI Calling Carrier Name: profile1
   WIFI Calling Priority: 1
     WIFI Calling Domains: Tmobile
     WIFI Calling IP address:10.10.100.100
ruckus#
```

## show url-filtering

show url-filtering

## Syntax Description

### show

Display information

### url-filtering

Display the current URL filtering settings.

## Example

```
ruckus# show url-filtering
Url Filtering Profiles:
  1:
    Url Name: Profile 1
    Filter Type: CLEAN_AND_SAFE
    Number of Blocked Categories: 25
    Blocked Categories:
      Abortion
      Abused Drugs
      Adult and Pornography
      Bot Nets
      Confirmed SPAM Sources
      Cult and Occult
      Dating
      Dead Sites
      Gambling
      Gross
      Hacking
      Hate and Racism
      Illegal
      Keyloggers and Monitoring
      Malware Sites
      Marijuana
      Nudity
      Pay to Surf
      Phishing and Other Frauds
      Proxy Avoidance and Anonymizers
      SPAM URLs
      Spyware and Adware
      Unconfirmed SPAM Sources
      Violence
      Weapons
    Blocklist-Domains: Not Configured
    Allowlist-Domains: Not Configured
    Google Safe Search: Disabled
    YouTube Safe Search: Disabled
    Bing Safe Search: Disabled
  2:
    Url Name: Profile 2
    Filter Type: CLEAN_AND_SAFE
    Number of Blocked Categories: 25
    Blocked Categories:
      Abortion
      Abused Drugs
      Adult and Pornography
      Bot Nets
      Confirmed SPAM Sources
      Cult and Occult
      Dating
      Dead Sites
      Gambling
      Gross
      Hacking
      Hate and Racism
      Illegal
      Keyloggers and Monitoring
      Malware Sites
```

## Viewing Current Configuration

show url-filtering

```

    Marijuana
    Nudity
    Pay to Surf
    Phishing and Other Frauds
    Proxy Avoidance and Anonymizers
    SPAM URLs
    Spyware and Adware
    Unconfirmed SPAM Sources
    Violence
    Weapons
Blocklist-Domains:
    blockthiswebsite.com
Allowlist-Domains: Not Configured
Google Safe Search: Disabled
YouTube Safe Search: Disabled
Bing Safe Search: Disabled
ruckus#
```



# Show Session-Timeout Commands

Use the **show session-timeout** command to display the current session timeout interval.

## show session-timeout

```
show session-timeout
```

### Syntax Description

**show**

Display information

**session-timeout**

Display the current session timeout interval

### Defaults

None.

### Example

```
ruckus# show session-timeout
Current session timeout interval is 30 minutes
ruckus#
```

## Viewing Current Configuration

Show Active Wired Client Commands

# Show Active Wired Client Commands

Use the **show active-wired-client** commands to display information about currently active wired clients.

## show active-wired-client all

```
show active-wired-client all
```

## show active-wired-client mac

```
show active-wired-client mac MAC
```

### Syntax Description

<b>show</b>	Display information
<b>active-wired-client</b>	Display the currently active wired client information
<b>all</b>	Show all wired clients
<b>mac</b>	Show a specific client information by MAC address
<b>MAC</b>	The MAC address of the specific client

### Defaults

None.

### Example

```
ruckus# show active-wired-client all
Current Active Wired Clients:

ruckus#
```

## Show RADIUS Statistics Commands

Use the following commands to display RADIUS statistics or to reset RADIUS statistics.

### show radius-statistics

To display a list of RADIUS server statistics, use the following command:

```
show radius-statistics [ server-all | server-name WORD ] [ wlan-all | wlan-name NAME ] [ latest-ten-min | latest-one-hour | latest-one-day ]
```

#### Syntax Description

**show radius-statistics**

Display list of RADIUS server statistics.

**server-all**

Display statistics for all servers. (Default: recorded from power on.)

**server-name WORD**

Display statistics for the specified server. (Default: recorded from power on.)

**wlan-all**

Display statistics for all WLANs. (Default: recorded for the last day.)

**wlan-name NAME**

Display statistics for the specified WLAN. (Default: recorded for the last day.)

**latest-ten-min**

Display statistics for the last 10 minutes.

**latest-one-hour**

Display statistics for the last hour.

**latest-one-day**

Display statistics for the last day.

### reset radius-statistics

To reset RADIUS statistics, use the following command:

```
reset radius-statistics [ server-all | server-name WORD ] [ master | standby ] [ latest-ten-min | latest-one-hour | latest-one-day ]
```

#### Syntax Description

**reset radius-statistics**

Reset RADIUS server statistics.

**server-all**

Reset statistics for all servers to zero. (Default: recorded from power on.)

**server-name WORD**

Reset statistics for the specified server to zero. (Default: recorded from power on.)

## Viewing Current Configuration

### Show RADIUS Statistics Commands

#### **wlan-all**

Reset statistics for all WLANs. (Default: recorded for the last day.)

#### **wlan-name** *NAME*

Reset statistics for the specified WLAN. (Default: recorded for the last day.)

#### **master**

Reset statistics of the master server to zero.

#### **standby**

Reset statistics of the standby server to zero.

#### **latest-ten-min**

Reset statistics recorded for the last 10 minutes

#### **latest-one-hour**

Reset statistics recorded for the last hour

#### **latest-one-day**

Reset statistics recorded for the last day

## Show Load Balancing Commands

Use the following commands to display AP load balancing information.

### show load-balance

To display AP load balancing information, use the following command:

```
show load-balance
```

#### Example

```
ruckus# show load-balance
*** Show AP load balance
Radio---Enable--Scan--ActThresh---AdjThresh---WeakBypass---StrongBypass---NewActTrigger---Headroom
2GHz      0   2000      10      50      33      55      3      3
5GHz      0   2000      10      43      35      55      3      3
----MAC Address----Cli-New-Lim---Allow-----Fallbk----Adjacent 2-GHz Radios [MacAdrs FwdRssi RevRssi
SumRssi]
c4:10:8a:1f:d1:f0  1  0  0 1000000000 0000000000
c0:c5:20:3b:91:f0  2  0  0 1000000000 0000000000
----MAC Address----Cli-New-Lim---Allow-----Fallbk----Adjacent 5-GHz Radios [MacAdrs FwdRssi RevRssi
SumRssi]
c4:10:8a:1f:d1:f0  0  0  0 1000000000 0000000000
c0:c5:20:3b:91:f0  1  0  0 1000000000 0000000000
ruckus#
```

## Show Station Rename Commands

Use the **show sta-rename** command to display the current renamed station list.

### show sta-rename

To display the current renamed station list, use the following command:

```
show sta-rename
```

#### Example

```
ruckus# show sta-rename
Displays sta rename list.
MAC Address= 6C:AA:B3:00:00:A0
rename= my-iphone

All sta rename number: 1
```

## Show Station Favorite Commands

Use the **show sta-favorite** command to display the current favorite station list.

## show sta-favorite

To display the current favorite station list, use the following command:

**show sta-favorite**

### Example

```
ruckus# show sta-favorite
Displays sta favorite list.
  MAC Address= aa:aa:aa:aa:aa:aa
  MAC Address= bb:bb:bb:bb:bb:bb
```

```
All sta favorite number: 2
```

# Configuring Master Settings

---

- Configuration Commands Overview..... 112
- General Config Commands..... 112
- Configure Context Show Commands..... 114
- Configure AAA Server Commands..... 122
- Configure DHCP Server Commands..... 125
- Configure Admin Commands..... 127
- Configure Access Points Commands..... 130
- Radio 2.4/5 GHz Commands..... 144
- Mesh Commands..... 148
- AP Port Setting Commands..... 150
- Configure AP Policy Commands..... 162
- Configure AP Group Commands..... 165
- Configure Hotspot Redirect Settings..... 208
- Configure Layer 2 Access Control Commands..... 209
- Configure Layer 3 Access Control Commands..... 214
- Configure Precedence Policy Commands..... 225
- Configure Device Policy Commands..... 229
- Configure Application Policy Commands..... 232
- Configure Wi-Fi Calling Settings..... 239
- Configure URL Filtering Settings..... 242
- Configure Allowlist Commands..... 248
- Configure Band Balancing Commands..... 250
- Configure Load Balancing Commands..... 252
- Configure STP Commands..... 257
- Configure System Commands..... 258
- Configure UPNP Settings..... 310
- Configure Zero-IT Settings..... 311
- Configure Dynamic PSK Expiration..... 312
- Configure WLAN Settings Commands..... 313
- Configure WLAN Group Commands..... 363
- Configure Role Commands..... 370
- Configure User Commands..... 382
- Configure Guest Access Commands..... 388
- Configure Web Auth Settings..... 401
- guest-access-auth-server..... 406
- Configuring Guest Access Restriction Rules..... 407
- Configure Hotspot Commands..... 413
- Configuring Hotspot Restricted Access Rules..... 427
- Hotspot Access Restriction Commands..... 429
- Configure Hotspot 2.0 Commands..... 434
- Configure Mesh Commands..... 451
- Configure Alarm Commands..... 462
- Configure Alarm-Event Settings..... 465
- Configure Services Commands..... 469
- Configure WIPS Commands..... 485
- Configure Email Server Commands..... 487
- Configure SMS Server Commands..... 493
- SNS..... 495

- Configure Station Rename Commands.....495
- Configure Favorite Station Commands..... 496
- Configure mDNS (Bonjour) Commands..... 498
- Configure Reportd Commands..... 502
- upload-debug..... 505
- no upload-debug..... 506

## Configuration Commands Overview

This section describes the commands that you can use to configure Unleashed via the **config** context. From the privileged commands context, type **config** to enter the configuration context. To show a list of commands available from within the **config** context, type **help** or **?**.

## General Config Commands

The following section describes general configuration commands can be executed from within the **config** context. To save your configuration changes and exit the **config** context, use the **end** or **exit** command. To discard your changes and exit the **config** context, use the **abort** or **quit** command.

Some sub-contexts within the **config** context do not allow the use of the **abort** or **quit** commands; you must save your changes and exit the sub-context. Many commands offer a corresponding “no” command to undo your configuration changes (for example, use “no wlan” to delete a WLAN).

### help

Shows available commands.

### history

Shows a list of previously run commands.

### abort

Exits the **config** context without saving changes. Some contexts do not allow **abort**, you must save your changes to exit the context (**end** or **exit**).

### end

Saves changes, and then exits the **config** context.

### exit

Saves changes, and then exits the **config** context.



## quit

Exits the **config** context without saving changes. Some contexts do not allow quit, you must save your changes to exit the context (**end** or **exit**).

## Configure Context Show Commands

Use the following show commands to display configured settings within the **config** context.

### show aaa

Displays a list of available AAA servers.

### show dhcp

Displays a list of available DHCP servers.

### show admin

Displays information about the administrator login settings.

#### Example

```
ruckus(config)# show admin
Administrator Name/Password:
  Name= admin
  Password= *****
  Authenticate:
    Mode= Authenticate using the admin name and password

ruckus(config)#
```

### show mgmt-acl

Displays a list of all management access controls.

### show static-route

Displays a list of all static route entries.

### show ap

Displays a list of all approved devices.

### show l2acl

Displays a list of L2 Access Control Lists.

### show l3acl

Displays a list of L3/L4/IP ACL.

## show allowlist

Displays a list of client isolation allow lists.

## show prece

Displays a list of Precedence Policies.

### Defaults

Name= Default

Description= None

Attribute=vlan

- Order = AAA,Device Policy,WLAN

Attribute = rate-limit

- Order = AAA,Device Policy,WLAN

### Example

```
ruckus(config)# show prece
Precedence Policy:
  ID:
    1:
      Name= Default
      Description=
      Rules:
        1:
          Description=
          Attribute = vlan
          Order = AAA,Device Policy,WLAN
        2:
          Description=
          Attribute = rate-limit
          Order = AAA,Device Policy,WLAN

ruckus(config)#
```

## show dvcpicy

Displays a list of Device Policies.

## show user-app-ip

Displays the IP-based user-defined applications.

### Example

```
ruckus(config)# show user-app-ip
User defined application hasn't been found.
ruckus(config)#
```

## show user-app-port

Displays the user-defined port-based application settings.

### *Example*

```
ruckus(config)# show user-app-port  
Application based on port hasn't been found.  
ruckus(config)#
```

## show user-app-port

Displays the user-defined application port mapping settings.

## show url-filtering

Displays the URL filtering profiles.

## show wificalling

To display Wi-Fi Calling profiles, use the following command:

**show wificalling**

### Example

```
ruckus(config)# show wificalling
1:
  WIFI Calling Carrier Name: AT&T
  WIFI Calling Description: AT&T
  WIFI Calling Priority: 3
  WIFI Calling Domains: internal.att.com
  WIFI Calling IP address:129.192.166.10
2:
  WIFI Calling Carrier Name: profile1
  WIFI Calling Priority: 1
  WIFI Calling Domains: Tmobile
  WIFI Calling IP address:10.10.100.100
ruckus(config)#
```

## show load-balancing

Displays information about Load balancing.

### Example

```
ruckus(config)# show load-balancing
Load Balancing:
Radio 0:
  Status= Disabled
  AdjacentThreshold= 50
  WeakBypass= 33
  StrongBypass= 55
  ActivationThreshold= 10
  NewTrigger= 3
  Headroom= 3

Radio 1:
  Status= Disabled
  AdjacentThreshold= 43
  WeakBypass= 35
  StrongBypass= 55
  ActivationThreshold= 10
  NewTrigger= 3
  Headroom= 3

ruckus(config)#
```

## show wlan

Displays a list of all WLAN services (Names).

## show wlan-group

Displays a list of existing WLAN groups.

### Example

```
ruckus(config)# show wlan-group
WLAN Group:
  ID:
    1:
      Name= Default
      Description= Default WLANs for Access Points
      WLAN Service:
        WLAN1:
          NAME= Ruckus1
          VLAN=

ruckus(config)#
```

## show role

Displays a list of roles.

## show user

Displays a list of users.

## show hotspot

Displays a list of hotspot entries.

## show guest-access-service

To display a list of guest access services, use the following command:

```
show guest-access-service
```

## show guest-access-generation

To display generation information for guest access, use the following command:

```
show guest-access-generation
```

### Example

```
ruckus(config)# show guest-access-generation
  Authentication Server: Local Database
  Force HTTPS Redirection: Disabled
ruckus(config)#
```

## show portal-auth-generation

To display generation information for portal authentication, use the following command:

```
show portal-auth-generation
```

### Example

```
ruckus(config)# show portal-auth-generation
  Force DNS server: Disabled
  Force Web Portal HTTPS Redirection: Enabled
ruckus(config)#
```

## show ap-group

To display all or specified AP groups, use the following command:

```
show ap-group [ all | name WORD ]
```

## show usb-software

Displays USB Software Package information.

## show location-services

Displays a list of configured location services.

## show sta-rename

Displays a list of renamed stations.

## show sta-favorite

Displays a list of favorite stations.

## **show hs20op**

Displays the list of hotspot 2.0 operator settings.



## show hs20sp

Displays a list of hotspot 2.0 service provider settings.

## show mdnsproxyrule

To display Mdnsproxy rules, use the following command:

```
show mdnsproxyrule ID-From ID-to
```

## show mdnsproxy

To display Mdnsproxy status, use the following command:

```
show mdnsproxy ID-From ID-to
```

## show bonjour-policy

To display Bonjour policy rules, use the following command:

```
show bonjour-policy name
```

## show bonjour-fencing

To display Bonjour Fencing rules, use the following command:

```
show bonjour-fencing name
```

## Configure AAA Server Commands

This section describes the commands that you can use to configure AAA server entries on the controller. The following commands can be executed from within the **config-aaa** context. To show a list of commands available from within the context, type **help** or **?**.

### aaa

Use the following command to configure an AAA server entry and enter the config-aaa context:

```
aaa WORD
```

### Syntax Description

#### abort

Exits the config-aaa context without saving changes.

#### end

Saves changes, and then exits the config-aaa context.

#### exit

Saves changes, and then exits the config-aaa context.

#### quit

Exits the config-aaa context without saving changes.

#### name WORD

Sets the AAA server name.

#### show

Displays a list of available AAA servers.

#### CaseSensitive

Sets the 'CaseSensitive' value of AD/LDAP server to 'enabled'.

#### type

Sets the type of AAA server.

#### type ad

Sets the AAA server type to 'Active Directory'.

#### type ldap

Sets the AAA server type to 'LDAP'.

#### type ad-802.1x

Sets the AAA server type to 'Active Directory For 802.1x'.

#### type radius-auth

Sets the AAA server type to 'RADIUS'.

#### type tacplus-auth

Sets the AAA server type to 'TACPLUS'.

#### type radius-acct

Sets the AAA server type to 'RADIUS Accounting'.

#### radius-encryption

Sets the AAA server encryption type.

**radius-encryption tls**

Sets the AAA server encryption type to 'TLS'.

**auth-method pap**

Sets the authentication method to PAP.

**auth-method chap**

Sets the authentication method to CHAP.

**ip-addr** *IP-ADDR*

Sets the AAA server's IP/IPv6 address.

**port** *PORT-NUM*

Sets the AAA server's port.

**tacplus-service** *WORD*

Sets TACPLUS service name with length (1-64 bytes).

**domain-name** *WORD*

Sets the windows/base domain name.

**domainServer-deviceName***WORD*

Sets the domain server device name.

**no radius-encryption**

Disables the AAA server encryption.

**no ad-global-catalog**

Disables global catalog support.

**no grp-search**

Disables group attribute lookup support.

**no encryption-TLS**

Disable the TLS Encryption

**no backup**

Disables the backup function.

**ad-global-catalog**

Enables global catalog support.

**grp-search**

Enables group attribute lookup support.

**admin-dn** *WORD*

Sets the admin domain name.

**admin-password** *WORD*

Sets the admin password.

**key-attribute** *WORD*

Sets the LDAP key attribute.

**search-filter** *WORD*

Sets the LDAP search filter.

**radius-secret** *WORD*

Sets the AAA server's shared secret.

## Configuring Master Settings

### Configure AAA Server Commands

#### **tacplus-secret** *WORD*

Sets the TACPLUS server's shared secret.

#### **encryption-TLS**

Enables the TLS Encryption

#### **backup**

Enables the backup function.

#### **backup-ip-addr** *IP-ADDR*

Sets the backup AAA server's IP/IPv6 address.

#### **backup-port** *PORT-NUM*

Sets the backup AAA server's port.

#### **backup-radius-secret** *WORD*

Sets the backup AAA server's shared secret.

#### **request-timeout** *NUMBER*

Sets the failover request timeout (2~20 seconds).

#### **retry-count** *NUMBER*

Sets the failover retry count (2~10 times).

#### **consecutive-drop-packet** *NUMBER*

Sets the number of consecutive dropped packet (range:1~10 , default is 1).

#### **reconnect-primary-interval** *NUMBER*

Sets the failover re-connect to primary interval (1~86400 minutes).

## Example

```
ruckus(config)# aaa activedir
The AAA server 'activedir' has been created. To save the AAA server, type 'end' or 'exit'.
ruckus(config-aaa)# type ad
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-aaa)# ip-addr 192.168.10.40
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-aaa)# show
AAA:
  ID:
  :
  Name= activedir
  Type= Active Directory
  IP Address= 192.168.10.40
  Port= 389
  Windows Domain Name=
  Global Catalog= Disabled
  Admin DN=
  Admin Password=
  Group Search= Enabled
  encryption-TLS = Disabled

ruckus(config-aaa)# end
The AAA server 'activedir' has been updated and saved.
Your changes have been saved.
ruckus(config)#
```

# Configure DHCP Server Commands

This section describes the commands that you can use to configure DHCP server entries on the controller. These DHCP server entries are used by the DHCP Relay feature, if enabled for a tunneled WLAN. The following commands can be executed from within the **config-dhcp** context.

## dhcp

Use the **dhcp** command from within the **config** context to create or edit a DHCP server entry.

**dhcp** WORD

### Syntax Description

**dhcp**

Configure the DHCP server settings

WORD

Name of the DHCP server entry

### Defaults

none

### Example

```
ruckus(config)# dhcp dhcp_server_2
The DHCP server 'dhcp_server_2' has been created. To save the DHCP server, type 'end' or 'exit'.
ruckus(config-dhcp)# first 192.168.11.99
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dhcp)# show
DHCP servers for DHCP relay agent:
  ID:
  :
  Name= dhcp_server_2
  Description=
  IP Address= 192.168.11.99
ruckus(config-dhcp)# end
The DHCP server 'dhcp_server_2' has been updated and saved.
Your changes have been saved.
ruckus(config)# show dhcp
DHCP servers for DHCP relay agent:
  ID:
  1:
  Name= DHCP Server 1
  Description=
  IP Address= 192.168.11.1
  IP Address=
  2:
  Name= dhcp_server_2
  Description=
  IP Address= 192.168.11.99
  IP Address=
ruckus(config)#
```

## no dhcp

Use the **no dhcp** command to delete a DHCP server entry.

## Configuring Master Settings

### Configure DHCP Server Commands

**no dhcp** *WORD*

### Example

```
ruckus(config)# no dhcp dhcp_server_2
The DHCP server 'dhcp_server_2' has been deleted.
ruckus(config)#
```

## show

Displays a list of available DHCP servers.

**show**

## name

Sets the DHCP server name.

**name** *WORD*

## description

Sets the DHCP server description.

**description** *WORD*

## first

Sets the DHCP server's first IP address.

**first** *IP-ADDR*

## second

Sets the DHCP server's second IP address.

**second** *IP-ADDR*

## no second

Deletes the DHCP server's second IP address.

**no second** *IP-ADDR*

# Configure Admin Commands

Use the admin commands to enter the **config-admin** context to set the admin user name, password and admin authentication server settings.

## admin

To enter the config-admin context and configure administrator preference, use the following command:

```
admin
```

### Example

```
ruckus(config)# admin
ruckus(config-admin)
```

## name

To set the administrator user name, use the following command:

```
name WORD
```

### Syntax Description

<b>name</b>	Configure the admin name setting
<b>WORD</b>	Set the admin name to this name

### Defaults

```
admin
```

### Example

```
ruckus(config)# admin
ruckus(config-admin)# name admin
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-admin)# end
The administrator preferences have been updated.
Your changes have been saved.
ruckus(config)#
```

## name password

To set the admin name and password at the same time, use the following command:

```
name WORD password WORD
```

## **Syntax Description**

**name**

Configure the admin name setting

**WORD**

Set the admin name to this name

**password**

Configure the admin password

**WORD**

Set the admin password to this password

## **Defaults**

admin

## **Example**

```
ruckus(config)# admin
ruckus(config-admin)# name admin password admin
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-admin)# end
The administrator preferences have been updated.
Your changes have been saved.
ruckus(config)#
```



## show

To view the current admin login and authentication settings, use the following command:

**show**

### Example

```
ruckus(config-admin)# show
Administrator Name/Password:
  Name= admin
  Password= *****
  Authenticate:
    Mode= Authenticate using the admin name and password

ruckus(config-admin)#
```

## Configure Access Points Commands

The following commands can be used from within the config-ap context to configure a specific Access Point.

### ap

To enter the config-ap context, enter the following command:

```
ap MAC
```

#### Syntax Description

<b>ap</b>	Access Point
MAC	MAC address of the access point for configuration

#### Defaults

None.

#### Example

```
ruckus(config)# ap 04:4f:aa:0c:b1:00  
The AP '04:4f:aa:0c:b1:00' has been loaded. To save the AP, type 'end' or 'exit' .  
ruckus(config-ap)#
```

### no ap

To delete an AP from the list of approved devices, use the following command:

```
no ap MAC
```

#### Syntax Description

<b>no ap</b>	Delete Access Point
MAC	MAC address of the access point

#### Defaults

None.

#### Example

```
ruckus(config)# no ap 04:4f:aa:0c:b1:00  
The AP '04:4f:aa:0c:b1:00' has been deleted.  
ruckus(config)#
```

## devname

To set the device name, use the following command:

```
devname WORD
```

### Syntax Description

**devname**

Device name

**WORD**

Set the device name to this name

### Defaults

None.

### Example

```
ruckus(config)# ap 04:4f:aa:0c:b1:00
The AP '04:4f:aa:0c:b1:00' has been loaded. To save the AP, type 'end' or 'exit'.
ruckus(config-ap)# devname 7962
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# end
The device information has been updated.
Your changes have been saved.
ruckus(config)#
```

## no devname

To delete the device's name, use the following command:

```
no devname
```

## bonjour-gateway

To bind a bonjour gateway policy to this AP, use the following command:

```
bonjour-gateway WORD
```

### Example

```
ruckus(config-ap)# bonjour-gateway bonjour1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## no bonjour-gateway

To unbind a bonjour gateway policy, use the following command:

```
no bonjour-gateway
```

## Example

```
ruckus(config-ap)# no bonjour-gateway
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## description

To set the device description, use the following command:

**description** WORD

### Syntax Description

**description**

Device description

WORD

Set the device description to this text

### Defaults

None.

## Example

```
ruckus(config-ap-00:13:92:00:33:1C)# description this-is-the-device-description
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## no description

To delete the device's description, use the following command:

**no description**

## gps

To set the device GPS coordinates, use the following command:

**gps** GPS-COORDINATE

### Syntax Description

**gps**

Set the device GPS coordinates

GPS-COORDINATE

Enter the device's GPS coordinates for the latitude and longitude. Use a comma (,) to separate the latitude and longitude. The first coordinate is for the latitude. The second coordinate is for the longitude. Ex. A,B or -37,38.

## Defaults

None.

## Example

```
ruckus(config-ap)# gps 37.3,-122
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## no gps

To delete the device's GPS coordinates, use the following command:

```
no gps
```

## location

To set the device location, use the following command:

```
location WORD
```

## Syntax Description

### **location**

Device location

### **WORD**

Set the device location to this address

## Defaults

None.

## Example

```
ruckus(config-ap)# location sunnyvale-office
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## no location

To delete the device's location, use the following command:

```
no location
```

## group

To set the AP group for this AP, use the following command:

```
group [name WORD] | system-default]
```

## Syntax Description

<b>group</b>	Set the AP group that this AP is a member of
<b>name</b>	Set the AP to be a member of the named AP group
<b>WORD</b>	The name of the AP group
<b>system-default</b>	Set the AP as a member of the system default AP group

## Defaults

system-default

## Example

```
ruckus(config-ap)# group system-default  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## ip

To set the AP's IPv4 address, use the following command from within the config-ap context:

```
ip [enable|disable] addr IP-ADDR NET-MASK name-server DNS-ADDR mode [dhcp|static|keep]
```

## Syntax Description

<b>ip</b>	Set the AP's IPv4 addressing
<b>enable</b>	Enable IPv4 addressing
<b>disable</b>	Disable IPv4 addressing
<b>addr</b>	Set the AP's IPv4 address
<b>IP-ADDR</b>	The IPv4 address
<b>NET-MASK</b>	The IPv4 netmask
<b>name-server</b>	Set the device's DNS servers. Use a space ( ) to separate primary and secondary DNS servers
<b>DNS-ADDR</b>	The IP address of the DNS server

<b>mode</b>	Set the device's IP addressing mode (DHCP, static or "keep AP's setting")
<b>dhcp</b>	Set the device's IP address mode to DHCP
<b>static</b>	Set the device's IP address mode to static
<b>keep</b>	Set the device to use its current network settings

## Defaults

none

## Example

```
ruckus(config-ap)# ip enable mode dhcp
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## usb-software

To set the AP USB software package vendor ID (VID) and product ID (PID), and version, use the following command:

```
usb-software VID-PID-VERSION
```

## no usb-software

To delete a USB software package from the list of USB software packages, use the following command:

```
no usb-software
```

## no usb-software-override

To disable the override of the AP USB software package, use the following command:

```
no usb-software-override
```

## status-leds

To enable or disable the AP's status LEDs, use the following command:

```
status-leds [enable | disable ]
```

## Defaults

Enabled.

## Syntax Description

### **status-leds**

Configure status LEDs

### **enable**

Override group config, enable status LEDs

### **disable**

Override group config, disable status LEDs

## Example

```
ruckus(config-ap) # status-leds disable  
ruckus(config-ap) #
```

## no status-leds-override

To disable override of status LEDs for this AP, use the following command:

**no status-leds-override**

## status-lacp

To enable or disable LACP, use the following command:

**status-lacp [enable | disable ]**

## Defaults

Disabled.

## Example

```
ruckus(config-ap) # status-lacp enable  
ruckus(config-ap) #
```

## no status-lacp-override

To disable override of AP group LACP settings, use the following command:

**no status-lacp-override**

## Example

```
ruckus(config-ap) # no status-lacp-override  
ruckus(config-ap) #
```

## usb-port

To disable the override the group configuration and enable/disable the USB port for this AP, use the following command:

**usb-port [ enable | disable ]**



## no usb-port-override

To disable the override of the USB port for the specified AP model, use the following command:

```
no usb-port-override
```

## poe-out

To enable or disable the AP's PoE Out port, use the following command:

```
poe-out [ enable | disable]
```

### Defaults

Disabled.

### Syntax Description

<b>poe-out</b>	Configure PoE Out port
<b>enable</b>	Override group config, enable PoE Out port
<b>disable</b>	Override group config, disable PoE Out port

### Example

```
ruckus(config-ap)# poe-out enable  
ruckus(config-ap)#
```

## no poe-out-override

To disable override of the PoE out port settings, use the following command:

```
no poe-out-override
```

## external-antenna

To configure the AP's external antenna settings, use the following command:

```
external-antenna [2.4G|5G][enable|disable]
```

### Syntax Description

<b>2.4G</b>	Configure external 2.4GHz antenna
<b>5G</b>	Configure external 5GHz antenna

**enable|disable**

Enable/disable external antenna

### Defaults

Varies by AP model.

## no external-antenna-override

To disable the external antenna override settings, use the following command:

**no external-antenna-override**

## spectra-analysis 2.4GHz

To enable or disable the spectrum analysis feature for this radio, use the following command:

**spectra-analysis 2.4GHz [ enable | disable ]**

## spectra-analysis 5GHz

To enable or disable the spectrum analysis feature for this radio, use the following command:

**spectra-analysis 5GHz [ enable | disable ]**

## internal-heater

To enable or disable the AP's internal heater, use the following command:

**internal-heater [ enable | disable ]**

### Defaults

Disabled.

### Syntax Description

**internal-heater**

Configure internal heater

**enable**

Override group config, enable internal heater

**disable**

Override group config, disable internal heater

### Example

```
ruckus(config-ap)# internal-heater enable  
ruckus(config-ap)#
```

## no internal-heater-override

To disable override of the internal heater for this AP, use the following command:

```
no internal-heater-override
```

## cband-channels

To enable or disable the 5.8 GHz C-band channels, use the following command:

```
cband-channels [ enable | disable ]
```

### Defaults

Disabled.

### Syntax Description

#### **cband-channels**

Configure C-band channels

#### **enable**

Override group config, enable C-band channels

#### **disable**

Override group config, disable C-band channels

### Example

```
ruckus(config-ap)# cband-channels enable  
ruckus(config-ap)#
```

## no cband-channels-override

To disable override of the 5.8 GHz channels, use the following command:

```
no cband-channels-override
```

## cband-license

To override the group configuration and enable or disable 5.8 GHz radio full power for this device, use the following command:

```
cband-license [ enable | disable ]
```

### Defaults

Disabled.

### Example

```
ruckus(config-ap)# cband-license enable  
Model r610 doesn't support to configure cband-license.  
ruckus(config-ap)#
```

## no cband-license-override

To disable the override of the 5.8 GHz Channels License for this AP, use the following command:

```
no cband-license-override
```

### Defaults

Disabled.

### Example

```
ruckus(config-ap)# no cband-license override
Model r610 doesn't support to configure cband-license.
ruckus(config-ap)#
```

## radio-band

To set the radio band of the AP, use the following command:

```
radio-band WORD
```

### Syntax Description

#### radio-band

Configure radio band mode

#### WORD

Set to 2.4 or 5 GHz radio mode

### Usage Guidelines

This command is available only on APs that support band switching between 2.4GHz and 5GHz radio band modes.

### Example

```
ruckus(config-ap)# radio-band 5
Your changes have been saved.
ruckus(config-ap)#
```

## no radio-band-override

To disable the AP radio band override, use the following command:

```
no radio-band-override
```

## venue-name

To set the venue name of the AP, use the following command:

```
venue-name [ language ] WORD
```

## Syntax Description

### **venue-name**

Set the venue name for the AP

### [ **language** ]

Set the language of the venue name. Valid languages are: English, Chinese, Czech, Danish, Dutch, French, German, Japanese, Spanish, Swedish, Turkish)

### **WORD**

Set the venue name to the name specified

## Example

```
ruckus(config-ap)# venue-name english venue1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## no venue-name

To remove a venue name entry, use the following command:

**no venue-name** [ **language** ]

## Example

```
ruckus(config-ap)# no venue-name english  
The entry 'English' has been removed. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## Ildp

To enable, disable or configure the AP's Link Layer Discover Protocol settings, use the following Ildp commands from within the config-ap context.

## Syntax Description

### **Ildp**

Configure LLDP settings.

### **enable**

Enable LLDP with current settings.

### **disable**

Disable LLDP with current settings.

### **interval** *NUMBER*

Set packet transmit interval in second(s).

### **holdtime** *NUMBER*

Set amount of time receiving device should retain the information.

### **ifname eth** *NUMBER*

Enter the AP port number.

## Configuring Master Settings

### Configure Access Points Commands

#### **mgmt enable**

Enable LLDP management IP address of the AP.

#### **mgmt disable**

Disable LLDP management IP address of the AP.

### Example

```
ruckus(config-ap) # lldp enable
ruckus(config-ap) #
```

## no lldp-override

To disable the AP's LLDP override settings (use parent settings), use the following command:

#### **no lldp-override**

### Example

```
ruckus(config-ap) # no lldp-override
ruckus(config-ap) #
```

## power-mode

To set the PoE mode of the AP, use the following command:

#### **power-mode <WORD>**

### Syntax Description

#### **power-mode**

Set the PoE power mode.

#### **auto**

Set the PoE power mode to auto.

#### **802.3af**

Set the PoE power mode to 802.3af.

#### **802.3at**

Set the PoE power mode to 802.3at.

#### **802.3bt5**

Set the PoE power mode to 802.3bt5.

#### **802.3bt6**

Set the PoE power mode to 802.3bt6.

#### **802.3bt7**

Set the PoE power mode to 802.3bt7.

### Example

```
ruckus(config-ap) # power-mode 802.3af
ruckus(config-ap) #
```

## no power-mode-override

To disable the override of the PoE mode, use the following command:

```
no power-mode-override
```

## 802.3af-txchain

To set the number of 2.4 GHz radio transmit chains in 802.3af PoE power mode, use the following command:

```
802.3af-txchain WORD
```

### Syntax Description

#### 802.3af-txchain

Set the number of 2.4 GHz radio transmit chains in 802.3af power mode.

1

Set the number of tx chains to 1.

2

Set the number of tx chains to 2.

4

Set the number of tx chains to 4.

### Example

```
ruckus(config-ap) # 802.3af-txchain 2  
ruckus(config-ap) #
```

## no 802.3af-txchain-override

To disable the override of the 2.4GHz radio transmit chains in 802.3af PoE mode, use the following command:

```
no 802.3af-txchain-override
```

### Example

```
ruckus(config-ap) # no 802.3af-txchain-override  
ruckus(config-ap) #
```

## Radio 2.4/5 GHz Commands

Use the radio 2.4 or radio 5 commands to configure the 2.4/5 GHz radio settings independently.

### radio

Use the radio command from within the config-ap context to configure the 2.4GHz or 5GHz radios independently.

**radio** [ 2.4 | 5 ] *arguments*

### Syntax Description

**2.4**

Configure the 2.4 GHz radio

**5**

Configure the 5 GHz radio

**channelization** [ **auto** | *NUMBER* ]

Set channel width to 20 MHz, 40 MHz or Auto

**channel** [ **auto** | *NUMBER* ]

Set channel to Auto or manually set channel

**tx-power** [ **auto** | **full** | **min** | **num** 1-10 ]

Set transmit power to auto, full, min, or a number (-1dB~-10dB)

**admission-control** *VALUE*

Set the radio to use the specified call admission control airtime usage limit (%)

**channel-range** *NUMBER-LIST*

Set the allowed list of channels for the specified radio

**wlan-group** *WORD*

Set the AP radio as a member of a WLAN group

**wlan-service** [ **enable** | **disable** ]

Enable WLAN service on this radio

**wlan-service-override**

Enable the override of the WLAN service settings for this radio

**extant-gain** *NUMBER*

Set external antenna gain (on APs that support external antennas) (dBi)

### Defaults

channelization: Auto

channel: Auto

wlan-group: Default

wlan-service: Enabled

wlan-service-override: Disabled

tx-power: Auto



admission-control: Disabled

spectralink-compatibility: Disabled

## Example

```
ruckus(config-ap)# radio 2.4 channelization auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# radio 2.4 channel auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# radio 2.4 wlan-group Default
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# radio 2.4 wlan-service
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# radio 2.4 tx-power auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)# end
The device information has been updated.
Your changes have been saved.
ruckus(config)#
```

## no radio

Use the no radio 2.4 or no radio 5 commands from within the config-ap context to disable AP group overrides for the 2.4GHz or 5GHz radio settings.

**no radio** [ 2.4 | 5 ] *arguments*

## Syntax Description

### **no radio**

Disable override of 2.4/5GHz radio settings

### **2.4**

Disable 2.4GHz radio override settings

### **5**

Disable 5GHz radio override settings

### **wlan-service**

Disable override of WLAN service settings

### **channel-range-override**

Disables override of channel range settings

### **channel-override**

Disables override of channel settings

### **channelization-override**

Disables override of 5GHz channelization settings

### **tx-power-override**

Disables override of Tx power

### **wlan-group-override**

Disables override of WLAN group settings

### **admission-control**

Disables call admission control on the radio

## Configuring Master Settings

### Radio 2.4/5 GHz Commands

#### **admission-control-override**

Disables override of call admission control settings

#### **wlan-service**

Disables WLAN service for the radio

#### **wlan-service-override**

Disables the override of the WLAN service settings for this radio.

#### **channel-range-override**

Disables override of channel range settings

## Example

```
ruckus(config-ap)# no radio 2.4 tx-power-override
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## show

To display the AP's current configuration settings, use the following command:

#### **show**

## Example

```
ruckus(config)# ap c0:8a:de:21:a8:10
The AP 'c0:8a:de:21:a8:10' has been loaded. To save the AP, type 'end' or 'exit'.
ruckus(config-ap)# show
AP:
ID:
 1:
  MAC Address= c0:8a:de:21:a8:10
  Model= zf7982
  Approved= Yes
  Device Name= RuckusAP
  Description=
  Location=
  GPS=
  CERT = Complex
  Bonjour-policy=
  Bonjour-fencing= Disabled
  Group Name= System Default
  Channel Range:
    A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
    B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
  Radio a/n:
    Channelization= Auto
    Channel= Auto
    WLAN Services enabled= Yes
    Tx. Power= Auto
    WLAN Group Name= Default
    Call Admission Control= OFF
    Protection Mode= Auto
  Radio b/g/n:
    Channelization= Auto
    Channel= Auto
    WLAN Services enabled= Yes
    Tx. Power= Auto
    WLAN Group Name= Default
    Call Admission Control= OFF
    Protection Mode= 2
  Override global ap-model port configuration= No
```

```
Network Setting:
  Protocol mode= Use Parent Setting
  Device IP Settings= Keep AP's Setting
  IP Type= DHCP
  IP Address= 10.10.3.51
  Netmask= 255.255.0.0
  Gateway= 10.10.0.1
  Primary DNS Server= 10.10.0.1
  Secondary DNS Server=

  Device IPv6 Settings= Keep AP's Setting
  IPv6 Type= Auto Configuration
  IPv6 Address= fc00::1
  IPv6 Prefix Length= 7
  IPv6 Gateway=
  IPv6 Primary DNS Server=
  IPv6 Secondary DNS Server=
Mesh:
  Status= Disabled
LLDP:
  Status = Use Parent Setting
Venue Name List:
LAN Port:
  0:
    Interface= eth0
    Dot1x= None
    LogicalLink= Up
    PhysicalLink= Up 100Mbps full
    Label= 10/100/1000 PoE LAN1
  1:
    Interface= eth1
    Dot1x= None
    LogicalLink= Down
    PhysicalLink= Down
    Label= 10/100/1000 LAN2
```

```
ruckus(config-ap) #
```

## Mesh Commands

Use the following commands to configure the AP's mesh-related settings.

### mesh mode

Use the mesh mode command from within the config-ap context to configure the AP's mesh mode settings.

```
mesh mode [ auto | root-ap | mesh-ap | disable ]
```

### Syntax Description

**mesh mode**

Configure the AP's mesh mode

**auto**

Set mesh mode to Auto

**root-ap**

Configure AP as a Root AP

**mesh-ap**

Configure AP as a Mesh AP

**disable**

Disable mesh

### Defaults

Auto.

### Example

```
ruckus(config-ap)# mesh mode auto  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## mesh uplink-selection

Use the mesh uplink-selection command from within the config-ap context to configure the AP's mesh uplink selection settings.

```
mesh uplink-selection [auto | manual ] add-mac | del-mac MAC
```

### Syntax Description

#### mesh uplink-selection

Configure the AP's mesh uplink selection mode

#### auto

Set mesh uplink selection to Auto

#### manual

Set mesh uplink selection to manual

#### add-mac

Add a manual uplink selection AP

#### del-mac

Delete a manual uplink selection AP

#### MAC

The MAC address of the uplink AP

### Defaults

Auto.

### Examples

```
ruckus(config-ap)# mesh uplink-selection manual add-mac 00:24:82:3f:14:60  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

```
ruckus(config-ap)# mesh uplink-selection auto  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## maxhops

To set the maximum mesh hops for the AP (0-3), use the following command:

```
maxhops <NUMBER>
```

### Example

```
ruckus(config-ap)# maxhops 3  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## AP Port Setting Commands

To override AP group configuration settings and configure the AP's Ethernet ports individually, you must first enter the **config-ap-model** context from within the **config-ap** context.

### port-setting

Use the following command to enter the config-ap-model context and override AP group settings to configure AP ports individually:

**port-setting**

### Syntax Description

**port-setting**

Configure AP port settings

**lan** *NUMBER* {*Arguments*}

Configure the AP LAN port

**no lan** *NUMBER*

Disable the AP LAN port

**uplink** *WORD*

Set the AP port to use the specified type (trunk, access or general)

**untag** *NUMBER*

Set the AP port to use the specified VLAN ID(1-4094)

**member** *NUMBER*

Set the AP port to use the specified members(1-4094)

**opt82** [ **enabled** | **disabled** ]

Enable the AP port DHCP Option 82 settings

**tunnel** [ **enabled** | **disabled** ]

Enable the AP port tunnel settings

**guest-vlan** *NUMBER*

Set the AP port to use the specified guest VLAN ID(1-4094)

**dvlan** [ **enabled** | **disabled** ]

Enable the AP port dynamic VLAN settings

**no dot1x** *authsvr acctsvr mac-auth-bypass*

Disable authentication server, accounting server, or MAC auth bypass for the AP's 802.1X settings

**dot1x** *authsvr acctsvr mac-auth-bypass*

Enable authentication server, accounting server, or MAC auth bypass for the AP's 802.1X settings

**authsvr** *WORD*

Enter the RADIUS server name

**acctsvr** *WORD*

Enter the RADIUS accounting server name

**mac-auth-bypass**

Enable MAC authentication bypass for the 802.1X-enabled port

**dot1x supplicant [ username | password ] WORD**

Set the username/password for AP 802.1X supplicant

**dot1x supplicant mac**

Set the username and password to use AP MAC address for AP 802.1X supplicant

## Defaults

Enable LAN: Yes

LAN Type: trunk

Untag ID: 1

Members: 1-4094

Guest VLAN: Disabled

Dynamic VLAN: Disabled

802.1X: disabled

DHCP opt82: Disabled

Tunnel= Disabled

MLD Snooping: Disabled

IGMP Snooping: Enabled

## Example

```
ruckus(config-ap)# port-setting
ruckus(config-ap-model)# lan 1 uplink trunk
ruckus(config-ap-model)# show
PORTS:
  LAN ID:
    1:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled
    2:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled

ruckus(config-ap-model)#
```

## abort

To exit the port-setting context without saving changes, use the abort command.

```
abort
```

## end

To save changes, and then exit the port-setting context, use the following command:

```
end
```

## exit

To save changes, and then exit the config-ap-model context, use the following command:

```
exit
```

## quit

To exit the config-ap-model context without saving changes, use the quit command.

```
quit
```

## show

To display the current port settings, use the following command:

```
show
```

## Example

```
ruckus(config)# ap 04:4f:ab:0c:b1:00
ruckus(config-ap)# port-setting
ruckus(config-ap-model)# show
PORTS:
  LAN ID:
    1:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled
    2:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
```



```
MLD Snooping= Disabled
IGMP Snooping= Enabled
ruckus(config-ap-model)#
```

## lan

To enable the LAN port, use the following command:

**lan** *NUMBER*

### Syntax Description

**lan**

Enable the LAN port

*NUMBER*

Specify the LAN port to enable

**uplink** *WORD*

Sets the AP port to use the specified type(trunk,access or general).

**untag** *NUMBER*

Sets the AP port to use the specified VLAN ID(1-4094) or none.

**member** *NUMBER*

Sets the AP port to use the specified members(1-4094).

**opt82**

Sets the AP port DHCP Option 82.

**tunnel**

Sets the AP port tunnel.

**guest-vlan** *NUMBER*

Sets the AP port to use the specified guest VLAN ID(1-4094).

**dvlan**

Sets the AP port dynamic VLAN.

**dot1x**

Sets the AP port 802.1X.

### Defaults

Enable LAN = Yes

LAN Type= trunk

Untag ID= 1

Members= 1-4094

Guest VLAN=

Enable Dynamic VLAN= Disabled

802.1X= disabled

DHCP opt82= Disabled

## Configuring Master Settings

### AP Port Setting Commands

Tunnel= Disabled

MLD Snooping= Disabled

IGMP Snooping= Enabled

### Example

```
ruckus(config-ap-model) # lan 1
ruckus(config-ap-model) #
```

## no lan

To disable the LAN port, use the following command:

**no lan** *NUMBER*

### Syntax Description

**no lan**

Disable the LAN port

*NUMBER*

Specify the LAN port to disable

### Defaults

None.

### Example

```
ruckus(config-ap-model) # no lan 1
ruckus(config-ap-model) #
```

## lan uplink

To sets the AP port type (Trunk, Access or General), use the following command:

**lan** *NUMBER uplink WORD*

### Syntax Description

**lan uplink**

Set the LAN port type

*NUMBER*

Specify the LAN port to configure

**uplink**

Set the port type to the specified type

*WORD*

LAN port type (Trunk port, Access port, General port)

## Defaults

For all APs other than 7025/7055: Trunk

For 7025/7055 LAN 5: Trunk

For 7025/7055 LAN 1-LAN 4: Access

## Example

```
ruckus(config-ap-model)# lan 1 uplink access  
ruckus(config-ap-model)#
```

## lan untag

To set the LAN port untag VLAN ID (native VLAN, for Trunk ports), use the following command:

**lan** *NUMBER* **untag** *NUMBER*

## Syntax Description

### lan untag

Set the LAN port untag VLAN ID

*NUMBER*

Specify the LAN port to configure

*NUMBER*

Set the untag VLAN ID (1~4094)

## Defaults

1

## Example

```
ruckus(config-ap-model)# lan 1 untag 1  
ruckus(config-ap-model)#
```

## lan member

To set the LAN port VLAN membership (only General ports have configurable membership; Trunk ports are members of all VLANs, and Access port membership must be the same as the Untag VLAN), use the following command:

**lan** *NUMBER* **member** *NUMBER*

## Syntax Description

### lan member

Set the LAN port VLAN membership

*NUMBER*

Specify the LAN port to configure

## Configuring Master Settings

### AP Port Setting Commands

*NUMBER*

Set the VLAN membership (1~4094, range separated by hyphen, multiple VLANs separated by commas)

### Defaults

1

### Example

```
ruckus(config-ap-model)# lan 2 member 1-10,100,200
ruckus(config-ap-model)# show
PORTS:
  LAN ID:
    1:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled
    2:
      Enable LAN = Yes
      LAN Type= general
      Untag ID= 1
      Members= 1-10,100,200
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled

ruckus(config-ap-model)#
```

## lan opt82

To enable or disable DHCP option 82 for a LAN port, use the following command:

**lan** *NUMBER* **opt82** [ **enabled** | **disabled** ]

### Syntax Description

#### **opt82**

Enable or disable DHCP option 82

#### **enabled**

Enable option 82

#### **disabled**

Disable option 82

### Defaults

Disabled

## Example

```
ruckus(config-ap-model)# lan 1 opt82 enable  
ruckus(config-ap-model)#
```

## lan tunnel

To enable or disable Ethernet port tunnel mode for the port, use the following command:

```
lan NUMBER tunnel [ enabled | disabled ]
```

## Syntax Description

### tunnel

Enable or disable port tunnel mode

### enabled

Enable tunnel mode

### disabled

Disable tunnel mode

## Defaults

Disabled

## Example

```
ruckus(config-ap-model)# lan 1 tunnel enable  
ruckus(config-ap-model)# show  
PORTS:  
  LAN ID:  
    1:  
      Enable LAN = Yes  
      LAN Type= trunk  
      Untag ID= 1  
      Members= 1-4094  
      Guest VLAN=  
      Enable Dynamic VLAN= Disabled  
      802.1X= disabled  
      DHCP opt82= Disabled  
      Tunnel= Enabled  
      MLD Snooping= Disabled  
      IGMP Snooping= Enabled  
    2:  
      Enable LAN = Yes  
      LAN Type= trunk  
      Untag ID= 1  
      Members= 1-4094  
      Guest VLAN=  
      Enable Dynamic VLAN= Disabled  
      802.1X= disabled  
      DHCP opt82= Disabled  
      Tunnel= Disabled  
      MLD Snooping= Disabled  
      IGMP Snooping= Enabled  
  
ruckus(config-ap-model)#
```

## lan guest-vlan

To set the AP port to use the specified Guest VLAN ID, use the following command:

```
lan NUMBER guest-vlan NUMBER
```

## lan dvlan enabled

To enable dynamic VLAN for the port, use the following command:

```
lan NUMBER dvlan enabled
```

## lan dvlan disabled

To disable dynamic VLAN for the port, use the following command:

```
lan NUMBER dvlan disabled
```

## lan dot1x

To configure 802.1X settings for a LAN port, use the following command:

```
lan NUMBER dot1x [ disable | supplicant | auth-port-based | auth-mac-based ]
```

### Syntax Description

**lan dot1x**

Configure 802.1X settings for this port

**NUMBER**

LAN port number to configure

**disabled**

Disable 802.1X

**supplicant**

Configure this LAN port as an 802.1X supplicant

**supplicant username WORD**

Set the username for AP 802.1X supplicant

**supplicant password WORD**

Set the password for AP 802.1X supplicant

**supplicant mac**

Set the username and password to use AP MAC address for AP 802.1X supplicant

**auth-port-based**

Configure this LAN port as an 802.1X authenticator (port-based)

**auth-mac-based**

Configure this LAN port as an 802.1X authenticator (MAC-based)

## Defaults

Disabled

## Example

```
ruckus(config-ap-model)# lan 1 dot1x supplicant  
ruckus(config-ap-model)#
```

## dot1x authsvr

To configure the 802.1X authentication server for the AP, use the following command:

```
dot1x authsvr WORD
```

## Syntax Description

**dot1x authsvr**

Configure 802.1X authentication server

WORD

Name of AAA server

## Defaults

None

## Example

```
ruckus(config-ap-model)# dot1x authsvr radius  
ruckus(config-ap-model)#
```

## dot1x acctsvr

To configure the 802.1X accounting server for the AP, use the following command:

```
dot1x acctsvr WORD
```

## Syntax Description

**dot1x acctsvr**

Configure 802.1X accounting server

WORD

Name of AAA server

## Defaults

None

### Example

```
ruckus(config-ap-model) # dot1x acctsvr radius-acct  
ruckus(config-ap-model) #
```

## dot1x mac-auth-bypass

To configure 802.1X MAC authentication bypass, use the following command:

```
dot1x mac-auth-bypass
```

### Syntax Description

**dot1x mac-auth-bypass**

Enable 802.1X MAC authentication bypass

### Defaults

Disabled

### Example

```
ruckus(config-ap-model) # dot1x mac-auth-bypass  
ruckus(config-ap-model) #
```

## dot1x supplicant username

To configure 802.1X supplicant user name, use the following command:

```
dot1x supplicant username WORD
```

### Syntax Description

**dot1x supplicant username**

Configure 802.1X supplicant user name

**WORD**

Set the 802.1X supplicant user name

### Defaults

None

### Example

```
ruckus(config-ap-model) # dot1x supplicant username johndoe  
ruckus(config-ap-model) #
```

## dot1x supplicant password

To configure 802.1X supplicant password, use the following command:



```
dot1x supplicant password WORD
```

### Syntax Description

```
dot1x supplicant password
    Configure 802.1X supplicant password

WORD
    Set the 802.1X supplicant password
```

### Defaults

None

### Example

```
ruckus(config-ap-model)# dot1x supplicant password test123
ruckus(config-ap-model)#
```

## dot1x supplicant mac

To set the 802.1X supplicant user name and password as the AP's MAC address, use the following command:

```
dot1x supplicant mac
```

### Syntax Description

```
dot1x supplicant mac
    Set the supplicant user name and password as the AP's MAC address
```

### Defaults

None

### Example

```
ruckus(config-ap-model)# dot1x supplicant mac
ruckus(config-ap-model)#
```

## Configure AP Policy Commands

Use the **ap-policy** commands to configure global AP policies such as automatic AP approval, limited ZD discovery, management VLAN, load balancing across APs and max clients per AP radio. To run these commands, you must first enter the config-ap-policy context.

### ap-policy

To enter the ap-policy context and configure global AP policies, enter the following command:

```
ap-policy
```

#### Syntax Description

**ap-policy**

Enter config-ap-policy context and configure global AP policies

#### Defaults

None.

#### Example

```
ruckus(config)# ap-policy  
ruckus(config-ap-policy)#
```

### preferred-master

To enable the Preferred Master and secondary Preferred Master AP settings, enter the following command:

```
preferred-master ap-mac <PREFERRED-MAC> [<PREFERRED-SECONDARY-MAC>]
```

#### Syntax Description

**<PREFERRED-MAC>**

Enter the MAC address of the primary Preferred Master.

**<PREFERRED-SECONDARY-MAC>**

Enter the MAC address of the secondary Preferred Master.

#### Defaults

None.

#### Example

```
ruckus(config-ap-policy)# preferred-master ap-mac d4:c1:9e:35:a9:40  
The Preferred Master function has been updated.  
ruckus(config-ap-policy)#
```

## no preferred-master

To disabled the Preferred Master and secondary Preferred Master AP settings, enter the following command:

```
no preferred-master <PREFERRED-MAC> [<PREFERRED-SECONDARY-MAC>]
```

### Defaults

Disabled.

### Example

```
ruckus(config-ap-policy)# no preferred-master  
The Preferred Master function has been updated.  
ruckus(config-ap-policy)#
```

## master-focus-controller

To enable the Focus Controller feature to allow the Master AP to focus on controller functions and not serve as a Wi-Fi access point, enter the following command:

```
master-focus-controller
```

### Defaults

Disabled.

### Example

```
ruckus(config-ap-policy)# master-focus-controller  
The AP automatically approve policy has been updated.  
ruckus(config-ap-policy)#
```

## no master-focus-controller

To disable the Focus Controller feature, enter the following command:

```
no master-focus-controller
```

### Defaults

Disabled.

### Example

```
ruckus(config-ap-policy)# no master-focus-controller  
The AP automatically approve policy has been updated.  
ruckus(config-ap-policy)#
```

## show

To display the Preferred Master and secondary Preferred Master AP settings, enter the following command:

## Configuring Master Settings

### Configure AP Policy Commands

**show**

### Example

```
ruckus(config-ap-policy)# show
  Automatically approve all join requests from APs= Enabled
  Limited Unleashed Discovery:
    Status= Disabled
  Management VLAN:
    Status= Keep AP's setting
  Auto Recovery= 30 minutes
ruckus(config-ap-policy)#
```

# Configure AP Group Commands

This section describes the commands that you can use to configure AP groups on the controller. The following commands can be executed from within the **config-apgrp** context. To show a list of commands available from within the context, type **help** or **?**.

## ap-group

To create a new AP group or configure an existing AP group and enter the config-apgrp context, enter the following command:

```
ap-group WORD
```

### Syntax Description

**ap-group**

Configure an AP group

*WORD*

Name of the AP group

### Defaults

"System Default"

### Example

```
ruckus(config)# ap-group "System Default"  
The AP group entry 'System Default' has been loaded. To save the AP group, type 'end' or 'exit'.  
ruckus(config-apgrp)#
```

## no ap-group

To delete an AP group from the list, enter the following command:

```
no ap-group WORD
```

### Syntax Description

**no ap-group**

Delete an AP group

*WORD*

Name of the AP group

### Defaults

None

### Example

```
ruckus(config)# no ap-group apgrp2  
The AP Group 'apgrp2' has been removed.  
ruckus(config)#
```

## exit

Saves changes, and then exits the config-ap-group context.

## abort

Exits the config-ap-group context without saving changes.

## quit

Exits the config-ap-group context without saving changes.

## show

To display current AP group configuration settings, use the following command from within the config-ap-group context:

**show**

### Example

```
ruckus(config)# ap-group apgroup1
The AP group 'apgroup1' has been created. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)# show
APGROUP:
  ID:
  :
  Name= apgroup1
  Description=
  Radio 11bgn:
    Channelization= Auto
    Channel= Auto
    Enable auto channel selection which select from 1,6,11= Yes
    Tx. Power= Auto
    11N only Mode= Auto
    WLAN Group= Default
    Call Admission Control= OFF
  Radio 11an:
    Channelization= Auto
    Channel= Auto
    Tx. Power= Auto
    11N only Mode= Auto
    WLAN Group= Default
    Call Admission Control= OFF
  Members:
ruckus(config-apgrp)#
exit
```

## description

To set the AP group description, use the following command:

**description WORD**

## no description

To delete the AP group description, use the following command:

**no description**

## wlan add

To add a WLAN service in the AP group, use the following command:

**wlan add name wlan\_name**

### Syntax Description

MAC

The MAC address of the device

### Defaults

None.

### Example

```
ruckus(config)# ap-group apgrp_aaa
The AP group 'apgrp_aaa' has been created. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)#
ruckus(config-apgrp)#
ruckus(config-apgrp)#
ruckus (config-apgrp)# wlan
add del
ruckus(config-apgrp)# wlan add name wlan_a
ruckus(config-apgrp)#
ruckus(config-apgrp)# end
The AP group 'apgrp_aaa' has been updated.
Your changes have been saved.
ruckus(config)#
ruckus(config)#
ruckus(config)# show ap-group
Name= apgrp_aaa
WLAN Service:
    wlan= wlan_a
```

## wlan del

To delete a WLAN service in the AP group, use the following command:

**wlan del name wlan\_name**

### Syntax Description

MAC

The MAC address of the device

### Defaults

None.

## Configuring Master Settings

### Configure AP Group Commands

#### Example

```
ruckus(config)# ap-group apgrp_aaa
The AP group 'apgrp_aaa' has been created. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)#
ruckus(config-apgrp)#
ruckus(config-apgrp)# wlan
add del
ruckus(config-apgrp)# wlan add name wlan_a
ruckus(config-apgrp)# wlan add name wlan_b
ruckus(config-apgrp)# wlan del name wlan_a
ruckus(config-apgrp)#
ruckus(config-apgrp)# end
The AP group 'apgrp_aaa' has been updated.
Your changes have been saved.
ruckus(config)#
ruckus(config)#
ruckus(config)# show ap-group
Name= apgrp_aaa
WLAN Service:
    Wlan= wlan_b
```

## member add

To add a member in the AP group, use the following command:

```
member add mac MAC
```

### Syntax Description

MAC

The MAC address of the device

### Defaults

None.

#### Example

```
ruckus(config)# ap-group apgrp_aaa
The AP group 'apgrp_aaa' has been created. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)#
ruckus(config-apgrp)#
ruckus(config-apgrp)# member add mac 34:fa:9f:1d:0d:20
ruckus(config-apgrp)# member add mac c8:03:f5:31:66:20
ruckus(config-apgrp)#
ruckus(config-apgrp)# end
The AP group 'apgrp_aaa' has been updated.
Your changes have been saved.
ruckus(config)# show ap-group
Members:
    MAC= 34:fa:9f:1d:0d:20
    MAC= c8:03:f5:31:66:20
```

## member mac move-to

To add a member in the AP group, use the following command:

```
member mac MAC move-to system-default name
```



**member mac MAC move-to name ap\_group**

## Syntax Description

**MAC**  
The MAC address of the device

**name**  
The name of the AP group

## Defaults

None.

## Example

```
ruckus(config)# ap-group apgrp_aaa
The AP group entry 'apgrp_aaa' has been loaded. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)# member
add mac
ruckus(config-apgrp)# member mac 34:fa:9f:1d:0d:20 move-to
system-default name
ruckus(config-apgrp)# member mac 34:fa:9f:1d:0d:20 move-to name apgrp_bbb
ruckus(config-apgrp)#
ruckus(config-apgrp)#
ruckus(config-apgrp)# end
The AP group 'apgrp_aaa' has been updated.
Your changes have been saved.
ruckus(config)#
ruckus(config)#
ruckus(config)# show ap-group
APGROUP:
Name= apgrp_aaa
Members:
    MAC= c8:03:f5:31:66:20

Name= apgrp_bbb
Members:
    MAC= 34:fa:9f:1d:0d:20
```

## Configure Location Based Service Commands

Use the following commands to create and configure location services for an AP group. Use the `location-services` command to enter the `config-location-services` context from within the `config` context.

### *location-services*

To create and begin configuring location services for this AP group, use the following command:

`location-services WORD`

### Syntax Description

**help**

Set the IP addressing mode

**history**

IPv4, IPv6 or dual

**abort**

Exits the `config-location-services` context without saving changes.

**end**

Saves changes, and then exits the `config-location-services` context.

**exit**

Saves changes, and then exits the `config-location-services` context.

**quit**

Exits the `config-location-services` context without saving changes.

**fqdn WORD**

Sets the location server FQDN.

**port PORT-NUM**

Sets the location server port.

**password WORD**

Sets the location server preshared key.

**show**

Displays configured location services for all venues.

### Example

```
ruckus(config)# location-services location-service1
The location venue 'location-service1' has been created. To save it, type 'end' or 'exit'.
ruckus(config-location-services)# fqdn example1.ruckuswireless.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-location-services)# port 8883
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-location-services)# password password
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-location-services)# end
The location venue 'location-service1' has been updated and saved.
Your changes have been saved.
ruckus(config)#
```

## **no location-services**

To disable location-based service on this AP group, use the following command:

**no location-services** WORD

### **Example**

```
ruckus(config)# no location-service location-service1
The location venue 'location-service1' has been deleted.
ruckus(config)#
```

## **ipmode**

To set the IP addressing mode of the AP group, use the following command:

**ipmode** WORD

### **Syntax Description**

**ipmode**

Set the IP addressing mode

WORD

IPv4, IPv6 or dual

### **Example**

```
ruckus(config-apgrp)# ipmode dual
ruckus(config-apgrp)#
```

## **no ipmode-override**

To disable the override of IP mode, use the following command:

**no ipmode-override**

## **mesh mode**

Use the mesh mode command from within the config-apgrp context to configure the group's mesh mode settings.

**mesh mode** [ auto | root-ap | mesh-ap | disable ]

### **Syntax Description**

**mesh mode**

Configure the AP's mesh mode

**auto**

Set mesh mode to Auto

**root-ap**

Configure AP as a Root AP

## Configuring Master Settings

### Configure AP Group Commands

#### **mesh-ap**

Configure AP as a Mesh AP

#### **disable**

Disable mesh

### Defaults

Auto.

### Example

```
ruckus(config-apgrp)# mesh mode auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)#
```

### no meshmode-override

To disable the override of the mesh mode settings for the AP group, use the following command:

**no meshmode-override**

### Defaults

Disabled.

### Example

```
ruckus(config-apgrp)# no meshmode-override
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)#
```

### maxhops

To set the maximum mesh hops for the AP (0-3), use the following command:

**maxhops <NUMBER>**

### Example

```
ruckus(config-ap)# maxhops 3
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-ap)#
```

## channelflyoff

The ChannelFly override setting allows APs to disable ChannelFly if the AP's uptime is higher than the specified value (in minutes). To enable the ChannelFly override feature for the AP group, use the following command:

### Defaults

Disabled

30 minutes

## Example

```
ruckus(config-apgrp)# channelflyoff 30
ruckus(config-apgrp)# show
APGROUP:
  ID:
  :
  Name= apgroup2
  Description=
  Channel Range:
    B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
    A/N Indoor= 36,40,44,48,149,153,157,161 (Disallowed= )
    A/N Outdoor= 36,40,44,48,149,153,157,161 (Disallowed= )
  Radio 11bgn:
    Channelization= Auto
    Channel= Auto
    Tx. Power= Auto
    11N only Mode= Auto
    WLAN Group= Default
    Call Admission Control= OFF
    SpectraLink Compatibility= Disabled
  Radio 11an:
    Channelization= Auto
    Indoor Channel= Auto
    Outdoor Channel= Auto
    Tx. Power= Auto
    11N only Mode= Auto
    WLAN Group= Default
    Call Admission Control= OFF
    SpectraLink Compatibility= Disabled
  Network Setting:
    Protocol mode= Use Parent Setting
  Turn off channfly setting: enabled
    if AP's uptime is more than 30 minutes will turn off AP's ChannelFly
  Members:

ruckus(config-apgrp)#
```

## no channelflyoff

To disable the ChannelFly off feature for the AP group, use the following command:

**no channelflyoff**

## no channelflyoff-override

To disable the override of ChannelFly settings (use parent settings), use the following command:

**no channelflyoff-override**

## Example

```
ruckus(config-apgrp)# no channelflyoff-override
ruckus(config-apgrp)# show
APGROUP:
  ID:
  :
  Name= apgroup2
  Description=
  Channel Range:
    B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
    A/N Indoor= 36,40,44,48,149,153,157,161 (Disallowed= )
```

## Configuring Master Settings

### Configure AP Group Commands

```
A/N Outdoor= 36,40,44,48,149,153,157,161 (Disallowed= )
Radio 11bgn:
  Channelization= Auto
  Channel= Auto
  Tx. Power= Auto
  11N only Mode= Auto
  WLAN Group= Default
  Call Admission Control= OFF
  SpectraLink Compatibility= Disabled
Radio 11an:
  Channelization= Auto
  Indoor Channel= Auto
  Outdoor Channel= Auto
  Tx. Power= Auto
  11N only Mode= Auto
  WLAN Group= Default
  Call Admission Control= OFF
  SpectraLink Compatibility= Disabled
Network Setting:
  Protocol mode= Use Parent Setting
  Turn off channfly setting: Use Parent Setting
Members:

ruckus(config-apgrp)#
```

## Radio 2.4/5 GHz Commands

Use the radio 2.4 or radio 5 commands to configure the 2.4/5 GHz radios on all APs within an AP group.

### radio

To configure radio settings for the 2.4 GHz or 5 GHz radios of an AP group, use the following command:

**radio** [2.4|5]*arguments*

### Syntax Description

**radio**

Configure AP group radio settings

**2.4**

Configure 2.4 GHz radio

**5**

Configure 5 GHz radio

**no**

Disables settings for the specified radios in the AP group

**channel**

Set radio channel (Auto or number)

**channelization**

Set radio channel width (Auto, 20MHz or 40MHz)

**auto-channel-selection** [four-channel| three-channel]

Set auto channel selection to four-channel (1,5,9,13) or three-channel (1,6,11)

**tx-power**

**Set radio transmit power (Auto, Full, 1/2, 1/4, 1/8, Min) or NUMBER (-1dB~-10dB)**

**wlan-group**

Set radio to the specified WLAN group

**admission-control**

Set the radio to use the specific call admission control airtime usage limit (%)

**spectralink-compatibility**

Enable SpectraLink Compatibility settings on the radio (sets DTIM=2, minrate=5.5Mbps and enable RTS-CTS protection mode)

**wlan-service**

Disable or enable WLAN service on the radio

### Defaults

Channel: Auto

Channelization: Auto

Auto-Channel Selection: Three-channel

TX Power: Auto

WLAN group: Default

## Configuring Master Settings

### Configure AP Group Commands

Admission Control: Off

SpecraLink Compatibility: Off

WLAN Service: Enabled

### Example

```
ruckus(config)# ap-group "System Default"
The AP group entry 'System Default' has been loaded. To save the AP group, type 'end' or 'exit'.
ruckus(config-apgrp)# radio 2.4 channel auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)# radio 5 channelization auto
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)# radio 5 wlan-group Default
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)# radio 2.4 tx-power Num 1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-apgrp)# show
APGROUP:
  ID:
  1:
  Name= System Default
  Description= System default group for Access Points
  Radio 11bgn:
  Channelization= Auto
  Channel= Auto
  Enable auto channel selection which select from 1,6,11= Yes
  Tx. Power= -1dB
  WLAN Group= Default
  Radio 11an:
  Channelization= Auto
  Channel= Auto
  Tx. Power= Auto
  WLAN Group= Default
  Members:
  MAC= 04:4f:aa:0c:b1:00
  MAC= 00:24:82:3f:14:60
  MAC= 74:91:1a:2b:ff:a0
  MAC= 00:1f:41:2a:2b:10

ruckus(config-apgrp)# end
The AP group 'System Default' has been updated.
Your changes have been saved.
ruckus(config)#
```

### **radio 2.4 channel auto**

Sets the 2.4GHz radio to use 'Auto' channel.

### **radio 2.4 channel number <NUMBER>**

Sets the 2.4GHz radio to use the specified channel.

### **radio 2.4 channelization auto**

Sets the 2.4GHz radio to use 'Auto' channelization.

### **radio 2.4 channelization number <NUMBER>**

Sets the 2.4GHz radio to use the specified channelization.



**radio 2.4 auto-channel-selection four-channel**

Enables the auto channel selection which always select from 1,5,9,13.

**radio 2.4 auto-channel-selection three-channel**

Enables the auto channel selection which always select from 1,6,11.

**radio 2.4 tx-power Auto**

Sets the 2.4GHz radio to use 'Auto' Tx. power setting.

**radio 2.4 tx-power Full**

Sets the 2.4GHz radio to use the specified Tx. power setting.

**radio 2.4 tx-power 1/2**

Sets the 2.4GHz radio to use the specified Tx. power setting.

**radio 2.4 tx-power 1/4**

Sets the 2.4GHz radio to use the specified Tx. power setting.

**radio 2.4 tx-power 1/8**

Sets the 2.4GHz radio to use the specified Tx. power setting.

**radio 2.4 tx-power Min**

Sets the 2.4GHz radio to use the specified Tx. power setting.

**radio 2.4 tx-power Num**

Sets the 2.4GHz radio to use the specified Tx by number from 1-10 (-1dB ~ -10dB).

**radio 2.4 wlan-group <WORD>**

Assigns the 2.4GHz radio to the specified WLAN group.

**radio 2.4 admission-control <VALUE>**

Sets the 2.4GHz radio to use the specific call admission control airtime usage limit(%).

## radio 2.4 prot-mode

### Syntax

```
radio 2.4 prot-mode { none | cts-only | rts-cts }
```

### Options

- None: Sets Protection Mode to 'none'
- cts-only: Sets Protection Mode to 'cts-only'
- rts-cts: Sets Protection Mode to 'rts-cts'

### Example

```
ruckus(config-ap)# radio 2.4 prot-mode rts-cts  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-ap)#
```

## radio 2.4 wlan-service [enable | disable]

Enables or disables the WLAN service on the 2.4GHz radio.

## radio 2.4 channel-range <NUMBER-LIST>

Sets the allowed list of channels used in 2.4GHz radio.

## radio 5 indoor channel auto

Sets the 5GHz radio (indoor) to use 'Auto' channel.

## radio 5 indoor channel number <NUMBER>

Sets the 5GHz radio (indoor) to use the specified channel.

## radio 5 indoor channel-range <NUMBER-LIST>

Sets the allowed list of indoor channels used in 5GHz radio.

## radio 5 outdoor channel auto

Sets the 5GHz radio (outdoor) to use 'Auto' channel.

## radio 5 outdoor channel number <NUMBER>

Sets the 5GHz radio (outdoor) to use the specified channel.

## radio 5 outdoor channel-range <NUMBER-LIST>

Sets the allowed list of outdoor channels used in 5GHz radio.

### **radio 5 channel auto**

Sets the 5GHz radio to use 'Auto' channel.

### **radio 5 channel number <NUMBER>**

Sets the 5GHz radio to use the specified channel.

### **radio 5 channelization auto**

Sets the 5GHz radio to use 'Auto' channelization.

### **radio 5 channelization number <NUMBER>**

Sets the 5GHz radio to use the specified channelization.

### **radio 5 tx-power Auto**

Sets the 5GHz radio to use 'Auto' Tx. power setting.

### **radio 5 tx-power Full**

Sets the 5GHz radio to use the specified Tx. power setting.

### **radio 5 tx-power 1/2**

Sets the 5GHz radio to use the specified Tx. power setting.

### **radio 5 tx-power 1/4**

Sets the 5GHz radio to use the specified Tx. power setting.

### **radio 5 tx-power 1/8**

Sets the 5GHz radio to use the specified Tx. power setting.

### **radio 5 tx-power Min**

Sets the 5GHz radio to use the specified Tx. power setting.

### **radio 5 tx-power Num**

Sets the 5GHz radio to use the specified Tx by number from 1-10 (-1dB ~ -10dB).

### **radio 5 wlan-group <WORD>**

Assigns the 5GHz radio to the specified WLAN group.

***radio 5 admission-control <VALUE>***

Sets the 5GHz radio to use the specific call admission control airtime usage limit(%).

***radio 5 wlan-service [enable | disable]***

Enables or disables the WLAN service on the 5GHz radio.

***no radio 2.4 channelization-override***

Disables the override of the 2.4GHz channelization settings.

***no radio 2.4 channel-range-override***

Disables the override of the 2.4GHz channel range settings.

***no radio 2.4 channel-override***

Disables the override of the 2.4GHz channel settings.

***no radio 2.4 tx-power-override***

Disables the override of the 2.4GHz Tx. power settings.

***no radio 2.4 wlan-group-override***

Disables the override of the 2.4GHz WLAN group settings.

***no radio 2.4 admission-control***

Disables call admission control function on the 2.4GHz radio.

***no radio 2.4 admission-control-override***

Disables the override of the 2.4GHz call admission control settings.

### ***no radio 2.4 prot-mode-override***

Disables the override of the 2.4GHz Protection Mode settings.

### ***no radio 2.4 wlan-service-override***

Disables the override of the 2.4GHz WLAN service settings.

### ***no radio 5 indoor channel-range-override***

Disables the override of the 5GHz indoor channel range settings.

### ***no radio 5 indoor channel-override***

Disables the override of the 5GHz indoor channel settings.

### ***no radio 5 outdoor channel-range-override***

Disables the override of the 5GHz outdoor channel range settings.

### ***no radio 5 outdoor channel-override***

Disables the override of the 5GHz outdoor channel settings.

### ***no radio 5 channelization-override***

Disables the override of the 5GHz channelization settings.

### ***no radio 5 tx-power-override***

Disables the override of the 5GHz Tx. power settings.

### ***no radio 5 wlan-group-override***

Disables the override of the 5GHz WLAN group settings.

### ***no radio 5 admission-control***

Disables call admission control function on the 5GHz radio.

### ***no radio 5 admission-control-override***

Disables the override of the 5GHz call admission control settings.

### ***no radio 5 wlan-service-override***

Disables the override of the 5GHz WLAN service settings.

## QoS Commands (AP)

Use the following commands to configure QoS settings for the AP group.

### **qos**

Contains commands that can be executed from within the context.

### **qos mld-query**

Contains commands that can be executed from within the context.

### **qos mld-query v1**

Enables the mld-query v1.

### **qos mld-query v2**

Enables the mld-query v2.

### **qos igmp-query**

Contains commands that can be executed from within the context.

### **qos igmp-query v2**

Enables the igmp-query v2.

### **qos igmp-query v3**

Enables the igmp-query v3.

### **no qos mld-query v1**

Disables the mld-query v1.

### **no qos mld-query v2**

Disables the mld-query v2.

### **no qos igmp-query v2**

Disables the igmp-query v2.

### **no qos igmp-query v3**

Disables the igmp-query v3.

## Model-Specific Commands

The following commands are used to configure model-specific settings for all APs of a certain model within an AP group.

### *model*

To configure model-specific settings for all APs of a certain model within an AP group, use the following command:

```
model <WORD> <arguments>
```

### Syntax Description

#### **model**

Configure AP group model-specific settings

<WORD>

Enter the AP model name.

#### **port-setting**

Configures the port setting for the specified AP model. Enters config-apgrp-port context. See [port-setting](#) on page 187 for more information.

#### **status-leds**

Configures the status LEDs for the specified AP model (enable, disable).

#### **usb-port**

Configures the USB port settings for the AP model (enable, disable).

#### **external-antenna**

Configures external antenna settings. See [external-antenna](#) on page 186.

#### **max-clients** NUMBER

Sets the maximum clients for the AP.

#### **usb-software** VID-PID-VERSION

Selects the USB Software Vendor ID, Product ID and version for the AP.

#### **poe-out**

Configures the PoE Out ports for the specified AP model (enable, disable).

#### **internal-heater**

Configures the internal heater for the specified AP model (enable, disable).

#### **cband-channels**

Configures the C-band (5.8 GHz) channels for the specified AP model (enable, disable). (UK country code only)

#### **cband-license**

Enable or disable 5.8 GHz Channels License for the specified AP model.

#### **lACP-status**

Configure LACP status for the specified AP model.

#### **power-mode**

Sets the PoE mode for the specified AP model.

#### **802.3af-txchain**

Sets the 2.4GHz radio transmit chains in 802.3af PoE mode for the specified AP model.

## Configuring Master Settings

### Configure AP Group Commands

#### Defaults

Status LEDs: Enabled  
PoE Out: Disabled  
USB Software: Disabled  
Internal Heater: Disabled  
C-band channels: Disabled  
C-band license: Disabled  
LACP status: Disabled  
Power mode: Varies by AP model  
USB Ports: Enabled  
Power Mode: Default  
802.3af-txchain: Varies by AP model

#### Example

```
ruckus(config-apgrp)# model R610 status-leds enable
ruckus(config-apgrp)# end
The AP group 'System Default' has been updated.
Your changes have been saved.
ruckus(config)#
```

#### *no model*

To disable model-specific settings for all APs of a certain model within an AP group, use the following command:

**no model** <WORD> <arguments>

#### Syntax Description

##### **no model**

Disable AP group model-specific override settings.

##### <WORD>

Enter the AP model name (e.g., r500, r600, r700, r710, r720, r510, r610, t710, t710s, t300, t300e, t301n, t301s, h510, r310, c110, t610, t610s, t310d, h320, t310c, t310n, t310s, e510, r730, r320).

##### **status-leds-override**

Disables the override of the status LEDs for the specified AP model.

##### **usb-port-override**

Disables the override of the USB port settings for the specified AP model.

##### **radio-band-override**

Disables the override of the radio band for this specified ap model.

##### **usb-software-override**

Disables the override of the USB software settings for the specified AP model.

##### **poe-out-override**

Disables the override of the PoE out port for this specified ap model.



**internal-heater-override**

Disables the override of the internal heater for this specified ap model.

**cband-channels-override**

Disables the override of the 5.8GHz Channels for this specified ap model.

**cband-license-override**

Disables the override of the 5.8GHz Channels license for this specified ap model.

**external-antenna-override**

Disables the override of external antenna settings for this specified ap model.

**lACP-status-override**

Disables the override of the status LACP for this specified ap model.

**power-mode-override**

Disables the override of the PoE mode for this specified ap model.

**802.3af-txchain-override**

Disables the override of the 2.4GHz radio transmit chains in 802.3af PoE mode for this specified ap model.

**Defaults**

Status LEDs: Enabled

USB Software: Disabled

Internal Heater: Disabled

C-band channels: Disabled

C-band license: Disabled

LACP status: Disabled

Power mode: Varies by AP model

USB Ports: Enabled

Power Mode: Default

802.3af-txchain: Varies by AP model

**Example**

```
ruckus(config-apgrp)# no model R610 status-leds-override
ruckus(config-apgrp)# end
The AP group 'apgroup2' has been updated.
Your changes have been saved.
ruckus(config)#
```

## external-antenna

To configure the external antenna settings for all APs of the specified model within the AP group, use the following command:

**external-antenna** <WORD>

### Syntax Description

**external-antenna 2.4Ghz(11BG) enable**

Enables the external antenna setting for the 2.4GHz(11BG) radio.

**external-antenna 2.4Ghz(11BG) disable**

Disables the external antenna setting for the 2.4GHz(11BG) radio.

**external-antenna 2.4Ghz(11BG) gain**

Sets the external antenna gain for the 2.4GHz(11BG) radio.

**external-antenna 2.4Ghz(11BG) 2-antennas**

Selects the two external antennas for the 2.4GHz(11BG) radio.

**external-antenna 2.4Ghz(11BG) 3-antennas**

Selects the three external antennas for the 2.4GHz(11BG) radio.

**external-antenna 2.4Ghz(11NG) enable**

Enables the external antenna setting for the 2.4GHz(11NG) radio.

**external-antenna 2.4Ghz(11NG) disable**

Disables the external antenna setting for the 2.4GHz(11NG) radio.

**external-antenna 2.4Ghz(11NG) gain**

Sets the external antenna gain for the 2.4GHz(11NG) radio.

**external-antenna 2.4Ghz(11NG) 2-antennas**

Selects the two external antennas for the 2.4GHz(11NG) radio.

**external-antenna 2.4Ghz(11NG) 3-antennas**

Selects the three external antennas for the 2.4GHz(11NG) radio.

**external-antenna 5Ghz(11NA) enable**

Enables the external antenna setting for the 5GHz(11NA) radio.

**external-antenna 5Ghz(11NA) disable**

Disables the external antenna setting for the 5GHz(11NA) radio.

**external-antenna 5Ghz(11NA) gain**

Sets the external antenna gain for the 5GHz(11NA) radio.

**external-antenna 5Ghz(11NA) 2-antennas**

Selects the two external antennas for the 2.4GHz(11NA) radio.

**external-antenna 5Ghz(11NA) 3-antennas**

Selects the three external antennas for the 2.4GHz(11NA) radio.

**external-antenna 5Ghz(11A) enable**

Enables the external antenna setting for the 5GHz(11A) radio.

**external-antenna 5Ghz(11A) disable**

Disables the external antenna setting for the 5GHz(11A) radio.

**external-antenna 5Ghz(11A) gain**

Sets the external antenna gain for the 5GHz(11A) radio.

**external-antenna 5Ghz(11A) 2-antennas**

Selects the two external antennas for the 2.4GHz(11A) radio.

**external-antenna 5Ghz(11A) 3-antennas**

Selects the three external antennas for the 2.4GHz(11A) radio.

## port-setting

To modify model-specific port settings for all APs of the specified model within the AP group, use the following command:

**model** <WORD> **port-setting**

### Syntax Description

**port-setting**

Enters the port-setting context.

**no port-setting**

Disables the override of the global AP mode configuration.

**help**

Shows available commands.

**history**

Shows a list of previously run commands.

**abort**

Exits the config-apgrp-port context without saving changes.

**end**

Saves changes, and then exits the config-apgrp-port context.

**exit**

Saves changes, and then exits the config-apgrp-port context.

**quit**

Exits the config-apgrp-port context without saving changes.

**show**

Displays config-apgrp-port context.

**lan** NUMBER

Enables the AP Ethernet port.

**lan** NUMBER **uplink** WORD

Sets the AP port to use the specified type (trunk, access or general).

**lan** NUMBER **untag** NUMBER

Sets the AP port to use the specified VLAN ID(1-4094).

**lan** NUMBER **member** NUMBER

Sets the AP port to use the specified members(1-4094).

**lan** NUMBER **opt82** **enabled**

Enables the AP port DHCP option 82 settings.

## Configuring Master Settings

### Configure AP Group Commands

#### **lan NUMBER opt82 disabled**

Disables the AP port DHCP option 82 settings.

#### **lan NUMBER tunnel disabled**

Disables the AP port tunnel settings.

#### **lan NUMBER tunnel enabled**

Enables the AP port tunnel settings.

#### **lan NUMBER dot1x disabled**

Disables the AP port 802.1X settings.

#### **lan NUMBER dot1x supplicant**

Sets the AP port to 802.1X supplicant.

#### **lan NUMBER dot1x auth-port-based**

Sets the AP port to port-based 802.1X.

#### **lan NUMBER dot1x auth-mac-based**

Sets the AP port to mac-based 802.1X.

#### **lan NUMBER guest-vlan WORD**

Sets the AP port to use the specified guest VLAN ID(1-4094).

#### **lan NUMBER dvlan enabled**

Enables the AP port dynamic VLAN settings.

#### **lan NUMBER dvlan disabled**

Disables the AP port dynamic VLAN settings.

#### **lan NUMBER qos mld-snooping**

Enables the AP port MLD Snooping setting.

#### **lan NUMBER qos igmp-snooping**

Enables the AP port IGMP Snooping setting.

#### **lan NUMBER qos directed-mcast**

Enables the AP port Directed Multicast setting.

#### **dot1x supplicant mac**

Sets the username and password to use AP MAC address for AP 802.1X supplicant.

#### **dot1x supplicant user-name WORD**

Sets the username for AP 802.1X supplicant.

#### **dot1x supplicant user-name WORD password WORD**

Sets the password for AP 802.1X supplicant.

#### **dot1x authsvr WORD;**

Sets the authentication server for AP 802.1X.

#### **dot1x acctsvr WORD**

Sets the accounting server for AP 802.1X.

#### **dot1x mac-auth-bypass**

Enables MAC authentication bypass (Use device MAC address as username and password).

#### **no lan NUMBER**

Disables the AP Ethernet port.

**no dot1x authsvr**

Disables the auth server settings.

**no lan NUMBER qos mld-snooping**

Disables the AP port MLD Snooping setting.

**no lan NUMBER qos igmp-snooping**

Disables the AP port IGMP snooping setting.

**no lan NUMBER qos directed-mcast**

Disables the AP port Directed Multicast setting.

**no dot1x authsvr**

Disables the authentication server settings.

**no dot1x acctsvr**

Disables the accounting server settings.

**no dot1x mac-auth-bypass**

Disables the MAC authentication bypass.

**Example**

```
ruckus(config-apgrp)# model zf7372 port-setting
ruckus(config-apgrp-port)# show
PORTS:
  LAN ID:
    1:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled
    2:
      Enable LAN = Yes
      LAN Type= trunk
      Untag ID= 1
      Members= 1-4094
      Guest VLAN=
      Enable Dynamic VLAN= Disabled
      802.1X= disabled
      DHCP opt82= Disabled
      Tunnel= Disabled
      MLD Snooping= Disabled
      IGMP Snooping= Enabled

ruckus(config-apgrp-port)#
```

## Model-Specific Port Settings

This section describes the commands that you can use to configure port settings for all APs of a specific model within an AP group. The following commands can be executed from within the **config-apgrp-port** context. To show a list of commands available from within the context, type **help** or **?**.

### *model port-setting*

To configure the port settings for all APs of a specific model within an AP group, and enter the config-apgrp-port context, use the following command:

**model WORD port-setting**

### Syntax Description

**model**

Configure AP group model-specific settings

**WORD**

Enter the AP model name (e.g., zf2942, zf2741, zf7025, zf7341, zf7343, zf7363, zf7761cm, zf7762, zf7762-s, zf7762-t, zf7762-ac, zf7762-s-ac, zf7762-t-ac, zf7942, zf7962).

**port-setting**

Configures the port setting for the specified AP model. Enters config-apgrp-port context.

### Example

```
ruckus(config)# ap-group "System Default"  
The AP group entry 'System Default' has been loaded. To save the AP group, type 'end' or 'exit'.  
ruckus(config-apgrp)# model zf7025 port-setting  
ruckus(config-apgrp-port)#
```

### *abort*

To exit the config-apgrp-port context without saving changes, use the following command:

**abort**

### Syntax Description

**abort**

Exit the context without saving changes

### Defaults

None.

### Example

```
ruckus(config-apgrp-port)# abort  
ruckus(config-apgrp)#
```

## **end**

To save changes, and then exit the config-apgrp-port context, use the following command:

```
end
```

### **Syntax Description**

```
end
    Save changes, and then exit the context
```

### **Defaults**

None.

### **Example**

```
ruckus(config-apgrp-port)# end
ruckus(config-apgrp)#
```

## **exit**

To save changes, and then exit the config-apgrp-port context, use the following command:

```
exit
```

### **Syntax Description**

```
exit
    Save changes, and then exit the context
```

### **Defaults**

None.

### **Example**

```
ruckus(config-apgrp-port)# exit
ruckus(config-apgrp)#
```

## **quit**

To exit the config-apgrp-port context without saving changes, use the following command:

```
quit
```

### **Syntax Description**

```
quit
    Exit the context without saving changes
```

## Configuring Master Settings

### Configure AP Group Commands

#### Defaults

None.

#### Example

```
ruckus(config-apgrp-port)# quit
ruckus(config-apgrp)#
```

#### show

To show a device's port state, use the following command:

**show**

#### Syntax Description

**show**

Display the device's port state

#### Defaults

None.

#### Example

```
ruckus(config-apgrp)# model zf7962 port-setting
ruckus(config-apgrp-port)# show
PORTS:
LAN ID:
1:
Enable LAN = Yes
LAN Type= trunk
Untag ID= 1
Members= 1-4094
802.1X= disabled
DHCP opt82= Disabled
LAN ID:
2:
Enable LAN = Yes
LAN Type= trunk
Untag ID= 1
Members= 1-4094
802.1X= disabled
DHCP opt82= Disabled
ruckus(config-apgrp-port)#
```

#### no lan

To disable a LAN port on APs in an AP group, use the following command:

**no lan** NUMBER

#### Syntax Description

**no lan**

Disable a specific port



*NUMBER*  
Disable this port

### Defaults

Enabled.

### Example

```
ruckus(config-apgrp-port)# no lan 2  
ruckus(config-apgrp-port)#
```

### lan

To enable a LAN port on APs in an AP group, use the following command:

**lan** *NUMBER*

### Syntax Description

**lan**  
Enable a specific port

*NUMBER*  
Enable this port

### Defaults

Enabled.

### Example

```
ruckus(config-apgrp-port)# lan 2  
ruckus(config-apgrp-port)#
```

### lan uplink

To set port type, use the following command:

**lan** *NUMBER* **uplink** *WORD*

### Syntax Description

**lan**  
Configure a specific port

*NUMBER*  
Configure this port

**uplink**  
Set the port type

*WORD*  
Port type (Trunk port, Access port, General port)

## Configuring Master Settings

### Configure AP Group Commands

#### Defaults

All AP ports other than ZF 7025: Trunk

ZF 7025 port 5: Trunk

ZF 7025 LAN 1-LAN 4: Access

#### Example

```
ruckus(config-apgrp)# model zf7962 port-setting
ruckus(config-apgrp-port)# lan 2 uplink access
ruckus(config-apgrp-port)# show
PORTS:
LAN ID:
1:
Enable LAN = Yes
LAN Type= trunk
Untag ID= 1
Members= 1-4094
802.1X= disabled
DHCP opt82= Disabled
LAN ID:
2:
Enable LAN = Yes
LAN Type= access
Untag ID= 1
Members= 1
802.1X= disabled
DHCP opt82= Disabled
ruckus(config-apgrp-port)#
```

#### lan untag

To configure untag VLAN settings for a model-specific port, use the following command:

**lan** *NUMBER* **untag** *NUMBER*

#### Syntax Description

##### lan untag

Configure port untag VLAN

##### *NUMBER*

Configure this port

##### *NUMBER*

Set untag VLAN to this number

#### Defaults

1

#### Example

```
ruckus(config-apgrp-port)# lan 2 untag 20
ruckus(config-apgrp-port)#
```

## lan member

To set the LAN port VLAN membership (only General ports have configurable membership; Trunk ports are members of all VLANs, and Access port membership must be the same as the Untag VLAN), use the following command:

```
lan NUMBER member NUMBER
```

### Syntax Description

#### lan member

Set the LAN port VLAN membership

#### NUMBER

Specify the LAN port to configure

#### NUMBER

Set the VLAN membership (1~4094, range separated by hyphen, multiple VLANs separated by commas)

### Defaults

1

### Example

```
ruckus(config-apgrp-port)# lan 2 uplink general
ruckus(config-apgrp-port)# lan 2 member 1-10,100,200
ruckus(config-apgrp-port)# show
PORTS:
LAN ID:
1:
Enable LAN = Yes
LAN Type= trunk
Untag ID= 1
Members= 1-4094
802.1X= disabled
DHCP opt82= Disabled
LAN ID:
2:
Enable LAN = Yes
LAN Type= general
Untag ID= 20
Members= 1-10,100,200
802.1X= disabled
DHCP opt82= Disabled
ruckus(config-apgrp-port)#
```

## lan opt82

To enable or disable DHCP option 82 for a LAN port, use the following command:

```
lan NUMBER opt82 [ enable | disable ]
```

### Syntax Description

#### lan opt82

Enable or disable DHCP option 82

#### enable

Enable option 82

## Configuring Master Settings

### Configure AP Group Commands

#### **disable**

Disable option 82

#### **Defaults**

Disabled

#### **Example**

```
ruckus(config-apgrp-port)# lan 2 opt82 enable
ruckus(config-apgrp-port)#
```

#### **dot1x**

To enable 802.1X on ports of all APs of a specific model in an AP group, use the following command:

**model WORD dot1x**

**lan NUMBER dot1x [ disable | supplicant | auth-port-based | auth-mac-based | guest-vlan NUMBER | dvlan ]**

#### **Syntax Description**

##### **lan dot1x**

Configure 802.1X settings for this port

##### **NUMBER**

LAN port number to configure

##### **disable**

Disable 802.1X

##### **supplicant**

Configure this LAN port as an 802.1X supplicant

##### **auth-port-based**

Configure this LAN port as an 802.1X authenticator (port-based)

##### **auth-mac-based**

Configure this LAN port as an 802.1X authenticator (MAC-based)

#### **Defaults**

Disabled

#### **Example**

```
ruckus(config-apgrp)# model zf7025 port-setting
ruckus(config-apgrp-port)# lan 1 dot1x supplicant
ruckus(config-apgrp-port)# show
PORTS:
LAN ID:
1:
Enable LAN = Yes
LAN Type= access
Untag ID= 1
Members= 1
```

```
802.1X= supp  
DHCP opt82= Disabled
```

### **dot1x authsvr**

To configure 802.1X authentication server, use the following command:

```
dot1x authsvr WORD
```

#### **Syntax Description**

```
dot1x authsvr  
Configure 802.1X authentication server  
  
WORD  
Name of AAA server
```

#### **Defaults**

None

#### **Example**

```
ruckus(config-apgrp-port)# dot1x authsvr radius  
ruckus(config-apgrp-port)#
```

### **dot1x acctsvr**

To configure 802.1X accounting server, use the following command:

```
dot1x acctsvr WORD
```

#### **Syntax Description**

```
dot1x acctsvr  
Configure 802.1X accounting server  
  
WORD  
Name of AAA server
```

#### **Defaults**

None

#### **Example**

```
ruckus(config-apgrp-port)# dot1x acctsvr radius-acct  
ruckus(config-apgrp-port)#
```

### **dot1x mac-auth-bypass**

To configure 802.1X MAC authentication bypass, use the following command:

```
dot1x mac-auth-bypass
```

### Syntax Description

**dot1x mac-auth-bypass**  
Enable 802.1X MAC authentication bypass

### Defaults

Disabled

### Example

```
ruckus(config-apgrp-port)# dot1x mac-auth-bypass  
ruckus(config-apgrp-port)#
```

### *dot1x supplicant username*

To configure 802.1X supplicant user name, use the following command:

**dot1x supplicant username WORD**

### Syntax Description

**dot1x supplicant username**  
Configure 802.1X supplicant user name

**WORD**  
Set the 802.1X supplicant user name

### Defaults

None

### Example

```
ruckus(config-apgrp-port)# dot1x supplicant username johndoe  
ruckus(config-apgrp-port)#
```

### *dot1x supplicant password*

To configure 802.1X supplicant password, use the following command:

**dot1x supplicant password WORD**

### Syntax Description

**dot1x supplicant password**  
Configure 802.1X supplicant password

**WORD**  
Set the 802.1X supplicant password

## Defaults

None

## Example

```
ruckus(config-apgrp-port)# dot1x supplicant password test123  
ruckus(config-apgrp-port)#
```

## *dot1x supplicant mac*

To set the 802.1X supplicant user name and password as the AP's MAC address, use the following command:

**dot1x supplicant mac**

## Syntax Description

**dot1x supplicant mac**

Set the supplicant user name and password as the AP's MAC address

## Defaults

None

## Example

```
ruckus(config-apgrp-port)# dot1x supplicant mac  
ruckus(config-apgrp-port)#
```

## *no dot1x*

To disable 802.1X settings for an AP model, use the following command:

**no dot1x [ authsvr ] [ acctsvr ] [ mac-auth-bypass ]**

## Syntax Description

**no dot1x**

Disable dot1x settings for the AP

**authsvr**

Disable authentication server

**acctsvr**

Disable accounting server

**mac-auth-bypass**

Disable MAC authentication bypass

## Defaults

None

## Configuring Master Settings

### Configure AP Group Commands

#### Example

```
ruckus(config-apgrp-port)# no dot1x authsvr  
ruckus(config-apgrp-port)#
```

#### *lan guest-vlan*

To set the AP port to use the specified guest VLAN ID(1-4094), use the following command:

```
lan NUMBER guest-vlan WORD
```

#### *lan dvlan*

To enable/disable dynamic VLAN for the AP port, use the following command:

```
lan NUMBER dvlan [ enabled | disabled ]
```

#### *lan qos*

To set the AP port QoS settings, use the following command:

```
lan NUMBER qos
```

#### *lan qos mld-snooping*

To enable MLD snooping for the port, use the following command:

```
lan NUMBER qos mld-snooping
```

#### *lan qos igmp-snooping*

To enable IGMP snooping for the port, use the following command:

```
lan NUMBER qos igmp-snooping
```

#### *lan qos directed-mcast*

To enable Directed Multicast for the port, use the following command:

```
lan NUMBER qos directed-mcast
```

#### *no lan qos*

To disable QoS settings for the port, use the following command:

```
no lan NUMBER qos
```

#### *no lan qos mld-snooping*

To disable MLD snooping on the port, use the following command:

```
no lan NUMBER qos mld-snooping
```



### ***no lan qos igmp-snooping***

To disable IGMP snooping on the port, use the following command:

```
no lan NUMBER qos igmp-snooping
```

### ***no lan qos directed-mcast***

To disable Directed Multicast on the port, use the following command:

```
no lan NUMBER qos directed-mcast
```

### ***no dot1x***

To disable 802.1x settings for the port, use the following command:

```
no dot1x
```

### ***no dot1x authsvr***

To disable the authentication server settings, use the following command

```
no dot1x authsvr
```

### ***no dot1x acctsvr***

To disable the accounting server settings, use the following command:

```
no dot1x acctsvr
```

### ***no dot1x mac-auth-bypass***

To disable MAC authentication bypass, use the following command:

```
no dot1x mac-auth-bypass
```

## LLDP Commands

To enable, disable or configure the Link Layer Discovery Protocol (LLDP) commands for the AP group, use the following commands from within the **config-apgrp** context.

### *lldp*

To enable, disable or configure the AP group's Link Layer Discover Protocol settings, use the following commands.

#### Syntax Description

**lldp**

Configure LLDP settings.

**enable**

Enable LLDP with current settings.

**disable**

Disable LLDP with current settings.

**interval** *NUMBER*

Set packet transmit interval in second(s).

**holdtime** *NUMBER*

Set amount of time receiving device should retain the information.

**ifname eth** *NUMBER*

Enter the AP port number.

**mgmt enable**

Enable LLDP management IP address of the AP.

**mgmt disable**

Disable LLDP management IP address of the AP.

#### Example

```
ruckus(config-apgrp)# lldp enable  
ruckus(config-apgrp)#
```

## **no lldp**

To allow ZoneDirector to modify AP's LLDP settings, use the following command:

```
no lldp keep-ap-settings
```

## **Syntax Description**

```
no lldp keep-ap-settings
```

## **Example**

```
ruckus(config-ap) # no lldp keep-ap-setting  
ruckus(config-ap) #
```

## Configuring Master Settings

### Configure AP Group Commands

#### *lldp keep-ap-setting*

To not let the controller modify the AP's LLDP settings, use the following command:

**lldp keep-ap-setting**

#### Example

```
ruckus(config-apgrp)# lldp keep-ap-setting  
ruckus(config-apgrp)#
```

## **no lldp keep-ap-setting**

To allow the controller to modify the AP's LLDP settings, use the following command:

**no lldp keep-ap-setting**

### **Example**

```
ruckus(config-apgrp)# no lldp keep-ap-setting  
ruckus(config-apgrp)#
```

## **power-mode**

To set the PoE mode of the AP, use the following command:

**model WORD power-mode WORD**

### **Syntax Description**

**model WORD**

Set the AP model.

**power-mode**

Set the AP's PoE power mode.

**auto**

Set the power mode to Auto.

**802.3af**

Set the power mode to 802.3af.

**802.3at**

Set the power mode to 802.3at.

### **Example**

```
ruckus(config-apgrp)# model R710 power-mode auto  
ruckus(config-apgrp)#
```

## **no power-mode-override**

To disable the override of the PoE mode, use the following command:

**no model WORD power-mode-override**

## **802.3af-txchain**

To set the number of 2.4 GHz radio transmit chains in 802.3af power mode for the AP, use the following command:

**model WORD 802.3af-txchain WORD**

### **Syntax Description**

**model WORD**

Set the AP model.

## Configuring Master Settings

### Configure AP Group Commands

#### **802.3af-txchain**

Set the number of 2.4 GHz radio chains.

**1**

Set the radio chains to 1.

**2**

Set the radio chains to 2.

**4**

Set the radio chains to 4.

#### Example

```
ruckus(config-apgrp)# model R710 802.3af-txchain 1
ruckus(config-apgrp)#
```

#### ***no 802.3af-txchain-override***

To disable the override of the 2.4 GHz radio transmit chains in 802.3af PoE mode, use the following command:

**no model WORD 802.3af-txchain-override**

## Bonjour Fencing Commands

Use the following commands to deploy a fencing policy to an AP group.

## bonjour-fencing

To enable or disable Bonjour fencing, or apply a fencing policy to an AP group, use the following command:

### Syntax

```
bonjour-fencing { enable | disable |[policy <NAME> ]
```

### Command Default

Disabled.

### Parameters

#### enable

Enables Bonjour fencing.

#### disable

Disables Bonjour fencing.

#### policy

Designates an existing fencing policy for the WLAN.

### Examples

```
ruckus(config-apgrp)# bonjour-fencing enable
Please choose a policy before bonjour-fencing is enabled!
ruckus(config-apgrp)# bonjour-fencing disable
ruckus(config-apgrp)# bonjour-fencing policy fence1
This bonjour fencing policy does not exist
ruckus(config-apgrp)#
```

## Configure Hotspot Redirect Settings

To configure Hotspot redirect settings, use the following command:

### hotspot\_redirect\_https

To enable Hotspot redirect, use the following command:

```
hotspot_redirect_https
```

#### Defaults

None.

#### Example

```
ruckus(config)# hotspot_redirect_https  
/bin/hotspot_redirect_https enable  
ruckus(config)#
```

### no hotspot\_redirect\_https

To disable Hotspot redirect, use the following command:

```
no hotspot_redirect_https
```

#### Defaults

None.

#### Example

```
ruckus(config)# no hotspot_redirect_https  
/bin/hotspot_redirect_https disable  
ruckus(config)#
```

### no blocked-client

To remove a blocked client from the blocked clients list, use the following command:

```
no blocked-client MAC
```

#### Defaults

None.

#### Example

```
ruckus(config)# no blocked-client dc:2b:61:13:f7:72  
The L2 ACL 'dc:2b:61:13:f7:72' has been deleted.  
ruckus(config)#
```



# Configure Layer 2 Access Control Commands

Use the layer2 access control commands to configure the Layer 2 Access Control List settings. To run these commands, you must first enter the **config-l2acl** context.

## acl

To create a new L2 ACL entry or update an existing entry, use the following command:

```
acl WORD
```

### Syntax Description

**acl**

Create a new ACL

**WORD**

Assign this name to the new ACL

### Defaults

None.

### Example

```
ruckus(config)# l2acl l2acl1  
The L2 ACL entry 'l2acl1' has been created.  
ruckus(config-l2acl)#
```

## no acl

To delete an L2 ACL, use the following command:

```
no acl WORD
```

### Syntax Description

**no acl**

Delete an existing ACL

**WORD**

Delete this ACL

### Defaults

None.

### Example

```
ruckus(config)# no l2acl l2acl1  
The L2 ACL 'l2acl1' has been deleted.  
ruckus(config)#
```

## abort

To exit the config-l2acl context without saving changes, use the following command:

```
abort
```

## end

To save changes, and then exit the config-l2acl context, use the following command:

```
end
```

### Example

```
ruckus(config-l2acl)# end
The L2 ACL entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## exit

To save changes, and then exit the config-l2acl context, use the following command:

```
exit
```

### Example

```
ruckus(config-l2acl)# exit
The L2 ACL entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## quit

To exit the config-l2acl context without saving changes, use the following command:

```
quit
```

### Example

```
ruckus(config-l2acl)# quit
No changes have been saved.
ruckus(config)#
```

## show

To displays the L2 ACL settings, use the show command. You must run this command from within the config-l2acl context.

```
show
```

### Example

```
ruckus(config-l2acl)# show
L2/MAC ACL:
```

```
ID:
:
Name= l2acl1
Description=
Restriction= Deny only the stations listed below
Stations:
  MAC Address= 00:11:22:33:44:55

ruckus(config-l2acl)#
```

## name

To rename an L2 ACL entry, use the following command:

```
name WORD
```

### Syntax Description

**name**

Sets the L2 ACL entry name.

**WORD**

Rename the ACL to this name.

### Defaults

None.

### Example

```
ruckus(config)# l2acl l2acl1
The L2 ACL entry 'l2acl1' has been created.
ruckus(config-l2acl)# name L2-ACL-1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-l2acl)#
```

## description

To set the description of an L2 ACL entry, use the following command (multiple word text must be enclosed in quotation marks):

```
description WORD
```

### Syntax Description

**description WORD**

Set the L2 ACL description.

### Defaults

None.

### Example

```
ruckus(config)# l2acl l2acl1
The L2 ACL entry 'l2acl1' has been created.
```

## Configuring Master Settings

### Configure Layer 2 Access Control Commands

```
ruckus(config-l2acl)# description "L2 ACL 1"  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-l2acl)#
```

## add-mac

To add a MAC address to the L2 ACL, use the following command:

```
add-mac MAC
```

### Syntax Description

#### **add mac**

Add a MAC address to the ACL

#### MAC

Add this MAC address

### Defaults

None.

### Example

```
ruckus(config-l2acl)# add-mac 00:11:22:33:44:55  
The station '00:11:22:33:44:55' has been added to the ACL.  
ruckus(config-l2acl)#
```

## mode allow

To set the ACL mode to 'allow', use the following command:

```
mode allow
```

### Syntax Description

#### **mode allow**

Set the ACL mode to allow

### Defaults

None.

### Example

```
ruckus(config-l2acl)# mode allow  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-l2acl)#
```

## mode deny

To set the ACL mode to 'deny', use the following command:

**mode deny**

### Syntax Description

**mode deny**

Set the ACL mode to deny

### Defaults

None.

### Example

```
ruckus(config-l2acl)# mode deny
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-l2acl)#
```

## del-mac

To delete a MAC address from an L2 ACL, use the following command:

**del-mac** MAC

### Syntax Description

**del-mac**

Delete a MAC address from the ACL

MAC

**Delete this MAC**

### Defaults

None.

### Example

```
ruckus(config-l2-acl)# del-mac 00:01:02:34:44:55
The station '00:01:02:34:44:55' has been removed from the ACL.
ruckus(config-l2-acl)# del-mac 00:01:02:34:44:55
The station '00:01:02:34:44:55' could not be found. Please check the spelling, and then try again.
```

## Configure Layer 3 Access Control Commands

Use the **l3acl** commands to configure the Layer 3 Access Control List settings. To run these commands, you must first enter the **config-l3acl** context.

### l3acl

To enter the config-l3acl context, run this command:

```
l3acl WORD
```

#### Syntax Description

**l3acl**

Create or configure a Layer 3 Access Control List

**WORD**

Name of the L3 ACL

#### Defaults

None.

#### Example

```
ruckus(config)# l3acl "ACL 1"  
The L3/L4/IP ACL entry 'ACL 1' has been created.  
ruckus(config-l3acl)#
```

### no l3acl

To delete an L3/L4 ACL entry, use the following command:

```
no l3acl WORD
```

#### Syntax Description

**no l3acl**

Delete a Layer 3 ACL

**WORD**

Name of the L3 ACL

#### Defaults

None.

#### Example

```
ruckus(config)# no l3acl "ACL test"  
The L3/L4/IP ACL 'ACL test' has been deleted.  
ruckus(config)#
```

## abort

To exit the config-l3acl context without saving changes, use the following command:

**abort**

### Example

```
ruckus(config-l3acl)# abort
No changes have been saved.
ruckus(config)#
```

## end

To save changes, and then exit the config-l3acl context, use the following command:

**end**

### Example

```
ruckus(config-l3acl)# end
The L3/L4/IP ACL entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## exit

To save changes, and then exit the config-l3acl context, use the following command:

**exit**

### Example

```
ruckus# config-l3acl
ruckus(config-l3acl)# exit
Your changes have been saved.
```

## quit

To exit the config-l3acl context without saving changes, use the following command:

**quit**

### Example

```
ruckus(config-l3acl)# quit
No changes have been saved.
ruckus(config)#
```

## show

To display the L3ACL settings, use the show command. You must run this command from within the config-l3acl context.

**show**

## Configuring Master Settings

### Configure Layer 3 Access Control Commands

#### Example

```
ruckus(config-l3acl)# show
L3/L4/IP ACL:
ID:
3:
Name= test_newname
Description= justfortestCLI
Default Action if no rule is matched= Deny all by default
Rules:
Order= 1
Description=
Type= Allow
Destination Address= Any
Destination Port= 53
Protocol= Any
Order= 2
Description=
Type= Allow
Destination Address= Any
Destination Port= 67
Protocol= Any
```

#### name

To set the name of an L3/L4/IP ACL entry, use the following command:

```
name WORD
```

#### Syntax Description

**name**

Set the name of an L3/L4/IP ACL entry

WORD

Name of the L3/L4/IP ACL entry

#### Defaults

None.

#### Example

```
ruckus(config-l3acl)# name test_newname
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

#### description

To set the description of an L3/L4/IP ACL entry, use the following command (multiple word text must be enclosed in quotes):

```
description WORD
```

#### Syntax Description

**description**

Set the L3/L4/IP ACL entry description



WORD

Set to this description

### Defaults

None.

### Example

```
ruckus(config-l3acl)# description justfortestCLI  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## mode allow

To set the ACL mode to 'allow', use the following command:

```
mode allow
```

### Syntax Description

**mode**

Set the ACL mode

**allow**

Set the mode to 'allow'

### Defaults

None.

### Example

```
ruckus(config-l3acl)# mode allow  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## mode deny

To set the ACL mode to 'deny', use the following command:

```
mode deny
```

### Syntax Description

**mode**

Set the ACL mode

**deny**

Set the mode to 'deny'

## Configuring Master Settings

### Configure Layer 3 Access Control Commands

#### Defaults

None.

#### Example

```
ruckus(config-l3acl)# mode deny
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## rule-order

To create or modify a rule in the L3/L4/IP ACL, use the following command:

```
rule-order NUMBER
```

#### Syntax Description

##### **rule-order**

Create a new rule or modify an existing one

##### NUMBER

Create or modify this rule ID

#### Defaults

None.

#### Example

For example, to set the current rule as the third ACL rule to apply, use the following command:

```
ruckus(config-l3acl)# rule-order 3
ruckus(config-l3acl-rule)#
```

### *source address*

To set the source address of a L3/L4/IP ACL rule, use the following command:

**source address <IP-ADDR/WORD>**

### **Example**

```
ruckus(config-l3acl-rule)# source address 192.168.0.1/24  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-l3acl-rule)#
```

## Configuring Master Settings

### Configure Layer 3 Access Control Commands

#### **source port**

To set the source port of a L3/L4/IP ACL rule, use the following command:

```
source port <NUMBER/WORD>
```

#### **Example**

```
ruckus(config-l3acl-rule)# source port 880  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-l3acl-rule)#
```

#### **no rule-order**

To delete a rule from the L3/L4/IP ACL, use the following command:

```
no rule-order NUMBER
```

#### **Syntax Description**

##### **no rule-order**

Delete a rule from the L3/L4/IP ACL

##### NUMBER

Delete this rule ID

#### **Defaults**

None.

#### **Example**

```
ruckus(config-l3acl)# no rule-order 3  
The rule '3' has been removed from the ACL.
```

## Layer 3 Access Control Rule Commands

Use the **l3acl-rule** commands to configure the Layer 3/Layer 4/IP Access Control List rules. To run these commands, you must first enter the **config-l3acl-rule** context. To enter the **config-l3acl-rule** context, run this command:

```
rule-order NUMBER
```

### **end**

To save changes, and then exit the config-l3acl-rule context, use the following command:

```
end
```

### **exit**

To save changes, and then exit the config-l3acl-rule context, use the following command:

```
exit
```

### **order**

To set the L3/L4/IP ACL rule order, use the following command:

```
order NUMBER
```

### **Example**

```
ruckus(config-l3acl-rule)# order 1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-l3acl-rule)#
```

### **description**

To set the description of an L3/L4/IP ACL rule, use the following command (multiple word text must be enclosed in quotes):

```
description WORD
```

### **Syntax Description**

#### **description**

Set the L3/L4/IP ACL rule description

WORD

Set to this description

### **Defaults**

None.

### **Example**

```
ruckus(config-l3acl-rule)# description thirdl3rule  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## Configuring Master Settings

### Configure Layer 3 Access Control Commands

#### **type allow**

To set the ACL rule type to 'allow', use the following command:

**type allow**

#### **Syntax Description**

**type**

Set the ACL rule type

**allow**

Set the rule type to 'allow'

#### **Defaults**

None.

#### **Example**

```
ruckus(config-l3acl-rule)# type allow
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

#### **type deny**

To set the ACL rule type to 'deny', use the following command:

**type deny**

#### **Syntax Description**

**type**

Set the ACL rule type

**deny**

Set the rule type to 'deny'

#### **Defaults**

None.

#### **Example**

```
ruckus(config-l3acl-rule)# type deny
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

#### **destination address**

To set the destination address of the rule, use the following command:

**destination address** *IP-ADDR/WORD*

## Syntax Description

### **destination address**

Set the destination address of the rule

*IP-ADDR/WORD*

Set the destination to this IP address

## Defaults

None.

## Example

```
ruckus(config-l3acl-rule)# destination address 192.168.1.22
The destination IP address is invalid. Please enter 'Any' or check the IP address (for example:
192.168.0.1/24), and then please try again.
ruckus(config-l3acl-rule)# destination address 192.168.1.22/24
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## *destination port*

To set the destination port of the rule, use the following command:

**destination port** *NUMBER/WORD*

## Syntax Description

### **destination port**

Set the destination port of the rule

*NUMBER/WORD*

Set the destination to this port number

## Defaults

None.

## Example

```
ruckus(config-l3acl-rule)# destination port 580
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## *protocol*

To set the protocol for the rule, use the following command:

**protocol** *NUMBER/WORD*

## Syntax Description

### **protocol**

Set the protocol for the rule

## Configuring Master Settings

### Configure Layer 3 Access Control Commands

NUMBER/WORD

Set to this protocol

#### Defaults

None.

#### Example

```
ruckus(config-l3acl-rule)# protocol tcp
The protocol must be a number between 0 and 254.
ruckus(config-l3acl-rule)# protocol Any
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

#### show

To display L3/L4/IP ACL settings, use the following command:

**show**

#### Example

```
ruckus(config-l3acl)# show
L3/L4/IP ACL:
  ID:
  :
  Name= l3acl1
  Description=
  Default Action if no rule is matched= Deny all by default
  Rules:
    1:
      Description=
      Type= Allow
      Destination Address= 192.168.1.22/24
      Destination Port= 53
      Protocol= Any
    2:
      Description=
      Type= Allow
      Destination Address= Any
      Destination Port= 67
      Protocol= Any

ruckus(config-l3acl)#
```



# Configure Precedence Policy Commands

Use the **prece** commands to configure precedence policy settings. Precedence policies are used to define the order in which VLAN and rate limiting policies are applied when the WLAN settings, AAA server configuration or Device Policy settings conflict.

To run these commands, you must first enter the **config-prece** context.

## prece

To create or modify a precedence policy, use the following command:

```
prece WORD
```

Enters the config-prece context. To save changes and exit the context, type exit or end. To exit the context without saving changes, type abort.

## Example

```
ruckus(config)# prece precedencel  
The Precedence Policy entry 'precedencel' has been created.  
ruckus(config-prece)#
```

## no prece

To delete a precedence policy entry, use the following command:

```
no prece WORD
```

## end

To save changes, and then exit the config-prece context, use the following command:

```
end
```

## Example

```
ruckus(config-prece)# end  
The Precedence Policy entry has saved successfully.  
Your changes have been saved.  
ruckus(config)#
```

## exit

To save changes, and then exit the config-prece context, use the following command:

```
exit
```

## Example

```
ruckus(config-prece)# exit  
The Precedence Policy entry has saved successfully.  
Your changes have been saved.  
ruckus(config)#
```

## Configuring Master Settings

### Configure Precedence Policy Commands

## quit

To exit the config-prece context without saving changes, use the following command:

```
quit
```

### Example

```
ruckus(config-prece)# quit
No changes have been saved.
ruckus(config)#
```

## name

Sets the Precedence Policy entry name.

## description

Sets the Precedence Policy entry description.

## show

To display the precedence settings, use the show command from within the config-prece context.

```
show
```

### Example

```
ruckus(config-prece)# show
Precedence Policy:
  ID:
    2:
      Name= precedencel
      Description=
      Rules:
        1:
          Description=
          Attribute = vlan
          Order = AAA,Device Policy,WLAN
        2:
          Description=
          Attribute = rate-limit
          Order = AAA,Device Policy,WLAN

ruckus(config-prece)#
```

## Configure Precedence Policy Rule Commands

Use the following commands to configure precedence policy rules.

### rule

Creates a new Precedence Policy rule or modifies an existing entry rule. Enters the config-prece-rule context.

**rule** *NUMBER*

### Syntax Description

#### rule

Create a rule and enter the rule creation context.

#### *NUMBER*

Enter the rule number (1-2). Each precedence policy can have up to two rules.

#### description

Sets the Precedence Policy rule description.

#### order *WORD*

Sets the order of a Precedence Policy rule. The default order is AAA, Device Policy, WLAN.

#### show

Displays precedence policy settings.

### Example

```
ruckus(config)# prece precedencel
The Precedence Policy entry 'precedencel' has been created.
ruckus(config-prece)# rule 1
ruckus(config-prece-rule)# order "Device Policy" "WLAN" "AAA"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-prece-rule)# end
ruckus(config-prece)# show
Precedence Policy:
  ID:
  :
  Name= precedencel
  Description=
  Rules:
    1:
      Description=
      Attribute = vlan
      Order = Device Policy,WLAN,AAA
    2:
      Description=
      Attribute = rate-limit
      Order = AAA,Device Policy,WLAN

ruckus(config-prece)#
ruckus(config-prece)# end
The Precedence Policy entry has saved successfully.
Your changes have been saved.
```

## Configuring Master Settings

### Configure Precedence Policy Commands

#### *description*

To set the Precedence Policy rule description, use the following command:

**description**

#### **Example**

```
ruckus(config-prece-rule)# description "Default precedence policy"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-prece-rule)#
```

#### *order*

To set the order of the precedence policy, use the following command from within the config-prece-rule context.

**order <WORD>**

#### **Syntax Description**

<WORD>: Enter the order of Precedence Policy (for example, "AAA" "Device Policy" "WLAN").

#### **Example**

```
ruckus(config-prece-rule)# order "AAA" "Device Policy" "WLAN"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-prece-rule)#
```

# Configure Device Policy Commands

Use the device policy commands to configure access control and rate limiting policies based on client type. To run these commands, you must first enter the **config-dvc-pcy** context.

## dvcpcy

To create a device policy or edit an existing device policy, enter the following command:

**dvcpcy** *WORD*

### Syntax Description

#### **show**

Display device policy settings.

#### **name** *WORD*

Set the device policy entry name.

#### **description** *WORD*

Sets the device policy entry description.

#### **mode** *WORD*

Sets the device policy entry default mode (allow or deny).

#### **no** *NUMBER*

Delete a rule.

#### **rule** *NUMBER*

Create or modify a rule. Enter the config-dvc-pcy-rule context. You can create up to nine rules per access policy (one for each OS/Type).

### Defaults

None.

### Example

```
ruckus(config)# dvcpcy devpcy1
The Device Policy entry 'devpcy1' has been loaded. To save the Device Policy entry, type end or exit.
ruckus(config-dvc-pcy)# name device_policy_1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-pcy)# description "deny iOS"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-pcy)# rule 1
ruckus(config-dvc-pcy-rule)# type deny
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-pcy-rule)# devinfo "Apple IOS"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-pcy-rule)# vlan none
The command was executed successfully. To save the changes, type 'end' or 'exit'.

ruckus(config-dvc-pcy-rule)# rate-limit uplink 10 downlink 10
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-pcy-rule)# end
ruckus(config-dvc-pcy)# show
Device Policy:
  ID:
```

## Configuring Master Settings

### Configure Device Policy Commands

```
1:
  Name= device_policy_1
  Description= deny iOS
  Default Mode= deny
  Rules:
    1:
      Description=
      OS/Type = Apple iOS
      Type= deny
      VLAN = Any
      Rate Limiting Uplink = 10.00Mbps
      Rate Limiting Downlink = 10.00Mbps

ruckus(config-dvc-pcy)# end
The Device Policy entry has saved successfully.
Your changes have been saved.
ruckus(config)# show dvcpcy
Device Policy:
  ID:
    2:
      Name= device_policy_1
      Description= deny iOS
      Default Mode= deny
      Rules:
        1:
          Description=
          OS/Type = Apple iOS
          Type= deny
          VLAN = Any
          Rate Limiting Uplink = 10.00Mbps
          Rate Limiting Downlink = 10.00Mbps

ruckus(config)#
```

## no dvcpcy

To delete a device policy, use the following command:

**no dvcpcy** *WORD*

## rule

Use the rule command from within the config-dvc-pcy context to create or edit a device policy rule and enter the config-dvc-pcy-rule context. Up to 9 rules can be created per device policy.

### Syntax Description

#### **rule**

Create or edit a device policy rule. Enter the config-dvc-pcy-rule context.

#### **description** *WORD*

Set the Device Policy rule description.

#### **dvctype** *WORD*

Sets the device type of a Device Policy rule.

#### **osvendor** *WORD*

Sets the os vendor of a Device Policy rule.

#### **type** *WORD*

Set the device policy rule type (allow or deny).

**vlan NUMBER**

Set the VLAN ID to the number specified or "none."

**rate-limit uplink NUMBER downlink NUMBER**

Set the rate limiting uplink and downlink speeds in mbps.

**no rate-limit**

Set rate limiting to disabled.

**Example**

```
ruckus(config-dvc-psy)# rule 2
ruckus(config-dvc-psy-rule)# description "rate limit gaming devices"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-psy-rule)# devinfo "Gaming"
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-psy-rule)# type allow
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-psy-rule)# vlan none
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-psy-rule)# rate-limit uplink 0.1 downlink 0.1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-dvc-psy-rule)# end
ruckus(config-dvc-psy)# show
Device Policy:
  ID:
    2:
      Name= device_policy_1
      Description= deny iOS
      Default Mode= deny
      Rules:
        1:
          Description=
          OS/Type = Apple iOS
          Type= deny
          VLAN = Any
          Rate Limiting Uplink = 10.00Mbps
          Rate Limiting Downlink = 10.00Mbps
        2:
          Description= rate limit gaming devices
          OS/Type = Gaming
          Type= allow
          VLAN = Any
          Rate Limiting Uplink = 0.10Mbps
          Rate Limiting Downlink = 0.10Mbps

ruckus(config-dvc-psy)#
```

## Configure Application Policy Commands

Use the following commands to create or modify application policies.

### app-policy

To create a new application policy or modify an existing policy, use the following command:

**app-policy** WORD

#### Syntax Description

app-policy: Creates a new Application Policy entry or modifies an existing entry.

<WORD>: Enter a name for the application policy.

#### Example

```
ruckus(config)# app-policy policy1  
The Application Policy entry 'policy1' has been created.  
ruckus(config-app-policy)#
```

### no app-policy

To delete an Application Policy entry, use the following command:

**no app-policy** WORD

#### Example

```
ruckus(config)# no app-policy policy1  
The Application Policy 'policy1' has been deleted.  
ruckus(config)#
```



## description

To set the description for the policy, use the following command:

```
description <WORD>
```

### Example

```
ruckus(config-app-policy)# description "Block Facebook"  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-app-policy)#
```

## show

To display the application policy settings, use the show command from within the config-app-policy context.

```
show
```

### Example

```
ruckus(config-app-policy)# show  
Application Policy:  
  ID:  
  :  
  Name= policy1  
  Description=  
  Rules:  
    1:  
      Rule Type= Denial Rules  
      Application Type= System Defined  
      Category= Social networks  
      Application= Facebook  
  
ruckus(config-app-policy)#
```

## Configure Application Policy Rules

Use the following commands to configure application policy rules.

### **rule**

Creates a new application policy rule or modifies an existing entry. Enters the *config-app-policy-rule* context.

**rule** NUMBER

### **Syntax Description**

**rule**: Create or modify an application policy rule.

<NUMBER>: Enter a rule ID.

### **Example**

```
ruckus(config-app-policy)# rule 1  
ruckus(config-app-policy-rule)#
```

### **no rule**

To delete a rule, use the following command:

**no rule** NUMBER

### **rule-type**

To set the application policy rule type, use the following command:

**rule-type**<WORD>

### **Syntax Description**

**rule-type**: Sets Application Policy rule type.

<WORD>: Enter rule type(Denial Rules | QoS | Rate Limiting).

### **Example**

```
ruckus(config-app-policy-rule)# rule-type Denial Rules  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-app-denial-rule)#
```

### **application-type**

To set the application type, use the following command:

**application-type**<WORD>

### **Syntax Description**

**application-type**: Sets Application Policy rule application type.

<WORD>: Enter application type ("System Defined" or "Port base User Defined Application" or "IP base User Defined Application" or "Application name").

### Example

```
ruckus(config-app-denial-rule)# application-type System Defined
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-app-denial-rule)#
```

### category

To set the application category, use the following command:

```
category<WORD>
```

### Syntax Description

category: Sets Application Policy rule application category.

<LIST>: Enter application name: [Instant messengers|Peer-to-peer networks|File sharing services and tools|Media streaming services|Email messaging services|VoIP services|Database tools|Online games|Management tools and protocols|Remote access terminals|Tunneling and proxy services|Investment platforms|Web services|Security update tools|Web instant messengers|Business tools|Network protocols (18)|Network protocols (19)|Network protocols (20)|Private protocols|Social networks]

### Example

```
ruckus(config-app-denial-rule)# category Social networks
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-app-denial-rule)#
```

### application

To set the application, use the following command:

```
application<WORD>
```

### Syntax Description

category: Sets Application Policy rule application name.

<LIST>: |Classmates|Yik Yak|Facebook|Flickr|Hi5|LinkedIn|Livejournal|Twitter|Plurk|MySpace|Khan Academy|Pinterest|Tumblr|MeetMe|VKontakte|Odnoklassniki|Niwota|Tagged|PerfSpot|Me2day|Mekusharim|Draugiem|Badoo|Meetup|Foursquare|Ning|i-Part/iPair|Dudu|Mig33|Hatena|eHarmony|Fotolog|Tencent QQ|Pixnet|Nk.Pl|Twoo|Plaxo|Cyworld|Jivesoftware|WordPress|FMyLife|Dcinside|Class Chinaren|Bai Sohu|Yammer|Douban|Gamer|Xuite|ChatMe|Clien.net|AdultFriendFinder|Fling.com|Delicious|Mei.fm|Streetlife|Daum-blog|Naver-blog|Panoramio|Blogger|FC2|Yahoo Blog|Friendster|Ameba|Bebo social network|Kaixin|Orkut|Aol-Answers|CoolTalk social network|RenRen.com|TweetDeck|Hootsuite|Xing|Lokalisten|meinVZ/studiVZ|Viadeo|Tuenti|Hyves|Mixi.jp|Yahoo-mbga.jp|GREE|Netlog|2ch|LoveTheseCurves|Weibo|Google+|Skyrock|51.com|Jackd|Touch|Skout|Instagram|Jiayuan|Zoosk|DatingDNA|500px|iAround|pairs|Path|WeHeartIt|Fancy|Vine|SnappyTV|Miliiao|After School|Weico|

### Example

```
ruckus(config-app-denial-rule)# application Facebook
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-app-denial-rule)#
```

## Configuring User-Defined Applications

Use the following commands to configure user-defined IP-based applications. Once created, user-defined applications can be controlled using the application policy commands.

### *user-app-ip*

To configure IP-based user-defined application settings, and enter the config-user-app-ip context, use the following command:

**user-app-ip**

### Example

```
ruckus(config)# user-app-ip Application1
The User Defined Application entry Application1 has been created.
ruckus(config-user-app-ip)#
```

### *no user-app-ip*

To delete a user-defined application entry, use the following command:

**no user-app-ip***WORD*

### Example

```
ruckus(config)# no user-app-ip Application1
The policy 'Application1' has been removed .
ruckus(config)#
```

### *abort*

Exits the config-user-app-ip context without saving changes.

### *end*

Saves changes, and then exits the config-user-app-ip context.

### *exit*

Saves changes, and then exits the config-user-app-ip context.

### *destination-IP*

To set the destination address of a user-defined application entry, use the following command:

**destination-IP** *IP-ADDR*

### Example

```
ruckus(config-user-app-ip)# destination-IP 192.168.40.3
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-ip)#
```

## netmask

To set the netmask of a user-defined application, use the following command:

**netmask** *IP-ADDR*

### Example

```
ruckus(config-user-app-ip)# netmask 255.255.255.0
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-ip)#
```

## destination-port

To set the destination port of a user-defined Application, use the following command:

**destination-port** *NUMBER*

### Example

```
ruckus(config-user-app-ip)# destination-port 883
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-ip)#
```

## protocol

To set the protocol of a user-defined application, use the following command:

**protocol** *WORD*

### Example

```
ruckus(config-user-app-ip)# protocol tcp
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-ip)#
```

## application-name

To set the name the application, use the following command:

**application** *WORD*

### Example

```
ruckus(config-user-app-ip)# application-name Blocked-Application-1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-ip)#
```

## Configuring User-Defined Applications Based on Port Mapping

Use the following commands to configure user-defined applications based on port mapping. Once configured, these user-defined applications can be controlled using the application policy commands.

### *user-app-port*

Configures port-based user-defined application settings. Enters config-user-app-port context.

#### Example

```
ruckus(config)# user-app-port Application2
The Application Port Mapping entry Application2 has been created.
ruckus(config-user-app-port)#
```

### *no user-app-port*

To delete a port-based user-defined application, use the following command:

**no user-app-port WORD**

#### Example

```
ruckus(config)# no user-app-port userappl
The policy 'userappl' has been removed .
ruckus(config)#
```

### *abort*

Exits the config-user-app-port context without saving changes.

### *end*

Saves changes, and then exits the config-user-app-port context.

### *exit*

Saves changes, and then exits the config-user-app-port context.

### *port*

To set the Port of the port-based application, use the following command:

**port NUMBER**

#### Example

```
ruckus(config-user-app-port)# port 443
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-port)#
```

## **protocol**

To set the Protocol for the port-based user-defined Application, use the following command:

**protocol** WORD

### **Example**

```
ruckus(config-user-app-port)# protocol tcp
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-port)#
```

## **application-name**

To set the application name, use the following command:

**application-name**<WORD>

### **Example**

```
ruckus(config-user-app-port)# application-name Application2
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-user-app-port)#
```

# **Configure Wi-Fi Calling Settings**

Use the following commands to configure Wi-Fi calling settings.

## **wificalling**

To configure Wi-Fi Calling with the specified profile name, use the following command:

**wificalling** enable profile <WORD>

### **Defaults**

None

### **Example**

```
ruckus(config)# wificalling profile1
The WIFI Calling "profile1" has been created.
ruckus(config-wifi-calling)#
```

## **no wificalling**

To delete a WiFi Calling profile, use the following command:

**no wificalling** <WORD>

## Defaults

None

## Example

```
ruckus(config)# no wificalling profile1  
The WIFI Calling Policy 'profile1' has been deleted.  
ruckus(config)#
```

## description

To set the Wi-Fi Calling policy entry description, use the following command:

```
description <WORD>
```

## Example

```
ruckus(config-wifi-calling)# description "T-Mobile Wi-Fi Calling Profile"  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wifi-calling)#
```

## no description

To remove the Wi-Fi Calling policy entry description, use the following command:

```
no description
```

## Example

```
ruckus(config-wifi-calling)# no description  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wifi-calling)#
```

## priority

To set the Wi-Fi Calling profile's priority level, use the following command:

```
priority [voice | video | best-effort | background ]
```

## Example

```
ruckus(config-wifi-calling)# priority voice  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wifi-calling)#
```

## epdg domain

To set the Wi-Fi Calling EPDG domain name and IP address, use the following command:

```
epdg domain <WORD> ipv4 <WORD>
```

A maximum of five domain and IP address pairs can be configured.



### Example

```
ruckus(config-wifi-calling)# epdg domain TMobile ipv4 192.168.9.99
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wifi-calling)#
```

## no epdg domain

To delete the Wi-Fi Calling policy EPDG entry, use the following command:

```
no epdg domain <WORD> ipv4 <WORD>
```

### Example

```
ruckus(config-wifi-calling)# no epdg domain tmobile ipv4 192.168.33.99
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wifi-calling)#
```

## show

To display the current Wi-Fi Calling policy entry information, use the following command:

```
show
```

### Example

```
ruckus(config-wifi-calling)# show
:
WIFI Calling Carrier Name: profile1
WIFI Calling Priority: 1
WIFI Calling Domains: tmobile
WIFI Calling IP address:192.168.33.99
ruckus(config-wifi-calling)#
```

## Configure URL Filtering Settings

Use the following commands to configure URL Filtering settings.

### url-filtering

To configure a URL Filtering Profile and enter the *config-url-filtering* context, use the following command:

```
url-filteringNAME
```

#### Example

```
ruckus(config)# url-filtering filter1
The Url Filtering "filter1" has been created.
ruckus(config-url-filtering)#
help                               Shows available commands.
history                             Shows a list of previously run commands.
abort                               Exits the config-url-filtering context without saving changes.
end                                  Saves changes, and then exits the config-url-filtering-xxx context.
exit                                 Saves changes, and then exits the config-url-filtering-xxx context.
show                                 Displays the current Url Filtering settings.
no                                   Contains commands that can be executed from within the context.
description <WORD>                  Sets the Policy entry description.
filtering-level <WORD>
                                     Selects a filtering categories level.
blocked-category <list>
                                     Selects the blocked categories only for "CUSTOM" (for example: Abortion,
                                     Abused Drugs, Auctions).
create-blocklist <domain>
                                     Creates a new Blocklist.
delete-blocklist <domain>
                                     Deletes a exist Blocklist.
create-allowlist <domain>
                                     Creates a new Allowlist.
delete-allowlist <domain>
                                     Deletes a exist Allowlist.
google-safe-search                  Enables Google Safe Search.
google-ip <IP-ADDR>                 Configures Google Safe Search Virtual IP(216.239.38.120).
youtube-safe-search                 Enables YouTube Safe Search.
youtube-ip <IP-ADDR>
                                     Configures YouTube Safe Search Virtual IP(216.239.38.120).
bing-safe-search                    Enables Bing Safe Search.
bing-ip <IP-ADDR>                   Configures Bing Safe Search Virtual IP(204.79.197.220).
ruckus(config-url-filtering)#
```

### no url-filtering

To delete a URL Filtering Profile, use the following command:

```
no url-filteringNAME
```

#### Example

```
ruckus(config)# no url-filtering filter1
The policy 'filter1' has been removed .
ruckus(config)#
```

## description

To set the URL Filtering policy entry description, use the following command:

```
description <WORD>
```

### Example

```
ruckus(config-url-filtering)# description "Filter 1"  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## filtering-level

To select a filtering level category, use the following command:

```
filtering-levelNO_ADULT | CLEAN_AND_SAFE | CHILD_AND_STUDENT_FRIENDLY | STRICT | CUSTOM
```

### Example

```
ruckus(config-url-filtering)# filtering-level NO_ADULT  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## blocked-category

To select a blocked category (only for "CUSTOM" for example: Abortion, Abused Drugs, Auctions), use the following command:

```
blocked-categoryAbortion, Abused Drugs, Adult and Pornography, Alcohol and Tobacco, Auctions, Bot Nets, Business and Economy,  
Cheating, Computer and Internet Info, Computer and Internet Security, Confirmed SPAM Sources, Content Delivery Networks, Cult and  
Occult, Dating, Dead Sites, Dynamic Comment, Educational Institutions, Entertainment and Arts, Fashion and Beauty, Financial Services,  
Food and Dining, Gambling, Games, Government, Gross, Hacking, Hate and Racism, Health and Medicine, Home and Garden, Hunting and  
Fishing, Illegal, Image and Video Search, Internet Communications, Internet Portals, Job Search, Keyloggers and Monitoring, Kids, Legal,  
Local Information, Malware Sites, Marijuana, Military, Motor Vehicles, Music, News and Media, Nudity, Online Greeting cards, Open HTTP  
Proxies, Parked Domains, Pay to Surf, Peer to Peer, Personal Storage, Personal sites and Blogs, Philosophy and Political Advocacy, Phishing  
and Other Frauds, Private IP Addresses, Proxy Avoidance and Anonymizers, Questionable, Real Estate, Recreation and Hobbies, Reference  
and Research, Religion, SPAM URLs, Search Engines, Sex Education, Shareware and Freeware, Shopping, Social Networking, Society, Sports,  
Spyware and Adware, Stock and Advice Tools, Streaming Media, Swimsuits & Intimate Apparel, Training and Tools, Translation, Travel,  
Unconfirmed SPAM Sources, Violence, Weapons, Web Advertisements, Web Hosting, Web based Email
```

### Example

```
ruckus(config-url-filtering)# blocked-category Violence  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## create-blocklist

To create a new domain blocklist, use the following command:

```
create-blocklist<domain>
```

### Example

```
ruckus(config-url-filtering)# create-blocklist facebook.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## delete-blocklist

To delete a domain blocklist, use the following command:

```
delete-blocklist<domain>
```

### Example

```
ruckus(config-url-filtering)# delete-blocklist facebook.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## create-allowlist

To create a domain allowlist, use the following command:

```
create-allowlist<domain>
```

### Example

```
ruckus(config-url-filtering)# create-allowlist ruckuswireless.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## delete-allowlist

To delete a domain allowlist, use the following command:

```
delete-allowlist<domain>
```

### Example

```
ruckus(config-url-filtering)# delete-allowlist ruckuswireless.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## google-safe-search

To enable Google Safe Search, use the following command:

```
google-safe-search
```

### Example

```
ruckus(config-url-filtering)# google-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## no google-safe-search

To disable Google Safe Search, use the following command:

```
no google-safe-search
```

### Example

```
ruckus(config-url-filtering)# no google-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## google-ip

To configure Google Safe Search Virtual IP (default: 216.239.38.120), use the following command:

```
google-ip IP Address
```

### Defaults

```
216.239.38.120
```

```
google-ip IP Address
```

### Example

```
ruckus(config-url-filtering)# google-ip 216.239.38.120  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## youtube-safe-search

To enable Youtube Safe Search, use the following command:

```
youtube-safe-search
```

### Example

```
ruckus(config-url-filtering)# youtube-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## no youtube-safe-search

To disable Youtube Safe Search, use the following command:

```
no youtube-safe-search
```

### Example

```
ruckus(config-url-filtering)# no youtube-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## youtube-ip

To configure the YouTube Safe Search Virtual IP (default: 216.239.38.120), use the following command:

```
youtube-ip IP-ADDR
```

### Defaults

216.239.38.120

### Example

```
ruckus(config-url-filtering)# youtube-ip 216.239.38.120  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## bing-safe-search

To enable Bing Safe Search, use the following command:

```
bing-safe-search
```

### Example

```
ruckus(config-url-filtering)# bing-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## no bing-safe-search

To disable Bing Safe Search, use the following command:

```
no bing-safe-search
```

### Example

```
ruckus(config-url-filtering)# no bing-safe-search  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-url-filtering)#
```

## bing-ip

To configure the Bing Safe Search Virtual IP (default: 204.79.197.220), use the following command:

```
bing-ip IP-ADDR
```

### Defaults

204.79.197.220

## Example

```
ruckus(config-url-filtering)# ping-ip 204.79.197.220
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-url-filtering)#
```

## show

To display the current URL Filtering settings, use the following command:

**show**

## Example

```
ruckus(config-url-filtering)# show
:
  Url Name: filter1
  Filter Type: CUSTOM
  Number of Blocked Categories: 1
  Blocked Categories:
    Violence
  Blocklist-Domains:
    cisco.com
    facebook.com
  Allowlist-Domains:
    ruckuswireless.com
  Google Safe Search: Disabled
  YouTube Safe Search VIP: 216.239.38.120
  Bing Safe Search VIP: 204.79.197.220
ruckus(config-url-filtering)#
```

## Configure Allowlist Commands

Use the allowlist command to create a new client isolation allowlist or modify an existing allowlist, and enter the **config-allowlist** context.

### allowlist

To create a new allow list entry or modify an existing entry, use the following command:

```
allowlist WORD
```

### no allowlist

To delete a allowlist entry, use the following command:

```
no allowlist WORD
```

### name

To set the Allow List entry name, use the following command:

```
name WORD
```

### description

To set the description of the allowlist entry, use the following command:

```
description WORD
```

### auto\_discover

To enable or disable auto discover state of the client isolation allowlist, use the following command:

```
auto_discover enable | disable
```



## Configuring Allowlist Rules

Use the rule command from within the config-allowlist context to create a new rule or modify an existing rule, and enter the **config-allowlist-rule** context.

### *rule*

To create a new allowlist rule or modify an existing rule, use the following command:

**rule** *NUMBER*

### *no rule*

To delete a allowlist rule, use the following command:

**no rule** *NUMBER*

### *description*

To set the Allow List rule description, use the following command:

**description** *WORD*

### *mac*

To set the MAC address, use the following command (format: XX:XX:XX:XX:XX:XX):

**mac** *MAC*

### *ip*

To set the IP address, use the following command (format: 172.18.110.12).

**ip** *IP*

## Configure Band Balancing Commands

Client Band Balancing attempts to balance the number of clients across AP radios, allowing configurable thresholds for ratio of clients on the 2.4 vs. 5 GHz radio bands. Use the band-balancing commands to configure the controller's band balancing settings. To run these commands, you must first enter the **config-band-balancing** context.

### **band-balancing**

To enable load-balancing and enter the config-band-balancing context, use the following command:

```
band-balancing
```

### **abort**

Exits the band balancing context without saving changes.

### **end**

Saves changes, and then exits the band balancing context.

### **exit**

Saves changes, and then exits the band balancing context.

### **quit**

Exits the band balancing context without saving changes.

### **enable**

To enable band balancing, use the following command:

```
enable
```

### **Example**

```
ruckus(config-band-balancing)# enable  
The band balancing settings have been updated.  
ruckus(config-band-balancing)#
```

### **disable**

To disable band balancing, use the following command:

```
disable
```

### **Example**

```
ruckus(config-band-balancing)# disable  
The band balancing settings have been updated.  
ruckus(config-band-balancing)#
```

## Proactive

To enable or disable Proactive Band Balancing, use the following command:

**Proactive <NUMBER>**

## Syntax

<NUMBER>: 0 for disable, 1 for enable

## Example

```
ruckus(config-band-balancing)# proactive 0
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-band-balancing)#
```

## percent-2.4G <NUMBER>

To configure the percentage of clients on the 2.4 GHz band, use the following command:

**percent-2.4G <NUMBER>**

## Defaults

25

## Example

```
ruckus(config-band-balancing)# percent-2.4G 25
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-band-balancing)#
```

## show

Displays information about Band balancing.

## Example

```
ruckus(config-band-balancing)# show
Band Balancing:
  Enable= 1
  Percent of clients on 2.4G band: 25%
  Proactive Status= 1

ruckus(config-band-balancing)#
```

## Configure Load Balancing Commands

Client Load Balancing attempts to balance the number of clients across APs, per radio band. Use the **load-balancing** commands to configure the controller's load balancing settings. To run these commands, you must first enter the **config-load-balancing** context.

### load-balancing

To enable load-balancing and enter the config-load-balancing context, use the following command:

```
load-balancing
```

#### Example

```
ruckus(config)# load-balancing  
ruckus(config-load-balancing)#
```

### adj-threshold

To configure the adjacent threshold for load balancing, use the following command:

```
adj-threshold [ wifi0 | wifi1 ] NUMBER
```

#### Syntax Description

##### adj-threshold

Configure the adjacent threshold for load balancing

##### wifi0, wifi1

Configure this interface

##### NUMBER

Set the adjacent threshold value (1~100)

#### Defaults

Wifi0: 50

Wifi1: 43

#### Example

```
ruckus(config-load-balancing)# enable wifi0  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)# adj-threshold wifi0 25  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)# show  
Load Balancing:  
  Radio 0:  
    Status= Enabled  
    AdjacentThreshold= 25  
    WeakBypass= 33  
    StrongBypass= 55  
    ActivationThreshold= 10  
    NewTrigger= 3  
    Headroom= 3
```

```
Radio 1:  
  Status= Disabled  
  AdjacentThreshold= 43  
  WeakBypass= 35  
  StrongBypass= 55  
  ActivationThreshold= 10  
  NewTrigger= 3  
  Headroom= 3  
  
ruckus(config-load-balancing)#
```

## weak-bypass

To configure the weak bypass for load balancing, use the following command:

```
weak-bypass [ wifi0 | wifi1 ] NUMBER
```

### Syntax Description

**weak-bypass**  
Configure the weak bypass for load balancing

**wifi0, wifi1**  
Configure this interface

*NUMBER*  
Set the weak-bypass value (1~100)

### Defaults

wifi0: 33  
wifi1: 35

### Example

```
ruckus(config-load-balancing)# weak-bypass wifi0 33  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)#
```

## strong-bypass

To configure the strong bypass for load balancing, use the following command:

```
strong-bypass [ wifi0 | wifi1 ] NUMBER
```

### Syntax Description

**strong-bypass**  
Configure the strong bypass for load balancing

**wifi0, wifi1**  
Configure this interface

*NUMBER*  
Set the strong-bypass value (1~100)

## Defaults

55

## Example

```
ruckus(config-load-balancing)# strong-bypass wifi0 55  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)#
```

## act-threshold

To configure the activation threshold for load balancing, use the following command:

```
act-threshold [ wifi0 | wifi1 ] NUMBER
```

### Syntax Description

#### **act-threshold**

Configure the activation threshold for load balancing.

#### **wifi0, wifi1**

Configure this interface.

#### *NUMBER*

Set the activation threshold value (1~100).

## Defaults

10

## Example

```
ruckus(config-load-balancing)# act-threshold wifi0 50  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)#
```

## new-trigger

To configure new trigger threshold (1-100), use the following command:

```
new-trigger [ wifi0 | wifi1 ] NUMBER
```

### Syntax Description

#### **new-trigger**

Configure a new trigger threshold for the specified interface.

#### **wifi0, wifi1**

Configure this interface.

#### *NUMBER*

Set the new trigger threshold value (1~100).

## Defaults

3

## Example

```
ruckus(config-load-balancing)# new-trigger wifi0 3  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)#
```

## headroom

To configure headroom settings for the specified interface, use the following command:

```
headroom [ wifi0 | wifi1 ] NUMBER
```

## Syntax Description

### **headroom**

Configure headroom for the specified interface.

### **wifi0, wifi1**

Configure this interface.

### *NUMBER*

Set the headroom value (1~100).

## Defaults

3

## Example

```
ruckus(config-load-balancing)# headroom wifi0 3  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-load-balancing)#
```

## disable wifi0

Disable wifi0 load balancing.

## disable wifi1

Disable wifi1 load balancing.

## enable wifi0

Enable wifi0 load balancing.

## enable wifi1

Enable wifi1 load balancing.

## show

To display the current service settings, use the following command:

**show**

### Syntax Description

**show**

Display the current service settings

### Defaults

None.

### Example

```
ruckus(config-load-balancing)# show
Load Balancing:
  Radio 0:
    Status= Enabled
    AdjacentThreshold= 50
    WeakBypass= 33
    StrongBypass= 55
    ActivationThreshold= 10
    NewTrigger= 3
    Headroom= 3

  Radio 1:
    Status= Disabled
    AdjacentThreshold= 43
    WeakBypass= 35
    StrongBypass= 55
    ActivationThreshold= 10
    NewTrigger= 3
    Headroom= 3

ruckus(config-load-balancing)#
```



## Configure STP Commands

Both Ethernet ports are one logical interface. They are designed to provide high availability connections to separate switches and do not provide dual-port ISL channel bonding. Switches should use STP to block one path. The default is “no stp”.

### stp

To enable Spanning Tree Protocol, use the following command:

```
stp
```

### no stp

To disable Spanning Tree Protocol, use the following:

```
no stp
```

## Configure System Commands

Use the `sys` or `system` command to configure the controller's system settings, including its host name, FlexMaster server, NTP server, SNMP, and QoS settings. To run these commands, you must first enter the **config-sys** context.

### system

To enter the `config-sys` context and configure system settings, use the following command:

```
system
```

### Example

```
ruckus(config)# system  
ruckus(config-sys)#
```

### dot11-country-code

To set the controller's country code, use the following command:

```
dot11-country-code COUNTRY-CODE {arguments}
```

### Syntax Description

#### dot11-country-code

Configure the controller's country code setting

*COUNTRY-CODE*

Set the country code to this value

#### channel-mode

Contains commands that can be executed from within the context

#### allow-indoor

Allows ZoneFlex Outdoor APs to use channels regulated as indoor use-only

#### not-allow-indoor

Disallows ZoneFlex Outdoor APs to use channels regulated as indoor use-only

#### channel-optimization

Set channel optimization type (compatibility, interoperability, performance)

### Defaults

None.

### Example

To set the country code to US, enter the following command:

```
ruckus# configruckus(config)# system  
ruckus(config-sys)# dot11-country-code US  
The country code settings have been updated.  
ruckus(config-sys)#
```

## internet-check

To configure the internet-check feature, use the following command:

### Syntax

```
internet-check < COMPANY >
```

### Command Default

Enabled.

### Examples

```
ruckus(config-sys)# internet-check all
The internet check settings have been updated.
ruckus(config-sys)# show internet-check
Internet Check:
Company = apple, Enable = 1

Internet Check:
Company = microsoft, Enable = 1

Internet Check:
Company = ruckus, Enable = 1

ruckus(config-sys)#
```

## **no internet-check**

To disable the internet-check feature, use the following command:

### **Syntax**

**no internet-check< COMPANY >**

### **Command Default**

Enabled.

### **Examples**

```
ruckus(config-sys)# no internet-check apple
The internet check settings have been updated.
ruckus(config-sys)# show internet-check
Internet Check:
Company = apple, Enable = 0

Internet Check:
Company = microsoft, Enable = 1

Internet Check:
Company = ruckus, Enable = 1

ruckus(config-sys)#
```

## **show internet-check**

To display the current internet-check settings, use the following command:

### **Syntax**

**show internet-check**

### **Command Default**

None.

### **Examples**

```
ruckus(config-sys)# show internet-check
Internet Check:
Company = apple, Enable = 1

Internet Check:
Company = microsoft, Enable = 1

Internet Check:
Company = ruckus, Enable = 1

ruckus(config-sys)#
```

## **hostname**

To set the system hostname, use the following command:

**hostname**

### **Syntax Description**

**hostname**

Set the controller's system hostname

### **Defaults**

None

### **Example**

```
ruckus(config-sys)# hostname ruckus-xjoe
The system identity/hostname settings have been updated.
```

## Interface Commands

Use the interface commands to configure the controller's IP address and VLAN settings. To run these commands, you must first enter the **config-sys-if** context.

### *interface*

To enter the config-sys-if context and configure IP address and VLAN settings, use the following command:

**interface**

### Example

```
ruckus(config-sys)# interface  
ruckus(config-sys-if)#
```

### *ip enable*

To enable IPv4 addressing, use the following command:

**ip enable**

### *ip route gateway*

To set the controller's gateway IP address, use the following command:

**ip route gateway GATEWAY-ADDR**

### Syntax Description

#### **ip route gateway**

Configure the controller's gateway IP address

**GATEWAY-ADDR**

Set the controller's gateway IP address to this value

### Defaults

None.

### Example

```
ruckus# config  
ruckus(config)# system  
ruckus(config-sys)# interface  
ruckus(config-sys-if)# ip route gateway 192.168.0.1  
The command was executed successfully.
```

### *ip name-server*

To set the controller's DNS servers, use the ip name-server command. Use a space to separate the primary and secondary DNS servers.

**ip name-server DNS-ADDR [ DNS-ADDR ]**

## Syntax Description

### **ip name-server**

Configure the controller's DNS server address or addresses

### *DNS-ADDR*

Set the DNS server address to this value. If entering primary and secondary DNS server addresses, use a space to separate the two addresses.

## Defaults

192.168.0.1

## Example

```
ruckus# config
ruckus(config)# system
ruckus(config-sys)# interface
ruckus(config-sys-if)# ip name-server 192.168.0.1
The command was executed successfully.
```

## *ip addr*

To set the controller's IP address and netmask, use the following command:

**ip addr** *IP-ADDR NET-MASK*

Use a space to separate the IP address and netmask.

## Syntax Description

### **ip addr**

Configure the controller's IP address and netmask

### *IP-ADDR*

Set the controller's IP address to this value

### *NET-MASK*

Set the controller's netmask to this value

## Defaults

IP address: 192.168.0.2

Subnet mask: 255.255.255.0

## Example

```
ruckus# config
ruckus(config)# system
ruckus(config-sys)# interface
ruckus(config-sys-if)# ip addr 192.168.0.2 255.255.255.0
The command was executed successfully.
```

## ip mode

To set the controller's IP address mode, use the following command:

```
ip mode [ dhcp | static ]
```

### Syntax Description

#### ip mode

Configure the controller's IP address mode

#### dhcp

Set the controller's IP address mode to DHCP

#### static

Set the controller's IP address mode to static

### Defaults

None.

### Example

To set the controller's IP address mode to DHCP, enter the following command:

```
ruckus# config
ruckus(config)# system
ruckus(config-sys)# interface
ruckus(config-sys-if)# ip mode dhcp
The command was executed successfully.
```

## show

To display the current management interface settings, use the following command:

```
show
```

### Syntax Description

#### show

Display the current management interface settings

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# system
ruckus(config-sys)# interface
ruckus(config-sys-if)# show
Protocol Mode= IPv4-Only
Device IP Address:
Mode= Manual
IP Address= 192.168.11.100
Netmask= 255.255.255.0
```



```
Gateway Address= 192.168.11.1
Primary DNS= 192.168.11.1
Secondary DNS= 168.95.1.1

Management VLAN:
Status= Disabled
VLAN ID=

ruckus(config-sys-if)#
```

## vlan

If the ZoneDirector is on a tagged Access VLAN, to set the VLAN ID, use the following

command:

```
vlan NUMBER
```

## no ip

To disable IPv4 addressing, use the following command:

```
no ip
```

## system-timezone

To configure time zone settings, use the following command:

```
system-timezone <TIMEZONE>
```

## Defaults

GMT+0

## Example

```
ruckus(config-sys)# system-timezone GMT+8
The timezone settings have been updated.
ruckus(config-sys)#
```

## userdefined-timezone

To configure user-defined time zone, use the following command:

```
userdefined-timezone <TIMEZONE>
```

## Defaults

None

## Example

```
ruckus(config-sys)# userdefined-timezone GMT+8:30
The timezone settings have been updated.
ruckus(config-sys)#
```

## system-dst

To configure system Daylight Savings Time settings, use the following command:

**system-dst** [enable | disable]

### Defaults

Disabled

### Example

```
ruckus(config-sys)# system-dst enable
The timezone settings have been updated.
ruckus(config-sys)#
```

## no system-dst

To disable the system Daylight Savings Time settings, use the following command:

**no system-dst**

### Defaults

Disabled

### Example

```
ruckus(config-sys)# no system-dst
The timezone settings have been updated.
ruckus(config-sys)#
```

## userdefined-dst

To configure user-defined Daylight Savings Time settings, use the following command:

**userdefined-dst** <DST>

### Defaults

Disabled

### Example

```
ruckus(config-sys)# userdefined-dst M1.1.0/00,M1.2.0/00
The timezone settings have been updated.
ruckus(config-sys)#
```

## no userdefined-dst

To delete the user-defined Daylight Savings Time settings, use the following command:

**no userdefined-dst**

## Defaults

Disabled

## Example

```
ruckus(config-sys)# no userdefined-dst
The timezone settings have been updated.
ruckus(config-sys)#
```

## ftp-anon

To enable FTP anonymous access, use the following command:

```
ftp-anon
```

## no ftp-anon

To disable FTP anonymous access, use the following command:

```
no ftp-anon
```

## ftp

Enable FTP server.

## no ftp

Disable FTP server.

## mgmt-if

To enable the management interface, use the following command:

```
mgmt-if
```

## Defaults

Disabled.

## Example

```
ruckus(config-sys)# mgmt-if
ruckus(config-sys-mgmt-if)#
  help           Shows available commands.
  history        Shows a list of previously run commands.
  abort         Exits the config-sys-mgmt-if context without saving changes.
  end           Saves changes, and then exits config-sys-mgmt-if context.
  exit          Saves changes, and then exits config-sys-mgmt-if context.
  quit         Exits the config-sys-mgmt-if context without saving changes.
  ip            Contains commands that can be executed from within the context.
  show         Displays current management interface settings.
ruckus(config-sys-mgmt-if)#
```

## **ip addr**

To configure the IP address of the management interface, use the following command:

**ip addr** IP-ADDR NET-MASK

### **Syntax Description**

#### **IP-ADDR**

Enter the IP address.

#### **NET-MASK**

Set the Netmask for the address.

### **Defaults**

None.

### **Example**

```
ruckus(config-sys-mgmt-if)# ip addr 192.168.40.4 255.255.255.0  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-sys-mgmt-if)#
```

## **no mgmt-if**

To disable the management interface, use the following command:

**no mgmt-if**

### **Defaults**

Disabled.

### **Example**

```
ruckus(config-sys)# no mgmt-if  
The management interface has been updated.  
ruckus(config-sys)#
```

## **Unleashed-Multi-Site-Manager**

To configure UMM settings, use the following command:

**Unleashed-Multi-Site-Manager**IP-ADDR DOMAIN-NAME interval <NUMBER>

### **Syntax Description**

#### **interval**

Configure UMM interval (1~60 minutes).

#### **IP-ADDR**

Configure UMM IP address.

## DOMAIN-NAME

Configure UMM domain name.

### Example

```
ruckus(config-sys)# Unleashed-Multi-Site-Manager www.ruckuswireless.com interval 15
The Unleashed Multi-Site Manager settings have been updated.
ruckus(config-sys)#
```

### no Unleashed-Multi-Site-Manager

To disable UMM settings, use the following command:

#### no Unleashed-Multi-Site-Manager

### Example

```
ruckus(config-sys)# no Unleashed-Multi-Site-Manager
Unleashed Multi-Site Manager has been disabled.
ruckus(config-sys)#
```

### Unleashed-Multi-Site-Manager-Force

To configure Force UMM settings, use the following command:

#### Unleashed-Multi-Site-Manager-Force IP-ADDR / DOMAIN-NAME interval <NUMBER>

### Syntax Description

#### interval

Configure UMM interval (1~60 minutes).

#### IP-ADDR

Configure UMM IP address.

#### DOMAIN-NAME

Configure UMM IP address domain name.

### Example

```
ruckus(config-sys)# Unleashed-Multi-Site-Manager-Force www.ruckuswireless.com interval 60
The Unleashed Multi-Site Manager settings have been updated.
ruckus(config-sys)#
```

### no Unleashed-Multi-Site-Manager-Force

To disable Force UMM settings, use the following command:

#### no Unleashed-Multi-Site-Manager-Force

### Example

```
ruckus(config-sys)# no Unleashed-Multi-Site-Manager-Force
Unleashed Multi-Site Manager has been disabled.
ruckus(config-sys)#
```

## northbound

To enable northbound portal interface and set the northbound portal interface password, use the following command:

### Syntax

```
northbound password [WORD]
```

### Parameters

**password**

Set the northbound portal interface password

### Examples

```
ruckus(config-sys)# northbound password password1234  
The northbound portal interface settings have been updated.  
ruckus(config-sys)#
```

## **no northbound**

To disable northbound portal authentication, use the following command:

### **Syntax**

**no northbound**

### **Command Default**

Disabled.

### **Examples**

```
ruckus(config-sys)# no northbound
Northbound portal interface has been disabled.
ruckus(config-sys)#
```

## **ntp**

To enable the NTP client, use the following command:

**ntp** *IP-ADDR/DOMAIN-NAME*

### **Syntax Description**

**ntp**

Enable the NTP client

*IP-ADDR/DOMAIN-NAME*

Set the NTP server address to this IP address/domain name

### **Defaults**

None.

### **Example**

```
ruckus(config-sys)# ntp 192.168.2.21
The NTP settings have been updated.
ruckus(config-sys)# ntp sohu.com
The NTP settings have been updated.
```

## **no ntp**

To disable the NTP client, use the following command:

**no ntp**

### **Syntax Description**

**no ntp**

Disable the NTP client on the controller.

## Configuring Master Settings

### Configure System Commands

#### Defaults

Enabled. The default NTP server address is ntp.ruckuswireless.com.

#### Example

```
ruckus(config-sys)# no ntp
The NTP settings have been updated.
```



## SNMPv2 Commands

Use the following commands to configure SNMPv2 settings. To use these commands, you must first enter the **config-sys-snmpv2** context.

### **snmpv2**

To configure the SNMPv2 settings, use the following command:

**snmpv2**

Executing this command enters the config-sys-snmpv2 context.

### Syntax Description

**snmpv2**

Configure the SNMPv2 settings

**abort**

Exits the config-sys-snmpv2 context without saving changes.

**end**

Saves changes, and then exits the config-sys-snmpv2 context.

**exit**

Saves changes, and then exits the config-sys-snmpv2 context.

**quit**

Exits the config-sys-snmpv2 context without saving changes.

**no access-v3**

Disables special MIB node for customer's kt.

**access-v3**

Enables special MIB node for customer's kt.

**contact** *WORD*

Enables SNMPV2 agent and sets the system contact.

**location** *WORD*

Enables SNMPV2 agent and sets the system location.

**ro-community** *WORD*

Enables SNMPV2 agent and sets the RO community name.

**rw-community** *WORD*

Enables SNMPV2 agent and sets the RW community name.

**show**

Displays SNMPV2 agent and SNMP trap settings.

### Defaults

SNMP Agent:

Status= Enabled

Contact= [https://support.ruckuswireless.com/contact\\_us](https://support.ruckuswireless.com/contact_us)

Location= 350 West Java Dr. Sunnyvale, CA 94089 US

## Configuring Master Settings

### Configure System Commands

RO Community= public  
RW Community= private  
SNMP Trap:  
Format= Version2  
Status= Disabled  
Support-access-V3:  
Status= Disabled

### Example

```
ruckus(config-sys) # snmpv2  
ruckus(config-sys-snmpv2) #
```

### contact

To enable SNMPv2 agent and set the system contact, use the following command:

**contact** WORD

### location

To enable SNMPv2 agent and set the system location, use the following command:

**location** WORD

### ro-community

To set the read-only (RO) community name, use the following command:

**ro-community** WORD

### Syntax Description

#### **ro-community**

Configure the read-only community name

WORD

Set the read-only community name to this value

### Defaults

public

### Example

```
ruckus(config-sys-snmpv2) # ro-community private-123  
The command was executed successfully
```

## **rw-community**

To set the read-write (RW) community name, use the following command:

```
rw-community WORD
```

This command must be entered from within the snmp-agent context.

### **Syntax Description**

#### **rw-community**

Configure the read-write community name

WORD

Set the read-write community name to this value

### **Defaults**

private

### **Example**

```
ruckus(config-sys-snmpv2)# rw-community private-123  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

### **show**

To display SNMPv2 agent and SNMP trap settings, use the show command.

### **Example**

```
ruckus(config-sys-snmpv2)# show  
SNMP Agent:  
  Status= Enabled  
  Contact= https://support.ruckuswireless.com/contact_us  
  Location= 350 West Java Dr. Sunnyvale, CA 94089 US  
  RO Community= public  
  RW Community= private  
  
SNMP Trap:  
  Format= Version2  
  Status= Disabled  
  
Support-access-V3:  
  Status= Disabled
```

## **snmpv2-ap**

To enable SNMP AP notification, use the following command:

```
snmpv2-ap
```

### **Example**

```
ruckus(config-sys)# snmpv2-ap  
The SNMP v2 agent settings have been updated.  
ruckus(config-sys)#
```

## Configuring Master Settings

### Configure System Commands

#### ***no snmpv2-ap***

To disable SNMP AP notification, use the following command:

```
no snmpv2-ap
```

#### **Example**

```
ruckus(config-sys)# no snmpv2-ap  
The SNMP v2 agent settings have been updated.  
ruckus(config-sys)#
```

## SNMPv3 Commands

Use the following commands to configure SNMPv3 settings. To use these commands, you must first enter the **config-sys-snmpv3** context.

### *snmpv3*

To configure the SNMPv3 settings, use the following command:

**snmpv3**

Executing this command enters the config-sys-snmpv3 context.

### Syntax Description

**snmpv3**

Configure the SNMPv3 settings

**abort**

Exits the config-sys-snmpv3 context without saving changes.

**end**

Saves changes, and then exits the config-sys-snmpv3 context.

**exit**

Saves changes, and then exits the config-sys-snmpv3 context.

**quit**

Exits the config-sys-snmpv3 context without saving changes.

**ro-user** *WORD*

Contains commands that can be executed from within the context.

**ro-user** *WORD MD5 WORD*

Contains commands that can be executed from within the context.

**ro-user** *WORD MD5 WORD DES WORD*

Sets the privacy phrase of DES for SNMPV3.

**ro-user** *WORD MD5 WORD AES WORD*

Sets the privacy phrase of AES for SNMPV3.

**ro-user** *WORD MD5 WORD None*

Sets the privacy to None for SNMPV3.

**ro-user** *WORD SHA WORD*

Contains commands that can be executed from within the context.

**ro-user** *WORD SHA WORD DES WORD*

Sets the privacy phrase of DES for SNMPV3.

**ro-user** *WORD SHA WORD AES WORD*

Sets the privacy phrase of AES for SNMPV3.

**ro-user** *WORD SHA WORD; None*

Sets the privacy to None for SNMPV3.

**rw-user** *WORD*

Contains commands that can be executed from within the context.

## Configuring Master Settings

### Configure System Commands

- rw-user** *WORD MD5 WORD*  
Contains commands that can be executed from within the context.
- rw-user** *WORD MD5 WORD DES WORD*  
Sets the privacy phrase of DES for SNMPV3.
- rw-user** *WORD MD5 WORD AES WORD*  
Sets the privacy phrase of AES for SNMPV3.
- rw-user** *WORD MD5 WORD None*  
Sets the privacy to None for SNMPV3.
- rw-user** *WORD SHA WORD*  
Contains commands that can be executed from within the context.
- rw-user** *WORD SHA WORD DES WORD*  
Sets the privacy phrase of DES for SNMPV3.
- rw-user** *WORD SHA WORD AES WORD*  
Sets the privacy phrase of AES for SNMPV3.
- rw-user** *WORD SHA WORD None*  
Sets the privacy to None for SNMPV3.
- show**  
Displays SNMPV3 agent and SNMP trap settings.

## Defaults

SNMPV3 Agent:  
Status= Disabled  
Ro:  
User=  
Authentication Type= MD5  
Authentication Pass Phrase=  
Privacy Type= DES  
Privacy Phrase=  
Rw:  
User=  
Authentication Type= MD5  
Authentication Pass Phrase=  
Privacy Type= DES  
Privacy Phrase=  
SNMP Trap:  
Format= Version3  
Status= Disabled

## **snmp-trap-format**

To set the SNMP trap format to SNMPV2 or SNMPV3, use the following command:

```
snmp-trap-format [ SNMPv2 | SNMPv3 ]
```

### **Syntax Description**

**snmp-trap-format**

Set the SNMP trap format

[ **SNMPv2** | **SNMPv3** ]

Set to either SNMPv2 or SNMPv3

### **Defaults**

SNMPv2

### **Example**

```
ruckus(config-sys)# snmp-trap-format SNMPV2  
The SNMP trap settings have been updated.
```

## **snmpv2-trap**

To enable the SNMPV2 trap and set the IP address of the trap server, use the following command:

```
snmpv2-trap NUMBER IP/IPv6-ADDR
```

### **Syntax Description**

**snmpv2-trap**

Enable the SNMPv2 trap and set the trap server's IP address

*NUMBER*

Assign the trap receiver ID (1-4)

*IP/IPv6-ADDR*

Set the trap receiver IP address

### **Defaults**

None

### **Example**

```
ruckus(config-sys)# snmpv2-trap 1 192.168.10.22  
The SNMP trap settings have been updated.
```

## **snmpv3-trap**

To enable and configure the SNMPV3 trap parameters, use the following command:

```
snmpv3-trap user_name snmp_trap_server_ip [ MD5 | SHA ] auth_pass_phrase [ DES privacy_phrase | AES privacy_phrase | None ]
```

### Syntax Description

**snmpv3-trap**  
Enable the SNMPv3 trap and configure the trap parameters

*user\_name*  
Trap user name

*snmp\_trap\_server\_ip*  
Trap server IP address

[ **MD5** | **SHA** ]  
Authentication method

*auth\_pass\_phrase*  
Authentication passphrase

[ **DES** *privacy\_phrase* | **AES** *privacy\_phrase* | **None** ]  
Privacy method and privacy phrase

### Defaults

None

### Example

```
ruckus(config-sys)#snmpv3-trap test1234 192.168.0.22 MD5 test1234 DES test4321  
The command was executed successfully.
```

### *no snmp-trap-ap*

To disable SNMP trap server configuration for AP, use the following command:

**no snmp-trap-ap**

### Example

```
ruckus(config-sys)#no snmp-trap-ap  
The SNMP AP trap settings have been updated.
```



## Syslog Settings Commands

Use the **syslog** commands to configure the controller's syslog notification settings. To run these commands, you must first enter the **config-sys** context.

### **syslog**

To enable syslog notifications and enter the config-sys-syslog context, use the following command:

**syslog**

### Example

```
ruckus(config-sys)# syslog
ruckus(config-sys-syslog)#
```

### **no syslog**

To disable syslog notification, use the following command:

**no syslog**

### Syntax Description

**no syslog**

Disable syslog notification

### Defaults

Disabled.

### Example

```
ruckus(config-sys)# no syslog
The syslog settings have been updated.
ruckus(config-sys)#
```

### **server**

To set the syslog server address, use the following command:

**server** *IP-ADDR*

### Syntax Description

**server**

Set the syslog server IP address.

*IPADDR*

Send syslog notifications to this IP address.

## Configuring Master Settings

### Configure System Commands

#### Defaults

Disabled.

#### Example

```
ruckus(config-sys-syslog)# server 172.17.16.2
The syslog settings have been updated.
ruckus(config-sys-syslog)#
```

## **type**

To set the syslog server type, use the following command:

**type** <LOG TYPE>

### **Syntax Description**

all: Sets remote syslog type to all.

client: Sets remote syslog type to client info.

flowlevel: Sets remote syslog type to flowlevel.

### **Example**

```
ruckus(config-sys-syslog)# type all
The syslog settings have been updated.
ruckus(config-sys-syslog)#
```

## **facility**

To set the facility name, use the following command:

**facility** FACILITY NAME

### **Syntax Description**

**facility** FACILITY NAME

Sets the syslog facility name (local0 - local7, or keep)

### **Defaults**

Disabled.

## **priority**

To set the syslog priority level, use the following command:

**priority** PRIORITY LEVEL

### **Syntax Description**

**priority** PRIORITY LEVEL

Sets the syslog priority level (emerg, alert, crit, err, warning, notice, info, debug).

### **Defaults**

Disabled.

## **ap-facility**

To set the AP syslog facility name, use the following command:

**ap-facility** *FACILITY-NAME*

### Syntax Description

**ap-facility** *FACILITY-NAME*

Sets the AP syslog facility name (local0 - local7, or keep).

### Defaults

Disabled.

### *ap-priority*

To set the AP syslog priority level, use the following command:

**ap-priority** *PRIORITY LEVEL*

### Syntax Description

**ap-priority** *PRIORITY LEVEL*

Sets the AP syslog priority level (emerg, alert, crit, err, warning, notice, info, debug).

*IPADDR*

Send syslog notifications to this IP address.

### Defaults

Disabled.

### Example

```
ruckus# config
ruckus(config)# system
ruckus(config-sys)# syslog
ruckus(config-sys-syslog)# server 192.168.3.10
The syslog settings have been updated.
ruckus(config-sys-syslog)# facility local0
The syslog settings have been updated.
ruckus(config-sys-syslog)# priority emerg
The syslog settings have been updated.
ruckus(config-sys-syslog)# ap-facility local0
The syslog settings have been updated.
ruckus(config-sys-syslog)# ap-priority emerg
The syslog settings have been updated.
ruckus(config-sys-syslog)# end
The syslog settings have been updated.
Your changes have been saved.
ruckus(config-sys)#
```

### *no syslog-ap*

To disable external syslog server configuration for AP, use the following command:

**no syslog-ap**

### Example

```
ruckus(config-sys)#no syslog-ap  
The AP syslog settings have been updated.
```

## Management Access Control List Commands

Use the following commands to create or configure management ACLs and enter the **config-sys-mgmt-acl** context. These commands must be used from the **config-sys** context.

### **mgmt-acl**

To create or configure a management ACL, use the following command:

```
mgmt-acl WORD
```

### Syntax Description

**mgmt-acl**

Create or configure a management ACL

WORD

Create or configure this management ACL

### Defaults

None.

### Usage Guidelines

Executing this command enters the **config-mgmt-acl** context.

### Example

```
ruckus(config-sys)# mgmt-acl macl1  
The management ACL 'macl1' has been created. To save the Management ACL, type 'end' or 'exit'.  
ruckus(config-mgmt-acl)#
```

### **no mgmt-acl**

To delete a management ACL for IPv4, use the following command:

```
no mgmt-acl WORD
```

### **exit**

Saves changes, and then exits the config-mgmt-acl context.

### **end**

Saves changes, and then exits the config-mgmt-acl context.

### **quit**

Exits the config-mgmt-acl context without saving changes.

## **abort**

Exits the config-mgmt-acl context without saving changes.

## **name**

To set the management ACL name, use the following command:

```
name WORD
```

## **restrict-type**

To set the management ACL restriction type, use the following command:

```
restrict-type [ single ip-addr IP-ADDR | range ip-range IP-ADDR IP-ADDR | subnet ip-subnet IP-ADDR IP-SUBNET ]
```

## **Syntax Description**

### **restrict-type**

Set the management ACL restriction type (single/range).

### **single ip-addr**

Set management ACL restriction type to single.

### **range**

Sets the management ACL restriction type to range.

### **ip-range**

Sets the IP address range for management ACL. Use a space ( ) to separate addresses.

### **subnet ip-subnet**

Sets the subnet for management ACL IP address. Use a space ( ) to separate IP address and Netmask (128.0.0.0 to 255.255.255.252).

## **restrict-type single ip-addr**

To set the management ACL restriction type to a single IP address, use the following command:

```
restrict-type single ip-addr ip_address
```

## **Syntax Description**

### **restrict-type single ip-addr**

Set the management ACL restriction type to a single IP address

### *ip\_address*

Set to this IP address only

## **Example**

```
ruckus(config-mgmt-acl)# restrict-type single ip-addr 192.168.110.22  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

### restrict-type subnet ip-subnet

To set the management ACL restriction type to certain subnets, use the following command:

```
restrict-type subnet ip-subnet IP-SUBNET IP-SUBNET
```

#### Syntax Description

##### **restrict-type subnet ip-subnet**

Set the management ACL restriction type to a single IP address

IP-SUBNET

Set to this subnet

#### Example

```
ruckus(config-mgmt-acl)#restrict-type subnet ip-subnet 172.30.110.26 255.255.254.0  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

### restrict-type range ip-range

To set the management ACL restriction type to an IP address range, use the following command:

```
restrict-type range ip-range ip_address ip_address
```

#### Syntax Description

##### **restrict-type range ip-range**

Set the management ACL restriction type to a single IP address

ip\_address ip\_address

**Set to this IP address range. The first ip\_address is for the startui**

#### Example

```
ruckus(config-mgmt-acl)#restrict-type range ip-range 172.30.110.28 172.30.110.39  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

### show

To display management ACL settings, use the show command.

## QoS Commands

Use the following commands to configure QoS settings on the controller. These commands must be executed from the **config-sys** context.

### no qos

To disable QoS on the controller, use the following command:

```
no qos
```



### Syntax Description

#### **no qos**

Disable QoS on the controller

### Defaults

None.

### Example

```
ruckus(config-sys)# no qos
Changes are saved!
System QoS function has been disabled.
```

### **qos**

To enable and configure Quality of Service settings on the controller, use the following command:

#### **qos**

### Usage Guidelines

Executing this command enters the **config-sys-qos** context. The following commands can be executed from within the qos context.

### Example

```
ruckus(config-sys)# qos
ruckus(config-sys-qos)#
```

### **heuristics video inter-packet-gap**

Use the following command to set the QoS heuristics video inter-packet gap minimum/maximum values:

```
heuristics video inter-packet-gap min NUMBER max NUMBER
```

### **heuristics video packet-length**

Use the following command to set the heuristics video packet-length values:

```
heuristics video packet-length min NUMBER max NUMBER
```

### **heuristics voice inter-packet-gap**

Use the following command to set the heuristics voice inter-packet-gap values:

```
heuristics voice inter-packet-gap min NUMBER max NUMBER
```

### **heuristics voice packet-length**

Use the following command to set the heuristics voice packet-length values:

```
heuristics voice packet-length min NUMBER max NUMBER
```

### **heuristics classification video packet-octet-count**

Use the following command to set the heuristics classification video packet-octet-count value:

**heuristics classification video packet-octet-count** *NUMBER*

### **heuristics classification voice packet-octet-count**

Use the following command to set the heuristics classification voice packet-octet-count value:

**heuristics classification voice packet-octet-count** *NUMBER*

### **heuristics no-classification video packet-octet-count**

Use the following command to set the heuristics no-classification video packet-octet-count value:

**heuristics no-classification video packet-octet-count** *NUMBER*

### **heuristics no-classification voice packet-octet-count**

Use the following command to set the heuristics no-classification voice packet-octet-count value:

**heuristics no-classification voice packet-octet-count** *NUMBER*

### **tos classification video**

Use the following command to set the TOS classification video value:

**tos classification video** *WORD*

### **tos classification voice**

Use the following command to set the TOS classification voice value:

**tos classification voice** *WORD*

### **tos classification data**

Use the following command to set the TOS classification data value:

**tos classification data** *WORD*

### **tos classification background**

Use the following command to set the TOS classification background value:

**tos classification background** *WORD*

### **show**

Use the following command to display the system QoS settings:

**show**

## Example

```
ruckus(config-sys)# qos
ruckus(config-sys-qos)# show
System QoS:
ToS DATA TUNNEL = 0xA0
ToS CTRL TUNNEL = 0xA0
ToS Classification-Voice = 0xE0 0xC0 0xB8
ToS Classification-Video = 0xA0 0x80
ToS Classification-Data = 0x0
ToS Classification-Background = 0x0
Tx fail threshold = 50
heuristics inter-packet-gap Video = 0 65
heuristics inter-packet-gap Voice = 15 275
heuristics packet-length Video = 1000 1518
heuristics packet-length Voice = 70 400
heuristics classification Video = 50000
heuristics classification Voice = 600
heuristics no classification Video = 500000
heuristics no classification Voice = 10000

ruckus(config-sys-qos)#
```

## tunnel-mtu

To set the tunnel MTU, use the following command:

```
tunnel-mtu NUMBER
```

### Syntax Description

**tunnel-mtu**

Set the tunnel MTU

### Defaults

None.

### Example

```
ruckus(config-sys)# tunnel-mtu 1500
The Tunnel MTU settings have been updated.
ruckus(config-sys)#
```

## bonjour

To enable bonjour service, use the following command:

```
bonjour
```

### Defaults

Disabled.

### Example

```
ruckus(config-sys)# bonjour
The bonjour service settings have been updated.
ruckus(config-sys)#
```

### no bonjour

To disable bonjour service, use the following command:

**no bonjour**

## telnetd

To enable the telnet server, use the following command:

**telnetd**

### Syntax Description

**telnetd**

Enable the telnet server

### Defaults

None.

### Example

```
ruckus(config-sys)# telnetd
The telnet server settings have been updated.
ruckus(config-sys)#
```

### no telnetd

To disable the telnet server, use the following command:

**telnetd**

### Syntax Description

**no telnetd**

Disable the telnet server

### Defaults

None.

### Example

```
ruckus(config-sys)# no telnetd
The telnet server settings have been updated.
ruckus(config-sys)#
```

## snmp-trap

To set the SNMP trap format, use the following command:

```
snmp-trap [SNMPv2 | SNMPv3]
```

### Syntax Description

**snmp-trap**

Enable SNMP trap notifications

**SNMPv2**

Set SNMP trap format to SNMPv2

**SNMPv3**

Set SNMP trap format to SNMPv3

### Example

```
ruckus(config-sys)# snmp-trap SNMPv2  
The SNMP trap settings have been updated.  
ruckus(config-sys)#
```

## no snmp-trap

To disable the SNMP trap notifications, use the following command:

```
no snmp-trap NUMBER
```

### Syntax Description

**no snmp-trap**

Disables SNMP trap notification by index

### Example

```
ruckus(config-sys)# no snmp-trap 1  
The SNMP trap settings have been updated.
```

## no snmpv2-trap

To disable the SNMP trap notifications, use the following command:

```
no snmp-trap NUMBER
```

### Syntax Description

**no snmpv2-trap**

Disables SNMP trap notification by index

### Example

```
ruckus(config-sys)# no snmpv2-trap 1  
The SNMP trap settings have been updated.
```

## **no snmpv3-trap**

To disable the SNMPv3 trap notification, use the following command:

```
no snmpv3-trap NUMBER
```

### **Syntax Description**

```
no snmpv3-trap
```

Disables SNMP trap notification by index

### **Example**

```
ruckus(config-sys)# no snmpv3-trap 1  
The SNMP trap settings have been updated.
```

## **no snmpv2**

To disable the SNMPv2 agent, use the following command:

```
no snmpv2
```

### **Syntax Description**

```
no snmpv2
```

Disables the SNMPv2 agent

### **Example**

```
ruckus(config-sys)# no snmpv2  
The SNMP v2 agent settings have been updated.
```

## **no snmpv3**

To disable the SNMPv3 agent, use the following command:

```
no snmpv3
```

### **Syntax Description**

```
no snmpv3
```

Disables the SNMPv3 agent

### **Example**

```
ruckus(config-sys)# no snmpv3  
The SNMP v3 agent settings have been updated.
```

## **login-warning**

To configure the login warning message, use the following command:

```
login-warning
```

## Syntax Description

### **login-warning**

Configure the login warning message.

### **abort**

Exits the login-warning context without saving changes.

### **end**

Saves changes, and then exits the login-warning context.

### **exit**

Saves changes, and then exits the login-warning context.

### **quit**

Exits the login-warning context without saving changes.

### **content** WORD

Customize login warning content.

## Example

```
ruckus(config-sys)# login-warning
ruckus(config-sys-login-warning)# content "Warning, you are logging into equipment belonging to ruckus,
if you are not an authorized user please logout immediately."
The login warning settings have been updated.
ruckus(config-sys-login-warning)# end
The login warning settings have been updated.
Your changes have been saved.
ruckus(config-sys)#
```

## no login-warning

To disable the login warning message, use the following command:

**no login-warning**

## event-log-level

To configure the event log level, use the following command:

**event-log-level** EVENT LOG LEVEL

## Syntax Description

### **event-log-level**

Enter the **syslog event log level** 1-3 (1:Critical Events Only, 2:Warning and Critical Events, 3:Show More).

## Defaults

2: Warning and Critical Events

## Example

```
ruckus# config
You have all rights in this mode.
```

## Configuring Master Settings

### Configure System Commands

```
ruckus(config)# sys
ruckus(config-sys)# syslog
ruckus(config-sys-syslog)# event-log-level 1
The syslog settings have been updated.
ruckus(config-sys-syslog)#
```

## show URL-Filtering-License

To display the current URL Filtering License information, use the following command:

**show URL-Filtering-License**

### Example

```
ruckus(config-sys)# show url-filtering-license
ID: 1
Name: URL Filtering Temporal License
Number of APs: 128
Generated by: URL Filtering Temporal license by Ruckus
Serial number/Unique ID: un9418490011251569244593778
Date to Start :Tue Sep 24 16:23:48 2019

Date to End: Mon Dec 23 15:23:48 2019

Status: active
Detailed: This license is available for 54 days.
ruckus(config-sys)#
```

## show internet

To display the current internet status information, use the following command:

**show internet**

### Example

```
ruckus(config-sys)# show internet
Status:          Connected
all port:       OK
  port1:        Up
  port2:        Down
IP status:      OK
  IP:           192.168.0.8
DNS status:     OK
  DNS1:         66.90.130.101
  DNS2:         216.82.201.11
GateWay status: OK
  GateWay:      192.168.0.1  Up
ruckus(config-sys)#
```

## show internet-check

To display the current internet status connection information, use the following command:

**show internet-check**



## Example

```
ruckus(config-sys)# show internet-check
Internet Check:
Company = apple, Enable = 1

Internet Check:
Company = microsoft, Enable = 1

Internet Check:
Company = ruckus, Enable = 1

ruckus(config-sys)#
```

## support-entitle

To manually download entitlement file, use the following command:

### Syntax

**support-entitle**

### Examples

```
ruckus(config-sys)# support-entitle
OK
ruckus(config-sys)#
```

## URL-Filtering-License-Renew

To synchronize the URL Filtering License from the Ruckus Server, use the following command:

**URL-Filtering-License-Renew**

### Example

```
ruckus(config-sys)# URL-Filtering-License-Renew
OK
ruckus(config-sys)#
```

## session-stats-resv

To enable session statistics recording, use the following command:

**session-stats-resv**

### Defaults

Disabled

### Example

```
ruckus(config-sys)# session-stats-resv
The session statistics function has been enabled.
ruckus(config-sys)#
```

### no session-stats-resv

Use the following command to disable recording of session statistics:

**no session-stats-resv**

### Example

```
ruckus(config-sys)# no session-stats-resv
The session statistics function has been disabled.
ruckus(config-sys)#
```

## arc-data-transmission

To enable ARC data transmission, use the following command:

```
arc-data-transmission
```

### Example

```
ruckus(config-sys)# arc-data-transmission  
The ARC data transmission has been enabled.  
ruckus(config-sys)#
```

### ***no arc-data-transmission***

To disable ARC (application recognition and control) data transmission, use the following command:

**no arc-data-transmission**

#### **Example**

```
ruckus(config-sys)# no arc-data-transmission
The ARC data transmission has been disabled.
ruckus(config-sys)#
```

### **session-limit-unauth-stats**

To enable recording of Layer 2 unauthorized session statistics, use the following command:

**session-limit-unauth-stats**

#### **Defaults**

Enabled

#### **Example**

```
ruckus(config-sys)# session-limit-unauth-stats
The limited unauthorized session statistics function has been enabled.
ruckus(config-sys)#
```

### ***no session-limit-unauth-stats***

To disable recording of Layer 2 unauthorized session statistics, use the following command:

**no session-limit-unauth-stats**

## eapol-no-retry

To disable retransmission of EAPOL-key (message 3/4 and group key), use the following command:

**eapol-no-retry**

### Example

```
ruckus(config-sys)# eapol-no-retry
Eapol-key retry has been disabled
ruckus(config-sys)#
```

## Configuring Master Settings

### Configure System Commands

#### *no eapol-no-retry*

To enable retransmission of EAPOL-key, use the following command:

**no eapol-no-retry**

#### Example

```
ruckus(config-sys)# no eapol-no-retry
Eapol-key retry has been enabled
ruckus(config-sys)#
```

## master-protect

To configure Unleashed Master AP protection settings, use the following command:

```
master-protect
```

### Example

```
ruckus(config-sys)# master-protect
ruckus(config-sys-master-protect)#
  help                Shows available commands.
  history             Shows a list of previously run commands.
  abort              Exits the master-protect context without saving changes.
  end                Saves changes, and then exits the master-protect context.
  exit              Saves changes, and then exits the master-protect context.
  quit              Exits the master-protect context without saving changes.
  master-max-sta <NUMBER>
                    Set the max station number in master AP.
  show              Displays master protection settings.
ruckus(config-sys-master-protect)#
```

## Configuring Master Settings

### Configure System Commands

#### *cpu-reject-sta*

To configure CPU reject value settings for the Master protection, use the following command:

```
cpu-reject-staNUMBER
```

#### Syntax Description

**cpu-reject-sta**

Configure CPU reject value.

NUMBER

Set the headroom CPU utilization threshold value (0~100).

#### Defaults

3

#### Example

```
ruckus(config-sys-master-protect)# cpu-reject-sta 85  
The master AP protection settings have been updated.  
ruckus(config-sys-master-protect)#
```



## **master-max-sta**

To configure Master max station value for the Master protection, use the following command:

**cpu-reject-sta***NUMBER*

### **Syntax Description**

**cpu-reject-sta**

Configure max APs for Master protection.

*NUMBER*

Set the max APs (0~100).

### **Defaults**

100

### **Example**

```
ruckus(config-sys-master-protect)# master-max-sta 85  
The master AP protection settings have been updated.  
ruckus(config-sys-master-protect)#
```

## generate-token

To Re-generate unleashed-network unique token, use the following command:

**generate-token**

### Example

```
ruckus(config-sys)# generate-token
new-token: un9418490011251346969169799
ruckus(config-sys)#
```

## gateway-mode

Use the following command to configure the dual WAN ports for the Unleashed gateway.

**gateway-mode**

### Syntax Description

**help**

Shows available commands.

**history**

Shows a list of previously run commands.

**abort**

Exits the config-sys-gateway context without saving changes.

**end**

Save changes, and then exits the config-sys-gateway context.

**exit**

Save changes, and then exits the config-sys-gateway context.

**quit**

Exits the config-sys-gateway context without saving changes.

**no**

Contains commands that can be executed from within the context.

**wan-port** *WORD*

Sets the port number for primary WAN port.

**standby-wan-port** *WORD*

Sets the port number for standby WAN port.

**show**

Displays the settings in gateway mode.

### Example

```
ruckus(config)# system
ruckus(config-sys)# gateway-mode

// show port info
wan-port 1
ruckus(config-sys-gateway-wan):
```

```
ip mode: dhcp
    dhcp static pppoe
ip addr <IPADDR> <NETMASK>
ip route gateway <GWADDR>
ip name-server {DNSADDR} [{DNSADDR2}]
pppoe user-name <username> password <password>

lan ip addr <IPADDR> <NETMASK>
lan ip name-server <DNS-ADDR> <DNS-ADDR>
lan ip-range <IPADDR> <IPADDR>
lan lease-time: 6-hours|12-hours|1-day|2-days|1-week|2-weeks;

show
ruckus(config-sys-gateway):
// show port info
standby-wan-port 2:
no standby-wan-port:

ruckus(config-sys-gateway-standby-wan):
ip mode: dhcp
    dhcp static
ip addr <IPADDR> <NETMASK> gateway <GWADDR>
ip name-server {DNSADDR} [{DNSADDR2}]
ruckus(config-sys-gateway)#
```

## show

To display config-sys current settings, use the following command:

**show**

### Example

```
ruckus(config-sys)# show
Country Code:
  Code= United States

Internet Check:
Company = apple, Enable = 1

Internet Check:
Company = microsoft, Enable = 1

Internet Check:
Company = ruckus, Enable = 1

Identity:
  Name= Ruckus-Unleashed

Session Statistics:
  Enable= false
  Limited Unauthorized Session= true

ARC Data Transmission:
  Enable= true

NTP:
  Status= Enabled
  Address= ntp.ruckuswireless.com
  Timezone= GMT

Log:
  Status= Disabled
  Address=
  Type=
  Facility=
  Priority=
  AP Facility=
  AP Priority=
  event log level= 1

Bonjour Service:
  Status= Enabled

Telnet Server:
  Status= Disabled

FTP Server:
  Status= Enabled
  Anonymous Status= Disabled

Unleashed Multi-Site Manager:
  Status= Disabled
  Address=
  Interval= 3

login warning:
  Status= Disabled
  content= "Warning, you are logging into device for authorized user only. If
yo
authorized user, please click Quit; otherwise click Continue to
log
in."
u are not an

LWAPP:
```

```
MGMT queue length threshold to drop AUTH frame = 100
MGMT queue length threshold to resume processing AUTH frame = 25

EAPoL Key no Retry:
  Status= Disabled

Unleashed Network:
  Token= un9418490011251529244593778

ruckus(config-sys)#
```

## Configure UPnP Settings

Use the following commands to enable or disable Universal Plug and Play:

### upnp

**upnp**

#### Syntax Description

**upnp**  
Enable UPnP

#### Defaults

Enabled.

#### Example

```
ruckus(config)# upnp
UPnP Service is enabled
/bin/upnp enable
ruckus(config)#
```

### no upnp

**no upnp**

#### Syntax Description

**no upnp**  
Enable UPnP

#### Defaults

Enabled.

#### Example

```
ruckus(config)# no upnp
UPnP Service is disabled
/bin/upnp disable
ruckus(config)#
```

# Configure Zero-IT Settings

To configure Zero-IT settings, use the following commands.

## zero-it

To configure Zero-IT settings, use the following command:

```
zero-it [ local | name WORD ]
```

## zero-it-auth-server

To configure Zero-IT settings, use the following command:

```
zero-it-auth-server [ local | name WORD]
```

### Syntax Description

#### zero-it-auth-server

Set Zero-IT authentication server

#### local

Set the Zero-IT authentication server to local database

#### name

Set the Zero-IT authentication server to an external AAA server

#### WORD

Name of AAA server

### Defaults

None.

### Example

```
ruckus(config)# zero-it-auth-server name radius
The Authentication Server of Zero IT Activation has been updated.
ruckus(config)#
```

## Configure Dynamic PSK Expiration

The following section lists commands for configuring Dynamic Pre-Shared Keys.

### dynamic-psk-expiration

To set DPSK expiration, use the following command:

```
dynamic-psk-expiration TIME
```

#### Syntax Description

##### dynamic-psk-expiration

Set DPSK expiration

##### *TIME*

Set DPSK expiration to this time limit (one-day, one-week, two-weeks, one-month, two-months, three-months, half-a-year, one-year, two-years)

##### unlimited

Set DPSKs to never expire

#### Defaults

None.

#### Example

```
ruckus(config)# dynamic-psk-expiration unlimited  
The Dynamic psk expiration value has been updated.  
ruckus(config)#
```



# Configure WLAN Settings Commands

Use the **config-wlan** commands to configure the WLAN settings, including the WLAN's description, SSID, and its security settings. To run these commands, you must first enter the **config-wlan** context.

## wlan

To create a WLAN or configure an existing WLAN, use the following command:

```
wlan <WORD>/<NAME>
```

Executing this command enters the config-wlan context.

### Syntax Description

**wlan**

Configure a WLAN

<WORD>/<NAME>

Name of the WLAN service

### Defaults

None.

### Example

```
ruckus(config)# wlan ruckus2
The WLAN service 'ruckus2' has been created. To save the WLAN service, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## abort

Exits the config-wlan context without saving changes.

## end

Saves changes, and then exits the config-wlan context.

## exit

Saves changes, and then exits the config-wlan context.

## quit

Exits the config-wlan context without saving changes.

## description

To set the WLAN service description, use the following command:

```
description WORD
```

### Syntax Description

**description**

Configure the WLAN description

**WORD**

Set the WLAN description this value

### Defaults

None.

### Example

```
ruckus(config-wlan)# description ruckustestwlan2  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## called-station-id-type

To set the called station ID type to, use the following command:

```
called-station-id-type [ wlan-bssid | ap-mac ]
```

### Syntax Description

**wlan-bssid**

Set the called station ID type to 'BSSID:SSID'

**ap-mac**

Set the called station ID type to 'APMAC:SSID'

### Defaults

wlan-bssid

### Example

```
ruckus(config-wlan)# called-station-id-type wlan-bssid  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## ssid

To set the WLAN service's SSID or network name, use the following command:

```
ssid SSID
```

## Syntax Description

<b>ssid</b>	Configure the WLAN service's SSID
<i>SSID</i>	Set the SSID to this value

## Defaults

None.

## Example

```
ruckus(config-wlan)# ssid ruckus2  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## beacon-interval

To set the beacon interval for mesh links, use the following command:

**beacon-interval** *NUMBER*

## Syntax Description

<b>beacon-interval</b>	Set the beacon interval for the WLAN
<i>NUMBER</i>	Enter the beacon interval (100~1000 TUs)

## Defaults

100

## Example

```
ruckus(config-wlan)# beacon-interval 100  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## wlan-bind

To set the radio for WLAN bind, use the following command:

```
wlan-bind <RADIO>
```

### Syntax

<RADIO>: [all | 2.g | 5g]

### Defaults

all

### Example

```
ruckus(config-wlan)# wlan-bind all  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## mgmt-tx-rate

To set the transmit rate for management frames, use the following command:

```
mgmt-tx-rate RATE
```

### Syntax Description

**mgmt-tx-rate**  
Set the max transmit rate for management frames

**RATE**  
Set the transmit rate (in Mbps).

### Defaults

2

### Example

```
ruckus(config-wlan)# mgmt-tx-rate 2  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## name

To set the name of the WLAN, use the following command:

```
name NAME
```

## Syntax Description

**name**  
Set the WLAN name

**NAME**  
Set to this name

## Defaults

None.

## Example

```
ruckus(config-wlan)# name ruckus2  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## type

To configure the WLAN type, use the following command:

**type** [ **standard-usage** | **guest-access** | **hotspot WORD** | **hs20 WORD** | **autonomous** ]

## Syntax Description

**type**  
Set the WLAN type

**standard-usage**  
Set the WLAN type to standard usage

**guest-access**  
Set the WLAN type to guest access

**hotspot WORD**  
Set the WLAN type to Hotspot using the hotspot service specified

**hs20 WORD**  
Set the WLAN type to Hotspot 2.0 using the HS2.0 operator specified

**autonomous**  
Set the WLAN type to Autonomous.

## Defaults

Standard usage

## Example

```
ruckus(config-wlan)# type standard-usage  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### **type standard-usage**

To set the WLAN type to “Standard Usage”, use the following command:

```
type standard-usage  
type standard
```

### **type guest-access**

To set the WLAN type to “Guest Access”, use the following command:

```
type guest-access WORD
```

### **Example**

```
ruckus(config-wlan)# type guest-access guestpolicy1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### **type hotspot**

To set the WLAN type to “Hotspot”, use the following command:

```
type hotspot
```

### **type hs20**

To set the WLAN type to “Hotspot 2.0”, use the following command:

```
type hs20<WORD>
```

### **Syntax Description**

**type hs20**: set WLAN type to Hotspot 2.0

**<WORD>**: set Hotspot 2.0 Operator name

### **Example**

```
ruckus(config-wlan)# type hs20 operator1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## **open**

To set the authentication method to 'open', use the following command:

```
open [none|owe|wpa2|wpa3|wpa23-mixed|wpa-mixed|wep-64|wep-128] passphrase <WORD> algorithm <WORD>]
```

### **Syntax Description**

- none: Sets the authentication method to 'open' and encryption method to 'none'.
- owe: Sets the authentication method to 'open', encryption method to 'OWE', algorithm to 'AES', and pmf to 'required'.
- wpa2: Sets the authentication method to 'open' and encryption method to 'WPA2'.

- **wpa3**: Sets the authentication method to 'open' and encryption method to 'WPA3'.
- **wpa23-mixed**: Sets the encryption method to 'WPA2/WPA3 Mixed'.
- **wpa-mixed**: Sets the encryption method to 'WPA/WPA2 Mixed'.
- **AES**: Sets the algorithm to AES.
- **auto**: Sets the algorithm to auto.
- **key**: Sets the WEP-64 or WEP-128 key.

## Defaults

None.

## Example

```
ruckus(config)# wlan wlan2
The WLAN service 'wlan2' has been created. To save the WLAN service, type 'end' or 'exit'.
ruckus(config-wlan)# open none
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)# end
The WLAN service 'wlan2' has been updated and saved.
Your changes have been saved.
ruckus(config)#
```

## open owe

To set the authentication method to 'open', encryption method to 'OWE', algorithm to 'AES', and pmf to 'required', use the following command:

**open owe**

## Example

```
ruckus(config-wlan)# open owe
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## open wpa2

To set the authentication method to 'open' and encryption method to 'WPA2', use the following command:

**open wpa2** passphrase WORD algorithm [*aes|auto*]

## Example

```
ruckus(config-wlan)# open wpa2 passphrase pass1234 algorithm aes
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## open wpa3

To set the encryption method to WPA3, use the following command:

**open wpa3** passphrase <PASSPHRASE> algorithm *aes*

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Example

```
ruckus(config-wlan)# open wpa3 passphrase pass1234 algorithm aes
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### **open wpa23-mixed**

To set the encryption method to 'WPA2/WPA3 Mixed', use the following command:

**open wpa23-mixed** psk-passphrase <PASSPHRASE> sae-passphrase <PASSPHRASE> algorithm AES

#### Example

```
ruckus(config-wlan)# open wpa23-mixed psk-passphrase pass1234 sae pass5678 algorithm aes
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## zero-it-activation

To enable Zero-IT activation, use the following command:

**zero-it-activation**

**zero-it**

### Syntax Description

**zero-it-activation**

Enable Zero-IT activation

**zero-it**

Enable Zero-IT activation

### Defaults

Disabled.

#### Example

```
ruckus(config-wlan)# zero-it-activation
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

#### **no zero-it-activation**

To disable Zero-IT activation, use the following command:

**no zero-it-activation**

**no zero-it**

### Syntax Description

**no zero-it-activation**

Disable Zero-IT activation



**no zero-it**

Disable Zero-IT activation

**Defaults**

Disabled.

**Example**

```
ruckus(config-wlan)# no zero-it  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## Configure Dynamic PSK Commands

Use the following commands to enable and configure Ruckus Dynamic Pre-Shared Key functionality for the WLAN.

### *dynamic-psk enable*

To enable internal Dynamic Pre-Shared Keys, use the following command:

```
dynamic-psk enable
```

### Syntax Description

**dynamic-psk enable**

Enable internal Dynamic PSK

### Defaults

Disabled

### Example

```
ruckus(config-wlan)# dynamic-psk enable  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### *no dynamic-psk*

To disable Dynamic Pre-Shared Keys on the WLAN, use the following command:

```
no dynamic-psk
```

### *dynamic-psk external*

To enable external dynamic PSK and set the authentication server to external DPSK, use the following command:

```
dynamic-psk external auth-server<WORD>
```

### Command Syntax

*dynamic-psk external*: set DPSK server to external.

*auth-server*: designate the external authentication server name.

*<WORD>*: name of the authentication server.

### Example

```
ruckus(config-wlan)#dynamic-psk external auth-server radius1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### *dynamic-psk passphrase-len*

To set the Dynamic Pre-Shared Key passphrase length, use the following command:

**dynamic-psk passphrase-len** *NUMBER*

### **dynamic-psk type**

To sets the type of dynamic PSK (secure or mobile-friendly), use the following command:

**dynamic-psk type** [mobile-friendly|secure]

#### **Syntax Description**

**dynamic-psk type**

Set the DPSK type

**mobile-friendly**

Set the DPSK type to mobile-friendly

**secure**

Set the DPSK type to secure

#### **Defaults**

Secure

#### **Example**

```
ruckus(config-wlan)# dynamic-psk type mobile-friendly
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

### **limit-dpsk**

To enable Dynamic PSK limits and set the max number of devices per user, use the following command:

**limit-dpsk** *NUMBER*

### **no limit-dpsk**

To disable Dynamic PSK limits, use the following command:

**no limit-dpsk**

### **shared-dpsk**

To enable Shared Dynamic PSK and set the number of device that shared one unbound DPSK, use the following command:

**shared-dpsk**<*NUMBER*>

#### **Command Syntax**

*shared-dpsk*: enable shared DPSK.

<*NUMBER*>: enter a number of devices which share one unbound DPSK.

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Example

```
ruckus(config-wlan)# shared-dpsk 40
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### no shared-dpsk

To disable shared Dynamic PSK, use the following command:

```
no shared-dpsk
```

#### Command Syntax

*no shared-dpsk*: disable shared DPSK.

#### Example

```
ruckus(config-wlan)# no shared-dpsk
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### dynamic-psk-expiration

To set the WLAN Dynamic PSK expiration, use the following command:

```
dynamic-psk-expiration [ length | start-point ] WORD
```

#### Syntax Description

##### **dynamic-psk-expiration**

Sets the DPSK expiration.

##### **length**

Sets the DPSK expiration length.

##### **unlimited**

Sets wlan dynamic psk expiration to unlimited.

##### **one-day**

Sets wlan dynamic psk expiration to one day.

##### **one-week**

Sets wlan dynamic psk expiration to one week.

##### **two-weeks**

Sets wlan dynamic psk expiration to two weeks.

##### **one-month**

Sets wlan dynamic psk expiration to one month.

##### **two-months**

Sets wlan dynamic psk expiration to two months.

##### **three-months**

Sets wlan dynamic psk expiration to three months.

**half-a-year**

Sets wlan dynamic psk expiration to half a year.

**one-year**

Sets wlan dynamic psk expiration to one year.

**two-years**

Sets wlan dynamic psk expiration to two years.

**start-point**

Sets the DPSK validity start-point.

**first-use**

The D-PSK expiration will be calculated from when it is first used.

**creation-time**

The D-PSK expiration will be calculated from when it is created.

**Example**

```
ruckus(config-wlan)# dynamic-psk-expiration start-point first-use
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)# dynamic-psk-expiration length one-week
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## mac none

To set the authentication method to 'MAC Address' and encryption method to 'none', use the following command:

```
mac none auth-server WORD
```

### Syntax Description

**mac**

Set the authentication method to 'MAC Address'

**none**

Set the encryption method to 'none'

**auth-server WORD**

Set the authorization server address to WORD

### Defaults

None.

### Example

```
ruckus(config-wlan)# mac none auth-server Ruckus-Auth-01
The command was executed successfully.
ruckus(config-wlan)#
```

## Configuring Master Settings

### Configure WLAN Settings Commands

## mac owe

To set the authentication to MAC address and encryption method to 'OWE', use the following command:

```
mac owe auth-server <WORD>
```

### Example

```
ruckus(config-wlan)# mac owe auth-server radius1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## dot1x

To set the authentication method to '802.1x EAP', use the following command:

```
dot1x [wpa2 | wpa3 | wpa23-mixed]algorithm[aes | AES-GCMP-256]auth-server[local | name<WORD>]
```

### Command Syntax

*dot1x*: set auth method to dot1x.

*wpa2*: set the encryption method to WPA2.

*wpa3*: set the encryption method to WPA3.

*wpa23-mixed*: set the encryption method to WPA2/WAP3-Mixed.

*algorithm*: define the encryption algorithm.

*aes*: set the encryption algorithm to "AES".

*AES-GCMP-256*: set the encryption algorithm to "AES-GCMP-256".

*auth-server*: designate the authentication server.

*local*: Sets the authentication server to 'Local Database'.

*name*: Sets the authentication server to the specified name from AAA.

<WORD>: name of the external authentication server.

### Example

```
ruckus(config-wlan)# dot1x wpa2 algorithm aes auth-server local
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## dot1x wpa2

To set the authentication method to '802.1x EAP', encryption method to 'WPA2', and algorithm to 'AES', use the following command:

```
dot1x wpa2algorithm AES auth-server[ local | name <WORD> ]
```

### Syntax Description

#### dot1x

Set the authentication method to '802.11x'

**wpa2**  
Set the encryption method to WPA2

**algorithm AES**  
Set the algorithm to AES

**auth-server**  
Set authentication server

**local**  
Set the authentication server to 'local database'

**name**  
Set the auth server

**<WORD>**  
Name of the auth server

### Defaults

None.

### Example

```
ruckus(config-wlan)# dot1x wpa2 algorithm AES auth-server Ruckus-RADIUS
The command was executed successfully.
ruckus(config-wlan)#
```

### *dot1x wpa3*

To set the authentication method to 802.1X and the encryption method to WPA3, use the following command:

**dot1x wpa3 algorithm AES-GCMP-256 auth-server name<WORD>**

### Defaults

None

### Example

```
ruckus(config-wlan)# ruckus(config-wlan)# dot1x wpa3 algorithm AES-GCMP-256 auth-server name radius1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

### *dot1x wpa2/wpa3-mixed*

To set the authentication method to "802.1x EAP", encryption method to "WPA2/WPA3-Mixed", and algorithm to "AES", use the following command:

**dot1x wpa23-mixed algorithm AES auth-server [local | name<WORD>]**

### Syntax Description

**dot1x**  
Set the authentication method to 802.11x

## Configuring Master Settings

### Configure WLAN Settings Commands

#### **wpa23-mixed**

Set the encryption method to WPA2/WPA3-Mixed

#### **algorithm AES**

Set the algorithm to AES

#### **auth-server**

Set authentication server

#### **local**

Set the authentication server to local database

#### **name**

Set the auth server

<WORD>

Name of the auth server

### Defaults

None.

### Example

```
ruckus(config-wlan)# dot1x wpa23-mixed algorithm AES auth-server Ruckus-RADIUS
The command was executed successfully.
ruckus(config-wlan)#
```

## bgscan

To enable background scanning on the WLAN, use the following command:

**bgscan**

### Example

```
ruckus(config-wlan)# bgscan
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

### no bgscan

To disable background scanning on the WLAN, use the following command:

**no bgscan**

### Example

```
ruckus(config-wlan)# no bgscan
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## client-isolation

To enable client isolation (per-AP or across APs), use the following command:



```
client-isolation [ isolation-on-ap | isolation-on-subnet ] [ enable | disable ]
```

## Syntax Description

### client-isolation

Enable client isolation for this WLAN.

### isolation-on-ap

Enable client isolation per AP.

### isolation-on-subnet

Enable client isolation across APs.

## Example

```
ruckus(config-wlan)# client-isolation isolation-on-ap enable  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## allowlist

To apply a client isolation allowlist to this WLAN, use the following command:

```
allowlist name WORD
```

## no allowlist

To disable the allowlist for this WLAN, use the following command:

```
no allowlist
```

## load-balancing

To enable load balancing for this WLAN, use the following command:

```
load-balancing
```

## Defaults

Disabled

## Example

```
ruckus(config-wlan)# load-balancing  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## no load-balancing

To disable load balancing for this WLAN, use the following command:

```
no load-balancing
```

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Example

```
ruckus(config-wlan)# no load-balancing
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## band-balancing

To enable band balancing for this WLAN, use the following command:

**band-balancing**

#### Defaults

Enabled.

#### Example

```
ruckus(config-wlan)# band-balancing
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *no band-balancing*

To disable band balancing for this WLAN, use the following command:

**no band-balancing**

## send-eap-failure

To enable send EAP failure messages, use the following command:

**send-eap-failure**

#### Defaults

Disabled

#### Example

```
ruckus(config-wlan)# send-eap-failure
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *no send-eap-failure*

To disable send EAP failure messages, use the following command:

**no send-eap-failure**

### Example

```
ruckus(config-wlan)# no send-eap-failure
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## pap-authenticator

To enable RADIUS message authenticator in PAP requests, use the following command:

```
pap-authenticator
```

### Example

```
ruckus(config-wlan)# pap-authenticator
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## no pap-authenticator

To disable RADIUS message authenticator in PAP requests, use the following command:

```
no pap-authenticator
```

### Example

```
ruckus(config-wlan)# no pap-authenticator
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## nasid-type

To set the NAS ID type, use the following command:

```
nasid-type [ wlan-bssid | mac-addr | user-define WORD]
```

### Syntax Description

#### **nasid-type**

Set the NAS ID type

#### **wlan-bssid**

Set NAS ID type WLAN-BSSID (default)

#### **mac-addr**

Set NAS ID type to Controller MAC Address

#### **user-define WORD**

Set NAD ID type to a user-defined string

### Defaults

WLAN-BSSID

## Example

```
ruckus(config-wlan)# nasid-type wlan-bssid  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## priority low

To set the WLAN priority to low, use the following command:

```
priority low
```

## priority high

To set the WLAN priority to high, use the following command:

```
priority high
```

## web-auth

To enable Web authentication, use the following command:

```
web-auth [ local | name WORD ]
```

## Syntax Description

### **web-auth**

Enable Web authentication

### **local**

Use local database as auth server

### **name**

Specify an external auth server

### *WORD*

The AAA server to use for Web authentication

## Defaults

None

## Example

```
ruckus# config  
ruckus(config)# wlan wlan-123  
ruckus(config-wlan)# web-auth Ruckus-RADIUS  
The command was executed successfully.  
ruckus(config-wlan)#
```

## no web-auth

To disable Web authentication, use the following command:

```
no web-auth
```

### Syntax Description

**no web-auth**  
Disable Web authentication

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan wlan-123
ruckus(config-wlan)# no web-auth
The command was executed successfully.
```

## grace-period

To enable and set a maximum time (in minutes) for which users must re-authenticate after disconnecting, use the following command:

**grace-period** *NUMBER*

### Syntax Description

**grace-period**  
Enables and Sets a maximum time (in minutes) for which users must re-authenticate after disconnecting.

### Defaults

Disabled.

### Example

```
ruckus(config-wlan)# grace-period 20
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no grace-period

To disable the grace period, use the following command:

**no grace-period** *NUMBER*

### Syntax Description

**no grace-period**  
Disables the grace period timeout.

### Defaults

Disabled.

### Example

```
ruckus(config-wlan)# no grace-period  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## acct-server

To set the accounting server, use the following command:

```
acct-server WORD
```

### Syntax Description

#### acct-server

Configure the AAA server

#### WORD

Set the AAA server to this address

### Defaults

None.

### Example

```
ruckus# config  
ruckus(config)# wlan wlan-123  
ruckus(config-wlan)# acct-server Ruckus-Acct-01  
The command was executed successfully.
```

## acct-server interim-update

To configure the interim update frequency (in minutes) of the AAA server, use the following command:

```
acct-server WORD interim-update NUMBER
```

### Syntax Description

#### acct-server

Configure the interim update frequency of the AAA server

#### interim-update{minutes}

Set the update frequency to this value (in minutes)

### Defaults

5 (minutes)

### Example

```
ruckus# config  
ruckus(config)# wlan wlan-123  
ruckus(config-wlan)# acct-server Ruckus-Acct-01 interim-update 5  
The command was executed successfully.
```

## no acct-server

To disable the AAA server, use the following command:

```
no acct-server
```

### Syntax Description

```
no acct-server
```

Disable AAA server authentication

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan wlan-123
ruckus(config-wlan)# no acct-server
The command was executed successfully.
```

## inactivity-timeout

To set the inactivity timeout to the specified number in minutes, use the following command:

```
inactivity-timeout NUMBER
```

### Syntax Description

```
inactivity-timeout
```

Enable and set the inactivity timeout

```
NUMBER
```

Set the inactivity timeout in minutes (1-500 min.)

### Defaults

5

### Example

```
ruckus(config-wlan)# inactivity-timeout 15
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## web-auth-timeout

To enable and set the web authentication timeout time to the specified number in minutes, use the following command:

```
web-auth-timeout NUMBER
```

## Syntax Description

### **web-auth-timeout**

Enable and set the web authentication timeout

### **NUMBER**

Set the inactivity timeout in minutes

## Defaults

5

## Example

```
ruckus(config-wlan)# web-auth-timeout 15  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## vlan

To set the VLAN ID for the WLAN, use the following command:

**vlan** *NUMBER*

## Syntax Description

### **vlan**

Enable VLAN

### **NUMBER**

Set the VLAN ID to this value

## Defaults

1

## Example

```
ruckus(config-wlan)# vlan 123  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## dynamic-vlan

To enable dynamic VLAN, use the following command:

**dynamic-vlan**

## Syntax Description

### **dynamic-vlan**

Enable dynamic VLAN



## Usage Guidelines

Dynamic VLAN can be enabled or disabled in the following two conditions: 1) The authentication method is '802.1X/EAP' or 'MAC Address', Encryption method is WPA, WPA2, WPA mixed, or none. 2) Authentication method is 'Open', Encryption method is WPA, WPA2 (Algorithm may not be Auto), enable Zero-IT Activation, enable Dynamic PSK.

## Example

```
ruckus(config-wlan)# dynamic-vlan  
The command was executed successfully. To save the changes, type 'end' or 'exit'
```

## no dynamic-vlan

To disable dynamic VLAN, use the following command:

```
no dynamic-vlan
```

## Syntax Description

```
no dynamic-vlan  
Disable dynamic VLAN
```

## Defaults

Disabled.

## Example

```
ruckus(config-wlan)# no dynamic-vlan  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## mcast-filter

To enable multicast filter for the WLAN, use the following command:

```
mcast-filter
```

## no mcast-filter

To disable multicast filter for the WLAN, use the following command:

```
no mcast-filter
```

## hide-ssid

To hide an SSID from wireless users, use the following command. Wireless users who know the SSID will still be able to connect to the WLAN service.

```
hide-ssid
```

## Syntax Description

### **hide-ssid**

Hide SSID from wireless users

## Defaults

Disabled

## Example

```
ruckus# config
ruckus(config)# wlan wlan-123
ruckus(config-wlan)# hide-ssid
The command was executed successfully.
```

## *no hide-ssid*

To unhide or broadcast an SSID to wireless users, use the following command:

**no hide-ssid**

## Syntax Description

### **no hide-ssid**

Broadcast SSID to wireless users

## Defaults

Disabled

## Example

```
ruckus# config
ruckus(config)# wlan wlan-123
ruckus(config-wlan)# no hide-ssid
The command was executed successfully
```

## ofdm-only

To enable support of OFDM rates only, use the following command:

**ofdm-only**

## *no ofdm-only*

To disable OFDM only rates, use the following command:

**no ofdm-only**

## admission-control

To enable Call Admission Control, use the following command:

**admission-control**

### **no admission-control**

To disable Call Admissino Control, use the following command:

**no admission-control**

## **transient-client-management**

To enable transient client management, use the following command:

**transient-client-management**

### **Defaults**

Disabled.

### **Example**

```
ruckus(config-wlan)# transient-client-management
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

### **no transient-client-management**

To disable transient client management, use the following command:

**no transient-client-management**

### **Defaults**

Disabled.

### **Example**

```
ruckus(config-wlan)# no transient-client-management
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **join-wait-time**

To set the time to wait on join requests (1-60 seconds, 5 by default), use the following command:

**join-wait-time <NUMBER>**

### **Defaults**

5

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Example

```
ruckus(config-wlan)# transient-client-management
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)# join-wait-time 5
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *join-wait-threshold*

To set the number of join requests to wait (1-50 seconds, 5 by default), use the following command:

```
join-wait-threshold <NUMBER>
```

#### Defaults

5

#### Example

```
ruckus(config-wlan)# join-wait-threshold 5
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *join-expire-time*

To set the join expire time (1-300 seconds, 300 by default), use the following command:

```
join-expire-time <NUMBER>
```

#### Defaults

300

#### Example

```
ruckus(config-wlan)# join-expire-time 300
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *min-client-rssi*

To set the minimum client RSSI threshold (-90 to -60 dBm, -85 by default), use the following command:

```
min-client-rssi <NUMBER>
```

#### Defaults

-85

#### Example

```
ruckus(config-wlan)# min-client-rssi -85
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## bss-minrate

To set the minimum BSS transmission rate of the WLAN (in Mbps), use the following command:

```
bss-minrate NUMBER
```

### Syntax Description

**bss-minrate**

Set the minimum BSS transmission rate in Mbps.

NUMBER

Minimum BSS transmission rate

### Defaults

None.

### Example

```
ruckus(config-wlan)# bss-minrate 2  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### no bss-minrate

To disable the minimum BSS transmission rate for the WLAN, use the following command:

```
no bss-minrate
```

## dtim-period

To set the DTIM period of the WLAN, use the following command:

```
dtim-period NUMBER
```

### Syntax Description

**dtim-period**

Sets the DTIM period of the WLAN (1-255).

NUMBER

DTIM period.

### Defaults

1

### Example

```
ruckus(config-wlan)# dtim-period 5  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## **no dtim-period**

To set the DTIM period of the WLAN to 1 (default), use the following command:

```
no dtim-period
```

## **Syntax Description**

```
no dtim-period
```

Set the DTIM period to 1.

## **Defaults**

1

## **Example**

```
ruckus(config-wlan)# no dtim-period  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## directed-threshold

To set the Directed MC/BC threshold of the WLAN (0-128), use the following command:

**directed-threshold** *NUMBER*

### Syntax Description

**directed-threshold**

Set the Directed MC/BC threshold of the WLAN.

*NUMBER*

Directed threshold (0-128)

### Defaults

5

### Example

```
ruckus(config-wlan)# directed-threshold 5
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```



## **no directed-threshold**

To set the Directed MC/BC threshold of the WLAN to 5 (default), use the following command:

```
no directed-threshold
```

### **Syntax Description**

```
no directed-threshold
```

Sets the Directed Multicast/Broadcast threshold to 5.

### **Defaults**

5

### **Example**

```
ruckus(config-wlan)# no directed-threshold  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## **dhcp-relay**

To set the DHCP relay server to the specified address (tunneled WLANs only), use the following command:

```
dhcp-relay WORD
```

## **no dhcp-relay**

To disable DHCP relay, use the following command:

```
no dhcp-relay
```

## **smart-roam**

To enable and set SmartRoam with the specified roam factor (1-10), use the following command:

```
smart-roam NUMBER/EMPTY
```

## **no smart-roam**

To disable the SmartRoam feature, use the following command:

```
no smart-roam
```

## **force-dhcp**

To enable the Force DHCP option, use the following command:

```
force-dhcp
```

## Defaults

Disabled

## Example

```
ruckus(config-wlan)# force-dhcp
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **force-dhcp-timeout**

To disconnect the client if it does not obtain valid IP address within the specified timeout period (in seconds), use the following command:

**force-dhcp-timeout** *NUMBER*

## Defaults

10 seconds

## Example

```
ruckus(config-wlan)# force-dhcp-timeout 10
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **no force-dhcp**

To disable the Force DHCP option, use the following command:

**no force-dhcp**

## **sta-info-extraction**

To enable station information extraction (client fingerprinting), use the following command:

**sta-info-extraction**

## Defaults

Enabled

## **no sta-info-extraction**

To disable station information extraction (client fingerprinting), use the following command:

**no sta-info-extraction**

## **max-clients**

To set the maximum number of clients for a specific WLAN, use the following command:

**max-clients** *NUMBER*

## Syntax Description

### **max-clients**

Configure the maximum number of clients that the WLAN can support

### *NUMBER*

Set the maximum clients to this value

## Defaults

100

## Example

```
ruckus(config-wlan)# max-clients 100  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## 802dot11d

To enable 802.11d for the WLAN, use the following command:

```
802dot11d
```

## Defaults

Enabled

## no 802dot11d

To disable 802.11d for the WLAN, use the following command:

```
no 802dot11d
```

## arc

Use the following command to enable Application Recognition & Control:

```
arc
```

## Defaults

Disabled

## Example

```
ruckus(config-wlan)# arc  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## Configuring Master Settings

### Configure WLAN Settings Commands

#### **no arc**

Use the following command to disable Application Recognition and Control:

```
no arc
```

#### **apply-arc-policy**

Use the following command to apply an application policy to the WLAN:

```
apply-arc-policy WORD
```

#### **Defaults**

None

#### **Example**

```
ruckus(config-wlan)# apply-arc-policy facebook  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

#### **no apply-arc-policy**

Use the following command to disable an application policy for the WLAN:

```
no apply-arc-policy
```

#### **Defaults**

None

#### **Example**

```
ruckus(config-wlan)# no apply-arc-policy  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

#### **wifi-calling**

To enable Wi-Fi Calling with the specified profile, enter the following command:

```
wifi-calling enable profile <WORD>
```

#### **Defaults**

Disabled.

#### **Example**

```
ruckus(config-wlan)# wifi-calling enable profile profile1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## **no wifi-calling**

To disable Wi-Fi Calling for the WLAN, enter the following command:

**no wifi-calling**

### **Defaults**

Disabled.

### **Example**

```
ruckus(config-wlan)# no wifi-calling
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **url-filtering**

To enable URL Filtering for the WLAN, use the following command:

**url-filtering**

### **Defaults**

Disabled

### **Example**

```
ruckus(config-wlan)# url-filtering
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **no url-filtering**

To disable URL Filtering for the WLAN, use the following command:

**no url-filtering**

### **Defaults**

Disabled

### **Example**

```
ruckus(config-wlan)# no url-filtering
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## **url-filtering-profile**

Use the following command to apply a URL filtering profile to the WLAN:

**url-filtering-profile** *WORD*

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Defaults

None

#### Example

```
ruckus(config-wlan)# url-filtering-profile filter1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## sae-anti-clogging-threshold

To set the SAE anti\_clogging\_threshold to the specified number, use the following command:

```
sae-anti-clogging-threshold<NUMBER>
```

#### Defaults

None

#### Example

```
ruckus(config-wlan)# sae-anti-clogging-threshold 10
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## roaming-acct-interim-update

To enable accounting interim-updates when a client roams, use the following command:

```
roaming-acct-interim-update
```

#### Defaults

Disabled.

#### Usage Guidelines

When “roaming-acct-interim-update” is set, all traffic and session-id data from the original session is carried over to the new session.

#### *no roaming-acct-interim-update*

To disable accounting interim updates when a client roams (default: disabled), use the following command:

```
no roaming-acct-interim-update
```

## rate-limit

To set the rate limiting for the WLAN, use the following command:

```
rate-limit uplink NUMBER downlink NUMBER
```

## Syntax Description

<b>rate-limit</b>	Set the rate limit
<b>uplink</b>	Set the uplink rate limit
<b>downlink</b>	Set the downlink rate limit
<b>NUMBER</b>	Set the rate limiting to the value specified.

## Defaults

None.

## Example

```
ruckus(config-wlan)# rate-limit uplink 20 downlink 20
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## no rate-limit

To disable the rate limit, use the following command:

**no rate-limit**

## Syntax Description

<b>no rate-limit</b>	Disable rate limiting for the WLAN
----------------------	------------------------------------

## Defaults

Disabled.

## Example

```
ruckus(config-wlan)# no rate-limit
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## acl

To configure an L2 MAC/L3/L4/IP ACL with the specified name, use the following command:

### Syntax

```
acl [l2acl | dvpcpy | prece | role-based-access-ctrl | l3acl] <WORD> ]
```

### Parameters

#### **l2acl**

Configures a L2 ACL with the specified name.

#### **dvpcpy**

Configures a Device Policy with the specified name.

#### **prece**

Configures a Precedence Policy with the specified name.

#### **role-based-access-ctrl**

Enable Role based Access Control Policy.

#### **l3acl**

Configures a L3/L4/IP ACL with the specified name.

#### **<WORD>**

Specify the name of the ACL.

### Examples

```
ruckus(config-wlan)# acl l2acl acl1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### **acl role-based-access-ctrl**

To enable Role based Access Control Policy on the WLAN, use the following command:

```
acl role-based-access-ctrl
```

### Defaults

Disabled

### Example

```
ruckus(config-wlan)# acl role-based-access-ctrl  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

### **no role-based-access-ctrl**

To disable role based access control policy service, use the following command:

```
no role-based-access-ctrl
```



### **no l2acl**

To disable Layer 2 Access Control Lists, use the following command:

```
no l2acl
```

### **no l3acl**

To disable Layer 3/4 ACLs, use the following command:

```
no l3acl
```

### **acl prece**

To apply a Precedence Policy to the WLAN, use the following command:

```
acl prece WORD
```

### **acl dvcpcy**

To apply a Device Policy to the WLAN, use the following command:

```
acl dvcpcy WORD
```

### **no dvcpcy**

To disable device policy for this WLAN, use the following command:

```
no dvcpcy
```

## **mac-addr-format**

Sets MAC auth username and password to one of the following formats:

**mac-addr-format aa-bb-cc-dd-ee-ff**

Sets MAC auth username and password to format aa-bb-cc-dd-ee-ff.

**mac-addr-format aa:bb:cc:dd:ee:ff**

Sets MAC auth username and password to format aa:bb:cc:dd:ee:ff.

**mac-addr-format AABCCDDEEFF**

Sets MAC auth username and password to format AABCCDDEEFF.

**mac-addr-format AA-BB-CC-DD-EE-FF**

Sets MAC auth username and password to format AA-BB-CC-DD-EE-FF.

**mac-addr-format AA:BB:CC:DD:EE:FF**

Sets MAC auth username and password to format AA:BB:CC:DD:EE:FF.

### **no mac-addr-format**

Sets MAC auth username and password to format aabccddeeff.

## **qos classification**

To enable Quality of Service classification, use the following command:

**qos classification**

## **no qos classification**

To disable Quality of Service classification, use the following command:

**no qos classification**

## **qos heuristics-udp**

To enable QoS heuristics for UDP traffic, use the following command:

**qos heuristics-udp**

## **no qos heuristics-udp**

To disable QoS heuristics for UDP traffic, use the following command:

**no qos heuristics-udp**

## **qos directed-multicast**

To enable QoS directed multicast, use the following command:

**qos directed-multicast**

## **no qos directed-multicast**

To disable QoS directed multicast, use the following command:

**no qos directed-multicast**

## **qos igmp-snooping**

To disable QoS directed multicast, use the following command:

**qos igmp-snooping**

## **no qos igmp-snooping**

To disable QoS IGMP snooping, use the following command:

**no qos igmp-snooping**

## **qos mld-snooping**

To enable QoS MLD snooping, use the following command:

**no qos mld-snooping**

### **no qos mld-snooping**

To disable QoS MLD snooping, use the following command:

```
no qos mld-snooping
```

### **qos tos-classification**

To enable QoS TOS classification, use the following command:

```
qos tos-classification
```

### **no qos tos-classification**

To disable QoS TOS classification, use the following command:

```
no qos tos-classification
```

### **qos priority high**

To set QoS priority to 'high', use the following command:

```
qos priority high
```

### **qos priority low**

To set QoS priority to 'low', use the following command:

```
qos priority low
```

### **qos directed-threshold**

To set the QoS directed threshold, use the following command:

```
qos directed-threshold NUMBER
```

### **disable-dgaf**

To disable Downstream Group-Address Frame Forwarding, use the following command (Hotspot 2.0 WLAN only):

```
disable-dgaf
```

### **no disable-dgaf**

To enable Downstream Group-Address Frame Forwarding, use the following command (Hotspot 2.0 WLAN only):

```
no disable-dgaf
```

### **proxy-arp**

To enable Proxy ARP service for the WLAN, use the following command:

```
proxy-arp
```

## Configuring Master Settings

### Configure WLAN Settings Commands

#### **no proxy-arp**

To disable Proxy ARP service for the WLAN, use the following command:

```
no proxy-arp
```

#### **80211w-pmf**

To enable 802.11w PM, use the following command:

```
80211w-pmf
```

#### **no 80211w-pmf**

To disable 802.11w PMF, use the following command:

```
no 80211w-pmf
```

#### **ignor-unauth-stats**

To enable ignoring unauthorized client statistics, use the following command:

```
ignor-unauth-stats
```

#### **no ignor-unauth-stats**

To disable ignoring unauthorized client statistics, use the following command:

```
no ignor-unauth-stats
```

#### **ft-roaming**

To enable FT Roaming, use the following command:

```
ft-roaming
```

#### **Example**

```
ruckus(config-wlan)# ft-roaming  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

#### **no ft-roaming**

To disable FT Roaming, use the following command:

```
no ft-roaming
```

#### **rrm-neigh-report**

To enable 802.11k Neighbor-list report, use the following command:

```
rrm-neigh-report
```

## Example

```
ruckus(config-wlan)# rrm-neigh-report  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## no rrm-neigh-report

To isable 802.11k Neighbor-list report, use the following command:

```
no rrm-neigh-report
```

## https-redirection

To enable HTTPS redirection, use the following command:

```
https-redirection
```

## no https-redirection

To disable HTTPS redirection, use the following command:

```
no https-redirection
```

## client-flow-log

To enable logging of client flow data to external syslog, use the following command:

```
client-flow-log
```

## Example

```
ruckus(config-wlan)# client-flow-log  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## no client-flow-log

To disable logging of client flow data to external syslog, use the following command:

```
no client-flow-log
```

## Example

```
ruckus(config-wlan)# no client-flow-log  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlan)#
```

## client-connect-log

To enable logging of client connect data, use the following command:

```
client-connect-log
```

## Configuring Master Settings

### Configure WLAN Settings Commands

#### Defaults

Disabled

#### Example

```
ruckus(config-wlan)# client-connect-log
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *no client-connect-log*

To disable logging of client connection data, use the following command:

**client-connect-log**

#### Defaults

Disabled

#### Example

```
ruckus(config-wlan)# no client-connect-log
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## bypasscna

Use the following command to bypass Apple Captive Network Assistance (CNA) on iOS and OS X devices.

**bypasscna**

#### Example

```
ruckus(config-wlan)# bypasscna
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

#### *no bypasscna*

To disable the bypass Apple CNA feature, use the following command:

**no bypasscna**

#### Example

```
ruckus(config-wlan)# no bypasscna
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```

## show

To display the WLAN settings, use the following command:

**show**

## Syntax Description

**show**

Display WLAN settings

## Defaults

None.

## Example

```
ruckus(config)# wlan ruckus1
The WLAN service 'ruckus1' has been loaded. To save the WLAN service, type 'end' or 'exit'.
ruckus(config-wlan)# show
WLAN Service:
ID:
  1:
    NAME = Ruckus-Wireless-1
    Tx. Rate of Management Frame(2.4GHz) = 2.0Mbps
    Tx. Rate of Management Frame(5GHz)   = 6.0Mbps
    Beacon Interval = 100ms
    SSID = Ruckus-Wireless-1
    Description = Ruckus-Wireless-1
    Type = Standard Usage
    Authentication = open
    Encryption = wpa
    Algorithm = aes
    Passphrase = password
    FT Roaming = Disabled
    802.11k Neighbor report = Disabled
    Web Authentication = Disabled
    Authentication Server = Disabled
    Accounting Server = Disabled
    Called-Station-Id type = wlan-bssid
    Tunnel Mode = Disabled
    DHCP relay = Disabled
    Max. Clients = 100
    Isolation per AP = Disabled
    Isolation across AP = Disabled
    Zero-IT Activation = Enabled
    Load Balancing = Disabled
    Band Balancing = Disabled
    Wifi6 = Enabled
    Service = Enabled
    Dynamic PSK = Enabled
    Dynamic PSK Passphrase Length =
    Limit Dynamic PSK = Disabled
    Auto-Proxy configuration:
      Status = Disabled
    Inactivity Timeout:
      Status = Disabled
    VLAN-ID = 1
    Dynamic VLAN = Disabled
    Closed System = Disabled
    OFDM-Only State = Disabled
    Multicast Filter State = Disabled
    802.11d State = Disabled
    Force DHCP State = Disabled
    Force DHCP Timeout = 0
    DHCP Option82:
      Status = Disabled
      Option82 sub-Option1 = Disabled
      Option82 sub-Option2 = Disabled
```

## Configuring Master Settings

### Configure WLAN Settings Commands

```
Option82 sub-Option150 = Disabled
Option82 sub-Option151 = Disabled
Ignore unauthorized client statistic = Disabled
STA Info Extraction State = Enabled
BSS Minrate = Disabled
Call Admission Control State = Disabled
PMK Cache Timeout= 720 minutes
PMK Cache for Reconnect= Enabled
NAS-ID Type= wlan-bssid
Roaming Acct-Interim-Update= Disabled
PAP Message Authenticator = Enabled
Send EAP-Failure = Disabled
L2/MAC = No ACLS
L3/L4/IP Address = No ACLS
L3/L4/IPv6 Address = No ACLS
Precedence = No ACLS
Proxy ARP = Disabled
Device Policy = No ACLS
Role based Access Control Policy = Disabled
SmartRoam = Disabled Roam-factor = 1
Allow List = No ACLS
Application Visibility = disabled
Apply Policy Group = No_Denys
```

```
ruckus(config)#
```

## wifi6

To enable wifi6 in WLAN for 11ax APs, use the following command:

```
wifi6
```

### Syntax Description

```
wifi6
```

Enable wifi6 for this WLAN.

### Example

```
ruckus(config-wlan)# wifi6
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)# show
WLAN Service:
  ID:
  .....
Wifi6 = Enabled
```

## no wifi6

To disable wifi6 on the WLAN, use the following command:

```
no wifi6
```

### Example

```
ruckus(config-wlan)# no wifi6
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlan)#
```



## service

To enable WLAN service, use the following command:

**service**

### Syntax Description

**service**

Enable WLAN service.

### Example

```
ruckus(config)# wlan wlan_aaa
The WLAN service 'wlan_aaa' has been loaded. To save the WLAN service, type 'end' or 'exit'.
ruckus (config-wlan)# service
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus (config-wlan)#
ruckus (config-wlan)# show
WLAN Service:
NAME = wlan_aaa
...
Service = Enabled
...
```

## no service

To disable WLAN service, use the following command:

**no service**

### Example

```
ruckus(config-wlan)# no service
The command was executed successfully. To save the changes, type 'end' or 'exit'.
WLAN Service:
NAME = wlan_aaa
...
Service = Disabled
...
```

## guess-friendly-key

To enable guest friendly key, use the following command:

**guess-friendly-key**

### Syntax Description

**guess-friendly-key**

Enables guest friendly key.

### Example

```
ruckus(config-wlan)# guess-friendly-key
Enables Guest Friendly Key
```

## Configuring Master Settings

### Configure WLAN Settings Commands

#### *no guess-friendly-key*

To disable guest friendly key, use the following command:

**no guess-friendly-key**

#### Example

```
ruckus(config-wlan)# no guess-friendly-key  
Disables Guest Friendly Key
```

# Configure WLAN Group Commands

Use the wlan-group commands to configure the settings of a particular WLAN group.

## wlan-group

To create a new WLAN group or update an existing WLAN group, use the following command:

```
wlan-group WORD
```

### Syntax Description

#### wlan-group

Configure the WLAN group

WORD

Name of the WLAN group

### Defaults

Default.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group 'wlangroup2' has been created. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)#
```

## no wlan-group

To delete a WLAN group from the list, use the following command:

```
no wlan-group WORD
```

### Syntax Description

#### no wlan-group

Delete the WLAN group

WORD

Name of the WLAN group

### Defaults

None.

### Example

```
ruckus(config)# no wlan-group wlan-grp-01
The WLAN group 'wlan-grp-01' has been removed.
ruckus(config)#
```

## abort

To exit the wlan-group context without saving changes, use the abort command. Enter this command from within the context of the WLAN group that you are configuring.

**abort**

### Syntax Description

**abort**

Exit the WLAN group without saving changes

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group 'wlangroup2' has been created. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)# abort
No changes have been saved.
ruckus(config)#
```

## end

To save changes to the WLAN group settings and exit the wlan-group context, use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**end**

### Syntax Description

**end**

Save changes, and then exit the WLAN group

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group 'wlangroup2' has been created. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)# end
The WLAN group 'wlangroup2' has been updated.
Your changes have been saved.
ruckus(config)#
```

## exit

To save changes to the WLAN group settings and exit the wlan-group context, use the exit command. Enter this command from within the context of the WLAN group that you are configuring.

**exit**

### Syntax Description

**exit**

Save changes, and then exit the WLAN group

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group entry 'wlangroup2' has been loaded. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)# exit
The WLAN group 'wlangroup2' has been updated.
Your changes have been saved.
ruckus(config)#
```

## quit

To exit the wlan-group context without saving changes, use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**quit**

### Syntax Description

**quit**

Exit the WLAN group without saving changes

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group entry 'wlangroup2' has been loaded. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)# quit
No changes have been saved.
ruckus(config)#
```

## name

To set the WLAN group name, use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**name** WORD

### Syntax Description

**name**

Configure the WLAN group name

WORD

Set the WLAN group name to this value

### Defaults

None.

### Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
The WLAN group entry 'wlangroup2' has been loaded. To save the WLAN group, type 'end' or 'exit'.
ruckus(config-wlangrp)# name wlangroup2
ruckus(config-wlangrp)# show
WLAN Group:
  ID:
  2:
    Name= wlangroup2
    Description=
    WLAN Service=

ruckus(config-wlangrp)#
```

## description

To set the WLAN group description, use the following command. Enter this command from within the context of the WLAN group that you are configuring. Multiple word text must be enclosed in quotes.

**description** WORD

### Syntax Description

**description**

Configure the WLAN group description

WORD

Set the WLAN group description to this value

### Defaults

None.

## Example

```
ruckus# config
ruckus(config)# wlan-group wlangroup2
ruckus(config-wlangrp)# description "WLAN Group 2"
ruckus(config-wlangrp)# show
WLAN Group:
  ID:
    2:
      Name= wlangroup2
      Description= WLAN Group 2
      WLAN Service:

ruckus(config-wlangrp)#
```

## wlan

To add a WLAN service to the WLAN group, use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**wlan** WORD

## Syntax Description

**wlan**

Add a WLAN to the WLAN group

WORD

Name of the WLAN to be added

## Defaults

None.

## Example

```
ruckus(config-wlangrp)# wlan ruckus1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlangrp)# show
WLAN Group:
  ID:
    :
      Name= wlangroup1
      Description=
      WLAN Service:
        WLAN1:
          NAME= ruckus1
          VLAN=

ruckus(config-wlangrp)#
```

## no wlan

To remove a WLAN service from the WLAN group, use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**no wlan** WORD

## Syntax Description

**no wlan**  
Delete an existing WLAN service from the WLAN group

**WORD**  
Name of the WLAN to be removed

## Defaults

None.

## Example

```
ruckus(config-wlangrp)# no wlan ruckus1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlangrp)#
```

## wlan vlan override none

To add a WLAN service to the WLAN group and set the VLAN tag to 'No Change', use the following command. Enter this command from within the context of the WLAN group that you are configuring.

**wlan WORD vlan override none**

## Syntax Description

**wlan WORD**  
Add the WLAN to the WLAN group

**vlan override none**  
Set the VLAN tag to No Change

## Defaults

None.

## Example

```
ruckus(config-wlangrp)# wlan ruckus1 vlan override none  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-wlangrp)#
```

## wlan vlan override tag

To add a WLAN service to the WLAN group and set the VLAN tag to the specified VLAN ID, use the following command:

**wlan NAME vlan override tag NUMBER**

## Syntax Description

**wlan NAME**  
Add the NAME to the WLAN group



**vlan override tag** *NUMBER*

Set the VLAN tag of *NAME* to the specified *NUMBER*

## Defaults

None.

## Example

```
ruckus(config-wlangrp)# wlan ruckus1 vlan override tag 12
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-wlangrp)#
```

## show

To display WLAN group settings, use the following command:

**show**

## Defaults

**ruckus(config-wlangrp)# show**

WLAN Group:

ID:

1:

Name= Default

Description= Default WLANs for Access Points

WLAN Service:

WLAN1:

NAME= Ruckus1

VLAN=

**ruckus(config-wlangrp)#**

## Configure Role Commands

Use the role commands to configure user roles on the controller. To run these commands, you must first enter the **config-role** context.

### role

To create a new role or modify an existing role, use the following command:

```
role WORD
```

#### Syntax Description

<b>role</b>	Create or modify a user role
<b>WORD</b>	Name of role

#### Defaults

None.

#### Example

```
ruckus(config)# role role1  
The role entry 'role1' has been created  
ruckus(config-role)#
```

### no role

To delete a role entry from the list, use the following command:

```
no role WORD
```

#### Syntax Description

<b>no role</b>	Delete a user role
<b>WORD</b>	Name of role

#### Defaults

None.

#### Example

```
ruckus(config)# no role role1  
The Role 'role1' has been deleted.  
ruckus(config)#
```

## abort

To exit the config-role context without saving changes, use the abort command. Enter this command from within the context of the role that you are configuring.

**abort**

### Syntax Description

**abort**

Exit the role without saving changes

### Defaults

None.

### Example

```
ruckus(config-role)# abort  
No changes have been saved.  
ruckus(config)#
```

## end

To save changes, and then exit the config-role context, use the following command:

**end**

### Syntax Description

**end**

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-role)# end  
The Role entry has saved successfully.  
Your changes have been saved.  
ruckus(config)#
```

## exit

To save changes, and then exit the config-role context, use the following command:

**exit**

## Syntax Description

**exit**

Save changes, and then exit the context

## Defaults

None.

## Example

```
ruckus(config-role)# exit
The Role entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## quit

To exit the config-role context without saving changes, use the quit command. Enter this command from within the context of the role that you are configuring.

**quit**

## Syntax Description

**quit**

Exit the role without saving changes

## Defaults

None.

## Example

```
ruckus(config-role)# quit
No changes have been saved.
ruckus(config)#
```

## name

To set the name of a user role, use the following command:

**name WORD**

## Syntax Description

**name**

Set the name of a user role

**WORD**

Set to this role

## Defaults

None.

## Example

```
ruckus(config-role)# name guest33  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## description

To set the description for a user role, use the following command:

**description** WORD

### Syntax Description

#### **description**

Set the description of a user role

#### WORD

Set to this description

## Defaults

None.

## Example

```
ruckus(config-role)# description testforCLI  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## group-attributes

To set the group attributes of a user role, use the following command:

**group-attributes** WORD

### Syntax Description

#### **group-attributes**

Set the attributes of a user role

#### WORD

Set to this attribute

## Defaults

None.

## Example

```
ruckus(config-role)# group-attributes ruckus1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## wlan-allowed

To set the WLANs to which a user role will have access, use the following command:

```
wlan-allowed [ all | specify-wlan ]
```

### Syntax Description

#### **wlan-allowed**

Set the WLANs to which a role will have access

#### **all**

Grant access to all WLANs

#### **specify-wlan**

Grant access to a specific WLAN

### Defaults

None.

## Example

```
ruckus(config-role)# wlan-allowed all  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-role)# wlan-allowed specify-wlan  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## specify-wlan-access

To add a particular WLAN to the list of WLANs that a user role can access, use the following command:

```
specify-wlan-access wlan_ssid
```

### Syntax Description

#### **specify-wlan-access**

Add access to a WLAN by a user role

#### *wlan\_ssid*

Add access to this WLAN

### Defaults

None.

## Example

```
ruckus(config-role)# specify-wlan-access joejoe98  
The wlan 'joejoe98' has been added to the Role.
```

## no specify-wlan-access

To remove a particular WLAN from the list of WLANs that a user role can access, use the following command:

```
no specify-wlan-access WORD/SSID
```

## Syntax Description

### **no specify-wlan-access**

Remove access to a WLAN by a user role

WORD/SSID

Remove access to this WLAN

## Defaults

None.

## Example

```
ruckus(config-role)# no specify-wlan-access joejoe98  
The wlan 'joejoe98' has been removed from the Role.
```

## guest-pass-generation

To add guest pass generation privileges to a user role, use the following command:

```
guest-pass-generation
```

## Syntax Description

### **guest-pass-generation**

Add guest pass generation privileges to a user role

## Defaults

None.

## Example

```
ruckus(config-role)# guest-pass-generation  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no guest-pass-generation

To remove guest pass generation privileges from a user role, use the following command:

```
no guest-pass-generation
```

## Configuring Master Settings

### Configure Role Commands

#### Syntax Description

**no guest-pass-generation**

Remove guest pass generation privileges from a user role

#### Defaults

None.

#### Example

```
ruckus(config-role)# no guest-pass-generation  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## admin

To add ZoneDirector administration privileges to a user role, use the following command:

**admin [ super | operator | monitoring ]**

#### Syntax Description

**admin**

Add ZoneDirector administration privileges to a user role

**super**

Sets to Super (Perform all configuration and management tasks)

**operator**

Sets to Operator (Change settings affecting single AP's only)

**monitoring**

Sets to Monitoring (Monitoring and viewing operation status only)

#### Defaults

None.

#### Example

```
ruckus(config-role)# admin super  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no admin

To remove ZoneDirector administration privileges from a user role, use the following command:

**no admin**

#### Syntax Description

**no admin**

Remove ZoneDirector administration privileges from a user role



## Defaults

None.

## Example

```
ruckus(config-role)# no admin  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## access-ctrl

Enables access control policy.

## Defaults

Disabled

## Example

```
ruckus(config)# role role1  
The Role entry 'role1' has been created.  
ruckus(config-role)# access-ctrl  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-role)# show  
Role:  
  ID:  
  :  
  Name= role1  
  Description=  
  Group Attributes=  
  Guest Pass Generation= Disallowed  
  ZoneDirector Administration:  
    Status= Disallowed  
  Allow All WLANs:  
    Mode= Allow Specify WLAN access  
  Access Control Policy= Allowed  
  Allow All OS Types:  
    Mode= Allow all OS types to access  
  VLAN = Any  
  Rate Limiting Uplink = Disabled  
  Rate Limiting Downlink = Disabled  
  
ruckus(config-role)#
```

## *no access-ctrl*

Disables access control policy.

**no access-ctrl**

## dvc-type-allowed

To allow all or specify device type access, use the following command:

**dvc-type-allowed [all|specify]**

### Example

```
ruckus(config-role)# dvc-type-allowed all
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-role)#
```

## specify-dvc-policy

To add the specified device policy into the role entry, use the following command:

**specify-dvc-policy** <WORD>

### Example

```
ruckus(config-role)# specify-dvc-policy 0
ruckus(config-role)#
```

## rate-limit uplink

Sets the rate limiting of uplink.

**rate-limit uplink** NUMBER

## rate-limit uplink downlink

Sets the rate limiting of downlink.

**rate-limit uplink** NUMBER **downlink** NUMBER

## no rate-limit

Sets rate limiting to Disable.

**no rate-limit**

## apply-arc-policy

To configure an ARC policy with the specified name, use the following command:

```
apply-arc-policy<WORD>
```

### Syntax Description

#### **apply-arc-policy**

Configures an Application Recognition and Control policy with the specified name.

*WORD*

Name of the ARC policy.

### Defaults

None.

### Example

```
ruckus(config-role)# apply-arc-policy Facebook  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-role)#
```

## Configuring Master Settings

### Configure Role Commands

### *no apply-arc-policy*

To disable ARC policy, use the following command:

**no apply-arc-policy**

### Example

```
ruckus(config-role)# no apply-arc-policy
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-role)#
```

## url-filtering

To configure URL Filtering with the specified name, use the following command:

**url-filtering WORD**

### Defaults

None

### Example

```
ruckus(config-role)# url-filtering filter1
Sorry, Please Enable 'Access Control Policy' firstly, then try again.
ruckus(config-role)#
```

### *no url-filtering*

To disable URL filtering, use the following command:

**no url-filtering**

### Defaults

None

### Example

```
ruckus(config-role)# no url-filtering
Sorry, Please Enable 'Access Control Policy' firstly, then try again.
ruckus(config-role)#
```

## show

To display the settings of a role, use the following command:

**show**

### Syntax Description

**show**

Display the settings of a role

## Defaults

None.

## Example

```
ruckus(config-role)# show
Role:
ID:
:
Name= role1
Description=
Group Attributes=
Guest Pass Generation= Disallowed
ZoneDirector Administration:
  Status= Disallowed
Allow All WLANs:
  Mode= Allow Specify WLAN access
  Access Control Policy= Disallowed

ruckus(config-role)#
```

## Configure User Commands

Use the user commands to configure a user's name, password, and role. To run these commands, you must first enter the **config-user** context.

### user

To create a user or modify an existing user and enter the config-user context, use the following command:

```
user WORD
```

#### Syntax Description

<b>user</b>	Create or modify a user entry
<b>WORD</b>	Name of the user

#### Defaults

None.

#### Example

```
ruckus(config)# user johndoe1  
The User entry 'johndoe1' has been created.  
ruckus(config-user)#
```

### no user

To delete a user record, use the following command:

```
no user WORD
```

#### Syntax Description

<b>user</b>	Create or modify a user entry
<b>WORD</b>	Name of the user

#### Defaults

None.

#### Example

```
ruckus(config)# no user johndoe1  
The User 'johndoe1' has been deleted.  
ruckus(config)#
```

## abort

To exit the config-user context without saving changes, use the abort command. Enter this command from within the context of the user that you are configuring.

**abort**

### Syntax Description

**abort**

Exit the user settings without saving changes

### Defaults

None.

### Example

```
ruckus(config-user)# abort  
No changes have been saved.  
ruckus(config)#
```

## end

To save changes, and then exit the config-user context, use the following command (you must first set a password before exiting):

**end**

### Syntax Description

**end**

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-user)# end  
The User entry has saved successfully.  
Your changes have been saved.  
ruckus(config)#
```

## exit

To save changes, and then exit the config-user context, use the following command (you must first set a password before exiting):

**exit**

### Syntax Description

**exit**

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-user)# exit
The User entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## quit

To exit the config-user context without saving changes, use the quit command. Enter this command from within the context of the user that you are configuring.

**quit**

### Syntax Description

**quit**

Exit the user settings without saving changes

### Defaults

None.

### Example

```
ruckus(config-role)# quit
No changes have been saved.
ruckus(config)#
```

## user-name

To set the name of a user, use the following command:

**user-name** *WORD*

### Syntax Description

**user-name**

Set the name of a user

*WORD*

Set to this user name



## Defaults

None.

## Example

```
ruckus(config-user)# user-name joel  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## full-name

To set the full name of a user, use the following command:

**full-name** WORD

## Syntax Description

### full-name

Set the full name of a user

WORD

Set to this full name

## Defaults

None.

## Example

```
ruckus(config-user)# full-name joeblow  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## password

To set the password of a user, use the following command:

**password** WORD

## Syntax Description

### password

Set the password of a user

WORD

Set to this password

## Defaults

None.

## Example

```
ruckus(config-user)# password 12345678  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## role

To assign a role to a user, use the following command:

```
role WORD
```

## Syntax Description

**role**

Assign a role to a user.

WORD

The name of the role to be assigned to the user.

## Defaults

Default

## Example

```
ruckus(config-user)# role guest  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## show

To display the settings of a user, use the following command:

```
show
```

## Syntax Description

**show**

Show user settings

## Defaults

None.

## Example

```
ruckus(config-user)# show  
User:  
  ID:  
  :  
  User Name= Joe  
  Full Name= Joe Blow  
  Password= *****  
  Role= Default
```

```
ruckus(config-user)#
```

## Configure Guest Access Commands

Use the guest-access commands to configure guest access services. To run these commands, you must first enter the **config-guest-access** context.

### guest-access

To create/configure a Guest Access service and enter the config-guest-access context, use the following command:

```
guest-access WORD
```

#### Example

```
ruckus(config)# guest-access guestpolicy1  
The Guest Access entry 'guestpolicy1' has been created.  
ruckus(config-guest-access)#
```

### no guest-access

To delete a Guest Access service, use the following command:

```
no guest-access
```

#### Example

```
ruckus(config)# no guest-access guest1  
The Guest Access 'guest1' has been deleted.  
ruckus(config)#
```

### abort

To exit the config-guest-access context without saving changes, use the abort command.

```
abort
```

### end

To save changes, and then exit the config-guest-access context, use the following command:

```
end
```

### exit

To save changes, and then exit the config-guest-access context, use the following command:

```
exit
```

### quit

To exit the config-guest-access context without saving changes, use the quit command.

```
quit
```

## guest-access-force-https-redirection

Enables guest access force HTTPS redirection.

### Syntax

**guest-access-force-https-redirection**

### Command Default

Disabled

### Examples

```
ruckus(config)# guest-access-force-https-redirection
The command was executed successfully.
ruckus(config)#
```

## **no guest-access-force-https-redirection**

Disables guest access force HTTPS redirection.

### **Syntax**

**no guest-access-force-https-redirection**

### **Command Default**

Disabled.

### **Examples**

```
ruckus(config)# no guest-access-force-https-redirection  
The command was executed successfully.  
ruckus(config)#
```

## guest-access-guestpass-effective

To set the guest pass effective date to begin from the creation time or from first use, use the following command:

```
guest-access-guestpass-effective [now | first-use-expired <NUMBER>]
```

### Syntax Description

**now**

Sets Effective from the creation time.

**first-use-expired <NUMBER>**

Effective from first use, Expire new guest passes if not used within xx days.

### Example

```
ruckus(config-guest-access)# guest-access-guestpass-effective first-use-expired 10
The command was executed successfully.
ruckus(config-guest-access)#
```

## name

To set the name of the guest access policy, use the following command:

```
name WORD
```

## self-service

To enable guest pass self-registration, use the following command:

```
self-service
```

## no self-service

To disable guest pass self-registration, use the following command:

```
no self-service
```

## guestpass-duration

To set the guest pass duration, use the following command:

```
guestpass-duration [ hour | day | week ] NUMBER
```

## guestpass-reauth

To set the guest pass reauthorization timeout, use the following command:

```
guestpass-reauth [ hour | day | week ] NUMBER
```

## no guestpass-reauth

To disable guest pass reauthorization timeout, use the following command:

```
no guestpass-reauth
```

## guestpass-share-number

To set the limit on how many devices can share one guest pass, use the following command (valid values: [0, 10] and 0 means unlimited):

```
guestpass-share-number NUMBER
```

## guestpass-sponsor

To enable guest pass sponsor approval, use the following command:

```
guestpass-sponsor
```

## no guestpass-sponsor

To disable guest pass sponsor approval, use the following command:

```
no guestpass-sponsor
```

## guestpass-sponsor-auth-server

Sets the authentication server to 'Local Database' or to a specified AAA server name, use the following command:

```
guestpass-sponsor-auth-server [ local | name WORD ]
```

## guestpass-sponsor-number

To set the number of sponsors that can be used for this guest pass service (valid values: [1,5]), use the following command:

```
guestpass-sponsor-number NUMBER
```

## guestpass-notification

To set the notification method for delivering guest passes, use the following command:

```
guestpass-notification NUMBER
```

### Syntax Description

- |   |               |
|---|---------------|
| 1 | Device Screen |
| 2 | Mobile        |
| 3 | Emai          |



## guestpass-terms-and-conditions

To enable and set the terms and conditions, use the following command:

```
guestpass-terms-and-conditions WORD
```

## no guestpass-terms-and-conditions

To disable the terms and conditions, use the following command:

```
no guestpass-terms-and-conditions
```

## onboarding

To configure onboarding portal options, use the following command:

```
onboarding [key-and-zeroit | zeroit]
```

### Syntax Description

#### onboarding

Enable onboarding portal.

#### key-and-zeroit

Enables guest pass and zero-it activation.

#### zeroit

Enables zero-it activation only.

### Defaults

Enabled, Guest Pass and Zero-IT.

### Example

```
ruckus(config-guest-access)# onboarding key-and-zeroit  
The command was executed successfully.  
ruckus(config-guest-access)#
```

## no onboarding

To disable the onboarding portal, use the following command:

```
no onboarding
```

## no authentication

To disable guest access authentication, use the following command:

## Configuring Master Settings

### Configure Guest Access Commands

**no authentication**

#### **Syntax Description**

**no authentication**

Disable guest access authentication

#### **Defaults**

Enabled.

#### **Example**

```
ruckus(config-guest-access)# no authentication
The command was executed successfully.
```

## **authentication guest-pass-and-social-login**

To enable guest pass and social media login authentication for this guest access service, use the following command:

**authentication guest-pass-and-social-login**

#### **Syntax Description**

**authentication guest-pass-and-social-login**

Enable guest pass and social media authentication.

#### **Example**

```
ruckus(config-guest-access)# authentication guest-pass-and-social-login
The command was executed successfully.
ruckus(config-guest-access)#
```

## authentication only-social-login

To enable social media login only for this guest access service, use the following command:

```
authentication only-social-login
```

### Syntax Description

```
authentication only-social-login
```

Enable social media authentication only.

### Example

```
ruckus(config-guest-access)# authentication only-social-login  
The command was executed successfully.  
ruckus(config-guest-access)#
```

## term-of-use

To display and specify the Terms of Use text on the guest pass access page, use the following command:

```
term-of-use WORD
```

### Syntax Description

```
term-of-use
```

Display Terms of Use

```
WORD
```

Display this text as content of Terms of Use on Guest Pass access page

### Defaults

Disabled.

### Example

```
ruckus(config-guest-access)# term-of-use test.guest  
The command was executed successfully.
```

## no term-of-use

To hide the Terms of Use text on the guest pass access page, use the following command:

```
no term-of-use
```

### Syntax Description

```
no term-of-use
```

Hide Terms of Use

## Defaults

Disabled.

## Example

```
ruckus(config-guest-access)# no term-of-use  
The command was executed successfully.
```

## redirect

To set the URL to which to redirect a guest user after passing authentication, use the following command:

```
redirect [ original | url WORD ]
```

### Syntax Description

#### **redirect**

Set the URL to which the guest user will be redirected

#### **original**

Redirect user to the original page that he intended to visit

#### **url** *WORD*

**Redirect user to a different URL. Specify the URL in *WORD*.**

## Defaults

original

## Example

```
ruckus(config-guest-access)# redirect url http://www.ruckuswireless.com  
The command was executed successfully.
```

## welcome-text

To configure the text to display on the guest access user login page, use the following command:

```
welcome-text WORD
```

### Syntax Description

#### **welcome-text**

Configure the welcome message

#### *WORD*

Use this as the welcome message

## Defaults

Welcome to the Guest Access login page.

## Example

```
ruckus(config-guest-access)# welcome-text "Welcome to the Guest Access Login Page."  
The command was executed successfully.  
ruckus(config-guest-access)#
```

## walled-garden

To set the walled garden URL, enter the following command:

```
walled-garden<INDEX><WORD>
```

## Defaults

Disabled.

## Example

```
ruckus(config-guest-access)# walled-garden 1 192.168.40.44  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-guest-access)#
```

## no walled-garden

To delete the specified walled garden entry, enter the following command:

```
no walled-garden <INDEX>
```

## Defaults

Disabled.

## Example

```
ruckus(config-guest-access)# no walled-garden 1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-guest-access)#
```

## social-media-login

To set the social media login, use the following command:

```
social-media-login WORD
```

## Syntax

<WORD>: Specify the social media login type:

- google <WORD> <WORD>: Sets the social media login to Google/Google+
- linkedin <WORD> <WORD>: Sets the social media login to LinkedIn
- microsoft <NUMBER> <WORD> <WORD>: Sets the social media login to Microsoft
- wechat <WORD> <WORD> <WORD> <WORD>: Sets the social media logging to WeChat.

## Configuring Master Settings

### Configure Guest Access Commands

#### Example

```
ruckus(config-guest-access)# social-media-login linkedin 1234456 test1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-guest-access)#
```

### **social-media-login delete-social-media**

To delete the social media, use the following command:

```
social-media-login delete-social-media <NUMBER>
```

#### **Syntax Description**

**<NUMBER>**

Delete the social media, google:3 linkedin:4 microsoft:5 wechat:6

#### **Example**

```
ruckus(config-guest-access)# social-media-login delete-social-media 3  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-guest-access)#
```

### **social-media-login google**

To set the social media login to Google/Google+, use the following command:

```
social-media-login google NUMBER WORD WORD
```

**NUMBER**

Enter the redirection method 0:HTTP 1:HTTPS.

**WORD**

Enter the client ID.

**WORD**

Enter the client secret.

### **social-media-login hds**

To set the Google host domain, use the following command:

```
social-media-login hds <WORD>
```

### **social-media-login no-hds**

To clear the Google host domain, use the following command:

```
social-media-login no-hds
```

### **social-media-login linkedin**

To set the social media login to LinkedIn, use the following command

```
social-media-login linkedin WORD WORD
```

### **social-media-login microsoft**

To sets the social media login to Microsoft, use the following command:

```
social-media-login microsoft NUMBERWORD WORD
```

## social-media-login wechat

To sets the social media login to WeChat, use the following command:

```
social-media-login wechat WORDWORD WORDWORD
```

## social-media-login wechat force-follow

To set the WeChat social media WLAN to force follow , use the following command:

```
social-media-login wechat WORDWORD WORDWORD force-follow WORD
```

## show

To display the guest access policy settings, use the following command:

```
show
```

## Syntax Description

**show**

Display the guest access settings

## Example

```
ruckus(config-guest-access)# show
Guest Access:
  Name = guest1
  Onboarding Portal:
    Disabled
  Authentication:
    Mode = Use Guest Pass and Social login authentication
  Effective time:
    Countdown-by-issued = false
    Effective Period    = 7 Days
  Title = Welcome to Guest WiFi !
  Terms of Use:
    Status = Disabled
  Redirection:
    Mode = To the URL that the user intends to visit
  Self Service Registration:
    Status = Disabled
  Wall Garden:

Restricted Subnet Access:
  Rules:
    1:
      Description=
      Type= Deny
      Source Address= Any
      Destination Address= local
      Source Port= Any
      Destination Port= Any
      Protocol= Any
    2:
      Description=
      Type= Deny
      Source Address= Any
      Destination Address= 10.0.0.0/8
      Source Port= Any
      Destination Port= Any
      Protocol= Any
    3:
```



```
Description=  
Type= Deny  
Source Address= Any  
Destination Address= 172.16.0.0/12  
Source Port= Any  
Destination Port= Any  
Protocol= Any  
4:  
Description=  
Type= Deny  
Source Address= Any  
Destination Address= 192.168.0.0/16  
Source Port= Any  
Destination Port= Any  
Protocol= Any  
  
Restricted IPv6 Access:  
Rules:  
1:  
Description=  
Type= Deny  
Source Address= Any  
Destination Address= local  
Source Port= Any  
Destination Port= Any  
Protocol= Any  
ICMPv6 Type= Any  
  
ruckus(config-guest-access)#
```

## Configure Web Auth Settings

Use the following commands to configure web portal authentication settings.

## web-portal-force-https-redirection

Enables web portal force HTTPS redirection.

### Syntax

**web-portal-force-https-redirection**

### Command Default

Disabled.

### Examples

```
ruckus(config)# web-portal-force-https-redirection
The command was executed successfully.
ruckus(config)#
```

## no web-portal-force-https-redirection

Disables web portal force HTTPS redirection.

### Syntax

```
no web-portal-force-https-redirection
```

### Command Default

Disabled.

### Examples

```
ruckus(config)# no web-portal-force-https-redirection  
The command was executed successfully.  
ruckus(config)#
```

## portal-auth-force-dns-server

Enables portal authentication WLAN (Hotspot Service, Guest Access and Web Authentication) force DNS server.

### Syntax

```
portal-auth-force-dns-server <IP/IPv6-ADDR1 [IP/IPv6-ADDR2]>
```

### Command Default

Disabled

### Examples

```
ruckus(config)# portal-auth-force-dns-server 192.168.40.10  
The command was executed successfully.  
ruckus(config)#
```

## no portal\_auth-force-dns-server

Disable portal authentication WLAN (Hotspot Service, Guest Access and Web Authentication) force DNS server.

### Syntax

```
no portal_auth-force-dns-server
```

### Command Default

Disabled

### Examples

```
ruckus(config)# no portal_auth-force-dns-server  
The command was executed successfully.  
ruckus(config)#
```

## guest-access-auth-server

Sets the authentication server to 'Local Database' or to a specified AAA server.

### Syntax

```
guest-access-auth-server { local | name <WORD> }
```

### Command Default

None

### Parameters

#### local

Sets the authentication server to 'Local Database'.

#### name <WORD>

Sets the authentication server to specified AAA server name.

### Examples

```
ruckus(config)# guest-access-auth-server name radius1  
The command was executed successfully.  
ruckus(config)#
```

# Configuring Guest Access Restriction Rules

Use the following commands to configure restricted access rules for a guest policy. To use these commands, you must enter the **config-guest-restrict-access** context from within the **config-guest-access** context.

## no restrict-access-order

To delete a restrict access order, use the following command:

```
no restrict-access-order NUMBER
```

### Syntax Description

**no restrict-access-order**

Delete a restrict access order

*NUMBER*

Delete this order ID

### Example

```
ruckus(config-guest-access)# no restrict-access-order 4  
The Restricted Subnet Access entry has been removed from the Guest Access.  
ruckus(config-guest-access)#
```

## restrict-access-order

To create a new restrict access order or modify an existing restrict access order, use the following command:

```
restrict-access-order NUMBER
```

This command enters the config-guest-restrict-access context. The following commands are available from within this context:

### Syntax Description

**help**

Shows available commands

**history**

Shows a list of previously run commands.

**abort**

Exits the config-guest-restrict-access context without saving changes.

**end**

Saves changes, and then exits the config-guest-restrict-access context.

**exit**

Saves changes, and then exits the config-guest-restrict-access context.

**quit**

Exits the config-guest-restrict-access context without saving changes.

**order** NUMBER

Sets the guest access rule order.

**description** WORD

Sets the guest access rule description.

**type** [ **allow** | **deny** ]

Sets the guest access rule type to allow or deny.

**destination** [ **address** ADDR | **port** NUMBER/WORD

Sets the destination address/port of a guest access rule.

**protocol** NUMBER/WORD

Sets the protocol of a guest access rule.

**show**

Displays restricted subnet access settings.

## show

To display guest access restriction settings, use the following command:

```
show
```

### Syntax Description

**show**

Display guest access restriction settings



## Defaults

None.

## order

To configure the guest access rule order, use the following command:

**order** *NUMBER*

## Syntax Description

**order**

Set the order of a guest access rule

*NUMBER*

Assign the rule this order

## Example

```
ruckus(config-guest-restrict-access)# order 3  
The command was executed successfully.
```

## description

To set the description of a guest access rule, use the following command:

**description** *WORD*

## Syntax Description

**description**

Set the description of a guest access rule

*WORD*

Set this as description

## Defaults

None.

## Example

```
ruckus(config-guest-restrict-access)# description guestd3  
The command was executed successfully.
```

## type allow

To set the guest access rule type to 'allow', use the following command:

**type allow**

## Configuring Master Settings

### Configuring Guest Access Restriction Rules

#### Syntax Description

**type**  
Set the guest access rule type

**allow**  
Set the rule type to 'allow'

#### Defaults

Deny.

#### Example

```
ruckus(config-guest-restrict-access)# type allow  
The command was executed successfully.
```

## type deny

To set the guest access rule type to 'deny', use the following command:

**type deny**

#### Syntax Description

**type**  
Set the guest access rule type

**deny**  
Set the rule type to 'deny'

#### Defaults

Deny.

#### Example

```
ruckus(config-guest-restrict-access)# type deny  
The command was executed successfully.
```

## destination address

To set the destination address of the rule, use the following command:

**destination address** *IP-ADDR/WORD*

#### Syntax Description

**destination address**  
Set the destination address of the rule

**IP-ADDR/WORD**  
Set the destination to this IP address

## Defaults

Any.

## Example

```
ruckus(config-guest-restrict-access)# destination address 192.168.0.20/24  
The command was executed successfully.
```

## destination port

To set the destination port of the rule, use the following command:

```
destination port NUMBER/WORD
```

## Syntax Description

### **destination port**

Set the destination port of the rule

NUMBER/WORD

Set the destination to this port number

## Defaults

Any.

## Example

```
ruckus(config-guest-restrict-access)# destination port 562  
The command was executed successfully.
```

## protocol

To set the protocol for the rule, use the following command:

```
protocol NUMBER/WORD
```

## Syntax Description

### **protocol**

Set the protocol for the rule

NUMBER/WORD

Set to this protocol

## Defaults

Any.

## Configuring Master Settings

### Configuring Guest Access Restriction Rules

#### Example

```
ruckus(config-guest-restrict-access)# protocol 69  
The command was executed successfully.
```

# Configure Hotspot Commands

Use the hotspot commands to configure the controller's hotspot settings. To run these commands, you must first enter the **config-hotspot** context.

## hotspot

To create a new hotspot or edit an existing entry and enter the config-hotspot context, use the following command:

```
hotspot WORD
```

### Syntax Description

#### hotspot

Create or edit a hotspot service

WORD

Name of hotspot service

### Defaults

None.

### Example

```
ruckus(config)# hotspot hotspot1  
The Hotspot entry 'hotspot1' has been loaded. To save the Hotspot entry, type end or exit.  
ruckus(config-hotspot)#
```

## no hotspot

To delete a hotspot record from the list, use the following command:

```
no hotspot WORD
```

### Syntax Description

#### hotspot

Create or edit a hotspot service

WORD

Name of hotspot service

### Defaults

None.

### Example

```
ruckus(config)# hotspot hotspot1  
The Hotspot entry 'hotspot1' has been loaded. To save the Hotspot entry, type end or exit.  
ruckus(config-hotspot)#
```

## abort

To exit the config-hotspot context without saving changes, use the abort command.

**abort**

### Syntax Description

**abort**

Exit the hotspot settings without saving changes

### Defaults

None.

### Example

```
ruckus(config-hotspot)# abort
No changes have been saved.
ruckus(config)#
```

## end

To save changes, and then exit the config-hotspot context, use the following command:

**end**

### Syntax Description

**end**

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-hotspot)# end
The login page url can't be empty.
ruckus(config-hotspot)# end
The Hotspot entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

## exit

To save changes, and then exit the config-hotspot context, use the following command:

**exit**

## Syntax Description

**exit**

Save changes, and then exit the context

## Defaults

None.

## Example

```
ruckus(config-hotspot)# exit
The login page url can't be empty
ruckus(config-hotspot)# exit
The Hotspot entry has saved successfully.
Your changes have been saved.
```

## quit

To exit the config-hotspot context without saving changes, use the quit command.

**quit**

## Syntax Description

**quit**

Exit the hotspot settings without saving changes

## Defaults

None.

## Example

```
ruckus(config-hotspot)# quit
No changes have been saved.
ruckus(config)#
```

## show

To display the current hotspot settings, use the following command:

**show**

## Syntax Description

**show**

Display the current hotspot settings

## Defaults

None.

## Example

```
ruckus(config-hotspot)# show
Hotspot:
ID:
1:
Name= h1
Login Page Url= http://172.18.110.122
Start Page= redirect to the URL that the user intends to visit.
Session Timeout= Disabled
Idle Timeout= Enabled
Timeout= 60 Minutes
Authentication Server= Local Database
Accounting Server= Disabled
Location ID=
Location Name=
Walled Garden 1=
Walled Garden 2=
Walled Garden 3=
Walled Garden 4=
Walled Garden 5=
Rules:
Order= 1
Description= h1_order1
Type= Deny
Destination Address= 192.168.20.20/24
Destination Port= 920
Protocol= 58
```

## name

To set the hotspot name, use the following command

```
name WORD
```

## Syntax Description

**name**

Set the hotspot name

**WORD**

Set to this name

## Defaults

None.

## Example

```
ruckus(config-hotspot)# name ruckus1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## smartclient

Use the following command to enable WISPr smart client support

```
smartclient [ secure https ] [ secure http ] [ wispr-only secure https ] [ wispr-only secure-http ] [ info ]
```



## Syntax Description

### **smartclient**

Enable WISPr smartclient support.

### **secure https**

Enables WISPr smart client support with HTTPS security.

### **secure http**

Enables WISPr smart client support with no security.

### **wispr-only secure https**

Enables only WISPr smart client support with HTTPS security.

### **wispr-only secure http**

Enables only WISPr smart client support with no security.

### **info**

Sets the instruction to guide user to login by Smart Client application.

## Defaults

None.

## Example

```
ruckus(config-hotspot)# smartclient secure https
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)#
```

## no smartclient

To disable WISPr Smart Client support, use the following command:

**no smartclient**

## login-page

To set the URL of the hotspot login, use the following command:

**login-page [ original | WORD ]**

## Syntax Description

### **login-page**

Set the URL of the hotspot login

### **WORD**

Set to this URL

### **original**

Redirect to the URL that the user intends to visit

## Defaults

None.

## Example

```
ruckus(config-hotspot)# login-page http://ruckuswireless.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## start-page

To set the URL or page to which the user will be redirected after logging into the hotspot, use the following command:

```
start-page [ original | url WORD ]
```

## Syntax Description

### **start-page**

Set the URL or page to which the user will be redirected after logging into the hotspot

### **original**

Redirect user to the original page he or she intended to visit

### **url WORD**

**Redirect use to another page. Set the URL of the page in WORD.**

## Defaults

original

## Example

```
ruckus(config-hotspot)# start-page url http://www.ruckuswireless.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no session-timeout

To disable the session timeout for hotspot usage, use the following command:

```
no session-timeout
```

## Syntax Description

### **no session-timeout**

Disable the session timeout for hotspot usage

## Defaults

None.

## Example

```
ruckus(config-hotspot)# no session-timeout  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## session-timeout

To enable and set the session timeout for hotspot usage, use the following command:

```
session-timeout minutes
```

### Syntax Description

#### **session-timeout**

Disable the session timeout for hotspot usage

#### *minutes*

Set the session timeout to this value (in minutes)

### Defaults

1440 minutes

## Example

```
ruckus(config-hotspot)# session-timeout 20  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no grace-period

To disable the grace period (idle timeout) for hotspot users, use the following command:

```
no grace-period
```

### Syntax Description

#### **no grace-period**

Disable the idle timeout for hotspot users

### Defaults

None.

## Example

```
ruckus(config-hotspot)# no grace-period  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## grace-period

To enable and set the grace period (idle timeout) for hotspot users, use the following command:

**grace-period** *minutes*

### Syntax Description

**grace-period**

Set the idle timeout for hotspot users

*minutes*

Set the idle timeout to this value (in minutes)

### Defaults

60 minutes

### Example

```
ruckus(config-hotspot)# grace-period 20  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## auth-server local

To use ZoneDirector as the authentication server for hotspot users, use the following command:

**auth-server local**

### Syntax Description

**auth-server**

Set an authentication server for hotspot users

**local**

Use ZoneDirector as the authentication server

### Defaults

local

### Example

```
ruckus(config-hotspot)# auth-server local  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## auth-server name

To use an external server for authenticating hotspot users, use the following command:

**auth-server name** *WORD*

## Syntax Description

### **auth-server name**

Set an external authentication server for hotspot users

### **WORD**

Use this server as the authentication server

## Defaults

None.

## Example

```
ruckus(config-hotspot)# auth-server name radius1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-hotspot)#
```

## auth-server name no-mac-bypass

To disable MAC authentication bypass (no redirection), use the following command:

```
auth-server name WORD no-mac-bypass
```

## auth-server name mac-bypass

To enable MAC authentication bypass (no redirection) and use password as authentication password, use the following command:

```
auth-server name WORD mac-bypass [ mac | password WORD ]
```

## Syntax Description

### **auth-server name**

Set an external authentication server for hotspot users

### **WORD**

Authentication server name

### **mac-bypass**

Enable MAC auth bypass

### **mac**

Enables MAC authentication bypass (no redirection) and use device MAC address as authentication password.

### **password** WORD

Enables MAC authentication bypass (no redirection) and use password as authentication password.

### **mac-in-dot1x**

Use device MAC address as authentication password and enable to send username and password in 802.1X format of 00-10-A4-23-19-C0 (by default 0010a42319c0).

### **password-in-dot1x** WORD

Use password as authentication password and enable to send username and password in 802.1X format of 00-10-A4-23-19-C0 (by default 0010a42319c0).

## Defaults

None.

## Example

```
ruckus(config-hotspot)# auth-server name radius1 mac-bypass mac
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)#
```

## auth-server name mac-bypass mac-addr-format

To set MAC auth username and password to one of the following formats, use the following command:

```
auth-server name WORD mac-bypass mac-addr-format [ FORMAT ]
```

## Syntax Description

### **auth-server name**

Set an external authentication server for hotspot users

*WORD*

Authentication server name

### **mac-bypass**

Enable MAC auth bypass

### **mac-addr-format**

Enable MAC authentication bypass (no redirection) and use device MAC address as authentication password.

[**FORMAT** ]

Set the MAC address format.

### **aabbccddeeff**

Set the MAC address format to aabbccddeeff.

### **aa-bb-cc-dd-ee-ff**

Set the MAC address format to aa-bb-cc-dd-ee-ff.

### **aa:bb:cc:dd:ee:ff**

Set the MAC address format to aa:bb:cc:dd:ee:ff.

### **AABBCCDDEEFF**

Set the MAC address format to AABBCCDDEEFF.

### **AA-BB-CC-DD-EE-FF**

Set the MAC address format to AA-BB-CC-DD-EE-FF.

### **AA:BB:CC:DD:EE:FF**

Set the MAC address format to AA:BB:CC:DD:EE:FF.

## acct-server

To enable the accounting server for hotspot usage, use the following command:

```
acct-server WORD
```

## Syntax Description

### **acct-server**

Enable the accounting server for hotspot usage

*WORD*

Name of the AAA server

## Defaults

None.

## Example

```
ruckus(config-hotspot)# acct-server "RADIUS Accounting"  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-hotspot)#
```

## no acct-server

To disable the accounting server for hotspot usage, use the following command:

**no acct-server**

## Syntax Description

### **no acct-server**

Disable the accounting server for hotspot usage

## Defaults

None.

## Example

```
ruckus(config-hotspot)# no acct-server  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## acct-server interim-update

To enable and set the accounting server for hotspot usage, use the following command:

**acct-server** *WORD* **interim-update** *NUMBER*

## Syntax Description

### **no acct-server**

Enable and set the accounting server for hotspot usage

*WORD*

Set to this accounting server

## Configuring Master Settings

### Configure Hotspot Commands

#### **interim-update**

Set the interim update interval

*NUMBER*

Set to this interval (in minutes)

### Defaults

5 minutes

### Example

```
ruckus(config-hotspot)# acct-server asd interim-update 10
The AAA server 'asd' could not be found. Please check the spelling, and then try again.
ruckus(config-hotspot)# acct-server acct1 interim-update 20
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## client-isolation

To enable wireless client isolation (on AP or across APs), use the following command:

```
client-isolation[ isolation-on-ap | isolation-across-ap] [enable | disable]
```

### Syntax Description

#### **client-isolation**

Enable client isolation.

#### **isolation-on-ap**

Enable client isolation per AP.

#### **isolation-on-subnet**

Enable spoof guarding and across AP client isolation using allowlist.

### Defaults

Disabled

### Example

```
ruckus(config-hotspot)# client-isolation isolation-on-ap enable
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)# client-isolation isolation-on-subnet enable
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)#
```

## allowlist

To apply a client isolation allowlist to this Hotspot, use the following command:

```
allowlist name WORD
```



## location-id

To set the location ID of the hotspot, use the following command:

**location-id** *location-id*

### Syntax Description

**location-id**

Set the location ID of the hotspot

*location-id*

Set to this location ID

### Defaults

None.

### Example

```
ruckus(config-hotspot)# location-id us  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## location-name

To set the location name of the hotspot, use the following command:

**location-name** *location-name*

### Syntax Description

**location-name**

Set the location name of the hotspot

*location-name*

Set to this location name

### Defaults

None.

### Example

```
ruckus(config-hotspot)# location-name shenzhen  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## walled-garden

To set a hotspot “walled garden” URL, use the following command:

**walled-garden** *INDEX WORD*

## Syntax Description

<b>walled-garden</b>	Create a walled garden rule
<b>INDEX</b>	Enter walled garden URL index. (1~35)
<b>WORD</b>	Destination URL

## Defaults

None.

## Example

```
ruckus(config-hotspot)# walled-garden 1 www.ruckuswireless.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)#
```

## no walled-garden

To delete a walled garden URL, use the following command

**no walled-garden INDEX**

## Syntax Description

<b>walled-garden</b>	Delete a walled garden rule
<b>INDEX</b>	Enter walled garden URL index. (1~35)

## Defaults

None.

## Example

```
ruckus(config-hotspot)# no walled-garden 1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hotspot)#
```

# Configuring Hotspot Restricted Access Rules

The following commands are used to create and modify Hotspot restricted access rules. Use the `restrict-access-order` command from the `config-hotspot` context to enter the `config-hotspot-restrict-access` context.

## restrict-access-order

To create a new restrict access order or modify an existing restrict access order, use the following command:

```
restrict-access-order NUMBER
```

### Syntax Description

**restrict-access-order**

Add a restrict access order

**NUMBER**

Add this order ID

**order** NUMBER

Sets the hotspot rule order.

**description** WORD

Sets the hotspot rule description.

**type allow**

Sets the hotspot rule type to 'allow'.

**type deny**

Sets the hotspot rule type to 'deny'.

**destination address** IP-ADDR/WORD

Sets the destination address of a hotspot rule.

**destination port** NUMBER/WORD

Sets the destination port of a hotspot rule.

**protocol** NUMBER/WORD

Sets the protocol of a hotspot rule.

**show**

Displays the policy rule.

### Defaults

None.

### Example

```
ruckus(config-hotspot)# restrict-access-order 1
ruckus(config-hotspot-restrict-access)#
ruckus(config-hotspot-restrict-access)# show
  Description=
  Type= Deny
  Destination Address= Any
  Destination Port= Any
```

## Configuring Master Settings

### Configuring Hotspot Restricted Access Rules

```
Protocol= Any  
ruckus(config-hotspot-restrict-access)#
```

## no restrict-access-order

To delete a restrict access order, use the following command:

```
no restrict-access-order NUMBER
```

### Syntax Description

#### **no restrict-access-order**

Delete a restrict access order

NUMBER

Delete this order ID

### Defaults

None.

### Example

```
ruckus(config-hotspot)# no restrict-access-order 1  
The rule '1' has been removed from the Hotspot.
```

# Hotspot Access Restriction Commands

Use the hotspot-restrict-access commands to configure network segments to which hotspot access will be blocked. To run these commands, you must first enter the **config-hotspot-restrict-access** context.

## end

To save changes, and then exit the config-hotspot-restrict-access context, use the following command:

```
end
```

### Syntax Description

```
end
```

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-hotspot-restrict-access)# end  
ruckus(config-hotspot)#
```

## exit

To save changes, and then exit the config-hotspot-restrict-access context, use the following command:

```
exit
```

### Syntax Description

```
exit
```

Save changes, and then exit the context

### Defaults

None.

### Example

```
ruckus(config-hotspot-restrict-access)# exit  
ruckus(config-hotspot)#
```

## show

To display hotspot access restriction settings, use the following command:

```
show
```

## Syntax Description

**show**  
Display the hotspot access restriction settings

## Defaults

None.

## order

To configure the hotspot access rule order, use the following command:

**order** *NUMBER*

## Syntax Description

**order**  
Set the order of a hotspot access rule

*NUMBER*  
Assign the rule this order

## Defaults

None.

## Example

```
ruckus(config-hotspot-restrict-access)# order 1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## description

To set the description of a hotspot access rule, use the following command:

**description** *WORD*

## Syntax Description

**description**  
Set the description of a hotspot access rule

*WORD*  
Set this as description

## Defaults

None.

## Example

```
ruckus(config-hotspot-restrict-access)# description h1_order1  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## type allow

To set the hotspot access rule type to 'allow', use the following command:

```
type allow
```

## Syntax Description

<b>type</b>	Set the hotspot access rule type
<b>allow</b>	Set the rule type to 'allow'

## Defaults

None.

## Example

```
ruckus(config-hotspot-restrict-access)# type allow  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## type deny

To set the hotspot access rule type to 'deny', use the following command:

```
type deny
```

## Syntax Description

<b>type</b>	Set the hotspot access rule type
<b>deny</b>	Set the rule type to 'deny'

## Defaults

None.

## Example

```
ruckus(config-hotspot-restrict-access)# type deny  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## destination address

To set the destination address of the rule, use the following command:

**destination address** *IP-ADDR/WORD*

### Syntax Description

**destination address**

Set the destination address of the rule

**IP-ADDR/WORD**

Set the destination to this IP address

### Defaults

None.

### Example

```
ruckus(config-hotspot-restrict-access)# destination address 192.168.20.20/24  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## destination port

To set the destination port of the rule, use the following command:

**destination port** *NUMBER/WORD*

### Syntax Description

**destination port**

Set the destination port of the rule

**NUMBER/WORD**

Set the destination to this port number

### Defaults

None.

### Example

```
ruckus(config-hotspot-restrict-access)# destination port 920  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## protocol

To set the protocol for the rule, use the following command:

**protocol** *NUMBER/WORD*



## Syntax Description

**protocol**  
Set the protocol for the rule

**NUMBER/WORD**  
Set to this protocol

## Defaults

None.

## Example

```
ruckus(config-hotspot-restrict-access)# protocol 58  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## intrusion-prevention

To enable temporary blocking of Hotspot clients with repeated authentication attempts, use the following command:

**intrusion-prevention**

## Defaults

Disabled.

## Example

```
ruckus(config-hotspot)# intrusion-prevention  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-hotspot)#
```

## no intrusion-prevention

To disable temporary blocking of Hotspot clients with repeated authentication failure, use the following command:

**no intrusion-prevention**

## Example

```
ruckus(config-hotspot)# no intrusion-prevention  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-hotspot)#
```

## Configure Hotspot 2.0 Commands

Use the `hs20op` and `hs20sp` commands to configure the controller's Hotspot 2.0 operator and service provider settings. To run these commands, you must first enter the `config-hs20op` or `config-hs20sp` context.

To deploy a Hotspot 2.0 service, you must configure the following:

- A Hotspot 2.0 Operator entry
- A Hotspot 2.0 Service Provider entry
- A WLAN with Hotspot 2.0 service enabled

### hs20op

Use the following command to configure a Hotspot 2.0 Operator entry:

```
hs20op WORD
```

#### Syntax Description

**hs20op**

Create or configure a Hotspot 2.0 Operator entry

**WORD**

The name of the Hotspot 2.0 Operator entry.

#### Example

```
ruckus(config)# hs20op operator1
The Hotspot (2.0) operator entry 'operator1' has been created.
ruckus(config-hs20op)# end
The Hotspot (2.0) operator entry has saved successfully.
Your changes have been saved.
ruckus(config)#
```

### no hs20op

Use the following command to delete a Hotspot 2.0 Operator entry:

```
no hs20op WORD
```

#### Example

```
ruckus(config)# no hs20op operator1
The Hotspot (2.0) operator 'operator1' has been deleted.
ruckus(config)#
```

## Configure Hotspot 2.0 Operator Settings

The following commands can be used to configure Hotspot 2.0 Operator entry settings. To execute these commands, you must first create or edit a Hotspot 2.0 Operator entry using the `hs20op` command and entering the **config-hs20op** context.

### Syntax Description

<b>help</b>	Shows available commands.
<b>history</b>	Shows a list of previously run commands.
<b>abort</b>	Exits the config-hs20op context without saving changes.
<b>end</b>	Saves changes, and then exits the config-hs20op context.
<b>exit</b>	Saves changes, and then exits the config-hs20op context.
<b>quit</b>	Exits the config-hs20op context without saving changes.
<b>no internet-option</b>	Disables with connectivity to internet.
<b>no hessid</b>	Sets the HESSID to empty.
<b>no service-provider</b> <i>WORD NUMBER</i>	Deletes a service provider from the Hotspot (2.0) operator.
<b>no venue-group-type</b>	Sets both venue group and venue type to unspecified.
<b>no friendly-name</b> <i>LANGUAGE</i>	Disable the friendly name for the specified language.
<b>no asra</b>	Disables additional step required for access.
<b>no asra terms</b>	Disables ASRA Type: Acceptance of terms and conditions.
<b>no asra enrollment</b>	Disables ASRA Type: On-line enrollment supported.
<b>no asra http-https</b>	Disables ASRA Type: http/https redirection.
<b>no asra dns</b>	Disables ASRA Type: DNS redirection.
<b>no asra http-https-url</b>	Sets the redirect URL of http/https redirection to empty.

## Configuring Master Settings

### Configure Hotspot 2.0 Commands

#### **no wan-metrics sym**

Disables Symmetric Link.

#### **no custm-conn-cap NUMBER**

Deletes a Connection Capability entry.

#### **no adv-gas dos-detect**

Disables the GAS DOS detection.

#### **no hs-caps operating-class-indication**

Disables the operating class indication.

#### **name WORD**

Sets the hotspot(2.0) operator entry name.

#### **description WORD**

Sets the hotspot(2.0) operator entry description.

#### **internet-option**

Enables with connectivity to internet.

#### **hessid MAC**

Sets the HESSID.

#### **hessid-use-bssid**

Sets the HESSID to use BSSID.

#### **service-provider WORD**

Adds a service provider to the Hotspot (2.0) operator.

#### **venue-group-type unspecified**

Sets the venue group to unspecified

#### **venue-group-type assembly**

Sets the venue group to assembly

#### **venue-group-type assembly unspecified**

Sets the venue type to unspecified

#### **venue-group-type assembly arena**

Sets the venue type to arena

#### **venue-group-type assembly stadium**

Sets the venue type to stadium

#### **venue-group-type assembly passenger-terminal**

Sets the venue type to passenger terminal

#### **venue-group-type assembly amphitheater**

Sets the venue type to amphitheater

#### **venue-group-type assembly amusement-park**

Sets the venue type to amusement park

#### **venue-group-type assembly place-worship**

Sets the venue type to place of worship

#### **venue-group-type assembly convention-center**

Sets the venue type to convention center

**venue-group-type assembly library**

Sets the venue type to library

**venue-group-type assembly museum**

Sets the venue type to museum

**venue-group-type assembly restaurant**

Sets the venue type to restaurant

**venue-group-type assembly theater**

Sets the venue type to theater

**venue-group-type assembly bar**

Sets the venue type to bar

**venue-group-type assembly coffee-shop**

Sets the venue type to coffee shop

**venue-group-type assembly zoo-or-aquarium**

Sets the venue type to zoo or aquarium

**venue-group-type assembly emergency-coordination-center**

Sets the venue type to emergency coordination center

**venue-group-type business**

Sets the venue group to business

**venue-group-type business unspecified**

Sets the venue type to unspecified

**venue-group-type business doctor-or-dentist-office**

Sets the venue type to doctor or dentist office

**venue-group-type business bank**

Sets the venue type to bank

**venue-group-type business fire-station**

Sets the venue type to fire station

**venue-group-type business police-station**

Sets the venue type to police station

**venue-group-type business post-office**

Sets the venue type to post office

**venue-group-type business professional-office**

Sets the venue type to professional office

**venue-group-type business research-and-development-facility**

Sets the venue type to research and development facility

**venue-group-type business attorney-office**

Sets the venue type to attorney office

**venue-group-type educational**

Sets the venue group to educational

**venue-group-type educational unspecified**

Sets the venue type to unspecified

- venue-group-type educational school-primary**  
Sets the venue type to school primary
- venue-group-type educational school-secondary**  
Sets the venue type to school secondary
- venue-group-type educational university-or-college**  
Sets the venue type to university or college
- venue-group-type factory-industrial**  
Sets the venue group to factory industrial
- venue-group-type factory-industrial unspecified**  
Sets the venue type to unspecified
- venue-group-type factory-industrial factory**  
Sets the venue type to factory
- venue-group-type institutional**  
Sets the venue group to institutional
- venue-group-type institutional unspecified**  
Sets the venue type to unspecified
- venue-group-type institutional hospital**  
Sets the venue type to hospital
- venue-group-type institutional long-term-care-facility**  
Sets the venue type to long term care facility
- venue-group-type institutional alcohol-and-drug-reHAbilitation-center**  
Sets the venue type to alcohol and drug reHAbilitation center
- venue-group-type institutional group-home**  
Sets the venue type to group home
- venue-group-type institutional prison-or-jail**  
Sets the venue type to prison or jail
- venue-group-type mercantile**  
Sets the venue group to mercantile
- venue-group-type mercantile unspecified**  
Sets the venue type to unspecified
- venue-group-type mercantile retail-store**  
Sets the venue type to retail store
- venue-group-type mercantile grocery-market**  
Sets the venue type to grocery market
- venue-group-type mercantile automotive-service-station**  
Sets the venue type to automotive service station
- venue-group-type mercantile shopping-mall**  
Sets the venue type to shopping mall
- venue-group-type mercantile gas-station**  
Sets the venue type to gas station

**venue-group-type residential**

Sets the venue group to residential

**venue-group-type residential unspecified**

Sets the venue type to unspecified

**venue-group-type residential private-residence**

Sets the venue type to private residence

**venue-group-type residential hotel-or-motel**

Sets the venue type to hotel or motel

**venue-group-type residential dormitory**

Sets the venue type to dormitory

**venue-group-type residential boarding-house**

Sets the venue type to boarding house

**venue-group-type storage**

Sets the venue group to storage

**venue-group-type storage unspecified**

Sets the venue type to unspecified

**venue-group-type utility-miscellaneous**

Sets the venue group to utility miscellaneous

**venue-group-type utility-miscellaneous unspecified**

Sets the venue type to unspecified

**venue-group-type vehicular**

Sets the venue group to vehicular

**venue-group-type vehicular unspecified**

Sets the venue type to unspecified

**venue-group-type vehicular automobile-or-truck**

Sets the venue type to automobile or truck

**venue-group-type vehicular airplane**

Sets the venue type to airplane

**venue-group-type vehicular bus**

Sets the venue type to bus

**venue-group-type vehicular ferry**

Sets the venue type to ferry

**venue-group-type vehicular ship-or-boat**

Sets the venue type to ship or boat

**venue-group-type vehicular train**

Sets the venue type to train

**venue-group-type vehicular motor-bike**

Sets the venue type to motor bike

**venue-group-type outdoor**

Sets the venue group to outdoor

**venue-group-type outdoor unspecified**

Sets the venue type to unspecified

**venue-group-type outdoor muni-mesh-network**

Sets the venue type to muni mesh network

**venue-group-type outdoor city-park**

Sets the venue type to city park

**venue-group-type outdoor rest-area**

Sets the venue type to rest area

**venue-group-type outdoor traffic-control**

Sets the venue type to traffic control

**venue-group-type outdoor bus-stop**

Sets the venue type to bus stop

**venue-group-type outdoor kiosk**

Sets the venue type to kiosk

**friendly-name LANGUAGE WORD**

Sets the friendly name for the specified language.

**asra**

Enables additional step required for access.

**asra terms**

Enables ASRA Type: Acceptance of terms and conditions.

**asra enrollment**

Enables ASRA Type: On-line enrollment supported.

**asra http-https**

Enables ASRA Type: http/https redirection.

**asra http-https urlWORD**

Sets the redirect URL of http/https redirection.

**asra dns**

Enables ASRA Type: DNS redirection.

**accs-net-type private**

Sets the access network type to Private network.

**accs-net-type private-with-guest**

Sets the access network type to Private network with guest access.

**accs-net-type chargeable-public**

Sets the access network type to Chargeable public network.

**accs-net-type free-public**

Sets the access network type to Free public network.

**accs-net-type personal-device**

Sets the access network type to Personal device network.

**accs-net-type test-or-experimental**

Sets the access network type to Test or experimental.



**accs-net-type wildcard**

Sets the access network type to Wildcard.

**ip-addr-type ipv4 not-avail**

Sets the IPv4 Address Type to not available.

**ip-addr-type ipv4 public**

Sets the IPv4 Address Type to public address.

**ip-addr-type ipv4 port-restricted**

Sets the IPv4 Address Type to port-restricted address.

**ip-addr-type ipv4 single-nated**

Sets the IPv4 Address Type to single NATed private address.

**ip-addr-type ipv4 double-nated**

Sets the IPv4 Address Type to double NATed private address.

**ip-addr-type ipv4 port-single**

Sets the IPv4 Address Type to port-restricted address and single NATed private address.

**ip-addr-type ipv4 port-double**

Sets the IPv4 Address Type to port-restricted address and double NATed private address.

**ip-addr-type ipv4 unknown**

Sets the IPv4 Address Type to unknown.

**ip-addr-type ipv6 not-avail**

Sets the IPv6 Address Type to not available.

**ip-addr-type ipv6 avail**

Sets the IPv6 Address Type to available.

**ip-addr-type ipv6 unknown**

Sets the IPv6 Address Type to unknown.

**wan-metrics sym**

Enables Symmetric Link.

**wan-metrics link-stat up**

Sets Link Status to Link UP.

**wan-metrics link-stat down**

Sets Link Status to Link Down.

**wan-metrics link-stat test**

Sets Link Status to Link in Test State.

**wan-metrics downlink-load NUMBER**

Sets WAN downlink load.

**wan-metrics downlink-speed NUMBER**

Sets WAN downlink speed.

**wan-metrics uplink-load NUMBER**

Sets WAN uplink load.

**wan-metrics uplink-speed NUMBER**

Sets WAN uplink speed.

## Configuring Master Settings

### Configure Hotspot 2.0 Commands

#### **wan-metrics lmd** *NUMBER*

Sets Load Measurement Duration.

#### **conn-cap icmp closed**

Sets the ICMP Connection Capability Status to closed

#### **conn-cap icmp open**

Sets the ICMP Connection Capability Status to open

#### **conn-cap icmp unknown**

Sets the ICMP Connection Capability Status to unknown

#### **conn-cap ftp closed**

Sets the FTP Connection Capability Status to closed

#### **conn-cap ftp open**

Sets the FTP Connection Capability Status to open

#### **conn-cap ftp unknown**

Sets the FTP Connection Capability Status to unknown

#### **conn-cap ssh closed**

Sets the SSH Connection Capability Status to closed

#### **conn-cap ssh open**

Sets the SSH Connection Capability Status to open

#### **conn-cap ssh unknown**

Sets the SSH Connection Capability Status to unknown

#### **conn-cap http closed**

Sets the HTTP Connection Capability Status to closed

#### **conn-cap http open**

Sets the HTTP Connection Capability Status to open

#### **conn-cap http unknown**

Sets the HTTP Connection Capability Status to unknown

#### **conn-cap tls-vpn closed**

Sets the TLS VPN Connection Capability Status to closed

#### **conn-cap tls-vpn open**

Sets the TLS VPN Connection Capability Status to open

#### **conn-cap tls-vpn unknown**

Sets the TLS VPN Connection Capability Status to unknown

#### **conn-cap pptp-vpn closed**

Sets the PPTP VPN Connection Capability Status to closed

#### **conn-cap pptp-vpn open**

Sets the PPTP VPN Connection Capability Status to open

#### **conn-cap pptp-vpn unknown**

Sets the PPTP VPN Connection Capability Status to unknown

#### **conn-cap voip-tcp closed**

Sets the VoIP(TCP) Connection Capability Status to closed

**conn-cap voip-tcp open**

Sets the VoIP(TCP) Connection Capability Status to open

**conn-cap voip-tcp unknown**

Sets the VoIP(TCP) Connection Capability Status to unknown

**conn-cap ikev2 closed**

Sets the IKEv2 Connection Capability Status to cloed

**conn-cap ikev2 open**

Sets the IKEv2 Connection Capability Status to open

**conn-cap ikev2 unknown**

Sets the IKEv2 Connection Capability Status to unknown

**conn-cap voip-udp closed**

Sets the VoIP(UDP) Connection Capability Status to closed

**conn-cap voip-udp open**

Sets the VoIP(UDP) Connection Capability Status to open

**conn-cap voip-udp unknown**

Sets the VoIP(UDP) Connection Capability Status to unknown

**conn-cap ipsec-vpn closed**

Sets the IPsec VPN Connection Capability Status to cloed

**conn-cap ipsec-vpn open**

Sets the IPsec VPN Connection Capability Status to open

**conn-cap ipsec-vpn unknown**

Sets the IPsec VPN Connection Capability Status to unknown

**conn-cap esp closed**

Sets the ESP Connection Capability Status to cloed

**conn-cap esp open**

Sets the ESP Connection Capability Status to open

**conn-cap esp unknown**

Sets the ESP Connection Capability Status to unknown

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus closed**

Sets Status to closed.

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus closed description WORD**

Sets the description of Connection Capability entry.

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus open**

Sets Status to open.

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus open description WORD**

Sets the description of Connection Capability entry.

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus unknown**

Sets Status to unknown.

**custm-conn-cap NUMBER ip-PROTO NUMBER port NUMBERstatus unknown description WORD**

Sets the description of Connection Capability entry.

## Configuring Master Settings

### Configure Hotspot 2.0 Commands

#### **adv-gas cb-delay** *NUMBER*

Sets the GAS Comeback Delay.

#### **adv-gas rsp-limit** *NUMBER*

Sets the GAS query response length limit.

#### **adv-gas rsp-buf-time** *NUMBER*

Sets the GAS query response buffering time.

#### **adv-gas dos-detect**

Enables the GAS DOS detection.

#### **adv-gas dos-maxreq** *NUMBER*

Set the GAS DOS detection maximum request number.

#### **hs-caps operating-class-indication 2.4**

Sets the operating class indication to 2.4 GHz.

#### **hs-caps operating-class-indication 5**

Sets the operating class indication to 5 GHz.

#### **hs-caps operating-class-indication dual-band**

Sets the operating class indication to 2.4/5 GHz.

#### **show**

Displays hotspot 2.0 operator settings.

## hs2osp

Use the following command to configure a Hotspot 2.0 Service Provider entry:

**hs2osp** *WORD*

### Example

```
ruckus(config)# hs2osp serviceprovider1
```

The Hotspot (2.0) service provider entry 'serviceprovider1' has been created.

```
ruckus(config-hs2osp)# end
```

The Hotspot (2.0) service provider entry has saved successfully.

Your changes have been saved.

```
ruckus(config)#
```

## no hs2osp

Use the following command to delete a Hotspot 2.0 Service Provider entry:

**no hs2osp** *WORD*

### Example

```
ruckus(config)# no hs2osp provider1
```

The Hotspot (2.0) service provider 'provider1' has been deleted.

```
ruckus(config)#
```

## Configure Hotspot 2.0 Service Provider Settings

The following commands can be used to configure Hotspot 2.0 Service Provider entry settings. To execute these commands, you must first create or edit a Hotspot 2.0 Service Provider entry using the **hs20sp** command and entering the **config-hs20sp** context.

### Syntax Description

**help**

Shows available commands.

**history**

Shows a list of previously run commands.

**abort**

Exits the config-hs20sp context without saving changes.

**end**

Saves changes, and then exits the config-hs20sp context.

**exit**

Saves changes, and then exits the config-hs20sp context.

**quit**

Exits the config-hs20sp context without saving changes.

**no nai-realm** *NUMBER*

Deletes a NAI Realm entry.

**no domain-name** *NUMBER*

Deletes a domain name entry.

**no roam-consortium** *NUMBER*

Deletes a roaming consortium entry.

**no anqp-3gpp-info** *NUMBER*

Deletes a 3GPP cellular network information entry.

**name** *WORD*

Sets the hotspot(2.0) service provider entry name.

**description** *WORD*

Sets the hotspot(2.0) service provider entry description.

**nai-realm** *NUMBER*

Creates a new NAI Realm entry or modifies an existing entry.

**domain-name** *NUMBER*

Creates a new domain name entry or modifies an existing entry.

**domain-name***NUMBER* **name** *WORD*

Sets the domain name of a domain name entry.

**roam-consortium** *NUMBER*

Creates a new roaming consortium entry or modifies an existing entry.

**roam-consortium***NUMBER* **org-id** *HEX*

Sets the organization ID of a roaming consortium entry.

## Configuring Master Settings

### Configure Hotspot 2.0 Commands

- roam-consortium** *NUMBER org-id HEX name WORD*  
Sets the name of a roaming consortium entry.
- anqp-3gpp-info** *NUMBER*  
Creates a 3GPP cellular network information entry or modifies an existing entry list.
- anqp-3gpp-info** *NUMBER mcc NUMBER*  
Sets the MCC of 3GPP cellular network information entry.
- anqp-3gpp-info** *NUMBER mcc NUMBER mnc NUMBER*  
Sets the MNC of 3GPP cellular network information entry.
- anqp-3gpp-info** *NUMBER mcc NUMBER mnc NUMBER name WORD*  
Sets the name of 3GPP cellular network information entry.
- show**  
Displays hotspot 2.0 service provider settings.

## nai-realm

To create, a new NAI Realm entry or modifies an existing entry, use the following command:

**nai-realm** *NUMBER*

This command enters the config-hs20sp-nai-realm context. The following commands can be executed from within this context.

### Syntax Description

- name**  
Sets the name of the NAI Realm entry.
- encoding**  
Sets the encoding of the NAI Realm entry.
- eap-method** *NUMBER*  
Sets the EAP method #X of the NAI Realm entry. (X:1~4)
- no**  
Contains commands that can be executed from within the context.
- show**  
Displays NAI Realm settings.

### Example

```
ruckus(config-hs20sp)# nai-realm 1
ruckus(config-hs20sp-nai-realm)# name realm1
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-hs20sp-nai-realm)# show
  Name= realm1
  Encoding= RFC-4282
  EAP Method #1= N/A
  EAP Method #2= N/A
  EAP Method #3= N/A
  EAP Method #4= N/A
ruckus(config-hs20sp-nai-realm)# end
To save the changes, type 'end' or 'exit'.
ruckus(config-hs20sp)# end
The Hotspot (2.0) service provider entry has saved successfully.
```

```
Your changes have been saved.  
ruckus(config)#
```

## name

Use the following command to set the name of the NAI Realm entry:

```
name WORD
```

## encoding

Use the following command to set the encoding of the NAI Realm entry:

```
encoding [ rfc-4282 | utf-8 ]
```

## eap-method

Use the following command to set the EAP method of the NAI Realm entry:

```
eap-method NUMBER
```

## eap-method eap-mthd

Use the following command to set the EAP method of the NAI Realm entry:

```
eap-method NUMBER eap-mthd [N/A | NAME ]
```

## Syntax Description

### N/A

Sets the EAP method of the NAI Realm entry to N/A.

### MD5-Challenge

Sets the EAP method of the NAI Realm entry to MD5-Challenge.

### EAP-TLS

Sets the EAP method of the NAI Realm entry to EAP-TLS.

### EAP-CISCO

Sets the EAP method of the NAI Realm entry to EAP-Cisco.

### EAP-SIM

Sets the EAP method of the NAI Realm entry to EAP-SIM.

### EAP-TTLS

Sets the EAP method of the NAI Realm entry to EAP-SIM.

### PEAP

Sets the EAP method of the NAI Realm entry to PEAP.

### MSCHAP-V2

Sets the EAP method of the NAI Realm entry to EAP-MSCHAP-V2.

### EAP-AKA

Sets the EAP method of the NAI Realm entry to EAP-AKA.

#### **EAP-AKA-Prime**

Sets the EAP method of the NAI Realm entry to EAP-AKA'.

#### **Reserved**

Sets the EAP method of the NAI Realm entry to Reserved.

### **Example**

```
ruckus(config-hs20sp-nai-realm)# eap-method 1 eap-mthd EAP-TLS
The command was executed successfully. To save the changes, type 'end' or 'exit'
ruckus(config-hs20sp-nai-realm)#
```

## **eap-method auth-info**

To set the Auth Info of the EAP method, use the following command:

```
eap-method NUMBER auth-info NUMBER
```

### **Syntax Description**

#### **auth-id**

Sets the auth info ID of the auth info.

#### **auth-id expanded-EAP-method**

Sets the Auth Info of the EAP method to expanded-EAP-method.

#### **auth-id expanded-EAP-method vndr-id** NUMBER

Sets the vendor ID of the auth info.

#### **auth-id expanded-EAP-method vndr-id** NUMBER NUMBER

Sets the vendor type of the auth info.

#### **auth-id nonEAP-inner-auth**

Sets the Auth Info of the EAP method to Non-EAP Inner Authentication Type.

#### **auth-id nonEAP-inner-auth auth-type**

Sets the auth info type of the auth info.

#### **nonEAP-inner-auth auth-type** Reserved

Sets the Non-EAP Inner Authentication Type to Reserved.

#### **auth-id nonEAP-inner-auth auth-type** PAP

Sets the Non-EAP Inner Authentication Type to PAP.

#### **auth-id nonEAP-inner-auth auth-type** CHAP

Sets the Non-EAP Inner Authentication Type to CHAP.

#### **auth-id nonEAP-inner-auth auth-type** MSCHAP

Sets the Non-EAP Inner Authentication Type to MSCHAP.

#### **auth-id nonEAP-inner-auth auth-type** MSCHAPV2

Sets the Non-EAP Inner Authentication Type to MSCHAPV2.

#### **auth-id inner-auth-EAP-mthd**

Sets the Auth Info of the EAP method to Inner Authentication EAP Method Type.



**auth-id inner-auth-EAP-mthd auth-type**

Sets the auth info type of the auth info.

**auth-id inner-auth-EAP-mthd auth-type EAP-TLS**

Sets the Inner Authentication EAP Method Type to EAP-TLS.

**auth-id inner-auth-EAP-mthd auth-type EAP-SIM**

Sets the Inner Authentication EAP Method Type to EAP-SIM.

**auth-id inner-auth-EAP-mthd auth-type EAP-TTLS**

Sets the Inner Authentication EAP Method Type to EAP-TTLS.

**auth-id inner-auth-EAP-mthd auth-type EAP-AKA**

Sets the Inner Authentication EAP Method Type to EAP-AKA.

**auth-id inner-auth-EAP-mthd auth-type EAP-AKA-Prime**

Sets the Inner Authentication EAP Method Type to EAP-AKA'.

**auth-id exp-inner-EAP-mthd**

Sets the Auth Info of the EAP method to expanded-inner-EAP-method.

**auth-id inner-EAP-mthd vndr-id NUMBER**

Sets the vendor ID of the auth info.

**auth-id exp-inner-EAP-mthd vndr-id NUMBER vndr-type NUMBER**

Sets the vendor type of the auth info.

**auth-id credential-type**

Sets the Auth Info of the EAP method to Credential Type.

**auth-id credential-type auth-type**

Sets the auth info type of the auth info.

**auth-id credential-type auth-type SIM**

Sets the Credential Type to SIM.

**auth-id credential-type auth-type USIM**

Sets the Credential Type to USIM.

**auth-id credential-type auth-type NFC-secure-elem**

Sets the Credential Type to NFC Secure Element.

**auth-id credential-type auth-type hardware-token**

Sets the Credential Type to Hardware Token.

**auth-id credential-type auth-type softoken**

Sets the Credential Type to Softoken.

**auth-id credential-type auth-type certificate**

Sets the Credential Type to Certificate.

**auth-id credential-type auth-type**

**auth-id credential-type auth-type username-password**

Sets the Credential Type to username/password.

**auth-id credential-type auth-type none**

Sets the Credential Type to none.

**auth-id credential-type auth-type reserved**

Sets the Credential Type to Reserved.

**auth-id tunnel-EAP-mthd-crdn-type**

Sets the Auth Info of the EAP method to Tunneled EAP Method Credential Type.

**auth-id tunnel-EAP-mthd-crdn-type auth-type**

Sets the auth info type of the auth info.

**auth-id tunnel-EAP-mthd-crdn-type auth-type SIM**

Sets the Tunneled EAP Method Credential Type to SIM.

**auth-id tunnel-EAP-mthd-crdn-type auth-type USIM**

Sets the Tunneled EAP Method Credential Type to USIM.

**auth-id tunnel-EAP-mthd-crdn-type auth-type NFC-secure-elem**

Sets the Tunneled EAP Method Credential Type to NFC Secure Element.

**auth-id tunnel-EAP-mthd-crdn-type auth-type hardware-token**

Sets the Tunneled EAP Method Credential Type to Hardware Token.

**auth-id tunnel-EAP-mthd-crdn-type auth-type softoken**

Sets the Tunneled EAP Method Credential Type to Softoken.

**auth-id tunnel-EAP-mthd-crdn-type auth-type certificate**

Sets the Tunneled EAP Method Credential Type to Certificate.

**auth-id tunnel-EAP-mthd-crdn-type auth-type username-password**

Sets the Tunneled EAP Method Credential Type to username/password.

**auth-id tunnel-EAP-mthd-crdn-type auth-type reserved**

Sets the Tunneled EAP Method Credential Type to Reserved.

**auth-id tunnel-EAP-mthd-crdn-type auth-type anonymous**

Sets the Tunneled EAP Method Credential Type to Anonymous.

**no eap-method NUMBER**

Sets the EAP method #X of the NAI Realm entry. (X:1~4)

**no eap-method NUMBER auth-info NUMBER**

Disable the Auth Info of the EAP method

**show**

Displays NAI Realm settings.

# Configure Mesh Commands

Use the mesh commands to configure the controller's mesh networking settings. To run these commands, you must first enter the **config-mesh** context.

## mesh

Use the mesh command to enter the config-mesh context and configure the mesh-related settings.

**mesh**

### Syntax Description

**mesh**

Configure mesh settings

### Defaults

none

### Example

```
ruckus(config)# mesh
ruckus(config-mesh)#
```

## abort

To exit the config-mesh context without saving changes, use the abort command.

## end

To save changes, and then exit the config-mesh context, use the end command.

## exit

To save changes, and then exit the config-mesh context, use the exit command.

## quit

To exit the config-mesh context without saving changes, use the quit command.

## show

To display the current mesh settings, use the following command from within the *config-mesh* context:

**show**

## Syntax Description

**show**

Display the current mesh settings

## Example

```
ruckus(config-mesh)# show
Mesh Settings:
  Mesh Status= Enabled
  Mesh Name (ESSID)= Mesh-951608000220
  Mesh Passphrase= bzj9Y0kEpKxOPzPXyKqLrJHZSAAntfaTm7Ebh6qps24PFPcc5MtCiiJGGwFZBG
  Mesh Radio Option= 5G
  Mesh Uplink Selection Algorithm = default(static)
  Mesh Hop Detection:
    Status= Disabled
  Mesh Downlinks Detection:
    Status= Disabled
  Tx. Rate of Management Frame= 2Mbps
  Beacon Interval= 200ms
  Zero-Touch-Mesh status= Enabled
Zero Touch Mesh Pre-Approved Serial Number List:
serial number = 921802014959, approved = 0, time = 0, id = 1
serial number = 441e981cf0d0, approved = 0, time = 0, id = 2
serial number = 4f1e681cf3f0, approved = 0, time = 0, id = 3
serial number = c41e781bd7c0, approved = 0, time = 0, id = 4

ruckus(config-mesh)#
```

## ssid

To set the SSID of the mesh network, use the following command:

**ssid WORD/SSID**

## Syntax Description

**ssid**

Set the SSID of the mesh network

**WORD/SSID**

Set to this SSID

## Defaults

None.

## Example

```
ruckus(config-mesh)# ssid rks_mesh
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## passphrase

To set the passphrase that allows access to the mesh network, use the following command:

**passphrase WORD**

## Syntax Description

**passphrase**  
Set the passphrase that allows access to the mesh network

**WORD**  
Set to this passphrase

## Defaults

None.

## Example

```
ruckus(config-mesh)# passphrase test123456  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## hops-warn-threshold

To enable and configure the mesh hop threshold, use the following command:

**hops-warn-threshold** *NUMBER*

## Syntax Description

**hops-warn-threshold**  
Set the mesh hop threshold (max hops)

**NUMBER**  
Set to this threshold value

## Defaults

5

## Example

```
ruckus(config-mesh)# hops-warn-threshold 6  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no detect-hops

To disable the mesh hop threshold, use the following command:

**no detect-hops**

## Syntax Description

**no detect-hops**  
Disable the mesh hop threshold

## Defaults

None.

## Example

```
ruckus(config-mesh)# no detect-hops  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## fan-out-threshold

To enable and configure the mesh downlink threshold, use the following command:

```
fan-out-threshold NUMBER
```

### Syntax Description

#### **fan-out-threshold**

Set the mesh downlink threshold (max downlinks)

NUMBER

Set to this threshold value

## Defaults

5

## Example

```
ruckus(config-mesh)# fan-out-threshold 8  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no detect-fanout

To disable the mesh downlink threshold, use the following command:

```
no detect-fanout
```

### Syntax Description

#### **no detect-fanout**

Disable the mesh downlink threshold

## Example

```
ruckus(config-mesh)# no detect-fanout  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## beacon-interval

To set the beacon interval for mesh links, use the following command:

**beacon-interval** *NUMBER*

### Syntax Description

**beacon-interval**

Set the beacon interval for mesh links

*NUMBER*

Enter the beacon interval (100~1000 TUs)

### Defaults

200

### Example

```
ruckus(config-mesh)# beacon-interval 200
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-mesh)#
```

## mgmt-tx-rate

To set the transmit rate for management frames, use the following command:

**mgmt-tx-rate** *RATE*

### Syntax Description

**mgmt-tx-rate**

Set the max transmit rate for management frames

*RATE*

Set the transmit rate (in Mbps).

### Defaults

2

### Example

```
ruckus(config-mesh)# mgmt-tx-rate 2
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-mesh)#
```

## mesh-uplink-selection static

Sets static on mesh uplinks, the default is static.

**mesh-uplink selection static**

### Syntax Description

**mesh-uplink-selection**

Set the mesh uplink selection method.

**static**

Set mesh uplink selection to static.

### Defaults

Static

### Example

```
ruckus(config-mesh)# mesh-uplink-selection static
Nothing changed
ruckus(config-mesh)#
```

## mesh-uplink-selection dynamic

Sets dynamic on mesh uplinks.

**mesh-uplink selection dynamic**

### Syntax Description

**mesh-uplink-selection**

Set the mesh uplink selection method.

**dynamic**

Set mesh uplink selection to dynamic.

### Defaults

Static

### Example

```
ruckus(config-mesh)# mesh-uplink-selection dynamic
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-mesh)#
```



## mesh-radio-option

To set the mesh radio, use the following command:

```
mesh-radio-option <2.4G | 5G>
```

### Options

2.4G: Sets mesh radio type to 2.4 GHz.

5G: Sets mesh radio type to 5 GHz.

### Defaults

5G

### Example

```
ruckus(config-mesh)# mesh-radio-option 5G  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-mesh)#
```

## zero-touch-mesh

To enable zero touch mesh, use the following command:

```
zero-touch-mesh
```

### Defaults

Disabled

### Example

```
ruckus(config-mesh)# zero-touch-mesh  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-mesh)#
```

## no zero-touch-mesh

To disable zero touch mesh, use the following command:

```
no zero-touch-mesh
```

### Defaults

Disabled

### Example

```
ruckus(config-mesh)# no zero-touch-mesh  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-mesh)#
```

## zt-mesh-serial

To add one or more zero-touch mesh pre-approved serial numbers, use the following command:

```
zt-mesh-serial[<SERIAL_1> <SERIAL_2> <...> <SERIAL_n>]
```

### Syntax Description

zt-mesh-serial: Add zero-touch mesh pre-approved serial number.

<SERIAL\_1>... : Serial number to be added to Zero Touch Mesh pre-approved list.

#### NOTE

The `zt-mesh-serial` command only submits these serial numbers to a system memory buffer. It does not save them to the pre-approved AP list. If you enter the `exit` or `end` command, these serial numbers will be saved to the pre-approved serial list and deleted from the system memory buffer. If you enter the `quit` or `abort` command, these serial numbers will be discarded and deleted from the system memory buffer.

### Example

```
ruckus(config-mesh)# zt-mesh-serial 111122223333 222233334444 333344445555 444455556666
Add all serial numbers to zt-mesh pre-approved list submit ok!
ruckus(config-mesh)# end
Add 111122223333 to zt-mesh pre-approved list execute success!
Add 222233334444 to zt-mesh pre-approved list execute success!
Add 333344445555 to zt-mesh pre-approved list execute success!
Add 444455556666 to zt-mesh pre-approved list execute success!
Your changes have been saved.
ruckus(config)#
```

## no zt-mesh-serial

To delete a zero-touch mesh pre-approved serial number, use the following command:

```
no zt-mesh-serial [<SERIAL_1> <SERIAL_2> <...> <SERIAL_n>]
```

### Syntax Description

no zt-mesh-serial: Delete zero-touch mesh pre-approved serial number.

<SERIAL\_1>... : Serial number to be removed from Zero Touch Mesh pre-approved list.

#### NOTE

The `no zt-mesh-serial` command only submits these serial numbers to a system memory buffer. It does not remove them from the pre-approved AP list. If you enter the `exit` or `end` command, these serial numbers will be removed from the pre-approved serial list and deleted from the system memory buffer. If you enter the `quit` or `abort` command, these serial numbers will be discarded and deleted from the system memory buffer.

### Example

```
ruckus(config-mesh)# no zt-mesh-serial 111122223333 222233334444 333344445555 444455556666
Delete all serial numbers from zt-mesh pre-approved list submit ok!
ruckus(config-mesh)# end
Delete 111122223333 from zt-mesh pre-approved list execute success!
Delete 222233334444 from zt-mesh pre-approved list execute success!
Delete 333344445555 from zt-mesh pre-approved list execute success!
Delete 444455556666 from zt-mesh pre-approved list execute success!
Your changes have been saved.
ruckus(config)#
```

## Configure Alarm Commands

Use the alarm commands to configure the controller's alarm notification settings. To run these commands, you must first enter the **config-alarm** context.

### alarm

To enter the config-alarm context, use the following command.

```
alarm
```

### Defaults

Disabled

### Example

```
ruckus(config)# alarm  
ruckus(config-alarm)#
```

### no alarm

To disable alarm settings, use the following command:

```
no alarm
```

### Example

```
ruckus(config)# no alarm  
The Alarm settings have been updated.  
ruckus(config)#
```

### abort

To exit the config-alarm context without saving changes, use the abort command.

```
abort
```

### end

To save changes, and then exit the config-alarm context, use the following command:

```
end
```

### Example

```
ruckus(config-alarm)# end  
The Alarm settings have been updated.  
Your changes have been saved.  
ruckus(config)#
```

## exit

To save changes, and then exit the config-alarm context, use the following command:

```
exit
```

### Example

```
ruckus(config-alarm)# exit
The Alarm settings have been updated.
Your changes have been saved.
```

## quit

To exit the config-alarm context without saving changes, use the quit command.

```
quit
```

### Example

```
ruckus(config-alarm)# quit
No changes have been saved.
ruckus(config)#
```

## e-mail

To set the email address to which alarm notifications will be sent, use the following command:

```
e-mail WORD
```

### Syntax Description

**e-mail**

Set the email address to which alarm notifications will be sent

**WORD**

Send alarm notifications to this email address

### Defaults

None.

### Example

```
ruckus(config-alarm)# e-mail joe@163.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## show

To display the current alarm settings, use the following command:

```
show
```

## Configuring Master Settings

### Configure Alarm Commands

#### Example

```
ruckus(config-alarm)# show
Alarm:
  Status= Enabled
  Email Address= test@hotmail.com

ruckus(config-alarm)#
```



# Configure Alarm-Event Settings

Use the alarm-event commands to configure which events will trigger ZoneDirector email alerts. Entering this command enters the **config-alarm-event** context.

## alarm-event

To enter the config-alarm-event context and configure email alarm notifications for specific event types, use the following command:

```
alarm-event
```

## event

To enable email alarm notifications for a specific alarm event, use the following command:

```
event WORD
```

### Syntax Description

**event all**

Enable email alarms for all event types

**rogue-ap-detected**

Enable email notification when Rogue AP detected

**rogue-device-detected**

Enable email notification when Ad hoc network detected

**ap-lost-contacted**

AP lost contact

**ssid-spoofing-ap-detected**

SSID spoofing AP detected

**mac-spoofing-ap-detected**

MAC spoofing AP detected

**user-blocked-ap-detected**

User blocked AP detected

**rogue-dhcp-server-detected**

Rogue DHCP server detected

**temporary-license-expired**

Temporary license has expired

**temporary-license-will-expire**

Temporary license will expire

**lan-rogue-ap-detected**

LAN Rogue AP detected

**radius-server-unreachable**

RADIUS server unreachable

## Configuring Master Settings

### Configure Alarm-Event Settings

#### **ap-has-hardware-problem**

AP hardware problem detected

#### **uplink-ap-lost**

Mesh AP uplink connection lost

#### **incomplete-primary/secondary-ip-settings**

AP fails to maintain primary/secondary ZD IP address settings

#### **smart-redundancy-state-changed**

Smart Redundancy device status change detected

#### **smart-redundancy-active-connected**

Smart Redundancy device active device connected

#### **smart-redundancy-standby-connected**

Smart Redundancy standby device connected

#### **smart-redundancy-active-disconnected**

Smart Redundancy active device disconnected

#### **smart-redundancy-standby-disconnected**

Smart Redundancy standby device disconnected

#### **entitlement-download-fail**

Failure to download the Support Entitlement file from the Ruckus Entitlement server

#### **license-download-fail**

Failure to download the URL License file from the Ruckus License Server.

#### **test-alarm ap-lose-connection**

Test AP connection lost alarm event

#### **show**

Show alarm settings

## Defaults

All enabled

## Example

```
ruckus(config)# alarm-event
ruckus(config-alarm-event)# event all
ruckus(config-alarm-event)# show
Alarm Events Notify By Email:
MSG_rogue_AP_detected=          enabled
MSG_ad_hoc_network_detected=    enabled
MSG_AP_lost=                    enabled
MSG_SSID_spoofing_AP_detected=  enabled
MSG_MAC_spoofing_AP_detected=   enabled
MSG_admin_rogue_dhcp_server=    enabled
MSG_admin_templc_expired=       enabled
MSG_admin_templc_oneday=        enabled
MSG_same_network_spoofing_AP_detected= enabled
MSG_RADIUS_service_outage=      enabled
MSG_AP_hardware_problem=        enabled
MSG_AP_no_mesh_uplink=          enabled
MSG_AP_keep_no_AC_cfg=          enabled
MSG_cltr_change_to_active=      enabled
MSG_cltr_active_connected=      enabled
```

```
MSG_cltr_standby_connected=          enabled
MSG_cltr_active_disconnected=       enabled
MSG_cltr_standby_disconnected=      enabled
MSG_user_blocked_AP_detected=       enabled
MSG_Entitlement_file_download_fail=  enabled
ruckus(config-alarm-event) #
```

## no event

To disable email alarm notifications for specific event types, use the following command:

```
no event event_name
```

### Syntax Description

#### **no event**

Disable email alarms for this event type

#### **all**

Disable email alarms for all event types

#### **rogue-ap-detected**

Rogue AP detected

#### **rogue-device-detected**

Ad hoc network detected

#### **ap-lost-contacted**

AP lost contact

#### **ssid-spoofing-ap-detected**

SSID spoofing AP detected

#### **mac-spoofing-ap-detected**

MAC spoofing AP detected

#### **user-blocked-ap-detected**

User blocked AP detected

#### **rogue-dhcp-server-detected**

Rogue DHCP server detected

#### **temporary-license-expired**

Temporary license has expired

#### **temporary-license-will-expire**

Temporary license will expire

#### **lan-rogue-ap-detected**

LAN Rogue AP detected

#### **radius-server-unreachable**

RADIUS server unreachable

#### **ap-has-hardware-problem**

AP hardware problem detected

#### **uplink-ap-lost**

Mesh AP uplink connection lost

## Configuring Master Settings

### Configure Alarm-Event Settings

#### **incomplete-primary/secondary-ip-settings**

AP fails to maintain primary/secondary ZD IP address settings

#### **smart-redundancy-state-changed**

Smart Redundancy device status change detected

#### **smart-redundancy-active-connected**

Smart Redundancy device active device connected

#### **smart-redundancy-standby-connected**

Smart Redundancy standby device connected

#### **smart-redundancy-active-disconnected**

Smart Redundancy active device disconnected

#### **smart-redundancy-standby-disconnected**

Smart Redundancy standby device disconnected

#### **entitlement-download-fail**

Failure to download the Support Entitlement file from the Ruckus Entitlement server

### Example

```
ruckus(config-alarm-event)# no event aaa-server-unreachable
ruckus(config-alarm-event)# show
Alarm Events Notify By Email:
MSG_rogue_AP_detected=                enabled
MSG_ad_hoc_network_detected=          enabled
MSG_AP_lost=                           enabled
MSG_SSID_spoofing_AP_detected=        enabled
MSG_MAC_spoofing_AP_detected=         enabled
MSG_admin_rogue_dhcp_server=          enabled
MSG_admin_templc_expired=             enabled
MSG_admin_templc_oneday=              enabled
MSG_same_network_spoofing_AP_detected= enabled
MSG_RADIUS_service_outage=            disabled
MSG_AP_hardware_problem=              enabled
MSG_AP_no_mesh_uplink=                enabled
MSG_AP_keep_no_AC_cfg=                enabled
MSG_cltr_change_to_active=            enabled
MSG_cltr_active_connected=            enabled
MSG_cltr_standby_connected=           enabled
MSG_cltr_active_disconnected=         enabled
MSG_cltr_standby_disconnected=        enabled
MSG_user_blocked_AP_detected=         enabled
MSG_Entitlement_file_download_fail=    enabled

ruckus(config-alarm-event)#
```

## Configure Services Commands

Use the services commands to configure miscellaneous service settings, such as automatic power and channel selection settings, ChannelFly, background scanning, rogue AP and rogue DHCP server detection, etc. To run these commands, you must first enter the **config-services** context.

### abort

To exit the config-services context without saving changes, use the abort command.

**abort**

#### Syntax Description

**abort**

Exit the service settings without saving changes

#### Example

```
ruckus(config-services)# abort
No changes have been saved.
ruckus(config)#
```

### end

To save changes, and then exit the config-services context, use the following command:

**end**

#### Syntax Description

**end**

Save changes, and then exit the context

#### Example

```
ruckus(config-services)# end
Your changes have been saved.
ruckus(config)#
```

### exit

To save changes, and then exit the config-services context, use the following command:

**exit**

#### Syntax Description

**exit**

Save changes, and then exit the context

### Example

```
ruckus(config-services)# exit  
Your changes have been saved.  
ruckus(config)#
```

## quit

To exit the config-services context without saving changes, use the quit command.

**quit**

### Syntax Description

**quit**

Exit the service settings without saving changes

### Example

```
ruckus(config-services)# quit  
No changes have been saved.  
ruckus(config)#
```

## auto-channel-background-scanning

To configure auto channel background scanning settings, and enter the *ruckus(config-auto-channel-background-scanning)* context, use the following command:

**auto-channel-background-scanning**

### Example

```
ruckus(config-services)# auto-channel-background-scanning  
ruckus(config-auto-channel-background-scanning)#
```

### radio-2.4

To enable auto channel background scanning on the 2.4 GHz radio, use the following command:

**radio-2.4**

### Defaults

Enabled.

### Example

```
ruckus(config-auto-channel-background-scanning)# radio-2.4  
The command was executed successfully.  
ruckus(config-auto-channel-background-scanning)#
```

## **no radio-2.4**

To disable auto channel background scanning on the 2.4 GHz radio, use the following command:

**no radio-2.4**

### **Defaults**

Enabled.

### **Example**

```
ruckus(config-auto-channel-background-scanning)# no radio-2.4  
The command was executed successfully.  
ruckus(config-auto-channel-background-scanning)#
```

## **radio-5**

To enable auto channel background scanning on the 5 GHz radio, use the following command:

**radio-5**

### **Defaults**

Enabled.

### **Example**

```
ruckus(config-auto-channel-background-scanning)# radio-5  
The command was executed successfully.  
ruckus(config-auto-channel-background-scanning)#
```

## **no radio-5**

To disable auto channel background scanning on the 5 GHz radio, use the following command:

**no radio-5**

### **Defaults**

Enabled.

### **Example**

```
ruckus(config-auto-channel-background-scanning)# no radio-5  
The command was executed successfully.  
ruckus(config-auto-channel-background-scanning)#
```

## **off-period**

To set the off period hours for auto channel background scanning, use the following command:

**off-period <NUMBER><NUMBER>**

## Configuring Master Settings

### Configure Services Commands

#### Defaults

Disabled.

#### Example

```
ruckus(config-auto-channel-background-scanning)# off-period 23
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-auto-channel-background-scanning)#
```

#### *no off-period*

To disable the off period for auto channel background scanning, use the following command:

**no off-period**

#### Defaults

Disabled.

#### Example

```
ruckus(config-auto-channel-background-scanning)# no off-period
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-auto-channel-background-scanning)#
```

#### *clients*

To set the max number of associated clients per AP above which auto channel selection will not function, use the following command:

**clients<NUMBER>**

#### Defaults

Disabled.

#### Example

```
ruckus(config-auto-channel-background-scanning)# clients 100
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-auto-channel-background-scanning)#
```

#### *interval*

To set the auto channel selection interval (in minutes), use the following command:

**interval <NUMBER>**

#### Defaults

10 minutes.



## Example

```
ruckus(config-auto-channel-background-scanning)# interval 10
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-auto-channel-background-scanning)#
```

## threshold

To set threshold auto channel background scanning threshold (low|medium|high), use the following command:

**threshold** [*low* | *medium* | *high*]

## Defaults

Medium.

## Example

```
ruckus(config-auto-channel-background-scanning)# threshold low
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-auto-channel-background-scanning)#
```

## simulate

To simulate auto channel selection with the current settings, use the following command:

**simulate**

## Example

```
ruckus(config-auto-channel-background-scanning)# simulate
#####2.4G channel plan#####
AP MAC          NB    Client  NB_Client  Rogue  Channel  Changed  New_Channel  New_NB  New_NB_Client
New_Rogue

#####5G channel plan#####
AP MAC          NB    Client  NB_Client  Rogue  Channel  Changed  New_Channel  New_NB  New_NB_Client
New_Rogue
d4:c1:9e:35:c9:40  0    1      0          0     40      No       NA           0      0           0

ruckus(config-auto-channel-background-scanning)#
```

## deploy

To deploy auto channel background scanning with the current settings, use the following command:

**deploy**

## Example

```
ruckus(config-auto-channel-background-scanning)# deploy
ruckus(config-auto-channel-background-scanning)#
```

## show

To display auto channel background scanning settings, use the following command:

show

### Example

```
ruckus(config-auto-channel-background-scanning)# show
 2.4GHZ radio status= Enabled
 5GHZ radio status= Enabled
 Off period hours = Disabled
 Interval = 1000 minutes
ruckus(config-auto-channel-background-scanning)#
```

## auto-adjust-ap-power radio-2.4

To enable automatically adjusting AP 2.4 GHz radio power when interference is detected, use the following command:

```
auto-adjust-ap-power radio-2.4
```

### Syntax Description

**auto-adjust-ap-power**

Enable the auto adjustment of the AP radio power.

**radio-2.4**

Enable the auto adjustment of the AP radio power on the 2.4 GHz radio.

### Defaults

Disabled.

### Example

```
ruckus(config-services)# auto-adjust-ap-power radio-2.4
The command was executed successfully.
```

## no auto-adjust-ap-power radio-2.4

To disable automatically adjusting AP 2.4 GHz radio channel when interference is detected, use the following command:

```
no auto-adjust-ap-power radio-2.4
```

### Syntax Description

**no auto-adjust-ap-power**

Disable the auto adjustment of the AP radio power.

**radio-2.4**

Disable the auto adjustment of the AP radio power on the 2.4 GHz radio.

### Defaults

Disabled.

### Example

```
ruckus(config-services)# no auto-adjust-ap-power radio-2.4  
The command was executed successfully.
```

## auto-adjust-ap-power radio-5

To enable automatically adjusting AP 5 GHz radio power when interference is detected, use the following command:

```
auto-adjust-ap-power radio-5
```

### Syntax Description

#### **auto-adjust-ap-power**

Enable the auto adjustment of the AP radio power.

#### **radio-2.4**

Enable the auto adjustment of the AP radio power on the 5 GHz radio.

### Defaults

Disabled.

### Example

```
ruckus(config-services)# auto-adjust-ap-power radio-5  
The command was executed successfully.
```

## no auto-adjust-ap-power radio-5

To disable automatically adjusting AP 5 GHz radio channel when interference is detected, use the following command:

```
no auto-adjust-ap-power radio-5
```

### Syntax Description

#### **no auto-adjust-ap-power**

Disable the auto adjustment of the AP radio power.

#### **radio-5**

Disable the auto adjustment of the AP radio power on the 5 GHz radio.

### Defaults

Enabled.

### Example

```
ruckus(config-services)# no auto-adjust-ap-power radio-5  
The command was executed successfully.
```

## auto-adjust-ap-channel radio-2.4

To enable automatically adjusting the AP 2.4 GHz radio channel when interference is detected, use the following command:

```
auto-adjust-ap-channel radio-2.4
```

### Syntax Description

#### auto-adjust-ap-channel

Enable the auto adjustment of the AP radio channel.

#### radio-2.4

Enable the auto adjustment of the AP radio channel on the 2.4 GHz radio.

### Defaults

Enabled.

### Example

```
ruckus(config-services)# auto-adjust-ap-channel radio-2.4  
The command was executed successfully.  
ruckus(config-services)#
```

## no auto-adjust-ap-channel radio-2.4

To disable automatically adjusting the AP 2.4 GHz radio channel when interference is detected, use the following command:

```
no auto-adjust-ap-channel radio-2.4
```

### Syntax Description

#### no auto-adjust-ap-channel

Disable the auto adjustment of the AP radio channel.

#### radio-2.4

Disable the auto adjustment of the AP radio channel on the 2.4 GHz radio.

### Defaults

Enabled.

### Example

```
ruckus(config-services)# no auto-adjust-ap-channel radio-2.4  
The command was executed successfully.  
ruckus(config-services)#
```

## auto-adjust-ap-channel radio-5

To enable automatically adjusting the AP 5 GHz radio channel when interference is detected, use the following command:

```
auto-adjust-ap-channel radio-5
```

## Syntax Description

### **auto-adjust-ap-channel**

Enable the auto adjustment of the AP radio channel.

### **radio-5**

Enable the auto adjustment of the AP radio channel on the 5 GHz radio.

## Defaults

Enabled.

## Example

```
ruckus(config-services)# auto-adjust-ap-channel radio-5  
The command was executed successfully.  
ruckus(config-services)#
```

## **no auto-adjust-ap-channel radio-5**

To disable automatically adjusting the AP 5 GHz radio channel when interference is detected, use the following command:

**no auto-adjust-ap-channel radio-5**

## Syntax Description

### **no auto-adjust-ap-channel**

Disable the auto adjustment of the AP radio channel.

### **radio-5**

Disable the auto adjustment of the AP radio channel on the 5 GHz radio.

## Defaults

Enabled.

## Example

```
ruckus(config-services)# no auto-adjust-ap-channel radio-5  
The command was executed successfully.  
ruckus(config-services)#
```

## **raps**

To enable the Radar Avoidance Pre-Scanning (RAPS) feature on supported access points (SC-8800-S, 7782, 7781, etc.), use the following command:

**raps**

## **no raps**

To disable the Radar Avoidance Pre-Scanning (RAPS) feature on supported access points (SC-8800-S, 7782, 7781, etc.), use the following command:

**no raps**

## channelfly

To enable ChannelFly channel management, use the following command:

```
channelfly [ radio-2.4-mtbc | radio-5-mtbc ] NUMBER
```

### Syntax Description

**channelfly**

Enable ChannelFly automatic adjustment of theAP radio channel

**radio-2.4**

Enable ChannelFly on the 2.4 GHz radio

**radio-5**

Enable ChannelFly on the 5 GHz radio

**mtbc**

Set the mean time between channel changes

**NUMBER**

Number in minutes (1~1440) to set as mean time between channel change

### Defaults

Enabled for both 2.4 and 5 GHz radios

MTBC: 100

### Example

Enable ChannelFly channel management for 2.4G radios

```
ruckus(config-services)# channelfly radio-2.4 100  
The command was executed successfully.  
ruckus(config-services)#
```

Enable ChannelFly channel management for 5 G radios

```
ruckus(config-services)# channelfly radio-2.4-mtbc 100  
The command was executed successfully.  
ruckus(config-services)#
```

## no channelfly

To disable ChannelFly channel management, use the following command:

```
no channelfly [ radio-2.4 | radio-5 ]
```

### Syntax Description

**no channelfly**

Disable ChannelFly automatic adjustment of theAP radio channel

#### **radio-2.4**

Disable ChannelFly on the 2.4 GHz radio

#### **radio-5**

Disable ChannelFly on the 5 GHz radio

### **Defaults**

None.

### **Example**

```
ruckus(config-services)# no channelfly radio-2.4
The command was executed successfully.
ruckus(config-services)# no channelfly radio-5
The command was executed successfully.
ruckus(config-services)#
```

## **background-scan**

To enable background scanning and configure the scan interval, use the following command:

```
background-scan [ radio-2.4-interval | radio-5-interval ] <NUMBER>
```

### **Syntax Description**

#### **background-scan**

Enable background scanning and configure the scan interval

#### **radio-2.4-interval <NUMBER>**

Configure background scanning interval for the 2.4 GHz radio

#### **radio-5-interval <NUMBER>**

Configure background scanning interval for the 5 GHz radio

#### **low-threshold <NUMBER>**

Set the min threshold of switch channel in 2.4 GHz radio (Range: 0 ~ 2000)

### **Defaults**

20 seconds

### **Example**

```
ruckus(config-services)# background-scan radio-2.4-interval 6
The command was executed successfully.
```

## **no background-scan**

To disable background scanning on the 2.4GHz radio, use the following command:

```
no background-scan [ radio-2.4-interval | radio-5 ]
```

### Syntax Description

**no background-scan**

Disable background scanning

**radio-2.4**

Disable background scanning on the 2.4GHz radio

**radio-5**

Disable background scanning on the 5GHz radio

### Defaults

None

### Example

```
ruckus(config-services)# no background-scan radio-2.4
The command was executed successfully.
ruckus(config-services)# no background-scan radio-5
The command was executed successfully.
```

## background-scan low-threshold

To set the min threshold to switch channels for the 2.4 GHz radio, use the following command:

**background-scan low-threshold** <NUMBER>

### Syntax Description

**background-scan low-threshold**

Configure the low threshold for the radio.

**NUMBER**

Set the minimum threshold value (0~2000).

### Defaults

Disabled

### Example

```
ruckus(config-services)# background-scan low-threshold 20
The command was executed successfully.
ruckus(config-services)#
```



## aeroscout-detection

To enable detection of AeroScout RFID Tags by APs that are managed by ZoneDirector, use the following command:

```
aeroscout-detection
```

### Syntax Description

```
aeroscout-detection
```

Enable detection of AeroScout RFID Tags by APs

### Defaults

Disabled

### Example

```
ruckus(config-services)# aeroscout-detection  
The command was executed successfully.
```

## no aeroscout-detection

To disable detection of AeroScout RFID Tags by APs that are managed by ZoneDirector, use the following command:

```
no aeroscout-detection
```

### Syntax Description

```
no aeroscout-detection
```

Disable detection of AeroScout RFID Tags by APs

### Defaults

Disabled

### Example

```
ruckus(config-services)# no aeroscout-detection  
The command was executed successfully.
```

## ekahau

To enable and set Ekahau Blink support with ERC IP and port, use the following command:

```
ekahau ERC IP ERC Port
```

### Defaults

Disabled

## Example

```
ruckus(config-services)# ekahau 10.10.10.1 500
The command was executed successfully.
ruckus(config-services)# show
Services:
  Automatically adjust ap radio power= Disabled
  Automatically adjust ap channel= Enabled
  Channelfly works on 2.4GHz radio:
    Status= Disabled
  Channelfly works on 5GHz radio:
    Status= Disabled
  Run a background scan on 2.4GHz radio:
    Status= Enabled
    Time= 2000 seconds
  Run a background scan on 5GHz radio:
    Status= Enabled
    Time= 2000 seconds
  AeroScout RFID tag detection= Disabled
  Tunnel encryption for tunneled traffic= Disabled
  Block multicast traffic from network to tunnel= Block non well-known
  Block broadcast traffic from network to tunnel except ARP and DHCP= Disabled
  Tunnel Proxy ARP of tunnel WLAN:
    status= Disabled
    ageing time= 0
  Packet Inspection Filter(PIF) uplink process= Disabled
  Packet Inspection Filter(PIF) rate limit:
    status= Disabled
  RAPS= Enabled
  EKHAU settings:
    status= Enabled
    ERC IP= 10.10.10.1
    ERC port= 500
ruckus(config-services)#
```

## no ekahau

To disable Ekahau Blink support, use the following command:

```
no ekahau
```

## Defaults

Disabled

## Example

```
ruckus(config-services)# no ekahau
The command was executed successfully.
ruckus(config-services)#
```

## pif

To enable Packet Inspection Filter and set rate limiting threshold, use the following command:

```
pif [uplink-proc | rate-limit NUMBER ]
```

## Syntax Description

**pif**

Enable Packet Inspection Filter

### uplink-proc

Enable uplink process of Packet Inspection Filter

### rate-limit

Enable and set Broadcast Neighbor Discovery Packets (ARP and ICMPv6 Neighbor Solicit) rate limit threshold.

### NUMBER

Rate limiting threshold for PIF feature.

## Example

```
ruckus(config-services)# pif uplink-proc
The command was executed successfully.
ruckus(config-services)# pif rate-limit 1000
The command was executed successfully.
ruckus(config-services)# show
Services:
  Automatically adjust ap radio power= Disabled
  Automatically adjust ap channel= Enabled
  Channelfly works on 2.4GHz radio:
    Status= Disabled
  Channelfly works on 5GHz radio:
    Status= Disabled
  Run a background scan on 2.4GHz radio:
    Status= Enabled
    Time= 20 seconds
  Run a background scan on 5GHz radio:
    Status= Enabled
    Time= 20 seconds
  AeroScout RFID tag detection= Disabled
  Tunnel encryption for tunneled traffic= Enabled
  Block multicast traffic from network to tunnel= Disabled
  Block broadcast traffic from network to tunnel except ARP and DHCP= Disabled
  Tunnel Proxy ARP of tunnel WLAN:
    status= Disabled
  Packet Inspection Filter(PIF) uplink process= Enabled
  Packet Inspection Filter(PIF) rate limit:
    status= Enabled
    rate limit= 1000
ruckus(config-services)#
```

## no pif

To disable uplink process of packet inspection filter or disables Broadcast Neighbor Discovery Packets (ARP and ICMPv6 Neighbor Solicit), use the following command:

```
no pif [uplink-proc | rate-limit ]
```

## Example

```
ruckus(config-services)# no pif uplink-proc
The command was executed successfully.
ruckus(config-services)# no pif rate-limit
The command was executed successfully.
ruckus(config-services)#
```

## show

To display the current service settings, use the following command:

```
show
```

## Syntax Description

**show**

Display the current service settings

## Defaults

None.

## Example

```
ruckus(config-services)# show
Services:
  Automatically adjust ap radio power= Disabled
  Automatically adjust ap channel= Enabled
  Channelfly works on 2.4GHz radio:
    Status= Disabled
  Channelfly works on 5GHz radio:
    Status= Disabled
  Run a background scan on 2.4GHz radio:
    Status= Enabled
    Time= 2000 seconds
  Run a background scan on 5GHz radio:
    Status= Enabled
    Time= 2000 seconds
  AeroScout RFID tag detection= Disabled
  Tunnel encryption for tunneled traffic= Disabled
  Block multicast traffic from network to tunnel= Block non well-known
  Block broadcast traffic from network to tunnel except ARP and DHCP= Disabled
  Tunnel Proxy ARP of tunnel WLAN:
    status= Disabled
    ageing time= 0
  Packet Inspection Filter(PIF) uplink process= Disabled
  Packet Inspection Filter(PIF) rate limit:
    status= Disabled
ruckus(config-services)#
```

# Configure WIPS Commands

Use the wips commands to configure Wireless Intrusion Prevention settings. To run these commands, you must first enter the **config-wips** context.

## wips

Use the following command to enter the config-wips context and configure WIPS settings:

**wips**

### Syntax Description

**help**

Shows available commands

**history**

Shows a list of previously run commands

**end**

Saves changes, and the exits the config-wips context

**exit**

Saves changes, and the exits the config-wips context

**no WORD**

Disable WIPS services

**protect-excessive-wireless-request**

Enables protecting the wireless network against excessive wireless requests

**temp-block-auth-failed-client time** NUMBER

Temporarily block wireless clients with repeated authentication failures for the specified time (in seconds)

**rogue-report** [ all ] | [ malicious *ssid-spoofing* | same-network | user-blocked | mac-spoofing]

Enables report rogue devices in ZD event log.

**all**

Report all rogue devices.

**malicious** [ *ssid-spoofing* | same-network | user-blocked | mac-spoofing]

Report particular malicious type.

**malicious-report**

Enables protecting the network from malicious rogue access points

**rogue-dhcp-detection**

Enables rogue DHCP server detection

**show**

Displays the WIPS settings

### Example

```
ruckus(config)# wips
ruckus(config-wips)# show
  Protect my wireless network against excessive wireless requests= Disabled
  Temporarily block wireless clients with repeated authentication failures:
```

## Configuring Master Settings

### Configure WIPS Commands

```
Status= Enabled
Time= 30 seconds
Report rogue devices in ZD event log= Enabled
Protect the network from malicious rogue access points= Disabled
Rogue DHCP server detection= Enabled
ruckus(config-wips)# temp-block-auth-failed-client time 30
The command was executed successfully.
ruckus(config-wips)# rogue-report all
The command was executed successfully.
ruckus(config-wips)# rogue-report malicious same-network
The command was executed successfully.
ruckus(config-wips)# rogue-dhcp-detection
The command was executed successfully.
ruckus(config-wips)# no rogue-dhcp-detection
The command was executed successfully.
ruckus(config-wips)# no rogue-report
The command was executed successfully.
ruckus(config-wips)# show
Protect my wireless network against excessive wireless requests= Disabled
Temporarily block wireless clients with repeated authentication failures:
Status= Enabled
Time= 30 seconds
Report rogue devices in ZD event log= Disabled
Protect the network from malicious rogue access points= Disabled
Rogue DHCP server detection= Disabled
ruckus(config-wips)#
```

# Configure Email Server Commands

Use the email-server commands to configure email server settings. To run these commands, you must first enter the **config-email-server** context.

## email-server

Use the following command to enter the **config-email-server** context and configure email server settings:

**email-server**

### Syntax Description

**help**

Shows available commands.

**history**

Shows a list of previously run commands.

**abort**

Exits the config-email-server context without saving changes.

**end**

Saves changes, and the exits the config-email-server context.

**exit**

Saves changes, and the exits the config-email-server context.

**quit**

Exits the config-email-server context without saving changes.

**enable**

Enables the E-Mail server.

**from** *WORD*

Sets the E-Mail from for email server.

**smtp-server-name** *WORD*

Sets the smtp server name for email server.

**smtp-server-port** *NUMBER*

Sets the smtp server port for email server.

**smtp-auth-name** *WORD*

Sets the smtp authentication user name for email server.

**smtp-auth-password** *WORD*

Sets the smtp authentication password for email server.

**smtp-wait-time**

Sets the smtp server wait time (in seconds).

**tls-smtp-encryption** *tls*

Enables TLS of smtp encryption for email server.

**tls-smtp-encryption** *starttls*

Enables starttls in the TLS of smtp encryption for email server.

## Configuring Master Settings

### Configure Email Server Commands

#### **no enable**

Disables the email server setting.

#### **no tls-smtp-encryption tls**

Disables TLS of smtp encryption for email server.

#### **no tls-smtp-encryption starttls**

Disables starttls in the TLS of smtp encryption for email server.

#### **show**

Shows email server settings.

## Example

```
ruckus(config)# email-server
ruckus(config-email-server)# enable
ruckus(config-email-server)# from example@example.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# smtp-server-name smtp.example.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# smtp-server-port 587
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# smtp-auth-name johndoe
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# smtp-auth-password password
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# tls-smtp-encryption tls
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# tls-smtp-encryption starttls
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)# show
Email Server:
  Status= Enabled
  E-mail From = example@example.com
  SMTP Server Name= smtp.example.com
  SMTP Server Port= 587
  SMTP Authentication Username= johndoe
  SMTP Authentication Password= *****
  SMTP Encryption Options:
    TLS= Enabled
    STARTTLS= Enabled

ruckus(config-email-server)# end
The Email server settings have been updated.
Your changes have been saved.
ruckus(config)#
```

## from

To set the sender from address for email alarms, use the following command:

**from** WORD

## Syntax Description

**from**

Set the email address from which alarm notifications will be sent

WORD

Send alarm notifications from this email address



## Defaults

None.

## Example

```
ruckus(config-email-server)# from test1@gmail.com
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-email-server)#
```

## enable

To enable the email server, use the following command:

**enable**

## Example

```
ruckus(config-email-server)# enable
ruckus(config-email-server)#
```

## no enable

To disable the email server, use the following command:

**no enable**

## Example

```
ruckus(config-email-server)# no enable
ruckus(config-email-server)# show
Email Server:
  Status= Disabled

ruckus(config-email-server)#
```

## smtp-server-name

To set the SMTP server that ZoneDirector uses to send alarm notifications, use the following command:

**smtp-server-name** *WORD*

## Syntax Description

### **smtp-server-name**

Set the SMTP server that ZoneDirector uses to send alarm notifications

### *WORD*

Set to this SMTP server name

## Defaults

None.

## Example

```
ruckus(config-email-server)# smtp-server-name smtp.163.com  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## smtp-server-port

To set the SMTP server port that ZoneDirector uses to send alarm notifications, use the following command:

```
smtp-server-port NUMBER
```

### Syntax Description

**smtp-server-port**

Set the SMTP server port that ZoneDirector uses to send alarm notifications

NUMBER

Set to this SMTP server port

### Defaults

587

## Example

```
ruckus(config-email-server)# smtp-server-port 25  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## smtp-auth-name

To set the user name that ZoneDirector uses to authenticate with the SMTP server, use the following command:

```
smtp_auth_name WORD
```

### Syntax Description

**smtp\_auth\_name**

Set the user name that ZoneDirector uses to authenticate with the SMTP server

WORD

Set to this user name

### Defaults

None.

## Example

```
ruckus(config-email-server)# smtp-auth-name joe  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## smtp-auth-password

To set the password that ZoneDirector uses to authenticate with the SMTP server, use the following command:

```
smtp-auth-password WORD
```

### Syntax Description

#### smtp-auth-password

Set the password that ZoneDirector uses to authenticate with the SMTP server

WORD

Set to this password

### Defaults

None.

### Example

```
ruckus(config-email-server)# smtp-auth-password 123456  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## smtp-wait-time

To set the SMTP server wait time (in seconds), use following command:

```
smtp-wait-time NUMBER
```

### Example

```
ruckus(config-email-server)# smtp-wait-time 10  
The command was executed successfully. To save the changes, type 'end' or 'exit'.  
ruckus(config-alarm)#
```

## tls-smtp-encryption

To enable TLS for SMTP encryption of email notifications, use the following command:

```
tls-smtp-encryption [ tls | starttls ]
```

### Syntax Description

#### tls-smtp-encryption

Enable SMTP encryption of email notifications

#### tls

Enable TLS encryption for email notifications

#### starttls

Enable STARTTLS encryption for email notifications

## Defaults

None.

## Example

```
ruckus(config-email-server)# tls-smtp-encryption tls  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

## no tls-smtp-encryption

To disable TLS for SMTP encryption of alarm notifications, use the following command:

```
no tls-smtp-encryption [ tls | starttls ]
```

## Syntax Description

### **no tls-smtp-encryption**

Disable SMTP encryption of alarm notifications

### **tls**

Disable TLS encryption

### **starttls**

Disable STARTTLS encryption

## Defaults

None.

## Example

```
ruckus(config-email-server)# no tls-smtp-encryption tls  
The command was executed successfully. To save the changes, type 'end' or 'exit'.
```

# Configure SMS Server Commands

Use the `sms-server` commands to configure SMS server settings. To run these commands, you must first enter the `config-sms-server` context.

## sms-server

Use the following command to enter the `config-sms-server` context and configure SMS server settings:

```
sms-server
```

### Syntax Description

#### help

Shows available commands.

#### history

Shows a list of previously run commands.

#### abort

Exits the `config-sms-server` context without saving changes.

#### end

Saves changes, and the exits the `config-sms-server` context.

#### exit

Saves changes, and the exits the `config-sms-server` context.

#### quit

Exits the `config-sms-server` context without saving changes.

#### twilio

Configures SMS server settings for twilio. Enters `ruckus(config-sms-server-twilio)#`

#### clickatell

Configures SMS server settings for clickatell. Enters `ruckus(config-sms-server-clickatell)#`

#### account-sid WORD

Sets the account sid for twilio of sms server

#### auth-token WORD

Sets the auth token for twilio of sms server

#### from-phonenummer WORD

Sets the from phonenummer for twilio of sms server

**country-code** [*no-default-and-ask-user-to-input* | *default* <country code default value> | *default* <country code default value> *allow-change* | *default* <country code default value> *disallow-change* ]

Sets the country code, default country code and whether to allow user input to change the country code from the default.

#### user-name WORD

Sets the user name for clickatell of sms server

#### password WORD

Sets the password for clickatell of sms server

#### api-id WORD

Sets the api id for clickatell of sms server

## Configuring Master Settings

### Configure SMS Server Commands

#### **show**

Displays the SMS server settings.

#### **customized**

Configures SMS server settings for customized server. Enters `ruckus(config-sms-server-customized)#`

#### **url <WORD> <WORD>**

Sets the URL for customized sms server

#### **post <WORD>**

Sets the post for customized sms server

## Example

```
ruckus(config)# sms-server
ruckus(config-sms-server)# twilio
ruckus(config-sms-server-twilio)# account-sid abcdef123
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sms-server-twilio)# auth-token word1234
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sms-server-twilio)# country-code default +1 allow-change
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sms-server-twilio)# from-phonenum 6661231234
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sms-server-twilio)# end
The SMS server settings have been updated.
Your changes have been saved.
ruckus(config-sms-server)# show
SMS Server:
  Server Type= twilio
  Account SID= abcdef123
  Auth Token= word1234
  From PhoneNumber= 6661231234
  Country Code= Use default +1 and allow user to change

ruckus(config-sms-server)# end
The SMS server settings have been updated.
Your changes have been saved.
ruckus(config)#
```

## no sms-server

To disable SMS server settings, use the following command:

**no sms-server**

## Example

```
ruckus(config)# no sms-server
The SMS server settings have been updated.
ruckus(config)#
```

## country-code

Use the following command to configure SMS server country code settings:

**country-code** [*no-default-and-ask-user-to-input* | *default*<WORD> + <NUMBER>] [*allow-change* | *disallow change*]

## Example

```
ruckus(config-sms-server-twilio)# country-code default +1 allow-change
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sms-server-twilio)# end
The SMS server settings have been updated.
Your changes have been saved.
ruckus(config-sms-server)# show
SMS Server:
  Server Type= twilio
  Account SID= test123
  Auth Token= test123
  From PhoneNumber= 1112223344
  Country Code= Use default +1 and allow user to change

ruckus(config-sms-server)#
```

## sns

To configure Short Notification Service settings and enter the *config-sns* context, use the following command:

**sns**

## Syntax Description

abort	Exits the config-sns context without saving changes.
end	Saves changes, and then exits the config-sns context.
exit	Saves changes, and then exits the config-sns context.
quit	Exits the config-sns context without saving changes.
enable	Enables Short Notification Service.
no enable	Disables Short Notification Service.
show	Shows Short Notification Service settings.

## Defaults

Enabled.

## Example

```
ruckus(config)# sns
ruckus(config-sns)# enable
ruckus(config-sns)# show
Short Notification Service:
  Status= Enabled

ruckus(config-sns)# end
The Short Notification Service settings have been updated.
Your changes have been saved.
ruckus(config)#
```

## Configure Station Rename Commands

Use the following commands to configure the renamed station list.

## sta-rename

To create or modify the renamed station list, use the following commands:

### Syntax Description

help	Shows available commands
history	Shows a list of previously run commands
no sta	Delete a renamed station
end	Save the current rule and quit
exit	Save the current rule and quit
abort	Discard the current rule and quit
quit	Discard the current rule and quit

### Example

```
ruckus(config)# sta-rename
ruckus(config- sta-rename)# sta 6C:AA:B3:00:00:A0 my-iphone
ruckus(config- sta-rename)# end
Your changes have been saved. ruckus(config)# show sta-name Displays sta rename list:
MAC Address= 6C:AA:B3:00:00:A0
  rename= my-iphone
```

```
All sta rename number: 1.
ruckus(config)#
```

## Configure Favorite Station Commands

Use the following commands to configure the favorite station list.



## sta-favorite

To create or modify the favorite station list, use the following commands:

### Syntax Description

help	Shows available commands
history	Shows a list of previously run commands
no sta	Delete a favorite station
sta <MAC>	Enable station favorite
end	Save the current rule and quit
exit	Save the current rule and quit
abort	Discard the current rule and quit
quit	Discard the current rule and quit

### Example

```
ruckus(config)# sta-favorite
ruckus(config-sta-favorite)# sta aa:aa:aa:aa:aa:aa
ruckus(config-sta-favorite)# end
Your changes have been saved. ruckus(config)# show sta-favorite Displays sta favorite list:
MAC Address= aa:aa:aa:aa:aa:aa
```

```
All sta favorite number: 1.
ruckus(config)#
```

## Configure mDNS (Bonjour) Commands

Use the following commands to configure mDNS (Bonjour Gateway) service.

### mdnsproxy

Use the following command to enable mDNS proxy (Bonjour Gateway) service:

```
mdnsproxy [ zd | ap ]
```

### no mdnsproxy

Use the following command to disable mDNS proxy (Bonjour Gateway) service:

```
no mdnsproxy [ zd | ap ]
```

### mdnsproxyrule

Use the following command to create a new Bonjour Gateway rule or modify an existing rule, and enter the config-mdnsproxyrule context:

```
mdnsproxyrule ID
```

### no mdnsproxyrule

Use the following command to delete a Bonjour Gateway rule:

```
no mdnsproxyrule ID
```

## Configure Bonjour Policy

The following commands can be used from within the **config-bonjourpolicy** context to configure the Bonjour policy.

### *bonjour-policy*

To create or edit a Bonjour policy, use the following command:

**bonjour-policy** *WORD*

### Syntax Description

<b>help</b>	Shows available commands
<b>history</b>	Shows a list of previously run commands
<b>no mdnsproxyrule</b>	Delete mDNSproxy rule
<b>mdnsproxyrule</b> <i>ID</i>	Add/update mDNSproxy rules
<b>note</b> <i>NOTE</i>	Rule comments
<b>end</b>	Save the current rule and quit
<b>exit</b>	Save the current rule and quit
<b>abort</b>	Discard the current rule and quit
<b>quit</b>	Discard the current rule and quit

### Example

```
ruckus(config)# bonjour-policy bonjour1
ruckus(config-bonjourpolicy)# note bonjourpolicy1
ruckus(config-bonjourpolicy)# end
Your changes have been saved.
ruckus(config)# show bonjour-policy
bonjour-policy:
  ID: 1
  Name: bonjour1
  Description: bonjourpolicy1
  rule:
ruckus(config)#
```

### *no bonjour-policy*

To delete a Bonjour policy, use the following command:

**no bonjour-policy** *WORD*

## Configuring Master Settings

### Configure mDNS (Bonjour) Commands

## Configure mDNS Proxy Rules

The following commands can be used from within the **config-mdnsproxyrule** context to configure the Bonjour Gateway bridge service rule.

### Syntax Description

<b>help</b>	Shows available commands
<b>history</b>	Shows a list of previously run commands
<b>service</b> <i>Service-Name</i>	Service name in ? list, or new bonjour rule
<b>from-vlan</b> <i>VLAN-From</i>	VLAN from
<b>to-vlan</b> <i>VLAN-to</i>	VLAN to
<b>note</b> <i>NOTE</i>	Rule comments
<b>show</b>	Show the current edited rule
<b>end</b>	Save the current rule and quit
<b>abort</b>	Discard the current rule and quit
<b>quit</b>	Discard the current rule and quit

### Example

```
ruckus(config-bonjourpolicy)# mdnsproxyrule 1
ruckus(config-policyrule)# service AirDisk
ruckus(config-policyrule)# from-vlan 220
ruckus(config-policyrule)# to-vlan 1
ruckus(config-policyrule)# note "share printer to vlan1"
ruckus(config-policyrule)# end
ruckus(config-bonjourpolicy)# end
ruckus(config)# show bonjour-policy
bonjour-policy:
  ID: 1
  Name: bonjour1
  Description: bonjourpolicy1
  rule:
  1:
    mdnsservice: AirDisk
    from_vlan: br0.220
    to_vlan: br0
  Notes: share printer to vlan1
ruckus(config)#
```

## Configure Bonjour Fencing Policy

To create a Bonjour Fencing policy and enter the **config-bonjourfencing** context, use the following command:

**bonjour-fencing** <NAME>

### Syntax Description

#### **bonjour-fencing**

Configure a Bonjour Fencing policy.

#### NAME

Set the name of the fencing policy.

no <ID>	Delete fencing rules
show	Show the current edited bonjour fence
description	Sets the bonjour fence description.
fencerule <ID>	Add/Update fence rules
end	Save current rule and quit
exit	Save current rule and quit
abort	Discard current rule and quit
quit	Discard current rule and quit

### Defaults

None.

### Example

```
ruckus(config)# bonjour-fencing fencel
ruckus(config-bonjourfencing)#
  help           Shows available commands.
  history        Shows a list of previously run commands.
  no <ID>        Delete fencing rules
  show           Show the current edited bonjour fence
  description <WORD> Sets the bonjour fence description.
  fencerule <ID> Add/Update fence rules
  end            Save current rule and quit
  exit           Save current rule and quit
  abort          Discard current rule and quit
  quit          Discard current rule and quit
ruckus(config-bonjourfencing)#
```

### fencerule

To add or update fence rules, and enter the *config-fencerule* context, use the following command:

**fencerule** <ID >

### Syntax Description

show	Show the current edited rule
source-type <TYPE>	Wired or wireless.
device-mac <MAC>	Device MAC.

## Configuring Master Settings

### Configure Reportd Commands

anchor-ap <MAC>	Anchor AP MAC.
service <Service-Name>	List service names.
fencing-range <RANGE>	Fencing Range: Same AP or 1-Hop AP Neighbors.
description <WORD>	Fencing rule description.
end	Save current rule and quit
quit	Save current rule and quit

### Example

```
ruckus(config-bonjourfencing)# fencerule 1
ruckus(config-fencerule)#
  help                Shows available commands.
  history             Shows a list of previously run commands.
  show               Show the current edited rule
  source-type <TYPE> Wireless or Wired.
  device-mac <MAC>   Device MAC.
  anchor-ap <MAC>    Anchor AP MAC.
  service <Service-Name>
                    List service names.
  fencing-range <RANGE>
                    Fenceing Range: Same AP or 1-Hop AP Neighbors.
  description <WORD> Fencing rule description.
  end                Save current rule and quit
  exit               Save current rule and quit
ruckus(config-fencerule)#
```

## Configure Reportd Commands

Use the following commands to configure Reportd settings.

### reportd

Use the following command to enter the **config-reportd** context and configure Reportd settings.

**reportd**

#### Syntax Description

##### help

Shows available commands

##### history

Shows a list of previously run commands

##### abort

Exits the config-reportd context without saving changes.

##### end

Save changes, and then exits the config-reportd context.

##### exit

Save changes, and then exits the config-reportd context.

##### quit

Exits the config-reportd context without saving changes.

- enable**  
Enable Reportd settings.
- disable**  
Disable Reportd settings.
- wlan-url** *WORD*  
Set WLAN report URL.
- ap-url** *WORD*  
Set AP report URL.
- client-url** *WORD*  
Set client report URL.
- system-url** *WORD*  
Set system report URL.
- wlan-interval** *NUMBER*  
Sets WLAN report interval for Reportd in minutes.
- ap-interval** *NUMBER*  
Sets AP report interval for Reportd in minutes.
- client-interval** *NUMBER*  
Sets client report interval for Reportd in minutes.
- system-interval** *NUMBER*  
Sets system report interval for Reportd in minutes.
- wlan-compress** *NUMBER*  
Sets WLAN report compress-mode for Reportd.
- ap-compress** *NUMBER*  
Sets AP report compress-mode for Reportd.
- client-compress** *NUMBER*  
Sets client report compress-mode for Reportd.
- system-compress** *NUMBER*  
Sets system report compress-mode for Reportd.
- show**  
Displays Reportd settings.

## Example

```
ruckus(config)# reportd
ruckus(config-reportd)# enable
The command was executed successfully. To save the changes, type 'end' or 'exit'
ruckus(config-reportd)# show
Reportd Settings:
  Reportd Status= Enabled
  WLAN report url=
  AP report url=
  Client report url=
  System report url=
  WLAN report interval= 15 min
  AP report interval= 15 min
  Client report interval= 15 min
  System report interval= 15 min
  WLAN compress mode= 0
```

**Configuring Master Settings**  
Configure Reportd Commands

```
AP compress mode= 0  
Client compress mode= 0  
System compress mode= 0
```



## upload-debug

To configure upload debug file settings, use the following command:

**upload-debug***NUMBER*

## Syntax Description

abort	Exits the config-upload-debug context without saving changes.
end	Saves changes, and then exits the config-upload-debug context.
exit	Saves changes, and then exits the config-upload-debug context.
quit	Exits the config-upload-debug context without saving changes.
show	Shows upload debug file settings.
enable	Enables the upload debug file.
proto <tftp or ftp>	Sets the protocol for upload debug file.
host <WORD>	Sets the host for upload debug file.
port <NUMBER>	Sets the port for upload debug file.
ftp-user <WORD>	Sets the FTP username for upload debug file.
ftp-pass <WORD>	Sets the FTP password for upload debug file.

## Defaults

Disabled.

## Example

```
ruckus(config-upload-debug)#
  help           Shows available commands.
  history        Shows a list of previously run commands.
  abort          Exits the config-upload-debug context without saving changes.
  end            Saves changes, and then exits the config-upload-debug context.
  exit           Saves changes, and then exits the config-upload-debug context.
  quit          Exits the config-upload-debug context without saving changes.
  show           Shows upload debug file settings.
  enable        Enables the upload debug file.
  proto <tftp or ftp> Sets the protocol for upload debug file.
  host <WORD>    Sets the host for upload debug file.
  port <NUMBER> Sets the port for upload debug file.
  ftp-user <WORD> Sets the FTP username for upload debug file.
  ftp-pass <WORD> Sets the FTP password for upload debug file.
ruckus(config-upload-debug)# enable
ruckus(config-upload-debug)# proto tftp
ruckus(config-upload-debug)# host 192.168.40.11
ruckus(config-upload-debug)# port 443
ruckus(config-upload-debug)# ftp-user user1
ruckus(config-upload-debug)# ftp-pass password1234
ruckus(config-upload-debug)# show
Upload Debug:
  Status= Enabled
  Protocol= TFTP
  Host = 192.168.40.11

ruckus(config-upload-debug)# end
The upload debug file settings have been updated.
Your changes have been saved.
ruckus(config)#
```

## no upload-debug

### Syntax

**no upload-debug**

### Command Default

Disabled.

### Examples

```
ruckus(config)# no upload-debug  
The upload debug file settings have been updated.  
ruckus(config)#
```

# Using Debug Commands

---

- Debug Commands Overview..... 507
- General Debug Commands..... 507
- Show Commands..... 520
- Accessing a Remote AP CLI..... 527
- Working with Debug Logs and Log Settings..... 529
- Remote Troubleshooting..... 538
- AP Core Dump Collection..... 540
- Script Execution..... 542

## Debug Commands Overview

This section describes the commands that you can use to debug Unleashed and connected APs, and to configure debug log settings.

From the privileged commands context, type **debug** to enter the debug context. To show a list of commands available from within the debug context, type **help** or **?**.

## General Debug Commands

The following section describes general debug commands can be executed from within the debug context.

### help

Shows available commands.

### list-all

List all available commands.

### history

Shows a list of previously run commands.

### quit

Exits the debug context.

### apfw\_upgrade

To upgrade the controller's firmware, use the following command:

```
apfw_upgrade <protocol>://server ip|server name/path/image name [ -f ]
```

```
apfw_upgrade OPTIONS
```

## Syntax Description

### **apfw\_upgrade**

Upgrade the AP's firmware

### *protocol*

Protocol for image transfer (FTP, TFTP, HTTP, KERMIT)

### OPTIONS

- p** protocol
- s** server IP address or name
- n** image name with path on the server
- f** non-verbose mode
- h** fw\_upgrade help message

## Defaults

None.

## Example

```
ruckus(debug) # apfw_upgrade
-----
Name: apfw_upgrade - AP Firmware Upgrade Tool (Ver.1.2)
Synopsis : apfw_upgrade tftp://<server ip|server name>/<path/image name>
-----
apfw_upgrade
ruckus(debug) #
```

## restore

To restore the controller's configuration, use the following command:

### Syntax

```
restore [ all | failover | policy ] <IP-ADDR> <FILE-NAME>
```

### Parameters

#### restore

Restore controller's configuration.

#### all

Restore everything.

#### failover

Restore everything, except system name and IP address settings.

#### policy

Restore only WLAN settings, access control list, roles, and users.

#### policy

Restore only WLAN settings, access control list, roles, and users.

#### <IP-ADDR>

The IP address of the location of the backup file.

#### <FILE-NAME>

The file name of the backup file.

### Examples

```
ruckus(debug)# restore all 192.168.0.9 backup.txt
** Checking if memory is sufficient**
** Downloading backup file **
** Verifying the backup file **
Invalid backup file
ruckus(debug)#
```

## delete-station

To deauthorize the station with the specified MAC address, use the following command.

```
delete-station MAC
```

### Syntax Description

#### delete-station

Delete the station with the specified MAC address

#### MAC

The MAC address of the station that will be deleted

## Defaults

None.

## Example

```
ruckus# debug
ruckus(debug)# delete-station 00:10:77:01:00:01
The command was executed successfully.
```

## restart-ap

To restart the device with the specified MAC address, use the restart ap command.

**restart-ap** MAC

## Syntax Description

### **restart-ap**

Restart the device with the specified MAC address

### MAC

The MAC address of the device to be restarted

## Defaults

None.

## Example

```
ruckus# debug
ruckus(debug)# restart-ap 00:13:92:EA:43:01
The command was executed successfully.
```

## wlaninfo

Configures and enables debugging of WLAN service settings. Enter wlaninfo without arguments to see all options.

**wlaninfo** OPTIONS

## Syntax Description

### **wlaninfo**

Enable logging of WLAN info

### OPTIONS

Configure WLAN debug information options

## Defaults

None.

## Example

```
ruckus(debug)# wlaninfo -W -x
WLAN svc "Rhastahl" (id=1):
  WLAN ID = 0, ref_cnt = 7
  SSID = "Rhastahl" enabled
  Apply to 11a and 11g/b radios
  Closed system = No, Privacy = Enabled, ACL enabled Guest-WLAN = No
  WISPr-WLAN = No
  Access Policy = 0/0, Web Auth = No, grace period = 0 (0 means disable), max clients = 100
  WMM = enabled priority = 0 uplink = DISABLE downlink = DISABLE
  Cipher = Clear Text Local bridging = Enabled, DHCP relay = Disabled, vlan = 1, dvlan = Disabled,
bgscan = Enabled
  Proxy ARP = Disabled (IE:Disabled)
  wep key index = 0, wep key len = 0
  PAP message authenticator = Enabled, EAP-Failure = Disabled
  Device Policy = 0, Precedence = 1
  Smart Room = Disabled Roam-factor = 1
  Hotspot2.0--WLAN = No (id=0)
  Num of VAP deployed: 6
    VAP: 04:4f:aa:0c:b1:0c, number of stations = 0
    VAP: 04:4f:aa:0c:b1:08, number of stations = 0
    VAP: c0:c5:20:3b:91:fc, number of stations = 1
    VAP: c0:c5:20:3b:91:f8, number of stations = 0
    VAP: c4:10:8a:1f:d1:fc, number of stations = 1
    VAP: c4:10:8a:1f:d1:f8, number of stations = 0
  ACL 1 (System): default=Allowed system-wide=yes
  Auth Policy:
    Auth Algorithms:RSN/PSK RSN/Dynamic PSK
    Auth Server Type: None
    WPA Verson: WPA2
    WPA Auth and Key Managment: WPA PSK
    WPA PSK Pass Phrase:password
    WPA PSK Prev Pass Phrase:
    WPA PSK Pass Phrase (Hex):
      31306173 68613130
    WPA PSK:
      6aa94bac df5346ac ecc7d38f a14a6dbf
      7ba6f6f8 df2a4943 b23c9655 ac4f33de
    WPA Prev PSK:
      00000000 00000000 00000000 00000000
      00000000 00000000 00000000 00000000
    GTK life time = 28800 seconds, GTK Life size = 2000 Kpkts
    GMK life time = 86400 seconds, Strict Rekey = No
    WPA Group Cipher Suites:0x00000010
      CCMP
    WPA Pairwise Cipher Suites:0x00000010
      CCMP
  NASID Type: = wlan-bssid
  PMK Cache Time: = 43200
  PMK Cache for Reconnect: = enabled
  Roaming Acct-Inerim-Update: = disabled
  Called-Station-Id-type: 0
  Classification: enabled
  UDP Heuristic Classification: enabled
  Directed Multicast: enabled
  IGMP Snooping: enabled
  MLD Snooping: disabled
  ToS Classification: enabled
  Dot1p Classification: disabled
  Multicast Filter: disabled
  Directed Threshold: 5
  Priority: Voice:0 Video:2 Data:4 Background:6
  Force DHCP: disabled Timeout:10

*** Total WLAN Entries: 1 ***
ruckus(debug)#
```

## show

To display parameters within the debug context, use the following command:

### Syntax

```
show [ ap | station | logs | tls | remote-troubleshooting ]
```

### Parameters

<b>show</b>	Display settings.
<b>ap</b>	Displays a list of all approved devices.
<i>station</i>	Displays a list of all connected stations (or clients).
<i>logs</i>	Displays a list of debug log components.
<i>tls</i>	Displays TLS version support.
<i>remote-troubleshooting</i>	Displays remote-troubleshooting.

### Examples

```
ruckus(debug)# show tls
  TLS= Support TLS 1.0 and TLS 1.1
ruckus(debug)#
```

## save\_debug\_info

Saves debug information.

```
save_debug_info IP-ADDR FILE-NAME
```

### Syntax Description

<b>save_debug_info</b>	Save debug log file
<i>IP-ADDR</i>	The destination IP address
<i>FILE-NAME</i>	The destination file name

### Defaults

None.



## Example

```
ruckus(debug)# save_debug_info 192.168.11.26 log.log
Creating debug info file ...
Done
Sending debug info file to "log.log@192.168.11.26" ...
...
ruckus(debug)#
```

## remote\_ap\_cli

Use the **remote\_ap\_cli** command to access an AP remotely and execute AP CLI commands.

```
remote_ap_cli [ -q ] { -a ap_mac | -A } "cmd arg1 arg2 .."
```

## Syntax Description

**remote\_ap\_cli**  
Execute CLI commands in a remote AP

**-q**  
Do not display results

**-a**  
Specify AP by MAC address

**ap\_mac**  
The AP's MAC address

**-A**  
All connected APs

**cmd**  
AP CLI command

**arg**  
AP CLI command argument

## Example

```
ruckus(debug)# remote_ap_cli -A "get director"
---- Command 'rkscli -c "get director "' executed at c0:c5:20:3b:91:f0
----- ZoneDirector Info -----
Primary Controller   : n/a
Secondary Controller : n/a
DHCP Opt43 Code     : 3

The information of the most recent Zone Director:
[1] 192.168.40.100

AP is under management of ZoneDirector: 192.168.40.100 / c0:c5:20:18:97:c1,
Currently AP is in state: RUN
OK
---- Command 'rkscli -c "get director "' executed at c4:10:8a:1f:d1:f0
----- ZoneDirector Info -----
Primary Controller   : n/a
Secondary Controller : n/a
DHCP Opt43 Code     : 3

The information of the most recent Zone Director:
[1] 192.168.40.100
```

## Using Debug Commands

### General Debug Commands

```
AP is under management of ZoneDirector: 192.168.40.100 / c0:c5:20:18:97:c1,
Currently AP is in state: RUN
OK
---- Command Execution Summary:
      success: 2
      failure: 0
      total: 2
ruckus(debug)#
```

## save-config

Upload the configuration file to the designated TFTP site.

**save-config** *IP-ADDR FILE-NAME*

### Syntax Description

#### **save-config**

Upload the configuration file

#### *IP-ADDR*

The destination IP address

#### *FILE-NAME*

The destination file name

### Defaults

None.

### Example

```
ruckus(debug)# save-config 192.168.11.26 config.log
Creating backup config file
Done
Uploading backup config file
...
ruckus(debug)#
```

## emfd-malloc-stats

Show uclibc malloc statistics.

### Example

```
ruckus(debug)# emfd-malloc-stats
==== [pid=350] Sat Feb 15 15:58:42 2014
total bytes allocated      = 2691072
total bytes in use        = 2471920
total bytes freed         = 219152
total allocated mmap space = 311296
number of free chunks     = 18
number of fastbin blocks  = 0
space in freed fastbin blocks = 0
bin[ 1]: chunk_num=      1, list_len=      1, alloc_bytes= 4152, min_chunk[1]= 4152,
max_chunk[1]= 4152
bin[ 3]: chunk_num=      3, list_len=      3, alloc_bytes= 72, min_chunk[1]= 24,
max_chunk[1]= 24
```

```

bin[ 4]: chunk_num=    1, list_len=    1, alloc_bytes=    32, min_chunk[1]=    32,
max_chunk[1]=    32
bin[ 5]: chunk_num=    4, list_len=    4, alloc_bytes=   160, min_chunk[1]=    40,
max_chunk[1]=    40
bin[ 6]: chunk_num=    1, list_len=    1, alloc_bytes=    48, min_chunk[1]=    48,
max_chunk[1]=    48
bin[10]: chunk_num=    1, list_len=    1, alloc_bytes=    80, min_chunk[1]=    80,
max_chunk[1]=    80
bin[14]: chunk_num=    1, list_len=    1, alloc_bytes=   112, min_chunk[1]=   112,
max_chunk[1]=   112
bin[45]: chunk_num=    1, list_len=    1, alloc_bytes=  2928, min_chunk[1]=  2928,
max_chunk[1]=  2928
bin[49]: chunk_num=    1, list_len=    1, alloc_bytes=  5168, min_chunk[1]=  5168,
max_chunk[1]=  5168
bin[51]: chunk_num=    2, list_len=    2, alloc_bytes= 14952, min_chunk[1]=  7248,
max_chunk[2]=  7704
bin[52]: chunk_num=    1, list_len=    1, alloc_bytes=  8208, min_chunk[1]=  8208,
max_chunk[1]=  8208
ruckus(debug)#

```

## save-config-as-default

To save the configuration to be restored upon reset to factory default settings, use the following command:

**save-config-as-default**

### Defaults

Disabled.

### Example

```
ruckus(debug)# save-config-as-default
```

The current configuration will be saved and will be restored when set-factory, are you sure(y/n):y

```
The configuration is saved successfully.
ruckus(debug)#
```

## no save-config-as-default

To disable the saved configuration to be restored upon reset to factory default settings, use the following command:

**no save-config-as-default**

### Defaults

Disabled.

### Example

```
ruckus(debug)# no save-config-as-default
```

The saved configuration will be deleted, are you sure(y/n):y

```
The configuration is deleted successfully.
ruckus(debug)#
```

## speedflex

To enable SpeedFlex on APs, use the following command:

**speedflex**

### Defaults

Enabled.

### Example

```
ruckus(debug)# speedflex
The System SpeedFlex has been enabled.
ruckus(debug)#
```

## no speedflex

To disable SpeedFlex on APs, use the following command:

**no speedflex**

### Defaults

Enabled.

### Example

```
ruckus(debug)# no speedflex
The System SpeedFlex has been disabled.
ruckus(debug)#
```

## support-tls

To configure the supported versions of TLS (ver. 1.0 or 1.1), use the following command:

### Syntax

```
support-tls [ <VER>]
```

### Command Default

TLS 1.0 and TLS 1.1

### Parameters

#### support-tls

Set TLS versions supported.

#### <VER>

TLS version 1.0, 1.1, or 1.0-1.1 (both).

### Examples

```
ruckus(debug)# support-tls 1.0-1.1  
Already support TLSv1.0 and TLSv1.1.  
ruckus(debug)#
```

## Using Debug Commands

### General Debug Commands

#### *no support-tls*

To disable support for TLS version 1.0 or 1.1, use the following command:

#### Syntax

**no support-tls <VER>**

#### Command Default

TLS version 1.0, 1.1 (both).

#### Parameters

**<VER>**

Select the TLS versions to disable.

#### Examples

```
ruckus(debug)# no support-tls 1.0
Are you sure you want to change whether support TLSv1.0, If yes, it will reboot Master.[Y/n]
ruckus(debug)#
```

## ssh-icx

To configure the ICX CLI through the Unleashed CLI, use the following command:

### Syntax

```
ssh-icx<USERNAME><ICX-IP>
```

### Command Default

None

### Examples

```
ruckus(debug)# ssh-icx admin 10.223.43.210

Host '10.223.43.210' is not in the trusted hosts file.
Do you want to continue connecting? (y/n) admin@10.223.43.210's password:
admin@10.223.43.210's password:

ruckus(debug)#
```

## Show Commands

This section describes the show commands available within the debug context.

### show ap

To display AP information for all APs, use the following command:

```
show ap
```

### Example

```
ruckus(debug)# show ap
AP:
  ID:
    1:
      MAC Address= 44:1e:94:1b:f0:d0
      Model= r510
      Approved= Yes
      Device Name= RuckusAP
      Description=
      Location=
      GPS=
      CERT = Normal
      Bonjour-policy=
      Bonjour-fencing=
      Group Name= System Default
      Channel Range:
        A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
        B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
      Radio a/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
        WLAN Group Name= Default
        Call Admission Control= OFF
        Protection Mode= Auto
      Radio b/g/n:
        Channelization= Auto
        Channel= Auto
        WLAN Services enabled= Yes
        Tx. Power= Auto
        WLAN Group Name= Default
        Call Admission Control= OFF
        Protection Mode= 2
      Override global ap-model port configuration= No
      Network Setting:
        Protocol mode= Use Parent Setting
        Device IP Settings= Keep AP's Setting
        IP Type= DHCP
        IP Address= 192.168.0.10
        Netmask= 255.255.255.0
        Gateway= 192.168.0.1
        Primary DNS Server=
        Secondary DNS Server=

      Device IPv6 Settings= Keep AP's Setting
      IPv6 Type= Auto Configuration
      IPv6 Address= ::461e:98ff:fe1b:f0d0
      IPv6 Prefix Length= 64
      IPv6 Gateway=
      IPv6 Primary DNS Server=
      IPv6 Secondary DNS Server=
      Mesh:
        Mode= Use Parent Setting
```



```

max hops= Use Parent Setting
LLDP:
  Status = Use Parent Setting
LAN Port:
  0:
    Interface= eth0
    Dot1x= None
    LogicalLink= Up
    PhysicalLink= Up 10Mbps full
    Label= 10/100/1000 PoE LAN1
  1:
    Interface= eth1
    Dot1x= None
    LogicalLink= Down
    PhysicalLink= Down
    Label= 10/100/1000 LAN2
2:
  MAC Address= d4:c2:9e:35:c9:50
  Model= r610
  Approved= Yes
  Device Name= RuckusAP
  Description=
  Location=
  GPS=
  CERT = Normal
  Bonjour-policy=
  Bonjour-fencing=
  Group Name= System Default
  Channel Range:
    A/N= 36,40,44,48,149,153,157,161 (Disallowed= )
    B/G/N= 1,2,3,4,5,6,7,8,9,10,11 (Disallowed= )
  Radio a/n:
    Channelization= Auto
    Channel= Auto
    WLAN Services enabled= Yes
    Tx. Power= Auto
    WLAN Group Name= Default
    Call Admission Control= OFF
    Protection Mode= Auto
  Radio b/g/n:
    Channelization= Auto
    Channel= Auto
    WLAN Services enabled= Yes
    Tx. Power= Auto
    WLAN Group Name= Default
    Call Admission Control= OFF
    Protection Mode= 2
  Override global ap-model port configuration= No
  Network Setting:
    Protocol mode= Use Parent Setting
    Device IP Settings= Keep AP's Setting
    IP Type= DHCP
    IP Address= 192.168.0.3
    Netmask= 255.255.255.0
    Gateway= 192.168.0.1
    Primary DNS Server=
    Secondary DNS Server=

    Device IPv6 Settings= Keep AP's Setting
    IPv6 Type= Auto Configuration
    IPv6 Address= ::d6c1:9eff:fe35:c950
    IPv6 Prefix Length= 64
    IPv6 Gateway=
    IPv6 Primary DNS Server=
    IPv6 Secondary DNS Server=
  Mesh:
    Mode= Use Parent Setting
    max hops= Use Parent Setting
  LLDP:
    Status = Use Parent Setting
  LAN Port:

```

## Using Debug Commands

### Show Commands

```
0:
  Interface= eth0
  Dot1x= None
  LogicalLink= Up
  PhysicalLink= Up 1000Mbps full
  Label= 10/100/1000 PoE LAN1
1:
  Interface= eth1
  Dot1x= None
  LogicalLink= Down
  PhysicalLink= Down
  Label= 10/100/1000 LAN2
PoE Mode= Auto
802.3af PoE Tx. chain= 2
```

```
ruckus(debug) #
```

## show station

To display a list of all connected stations, use the following command:

**show station**

### Example

```
ruckus(debug) # show station
Clients List:
Client:
  MAC Address= c8:3a:6c:db:1a:3e
  User Name=
  IP Address= 192.168.0.5
  Access Point= d4:c2:9e:35:c9:40
  WLAN= Unleashed
  Channel= 1
  Signal (dB)= 90

Client:
  MAC Address= 88:71:e6:a8:7a:d3
  User Name=
  IP Address= 192.168.0.7
  Access Point= d4:c2:9e:35:c9:40
  WLAN= Unleashed
  Channel= 40
  Signal (dB)= 63

Client:
  MAC Address= 0c:91:61:88:d3:ca
  User Name=
  IP Address= 192.168.0.15
  Access Point= d4:c2:9e:35:c9:40
  WLAN= Unleashed
  Channel= 1
  Signal (dB)= 83

Client:
  MAC Address= f0:04:8c:fb:73:38
  User Name=
  IP Address= 192.168.0.13
  Access Point= d4:c2:9e:35:c9:40
  WLAN= Unleashed
  Channel= 1
  Signal (dB)= 41

ruckus(debug) #
```

## show logs

Displays a list of debug log components.

```
show logs
```

### Example

```
ruckus(debug)# show logs
Debug Logs:
  All= Disabled
  Sys-mgmt= Disabled
  Mesh= Disabled
  Web-auth= Disabled
  Rf-mgmt= Disabled
  Radius= Disabled
  Hotspot-srv= Disabled
  Aps= Disabled
  Net-mgmt= Disabled
  802.1x= Disabled
  Web-svr= Disabled
  802.11= Disabled
  Client-association= Disabled
  Debug logs of specified MAC address:
    Status= Disabled
ruckus(debug)#
```

## show tls

To display the current TLS version support enabled, use the following command:

```
show tls
```

### Example

```
ruckus(debug)# show tls
TLS= Support TLS 1.0 and TLS 1.1
ruckus(debug)#
```

## show save-config-as-default

To display the current save configuration, use the following command:

```
show save-config-as-default
```

### Example

```
ruckus(debug)# show save-config-as-default
Save-config-as-default= enable: true, Mon Apr 27 04:16:33 2020

ruckus(debug)#
```

## show speedflex

To display SpeedFlex enabled status, use the following command:

```
show speedflex
```

## Using Debug Commands

### Show Commands

#### Example

```
ruckus(debug)# show speedflex
SpeedFlex= Enabled
ruckus(debug)#
```

## show remote-troubleshooting

To display remote troubleshooting status, use the following command:

```
show remote-troubleshooting
```

#### Example

```
ruckus(debug)# show remote-troubleshooting
Ruckus CA troubleshooting is stopped!
The server addr is: None

ruckus(debug)#
```

## ps

To display information about all processes that are running, use the following command:

```
ps
```

#### Example

```
ruckus(debug)# ps
  PID  PPID  USER      VSZ  STAT  COMMAND
   1     0  root      1184  S     init
   2     0  root         0  SW    [kthreadd]
   3     2  root         0  SW    [ksoftirqd/0]
   5     2  root         0  SW<   [kworker/0:0H]
   7     2  root         0  SW    [rcu_sched]
   8     2  root         0  SW    [rcu_bh]
   9     2  root         0  SW    [migration/0]
  10    2  root         0  SW    [watchdog/0]
  11    2  root         0  SW    [watchdog/1]
  12    2  root         0  SW    [migration/1]
  13    2  root         0  SW    [ksoftirqd/1]
  15    2  root         0  SW<   [kworker/1:0H]
  16    2  root         0  SW<   [khelper]
  17    2  root         0  SW    [irq/202-msmdata]
  18    2  root         0  SW<   [writeback]
  19    2  root         0  SW<   [bioset]
  20    2  root         0  SW<   [crypto]
  21    2  root         0  SW<   [kblockd]
  22    2  root         0  SW    [khubd]
  23    2  root         0  SW    [kswapd0]
  24    2  root         0  SW    [kworker/1:1]
  25    2  root         0  SW    [fsnotify_mark]
  26    2  root         0  SW    [kworker/u4:1]
  30    2  root         0  SW    [spi32766]
  39    2  root         0  SW<   [ipv6_addrconf]
  53    2  root         0  SW<   [deferwq]
  54    2  root         0  SW    [kworker/u4:2]
  55    2  root         0  SW    [ubi_bgt0d]
  62    1  root      1172  S     /bin/sh /usr/sbin/pad.sh
  65   62  root         720  S     /usr/sbin/pad
  68    1  root      5764  S <    /usr/sbin/rsmd start
  70    1  root      5740  S <    watchdog
  79    2  root         0  SW    [ubi_bgt1d]
```

```

81      2 root          0 SW  [ubi_bgt2d]
83      2 root          0 SW  [ubifs_bgt2_0]
245    68 root        5808 S < /usr/sbin/timer start
261    2 root          0 SW< [gmac_workqueue]
262    2 root          0 SW< [nss_data_plane_]
263    2 root          0 SW< [nss_freq_queue]
264    2 root          0 SW< [coredump_wait]
329    1 root          8444 S  /usr/sbin/tcsd
394    2 root          0 SW< [alloc_task_wque]
395    2 root          0 SW< [alloc_task_wque]
416    1 root          5900 S  eved
444    1 root          1172 S  klogd -c 4
498    1 root          2668 S  /usr/bin/mosquitto -c /tmp/mosquitto.conf
501    1 root          2676 S  /usr/bin/matrix
512    1 root          5764 S  rkscast
541    1 root          2792 S  /usr/sbin/dropbear -e /var/run/-login -I 900 -p
588    68 root        5836 S < /usr/sbin/rfwd start
630    2 root          0 SW< [uif-630]
636    1 root          17960 S /usr/sbin/apmgr -r start
640    1 root          9712 S  /usr/sbin/election
651    3147 root        1168 S  sleep 300
652    1 root          5760 S  /usr/sbin/wrad
659    1 root          6000 S  /usr/sbin/mdnsfence -p /tmp/mdnsfence.pid -b
669    1 root          5736 S  hs20d
699    1 root          5924 S  /usr/sbin/channelfly -i wifi0 -q
710    1 root          2912 S  hostapd -B -g/var/run/hostapd-global -P/var/run
714    1 root          5868 S  /usr/sbin/channelfly -i wifil -q
716    1 root          6248 S  ztmd -s
727    1 root          5996 S  /usr/sbin/rfmd -S
729    1 root          7784 S  /usr/sbin/wipingd
735    1 root          7400 S  cpd
806    1 root          6176 S  /usr/sbin/avpd -D
822    1 root          19300 S /usr/sbin/uf_agent
846    1 root          7116 S  /usr/sbin/statd -D
853    1 root          33796 S /usr/sbin/qm_dpi -D -n 1
862    1 root          5744 S  dbdc
867    1 root          5736 S  /usr/sbin/PoEMgr
899    1 root          5740 S  rflow_radiod -b -m 2
901    1 root          3032 S  /bin/wd_feeder
1700   1 root          6652 S  /tmp/var/run/-login
1705   1 root          1168 S  sleep 1000d
1877   1 root          5720 S  snmpget -p /var/run/snmpget.pid1 -i 1
1897   1 root          5724 S  snmpwalk -p /var/run/snmpwalk.pid1 -i 1
1943   3269 root        1168 S  sleep 20
1957   2488 root        1168 S  sleep 21
1977   68 root          0 Z < [rsmd_func]
1978   68 root          0 Z < [rsmd_func]
1979   68 root          0 Z < [rsmd_func]
1980   68 root          0 Z < [rsmd_func]
1988   65 root          720 S  /usr/sbin/pad
1989   1988 root        1172 S  sh -c /bin/ps -aux
1990   1989 root        1176 R  /bin/ps -aux
2032   1 root          1176 S  /bin/sh /bin/tsyslogd.sh
2034   2032 root        3940 S  /bin/tsyslogd -r -h -n --rotate=21
2036   1 root          980 S  /usr/sbin/in.tftpd -l -s /etc/airespider-images
2088   1 root          1172 S  /bin/sh /bin/tacmon.sh
2092   2088 root        3688 S  /bin/tacmon -i 30 -r 15
2117   1 root          4384 S  /bin/emf_repo_flashsync monitor 15
2118   1 root          3072 S  ttylogd
2166   1 root          1124 S < clusterD
2167   1 root          26348 S stamgr -d3 -t0
2169   1 root          11996 S apmgr_zd -r start
2230   1 root          7168 S  upnpd
2296   1 root          10432 S getstatd
2297   1 root          41668 S emfd
2298   1 root          5340 S N sqlited
2300   1 root          10488 S rhttpc
2488   1 root          1184 S  /bin/sh /usr/sbin/bonjour_mon.sh
2882   1 root          1188 S  /sbin/udhcp -b -i br0 --pidfile=/var/run/udhcp
3145   1 root          2496 S  /usr/sbin/vsftpd /etc/vsftpd2.conf
3147   1 root          1176 S  /bin/sh /bin/ftpdMon.sh
3269   1 root          1176 S  /bin/sh /usr/sbin/pubnub_mon.sh un9418490011251

```

## Using Debug Commands

### Show Commands

```
3277 3269 root      8380 S    /usr/sbin/pubnubd un9418490011251572982362879
3395   2 root        0 SW    [kworker/0:1]
3450   1 root      2580 S    radsecproxy
3474   1 root      1172 S    /sbin/udhcpd -i br0 --pidfile=/var/run/udhcpd.p
3535   1 root     23988 S    /bin/webs
3757   1 root     2376 S <    /usr/sbin/zapd
3758   1 root     5876 S    lldpd -C d4:c1:9e:35:c9:40 -S Ruckus R610 Multi
3763 3758 root     5888 S    lldpd -C d4:c1:9e:35:c9:40 -S Ruckus R610 Multi
3845   1 root     14740 S    /usr/bin/stainfod
4256   1 root     1416 S    mDNSd
4301 2488 root       744 S    /usr/sbin/dns-sd -R Ruckus-Unleashed _ruckus-un
5266   65 root       724 S    /usr/sbin/pad
5290   1 root     3092 S    empty -f -L /tmp/empty/icx_01.tmp -i /tmp/empty
5292 5290 root     2860 S    dbclient -y super@192.168.0.8
14982  2 root        0 SW    [kworker/1:2]
26640 541 root     2864 R    /usr/sbin/dropbear -e /var/run/-login -I 900 -p
26651 26640 root     1176 S    /bin/sh /var/run/-login
26652 26651 root     5588 S    /bin/login
26693 26652 root    10952 S    ruckus_cli2 -p VTcEyiFPy6&rw
27890  2 root        0 SW    [kworker/0:0]
ruckus (debug) #
```

## show configuration\_change\_log

To display the configuration change log, use the following command:

```
show configuration_change_log
```

### Example

```
ruckus (debug) # show configuration_change_log
configuration changing log is on!

ruckus (debug) #
```

## Accessing a Remote AP CLI

The following command is used to access the command line interface of a connected AP and execute AP CLI commands from the controller CLI. Configuration changes made through the AP CLI may be overwritten by controller settings if the AP is restarted or reconnects to the controller.

### remote\_ap\_cli

Use the **remote\_ap\_cli** command to access an AP remotely and execute AP CLI commands.

```
remote_ap_cli [ -q ] {-a ap_mac | -A } "cmd arg1 arg2 .."
```

### Syntax Description

<b>remote_ap_cli</b>	Execute CLI commands in a remote AP
<b>-q</b>	Do not display results
<b>-a</b>	Specify AP by MAC address
<b>ap_mac</b>	The AP's MAC address
<b>-A</b>	All connected APs
<b>cmd</b>	AP CLI command
<b>arg</b>	AP CLI command argument

### Example

```
ruckus(debug)# remote_ap_cli -A "get director"
---- Command 'rkscli -c "get director "' executed at c0:c5:20:3b:91:f0
----- ZoneDirector Info -----
Primary Controller   : n/a
Secondary Controller : n/a
DHCP Opt43 Code     : 3

The information of the most recent Zone Director:
[1] 192.168.40.100

AP is under management of ZoneDirector: 192.168.40.100 / c0:c5:20:18:97:c1,
Currently AP is in state: RUN
OK
---- Command 'rkscli -c "get director "' executed at c4:10:8a:1f:d1:f0
----- ZoneDirector Info -----
Primary Controller   : n/a
Secondary Controller : n/a
DHCP Opt43 Code     : 3

The information of the most recent Zone Director:
[1] 192.168.40.100

AP is under management of ZoneDirector: 192.168.40.100 / c0:c5:20:18:97:c1,
Currently AP is in state: RUN
```

## Using Debug Commands

### Accessing a Remote AP CLI

```
OK
---- Command Execution Summary:
      success: 2
      failure: 0
      total: 2
ruckus(debug) #
```



# Working with Debug Logs and Log Settings

This section describes the commands that you can use to configure and review ZoneDirector debug logs.

## logs all

Enables debug logs of all debug components.

### Syntax Description

#### logs all

Enable logging of all debug components

### Usage Guidelines

Running this command can place considerable load on the system. If your ZoneDirector is already under load, running this command could potentially cause errors resulting in a reboot. In general, only use this command when working with Ruckus support to troubleshoot an issue.

### Example

```
ruckus(debug)# logs all
The command was executed successfully.
ruckus(debug)# show logs
Debug Logs:
  All= Enabled
  Sys-mgmt= Enabled
  Mesh= Enabled
  Web-auth= Enabled
  Rf-mgmt= Enabled
  Radius= Enabled
  Hotspot-srv= Enabled
  Aps= Enabled
  Net-mgmt= Enabled
  802.1x= Enabled
  Web-svr= Enabled
  802.11= Enabled
  Dvlan= Enabled
  Smart-redundancy= Enabled
  Client-association= Enabled
  Debug logs of specified MAC address:
    Status= Disabled
ruckus(debug)#
```

## no logs all

Disables debug logs of all debug components.

### Syntax Description

#### no logs

Disable debug logs

#### all

Disable all log components

## Using Debug Commands

### Working with Debug Logs and Log Settings

#### Example

```
ruckus(debug)# no logs all
The command was executed successfully.
ruckus(debug)#
```

## logs comp sys-mgmt

Enables debug logs of system management components.

#### Syntax Description

##### logs

Enable debug logs

##### comp sys-mgmt

Component system management

#### Example

```
ruckus(debug)# logs comp sys-mgmt
The command was executed successfully.
ruckus(debug)# show logs
Debug Logs:
  All= Disabled
  Sys-mgmt= Enabled
  Mesh= Disabled
  Web-auth= Disabled
  Rf-mgmt= Disabled
  Radius= Disabled
  Hotspot-srv= Disabled
  Aps= Disabled
  Net-mgmt= Disabled
  802.1x= Disabled
  Web-svr= Disabled
  802.11= Disabled
  Dvlan= Disabled
  Smart-redundancy= Disabled
  Client-association= Disabled
  Debug logs of specified MAC address:
    Status= Disabled
ruckus(debug)#
```

## no logs comp sys-mgmt

Disables debug logs of system management components.

## logs comp mesh

Enables debug logs of mesh components.

## no logs comp mesh

Disables debug logs of mesh components.

## logs comp web-auth

Enables debug logs of web authentication components.

## no logs comp web-auth

Disables debug logs of web authentication components.

## logs comp rf-mgmt

Enables debug logs of RF management components.

## no logs comp rf-mgmt

Disables debug logs of RF management components.

## logs comp radius

Enables debug logs of radius components.

## no logs comp radius

Disables debug logs of radius components.

## logs comp hotspot-srv

Enables debug logs of hotspot services components.

## no logs comp hotspot-srv

Disables debug logs of hotspot services components.

## logs comp aps

Enables debug logs of AP components.

## no logs comp aps

Disables debug logs of access points components.

## logs comp net-mgmt

Enables debug logs of network management components.

#### **no logs comp net-mgmt**

Disables debug logs of network management components.

#### **logs comp 802.1x**

Enables debug logs of 802.1x components.

#### **no logs comp 802.1x**

Disables debug logs of 802.1x components.

#### **logs comp web-svr**

Enables debug logs of web server components.

#### **no logs comp web-svr**

Disables debug logs of web server components.

#### **logs comp 802.11**

Enables debug logs of 802.11 components.

#### **no logs comp 802.11**

Disables debug logs of 802.11 components.

#### **logs comp dvlan**

Enables debug logs of dynamic VLAN components.

#### **no logs comp dvlan**

Disables debug logs of dynamic vlan components.

#### **logs comp smart-redundancy**

Enable Smart Redundancy component debug logs.

#### **no logs comp smart-redundancy**

Disable Smart Redundancy component debug logs.

## logs comp bonjour-gateway

Enable Bonjour Gateway debug logs.

## no logs comp bonjour-gateway

Disable Bonjour Gateway debug logs.

## logs comp mDNSd

Enable Bonjour mDNSd debug logs.

## no logs comp mDNSd

Disable Bonjour mDNSd debug logs.

## logs comp client-association

Enable client association debug logs.

## no logs comp client-association

Disable client association debug logs.

## logs mac

Enables and sets filter running logs based on specified mac address.

**logs mac** MAC

### Syntax Description

**logs**

Enable debug logs

**mac**

Filter logs by specific MAC address

MAC

The MAC address of the device to be filtered

### Example

```
ruckus(debug)# logs mac 04:4f:aa:0c:b1:00
The command was executed successfully.
ruckus(debug)#
```

## no logs mac

Disables MAC address filtering on running logs.

### Syntax Description

#### no logs

Disable debug logs

#### mac

Filter by MAC address

### Example

```
ruckus(debug)# no logs mac
The command was executed successfully.
ruckus(debug)#
```

## logs winbind

To set the winbind log level (1-10), use the following command:

**logs winbind**<NUMBER>

### Syntax Description

#### logs winbind

Set the winbind log level.

#### <NUMBER>

Choose the level of winbind debug logs.

### Example

```
ruckus(debug)# logs winbind 3
killall: winbindd: no process killed
sh: winbindd: not found
ruckus(debug)#
```

## logs level

To set the debug log level (1-10), use the following command:

**logs level**<NUMBER>

### Syntax Description

#### logs level

Set the debug logs level.

#### <NUMBER>

Select a debug log level (1-10).

## Example

```
ruckus(debug)# logs level 3
The command was executed successfully.
ruckus(debug)#
```

## logs play

Starts displaying logs on console.

### Syntax Description

<b>logs</b>	Enable debug logs
<b>play</b>	Start log play

### Usage Guidelines



#### CAUTION

Running this command can place considerable load on the system. If your ZoneDirector is already under load, running this command could potentially cause errors resulting in a reboot. In general, only use this command when working with Ruckus support to troubleshoot an issue.

## Example

```
ruckus(debug)# logs play
ruckus(debug)# [Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job[user auth
attempt_hash_autoexpire] at 1329285210...
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job at 1329285210...Done
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job[station auth attempt_hash_autoexpire] at
1329285210...
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job at 1329285210...Done
[Feb 15 05:53:33][STAMgr][debug]acsrvc_thread():ACSRVC rcv AP 04:4f:aa:0c:b1:00, IP= 192.168.11.6,
IPv6=fc00::1
...
...
ruckus(debug)# no logs play
ruckus(debug)#
```

## no logs play

Stops displaying logs on console.

### Syntax Description

<b>no logs</b>	Disable debug logs
<b>play</b>	Stop log play

## Using Debug Commands

### Working with Debug Logs and Log Settings

#### Example

```
ruckus(debug)# logs play
ruckus(debug)# [Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job[user auth
attempt_hash_autoexpire] at 1329285210...
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job at 1329285210...Done
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job[station auth attempt_hash_autoexpire] at
1329285210...
[Feb 15 05:53:30][EMFD][debug]jobServiceFunc():Executing job at 1329285210...Done
[Feb 15 05:53:33][STAMgr][debug]acsrvc_thread():ACSRVC rcv AP 04:4f:aa:0c:b1:00, IP= 192.168.11.6,
IPv6=fc00::1
...
...
ruckus(debug)# no logs play
ruckus(debug)#
```

## support-tls

To set the TLS support version, use the following command:

```
support-tls<VER>
```

#### Defaults

1.0-1.1

#### Example

```
ruckus(debug)# support-tls 1.0-1.1
Already support TLSv1.0 and TLSv1.1.
ruckus(debug)#
```

## no support-tls

To disable TLS support, use the following command:

```
no support-tls<VER>
```

## configuration\_change\_log

To record all the configuration changes, use the following command:

```
configuration_change_log
```

#### Defaults

Disabled.

#### Example

```
ruckus(debug)# configuration_change_log
configuration changing log enabled!
ruckus(debug)# show configuration_change_log
configuration changing log is on!
ruckus(debug)#
```



## no configuration\_change\_log

To disable the record of configuration changes, use the following command:

```
no configuration_change_log
```

### Defaults

Disabled.

### Example

```
ruckus(debug)# no save-config-as-default  
configuration changing log disabled!  
ruckus(debug)# show configuration_change_log  
configuration changing log is off!  
ruckus(debug)#
```

# Remote Troubleshooting

This section describes remote troubleshooting commands.

## remote-troubleshooting server

To set the remote troubleshooting server IP address, use the following command:

```
remote-troubleshooting server IP-ADDR
```

## remote-troubleshooting start

Enables remote troubleshooting.

### Syntax Description

<b>remote-troubleshooting</b>	Remote troubleshooting
<b>start</b>	Start remote troubleshooting

### Defaults

None.

### Example

```
ruckus(debug)# remote-troubleshooting start  
ruckus(debug)#
```

## remote-troubleshooting stop

Disables remote troubleshooting.

### Syntax Description

<b>remote-troubleshooting</b>	Remote troubleshooting
<b>stop</b>	Stop remote troubleshooting

### Defaults

None.

### Example

```
ruckus(debug) # remote-troubleshooting stop  
ruckus(debug) #
```

### radius-stats-wlan

Show web-auth WLAN radius statistics bins.

### radius-stats-authsvr

Show web-auth WLAN radius statistics bins.

## AP Core Dump Collection

This section lists the AP core dump commands.

### collect\_ap\_coredump

Enable AP core dump collection.

```
collect_ap_coredump [ all | MAC ]
```

#### Syntax Description

**collect\_ap\_coredump**

Collect AP core dump

**all**

Collect core dump from all connected APs

**MAC**

Specific AP MAC address

#### Defaults

None.

#### Example

```
ruckus(debug)# collect_ap_coredump all
---- Command 'apmgrinfo --coredump y ' executed at 04:4f:aa:0c:b1:00
start reporting coredump to ZD!
---- Command 'apmgrinfo --coredump y ' executed at 00:24:82:3f:14:60
start reporting coredump to ZD!
---- Command Execution Summary:
      success: 2
      failure: 0
      total: 2
rm: cannot remove '/etc/airespider-images/firmwares/ap-dump/*': No such file or directory
sh: codump_server: not found
start collecting AP's coredump !
ok
ruckus(debug)#
```

### no collect\_ap\_coredump

Disable AP core dump collection.

#### Syntax Description

**no collect\_ap\_coredump**

Stop collecting AP core dump

#### Defaults

None.

## Example

```
ruckus(debug)# no collect_ap_coredump all
---- Command 'apmgrinfo --coredump n ' executed at 04:4f:aa:0c:b1:00
stop reporting coredump to ZD!
---- Command 'apmgrinfo --coredump n ' executed at 00:24:82:3f:14:60
stop reporting coredump to ZD!
---- Command Execution Summary:
      success: 2
      failure: 0
      total: 2
rm: cannot remove '/etc/airespider-images/firmwares/ap-dump/*': No such file or directory
stop collecting AP's coredump !
ok
ruckus(debug)#
```

## Script Execution

This section lists the commands that can be executed from the **script** context. The script context must be entered from the debug context.

### script

Enters the script context from the debug context. You must first enter the script context before executing a script.

**script**

#### Syntax Description

**script**

Enter the script context

#### Defaults

None.

#### Example

```
ruckus(debug)# script  
ruckus(script)#
```

### quit

Exit the script context.

**quit**

#### Syntax Description

**quit**

Exit the script context

#### Defaults

None.

#### Example

```
ruckus(script)# quit  
ruckus(debug)#
```

### list

List all available scripts.

**list**

## Syntax Description

### **list**

List all available scripts

## Defaults

None.

## Example

```
ruckus(script)# list -a
Index                Scripts
1                    .version.sh
ruckus(script)#
```

## del

Deletes a script.

## info

Display script help file

### **info**

## Syntax Description

### **info**

Display script information

## Defaults

None.

## Example

```
ruckus(script)# info
info <file>
ruckus(script)#
```

## exec

Execute script.

**exec** *file* {parameter}

## Syntax Description

### **exec**

Execute the script

## Using Debug Commands

### Script Execution

#### Defaults

None.

#### Example

```
ruckus(script)# exec  
exec <file> {parameter}  
ruckus(script)#
```



# Accessing the AP-Mode CLI

- [Accessing the AP Mode CLI from the Unleashed CLI.....](#) 545

## Accessing the AP Mode CLI from the Unleashed CLI

To access the AP CLI from the Unleashed Master (controller) CLI, use the following command:

### ap-mode

```
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)#
```

## Configure LTE Commands

The following CLI commands are provided to GET/SET the 3G/4G/LTE mobile configuration options for Unleashed LTE+Wi-Fi Access Points (Unleashed M510).

To use these CLI commands, you must enter the ap-mode CLI.

### get lte

Use the following commands to display current LTE settings:

```
ruckus> en
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)#
The following CLI commands are supported.
get lte-airplane-mode-state : get lte-airplane-mode-state
    Display LTE airplane mode state
get lte-default-eth-for-wan : get lte-default-eth-for-wan
    Display LTE default ethernet port for wan
get lte-failover-selection : get lte-failover-selection
    Display LTE failover selection info
get lte-gps-probe-interval : get lte-gps-probe-interval
    Display configured GPS probe interval time
get lte-imei : get lte-imei
    Display LTE IMEI info
get lte-internet-host : get lte-internet-host
    Display the remote host details configured for internet availability check
get lte-primary-wan-recovery-time : get lte-primary-wan-recovery-time
    Display primary wan recovery time
get lte-sim-apn : get lte-sim-apn {all|primary|secondary}
    Display LTE sim-apn info
get lte-sim-network-selection : get lte-sim-network-selection {all|primary|secondary}
    Display LTE sim-network-selection status
get lte-sim-password : get lte-sim-password {all|primary|secondary}
    Display LTE sim-password info
get lte-sim-pincode : get lte-sim-pincode {all|primary|secondary}
    Display LTE sim-pincode info
get lte-sim-roaming : get lte-sim-roaming {all|primary|secondary}
    Display LTE sim-roaming status

get lte-sim-selection : get lte-sim-selection
    Display LTE sim-selection info
get lte-sim-username : get lte-sim-username {all|primary|secondary}
    Display LTE sim-user-name info
get lte-state : get lte-state
```

## Accessing the AP-Mode CLI

### Accessing the AP Mode CLI from the Unleashed CLI

```
Display LTE state
get lte-statistics : get lte-statistics {all|primary|secondary}
Display LTE status info
get lte-status : get lte-status
Display LTE status
```

## set lte

Use the following commands to configure LTE settings:

```
set lte-airplane-mode-state : set lte-airplane-mode-state {enable|disable}
Set LTE airplane mode state
set lte-default-eth-for-wan : set lte-default-eth-for-wan {eth0|eth1}
Set LTE default ethernet port for wan (It will be overwritten by WEB UI configuration)
set lte-failover-selection : set lte-failover-selection {ethernet-lte|lte-ethernet|ethernet|lte}
Set LTE failover selection info (It will be overwritten by WEB UI configuration)
-----
ethernet-lte - primary ethernet, failover LTE
lte-ethernet - primary LTE, failover ethernet
ethernet - ethernet only
lte - LTE only
-----
set lte-gps-probe-interval : set lte-gps-probe-interval {seconds}
Set how frequently to probe GPS coordinates
min - 1 sec, max - 500000 sec
set lte-internet-host : set lte-internet-host {host_index} {status|addr|port} {value}
Set the host address and TCP port number to confirm the internet availability
{host_index} = numeric number, valid range = 0 to 4
{status|addr|port} = specifies the purpose of {value}.
{value} = {enable|disable} specific host if the previous attribute is 'status' (or)
URL or IP address of remote host if the previous attribute is 'addr', max. allowed URL address
length = 255 (or)
TCP port number if the previous attribute is 'port', valid port range = 0 to 65535.
```

Examples:

```
-> set lte-internet-host 0 addr www.google.com
(Set www.google.com in 0'th index)
-> set lte-internet-host 0 port 443
(Set port number 443 in 0'th index)
-> set lte-internet-host 0 status enable
(Allow 0'th indexed host to be considered for internet reachability check)
-> set lte-internet-host 0 status disable
(Don't use 0'th indexed host for internet reachability check)
```

Note:

The user must ensure the correctness and reliability of host URL/IP before the configuration.

```
set lte-primary-wan-recovery-time : set lte-primary-wan-recovery-time {seconds}
Set primary wan recovery time (It will be overwritten by WEB UI configuration)
min - 10 sec max - 300 sec
set lte-reset : set lte-reset
Reset LTE chip
Note : Issue "set lte-state disable" before executing lte-reset
set lte-sim-apn : set lte-sim-apn {primary|secondary} {APN name} (It will be overwritten by WEB UI
configuration)
max. allowed characters - 100
allowed characters - A-Z, a-z, 0-9, (-)
set lte-sim-network-selection : set lte-sim-network-selection {primary|secondary} {lte|3g|auto}
set lte-sim-password : set lte-sim-password {primary|secondary} {Password}
Omit the {Password} to disable/set to default
set lte-sim-pincode : set lte-sim-pincode {primary|secondary} {pincode}
Omit the {pincode} to disable/set to default
set lte-sim-roaming : set lte-sim-roaming {primary|secondary} {enable|disable}

set lte-sim-selection : set lte-sim-selection {auto|primary|secondary}
primary - SIM 0
secondary - SIM 1
set lte-sim-username : set lte-sim-username {primary|secondary} {User name}
Omit the {User name} to disable/set to default
set lte-state : set lte-state {enable|disable}
Set LTE state
```

## Configure OpenVPN Commands

The following CLI commands are provided to GET/SET the Open VPN configuration options for Unleashed.

To use these CLI commands, you must enter the ap-mode CLI.

### *get openvpn*

Use the following commands to display current VPN settings:

```
ruckus> en
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)#
The following CLI commands are supported.
get openvpn status
    Display the current openvpn status
get openvpn config
    Display the current openvpn configuration, including username and password
get openvpn statistics
    Display the statistics of the openvpn tunnel
```

### *set openvpn*

Use the following commands to configure VPN settings:

```
set openvpn user {username} {password}
    Set the openvpn client username and password, which will be authenticated by the VPN server
set openvpn remote {FQDN} {port}
    Set the remote openvpn server address and port
set openvpn service {enable|disable}
    Enable or disable the openvpn service
set openvpn config {options}
    Provide various openvpn configuration options
set openvpn config-remove {option keyword}
    Remove a specific option from the openvpn configuration
set openvpn cert {add|del} [local file name] {tftp|ftp|zd} [remote file name] {host|IP}
    Retrieve the openvpn root certificate to authenticate the openvpn server
set openvpn auth-server {enable|disable}
    Enable - the vpn client will authenticate the openvpn server by certificate before establishing the
connection
    Disable (default)
set openvpn persistent {true|false}
    True - the openvpn configuration file will be effective after set-factory
    False (default)
set openvpn clean
    Remove the openvpn configuration file and the user must re-configure openvpn after this command
set openvpn start
    Start the openvpn service
set openvpn stop
    Stop the openvpn service
```

## Configure LACP Support Commands

The following CLI command is provided to GET the LACP status for a member AP on Unleashed.

To use these CLI commands, you must enter the ap-mode CLI.

## Accessing the AP-Mode CLI

Accessing the AP Mode CLI from the Unleashed CLI

### *get bond*

Use the following command to display the LACP status on a member AP:

```
ruckus> en
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)# get bond
LACP/Bonding is DISABLED.
OK
ruckus(ap-mode)# get bond
LACP/Bonding is ENABLED.
<bond0>
    Mode:                8023AD
    LACP-rate:           fast
    MII-Mon:             100 (ms)
    Xmit-Hash:           layer2+3
    Slaves:              2
    Slave-0:             eth0, ACTIVE, DOWN TOO LONG, link-fail-count: 0
    Slave-1:             eth1, ACTIVE, UP, link-fail-count: 0
OK
```

#### **NOTE**

The **get bond** command is supported for 11ax and Wave 2 APs.

#### **NOTE**

To enable or disable LACP on Master AP, use the **status-lacp [enable | disable ]** command.

## support

To execute AP CLI commands in the local AP, use the following command:

### Syntax

**support**

### Command Default

None

### Examples

```
ruckus(ap-mode)# support
-----RPM Config-----
Enable       : 0
Rx-Cell      : 1
Interval     : 300 seconds
NBR Intvl    : 60 seconds
NBR Thr      : -85
Co-ch Thr    : -85
Use all ch   : 0
BGScan on    : 0
BGScan Intvl : 20 seconds
OnDemand Scan : 0
TxPwr Floor  : 6
RxSens Floor : 10
Syslog Lvl   : 3
sh: acsd_cli: not found
OK
ruckus(ap-mode)#
```

